

Introduction

On the 28th November 2025, Constructive Evaluation Ltd (CE) was commissioned by Eastmere Paddocks Ltd (the Client) to undertake a site investigation at Hillview, Eastergate Lane, PO20 3SJ, hereafter referred to as the “site”. The proposed development and testing locations plan completed by Symmetry architecture has been provided as **Figure 1**, drawing reference: 1863-XX-ZZ-DR-A-0301 P03, dated March 2025.

The intent of this report is to present a factual summary of the site investigation and testing results derived from the investigation. Attention is drawn to the fact that whilst every effort has been made to ensure the accuracy of the data supplied and any analysis derived from it, there is a potential for variations in ground and groundwater conditions between and beyond the specific locations investigated. No liability can be accepted for any such variations. Furthermore, any recommendations are specific to the Client’s requirements as detailed herein and no liability will be accepted should these be used by third parties without prior consultation with Constructive Evaluation Ltd.

Site Description

The subject site has an approximate grid reference of SU 94848 06047 and is rectangular in shape covering an approximate area of 0.5ha. The site is surrounded by residential properties, agricultural arable fields, woodland and nurseries. Ordnance Survey Maps 1:25000 of the area indicate surface elevations of between 15 and 16 metres AOD.

The site was accessed via a gated entrance from Eastergate Lane to the north of the site. Existing structures on the site include two residential properties, garages and storage areas for vehicles and equipment. Topography across the site is relatively level with heavy vegetation, hedging, mature deciduous trees and fencing forming the borders of the site. The majority of the site is covered in grass, with concrete surfacing to the south. Surface water was not present across the site and surrounding area.

An outline of the site boundaries is provided below:

- Northern Boundary – Eastergate Lane running east-west with stables and residential buildings occupy the land adjacent
- Eastern Boundary – Fencing with hedging, heavy vegetation and mature trees
- Southern Boundary – Small woodland with natural fields
- Western Boundary – Natural fields with residential buildings leading to Fontwell Avenue

The Site Location Plan is provided as **Figure 2**.

Site Investigation

The site investigation comprised the following:

- Nine mechanically excavated trial pits (TP101-TP109) to depths of 0.70m and 1.70m bgl
- Two existing mechanically excavated trial pits (TP01 and TP02) were used for testing and had been left open since the previous investigation conducted by CE Ltd in May 2025 (ref: CE25.1632)
- Two windowless sampler boreholes (BH101 and BH102) to a maximum depth of 5.0mbgl and standpipe installation to monitoring groundwater levels
- Three cycles of soil infiltration tests within each trial pit in accordance with BRE Digest 365

The following materials were encountered during the site investigation;

Table 1: Summary of Encountered Strata

Material	Min-Max Depth (mbgl)
TOPSOIL. Grass over brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.	0.00 – 0.30
Firm sandy gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.	0.30 – 2.80
Clayey/silty sandy GRAVEL. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint and chalk. (HEAD DEPOSITS)	2.80 – 5.00

Some variations in encountered strata occurred across the subject site. TP101 was conducted on an existing blacktop road with the surface cover between 0.0m to 0.15m bgl incorporating bituminous material. The transition from cohesive to granular soil averaged between 1.0m to 1.2m bgl, with BH101 encountering soft brown slightly sandy gravelly clay to a maximum depth of 2.80m bgl, overlying the granular Head Deposits.

Groundwater was encountered in BH101 and BH102 during the site investigation. These are summarised in Table 2.

Table 2: Summary of Encountered Groundwater

Borehole ID	Groundwater Encountered (mbgl)	Groundwater Level at Completion of Borehole (mbgl)
BH101	4.00	3.42
BH102	4.50	4.28

Allowance should be made for both the long-term and short-term natural variations of recorded groundwater levels as influenced by environmental factors such as precipitation and tidal influences.

The final positions of the tests are detailed on the Site Investigation Plan in **Figure 3**.

Geotechnical Observations

All trial pits (TP101 – TP109, & TP01 – TP02) successfully completed three cycles of soil infiltration testing in accordance with BRE Digest 365 methodology. Table 3 summarises the results of the test cycles for each trial pit.

Table 3: Summary of BRE Digest 365 Infiltration Testing Results

Location ID	Test Depth (m bgl)[m AOD]	Cycle Number	Infiltration Rate (m/s)	Drainage Conditions*
TP01	0.85 – 1.60	1	1.08E-04	Good
	0.90 – 1.60	2	1.81E-04	
	0.90 – 1.60	3	1.31E-04	
TP02	0.87 – 1.60	1	1.47E-04	Good
	0.90 – 1.60	2	1.89E-04	
	0.90 – 1.60	3	1.54E-04	
TP101	0.28 – 0.70	1	5.72E-04	Good
	0.30 – 0.70	2	2.26E-04	
	0.30 – 0.70	3	1.92E-04	
TP102	0.27 – 0.70	1	1.91E-04	Good
	0.28 – 0.70	2	1.72E-04	
	0.28 – 0.70	3	1.45E-04	
TP103	0.26 – 0.70	1	2.22E-04	Good
	0.28 – 0.70	2	3.80E-04	
	0.25 – 0.70	3	4.49E-04	
TP104	0.20 – 0.70	1	1.09E-04	Good
	0.22 – 0.70	2	7.53E-05	
	0.25 – 0.70	3	5.13E-05	
TP105	0.79 – 1.70	1	3.20E-04	Good
	0.80 – 1.70	2	4.35E-04	
	0.85 – 1.70	3	3.41E-04	
TP106	1.0 – 1.70	1	7.06E-04	Good
	0.90 – 1.70	2	4.47E-05	
	1.10 – 1.70	3	5.33E-05	
TP107	0.91 – 1.70	1	6.04E-04	Good
	0.95 – 1.70	2	3.66E-04	
	0.92 – 1.70	3	3.43E-04	
TP108	0.82 – 1.70	1	3.58E-04	Good
	0.85 – 1.70	2	2.11E-04	
	0.85 – 1.70	3	4.27E-04	
TP109	0.28 – 0.70	1	6.88E-05	Good
	0.30 – 0.70	2	4.70E-05	
	0.32 – 0.70	3	5.71E-05	

*After Casagrande and Fadum (1940)

Date: 19th December 2025
Ref. No: CE25.2088
Page 4 of 4

Enclosed are appendices including Site Photographs, Stratigraphic Logs and Soil Infiltration Results.

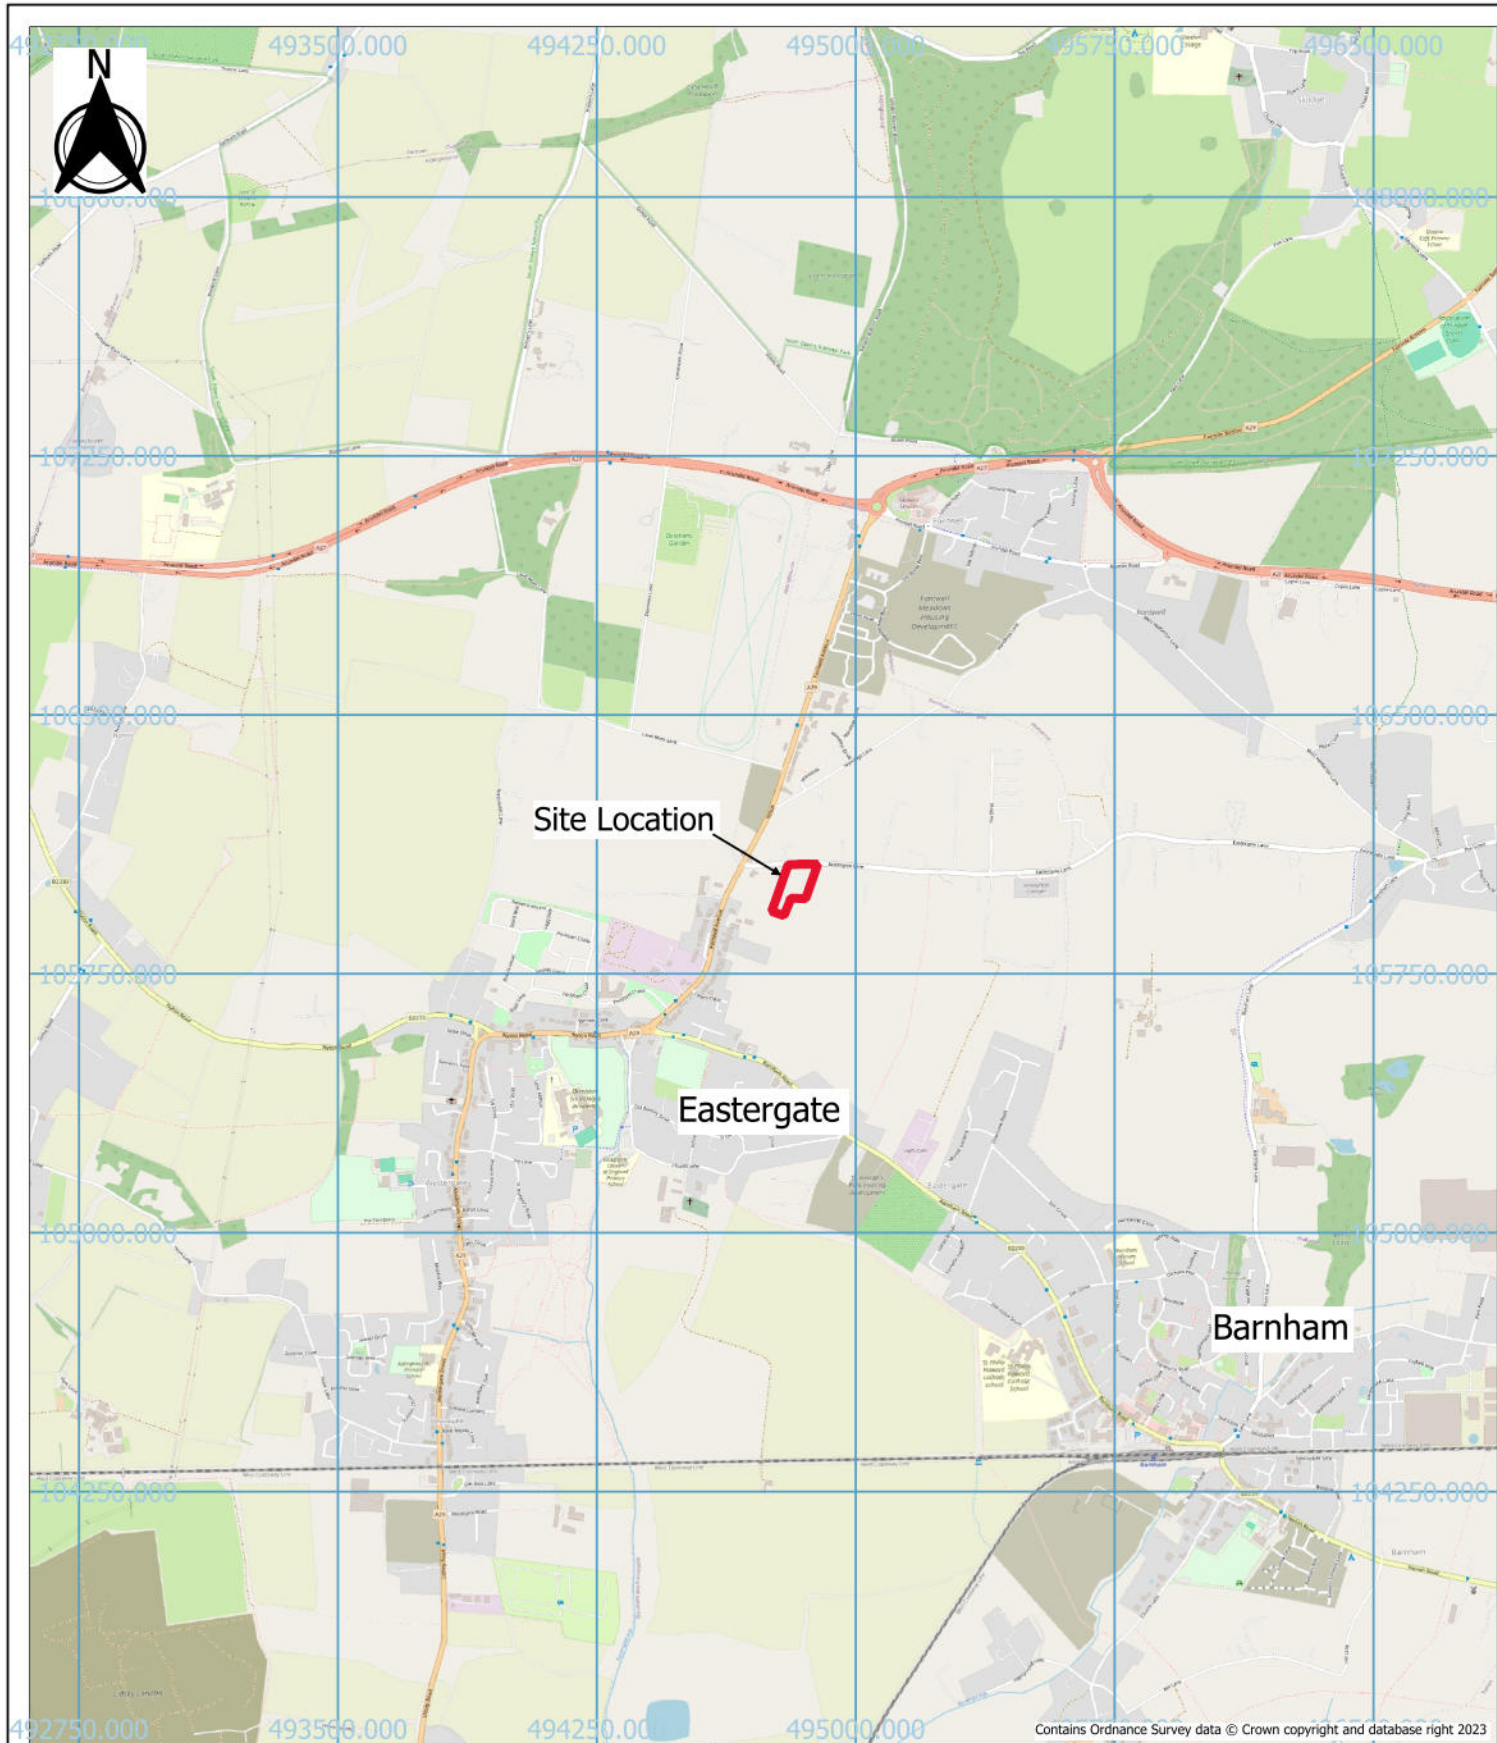
We trust the above information meets your requirements and should you require any further clarification or assistance please do not hesitate to contact CE Ltd.

Kind regards,



Engineering Geologist
Constructive Evaluation Limited





Units 15 & 16, Ford Lane Business Park, Ford,
Arundel BN18 0UZ

Dimension
m

Size

A4

Geolocation
494851 , 106027

Client Eastmere Paddocks Ltd

Project CE25.2088 - Hillview, Eastergate Lane
Eastergate, PO20 3SJ

Title Site Location Plan

Figure 2



Units 15 & 16, Ford Lane Business Park,
Ford, Arundel BN18 0UZ

Client Eastmere Paddocks Ltd

Project CE25.2088 - Hillview, Eastergate Lane
Eastergate, PO20 3SJ

Title Site Investigation Plan

Dimension m	Size A4	Geolocation 494851 , 106027
----------------	------------	--------------------------------

Legend

- Site Boundary
- Borehole with standpipe installation
- Trial pits (0.70mbgl)
- Trial Pits (1.70mbgl)
- Existing Trial Pits

0 10 20 30 40 m

Figure 3

Site Photographs

Project Ref: CE25.2088

Site Name: Hillview, Eastergate Lane

1.



2.



3.



4.



- 1) BRE 365 testing
- 2) BRE 365 testing
- 3) BRE 365 testing
- 4) BRE 365 testing

Key to exploratory hole symbols and abbreviations

SAMPLE TYPES

ACM - Asbestos sample	AMAL - Amalgamated sample	B - Bulk disturbed sample
BLK - Block sample	C - Core sample	CBR - CBR test sample
D - Disturbed sample	ES - Environmental sample	EW - Environmental water sample
G - Gas sample	J - Jar sample	L - Liner sample
TW - Pushed thin wall sample	U - Undisturbed sample	UT - Undisturbed thin wall sample
W - Water sample		

IN-SITU TESTS

HV - Hand shear vane	HV(r) - Hand shear vane residual	PID - Photo ionisation detector
PP - Hand penetrometer	SPT - Standard penetration test	SPT(C) - SPT using cone



















GROUNDWATER

 Groundwater strike	 Groundwater rest level
--	--

ROTARY CORE DETAILS

TCR - Total core recovery (%)	SCR - Solid core recovery (%)	RQD - Rock quality designation (%)
FI - Fracture index	NI - Non-intact core	AZCL - Assumed zone of core loss

LEGEND

 Topsoil	 Clay	 Chalk	 Sand backfill
 Peat	 Silt	 Breccia	 Gravel backfill
 Made ground [cohesive]	 Sand	 Conglomerate	 Arisings
 Concrete	 Gravel	 Metamorphic	 Bentonite
 Wood	 Cobbles	 Igneous	 Concrete
 Brick	 Boulders		 Grout
 Bituminous material	 Mudstone		 Plain pipe
 Gypsum	 Siltstone		
 Coal	 Sandstone		 Slotted pipe
 Void	 Limestone		


Dynamic (Windowless) Sampler

BH101

Sheet 1 of 1

Hole Type WLS	Easting	Northing	Ground Level (m)	Scale 1:25
Project Name Hill View and Wayside	Project No. CE25.2088		Start Date 2025-12-01	End Date 2025-12-01

Client Eastmere Paddocks Ltd	Consultant LS	Contractor
---------------------------------	------------------	------------

Inst/ Backfill	Water Levels	Samples and Tests		Level (m)	Depth (m) (thickness)	Strata	
		Depth (m)	Type/ Ref			Results	Legend
					(0.20)		Grass over brown slightly gravelly slightly sandy CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint. Abundant rootlets. (TOPSOIL)
					0.20		Soft brown slightly gravelly slightly sandy CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.
					(1.80)		
					2.00		Soft brown slightly sandy gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.
					(0.80)		
					2.80		Light brown mottled cream very silty very sandy GRAVEL. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint and white chalk. (HEAD DEPOSITS)
					(2.20)		
					5.00		
						End of Borehole at 5.00m	

Remarks 1. CAT scanned prior to manual excavation. 2. Groundwater observed at 4.0mbgl, rising to 3.42mbgl within 30 minutes. 3. Borehole reached a maximum depth of 5.0mbgl. 4. Standpipe installed to target groundwater levels between 1.0m to 5.0m bgl.	Method, Plant, Stability, Dimensions 0.00 - 5.00m WLS	Logger LS
---	--	--------------

Checked By: LS Approved By: IB



Dynamic (Windowless) Sampler

BH102

Sheet 1 of 1

Hole Type WLS	Easting	Northing	Ground Level (m)	Scale 1:25
Project Name Hill View and Wayside	Project No. CE25.2088		Start Date 2025-12-01	End Date 2025-12-01

Client NJS Group	Consultant LS	Contractor
---------------------	------------------	------------

Inst/ Backfill	Water Levels	Samples and Tests		Level (m)	Depth (m)	Strata	
		Depth (m)	Type/ Ref			Legend	Description
					(0.20) 0.20		Grass over brown slightly gravelly slightly sandy CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint. Abundant rootlets. (TOPSOIL)
					(1.30) 1.50 (3.50) 5.00	 	Soft brown slightly gravelly slightly sandy CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint. Light brown mottled cream very silty very sandy GRAVEL. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint and white chalk. (HEAD DEPOSITS)
						End of Borehole at 5.00m	


Remarks 1. CAT scanned prior to manual excavation. 2. Groundwater observed at 4.5mbgl, rising to 4.28mbgl within 30 minutes. 3. Borehole reached a maximum depth of 5.0mbgl. 4. Standpipe installed to target groundwater levels between 1.0m to 5.0m bgl.	Method, Plant, Stability, Dimensions 0.00 - 5.00m WLS	Logger LS
---	--	--------------

Checked By: LS Approved By: IB

Trial Pit

Hole Type TP	Easting	Northing	Ground Level (m)	Scale 1:10
Project Name Hill View and Wayside	Project No. CE25.2088	Start Date 2025-12-01	End Date 2025-12-01	

Client NJS Group	Consultant LS	Contractor
---------------------	------------------	------------


Inst/ Backfill	Water Levels	Samples and Tests			Level (m)	Depth (m) (thickness)	Strata	
		Depth (m)	Type/ Ref	Results			Legend	Description
						(0.15)		Bituminous GRAVEL.
						0.15		Firm brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.
						(0.55)		
						0.70		End of Trial Pit at 0.70m
								
								

Remarks 1. Mechanical excavation of trial pit by the Client to a target depth of 0.70mbgl. 2. BRE 365 infiltration testing was conducted within the trial pit. 3. Backfilled with arisings on completion of testing.	Method, Plant, Stability, Dimensions	Logger
---	--------------------------------------	--------

Trial Pit

Hole Type TP	Easting	Northing	Ground Level (m)	Scale 1:10
Project Name Hill View and Wayside	Project No. CE25.2088	Start Date 2025-12-01	End Date 2025-12-01	

Client NJS Group	Consultant LS	Contractor
---------------------	------------------	------------


Inst/ Backfill	Water Levels	Samples and Tests			Level (m)	Depth (m) (thickness)	Strata	
		Depth (m)	Type/ Ref	Results			Legend	Description
						(0.15)		Grass over brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint. (TOPSOIL)
						0.15		Firm brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.
						(0.55)		
						0.70		End of Trial Pit at 0.70m
								
								

Remarks 1. Mechanical excavation of trial pit by the Client to a target depth of 0.70m bgl. 2. BRE 365 infiltration testing was conducted within the trial pit. 3. Backfilled with arisings on completion of testing.	Method, Plant, Stability, Dimensions	Logger
--	--------------------------------------	--------

Trial Pit

Hole Type TP	Easting	Northing	Ground Level (m)	Scale 1:10
Project Name Hill View and Wayside	Project No. CE25.2088	Start Date 2025-12-02	End Date 2025-12-02	

Client NJS Group	Consultant LS	Contractor
---------------------	------------------	------------


Inst/ Backfill	Water Levels	Samples and Tests			Level (m)	Depth (m) (thickness)	Strata	
		Depth (m)	Type/ Ref	Results			Legend	Description
						(0.15)		Grass over brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint. (TOPSOIL)
						0.15		Firm brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.
						(0.55)		
						0.70		End of Trial Pit at 0.70m
								
								

Remarks 1. Mechanical excavation of trial pit by the Client to a target depth of 0.70mbgl. 2. BRE 365 infiltration testing was conducted within the trial pit. 3. Backfilled with arisings on completion of testing.	Method, Plant, Stability, Dimensions	Logger
---	--------------------------------------	--------

Trial Pit

Hole Type TP	Easting	Northing	Ground Level (m)	Scale 1:10
Project Name Hill View and Wayside	Project No. CE25.2088	Start Date 2025-12-02	End Date 2025-12-02	




Client NJS Group	Consultant LS	Contractor
---------------------	------------------	------------

Inst/ Backfill	Water Levels	Samples and Tests			Level (m)	Depth (m) (thickness)	Strata	
		Depth (m)	Type/ Ref	Results			Legend	Description
						(0.15)		Grass over brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint. (TOPSOIL)
						0.15		Firm brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.
						(0.55)		
						0.70		End of Trial Pit at 0.70m
								

Remarks 1. Mechanical excavation of trial pit by the Client to a target depth of 0.70m bgl. 2. BRE 365 infiltration testing was conducted within the trial pit. 3. Backfilled with arisings on completion of testing.	Method, Plant, Stability, Dimensions	Logger
--	--------------------------------------	--------

Hole Type TP	Easting	Northing	Ground Level (m)	Scale 1:10
Project Name Hill View and Wayside		Project No. CE25.2088	Start Date 2025-12-01	End Date 2025-12-01

Client NJS Group	Consultant LS	Contractor
----------------------------	-------------------------	-------------------

Inst/ Backfill		Water Levels	Samples and Tests		Level (m)	Depth (thickness) (m)	Strata		
			Depth (m)	Type/ Ref			Results	Legend	
						0.15		Grass over brown slightly sandy slightly gravelly CLAY. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint. (TOPSOIL)	
						0.15		Firm brown slightly sandy CLAY. Sand is fine to coarse.	
						(0.85)			
						1.00			
						(0.50)		Brown clayey sandy GRAVEL. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint.	1.0
1.50		Cream very silty sandy GRAVEL. Sand is fine to coarse. Gravel is fine to coarse angular to sub-rounded flint and chalk.	1.5						
(0.20)									
1.70		End of Trial Pit at 1.70m							
									2.0

Remarks

1. Mechanical excavation of trial pit by the Client to a target depth of 1.7mbgl. 2. BRE 365 infiltration testing was conducted within the trial pit. 3. Backfilled with arisings on completion of testing.

Method, Plant, Stability, Dimensions

Logger








constructiveevaluation
site investigation • building pathology

Trial Hole: TP102

Test 2

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	1.45E-04
		m/s

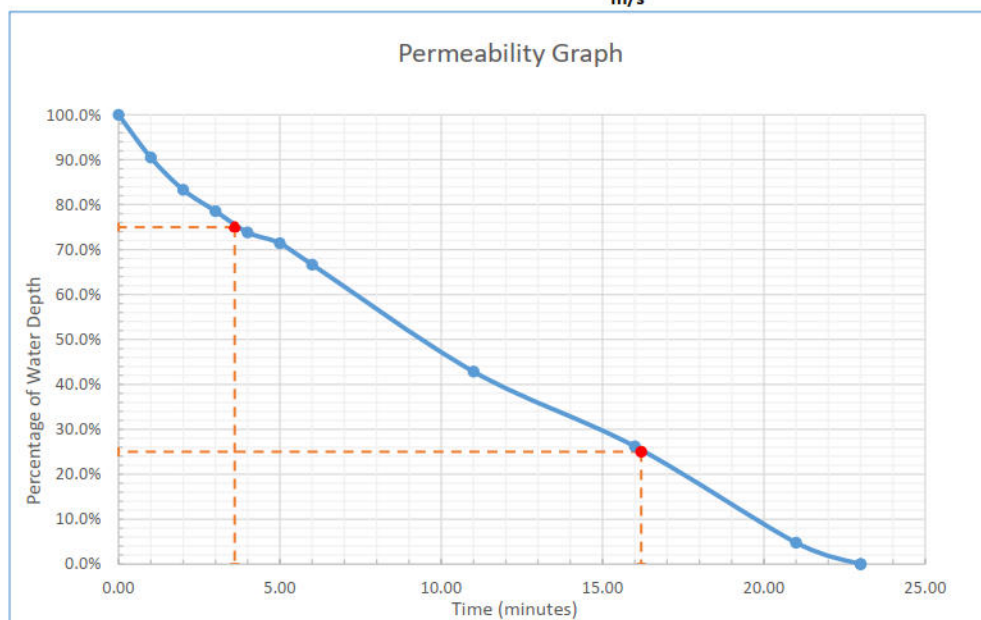


constructiveevaluation
site investigation • building pathology

Trial Hole: TP103

Test 1

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	2.22E-04
		m/s

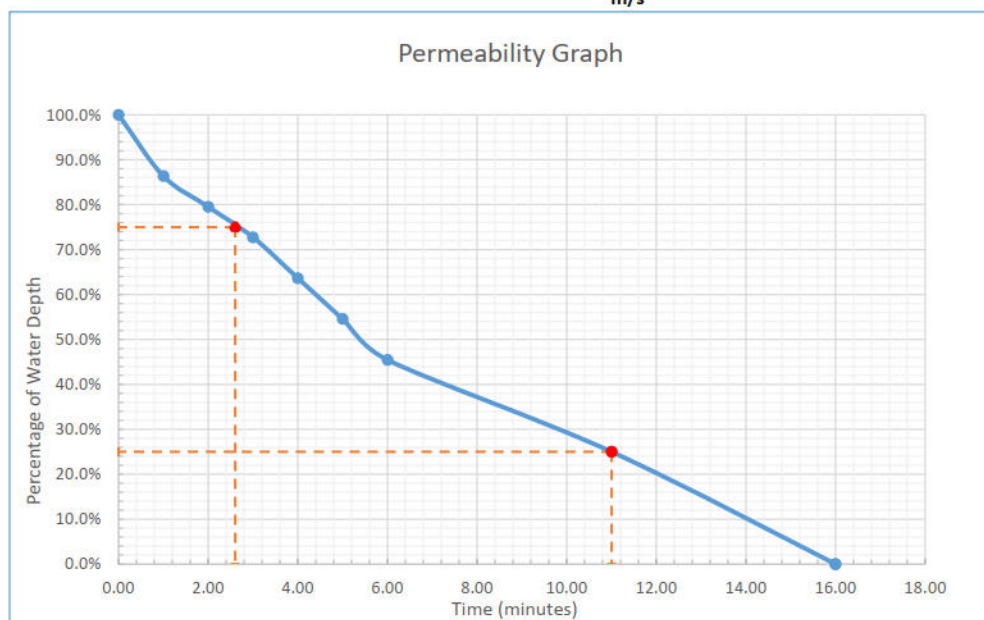






constructiveevaluation
site investigation • building pathology

Trial Hole: TP104

Test 1

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	1.09E-04
		m/s

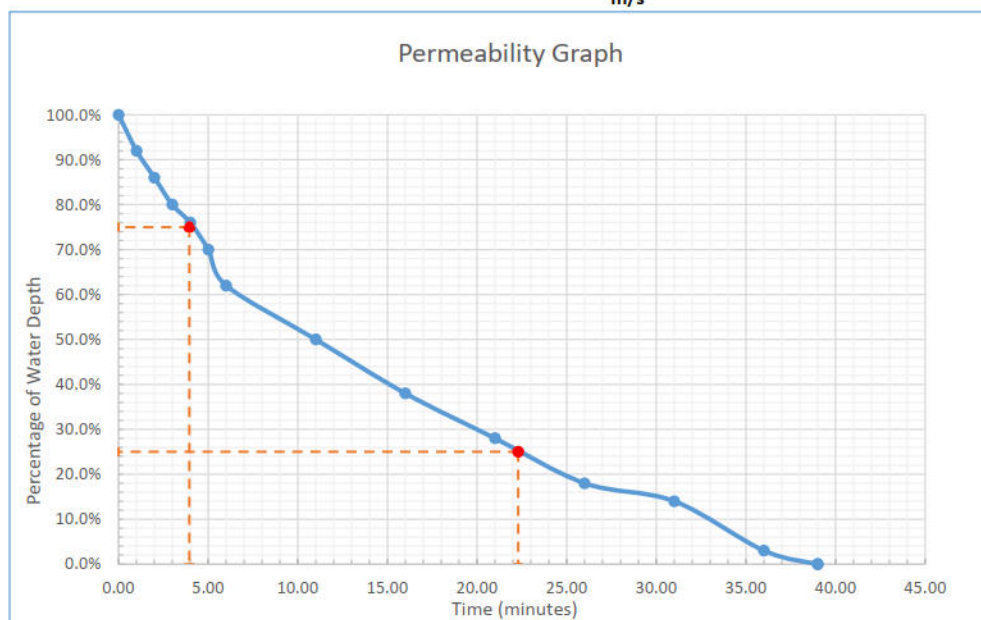

constructiveevaluation
site investigation • building pathology

Site: Hill View, Eastergate

Ref: CE25.2088

Trial Hole: TP104

Test 2

[illegible]

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE


Pit Size		Time in mins	
Length	2.00	5.4	75%
Width	0.60	31.5	25%
Depth	0.70		

Infiltration Rate

from 75%-25%

7.51258E-05

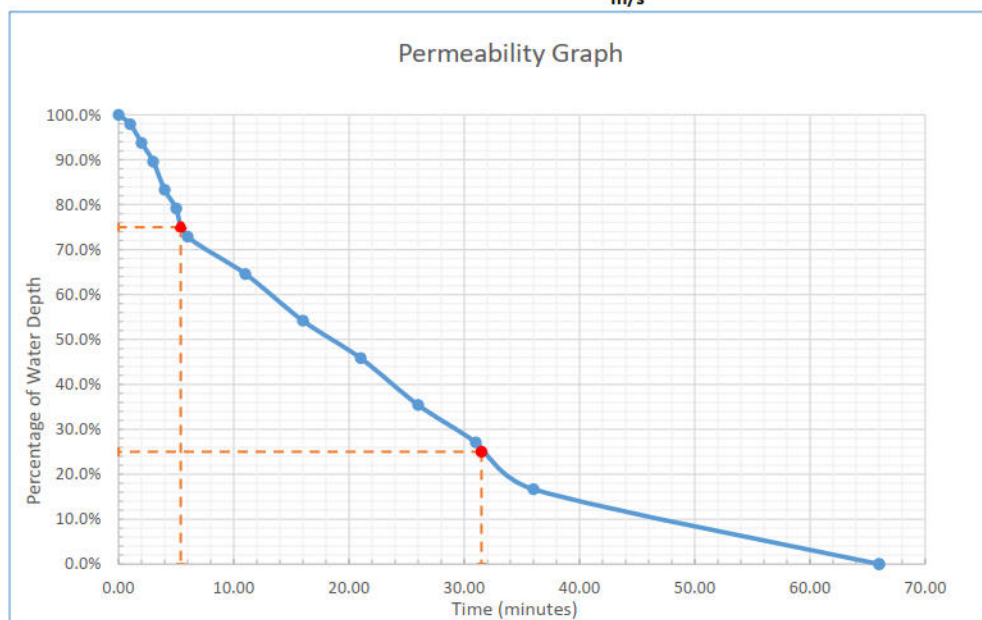m/s




constructiveevaluation
site investigation • building pathology

Trial Hole: TP104

Test 3

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	5.13171E-05
		m/s

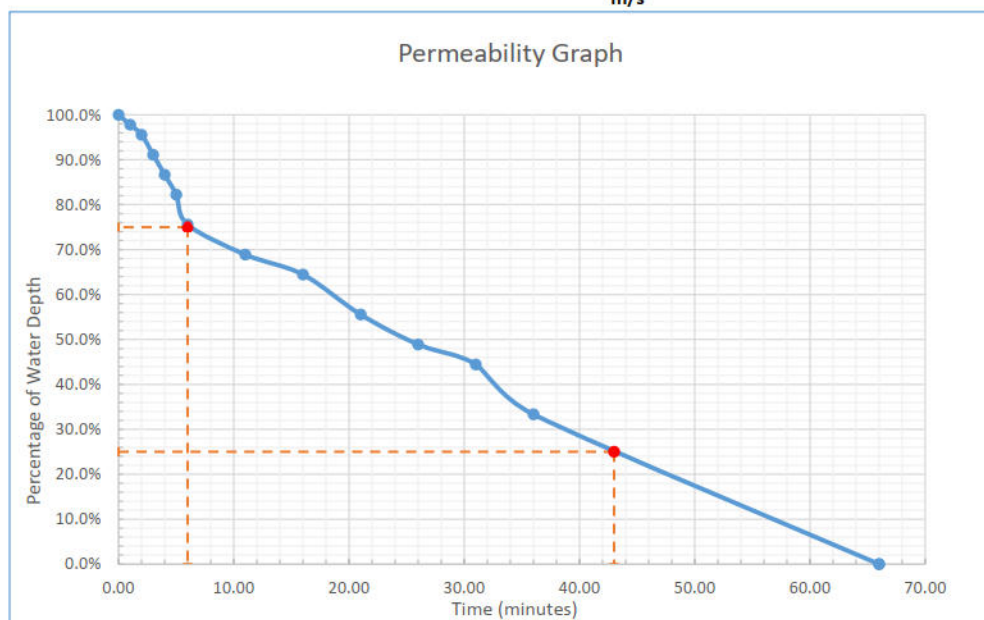


constructiveevaluation
site investigation • building pathology

Trial Hole: TP105

Test 1

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	3.20E-04
		m/s

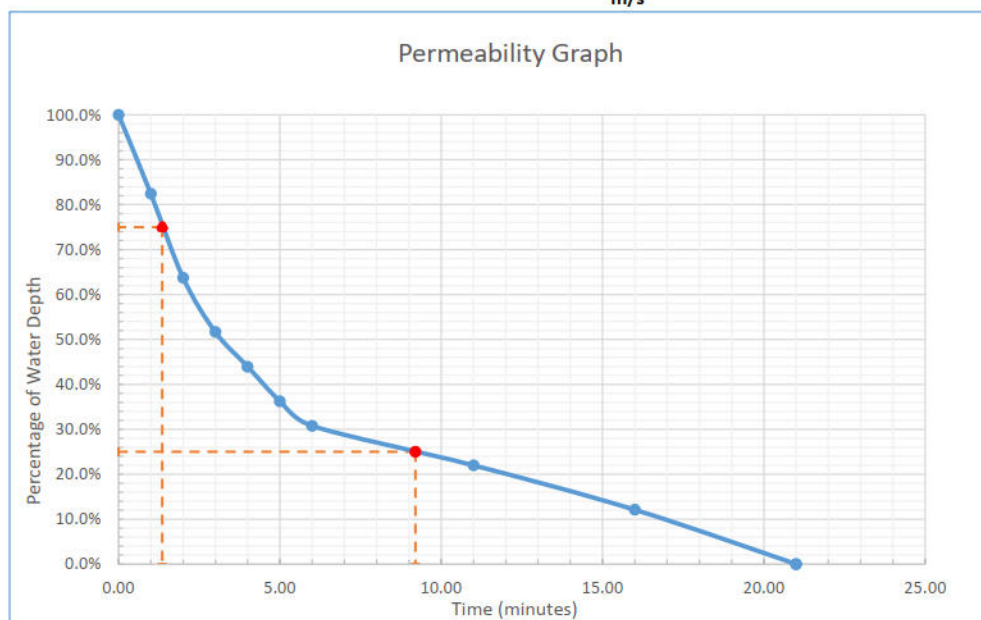

Ref: CE25.2088

Trial Hole: TP105

Test 2

[illegible]

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE


Pit Size		Time in mins	
Length	1.80	2.45	75%
Width	0.60	8.2	25%
Depth	1.70		

Infiltration Rate

from 75%-25%

4.35E-04

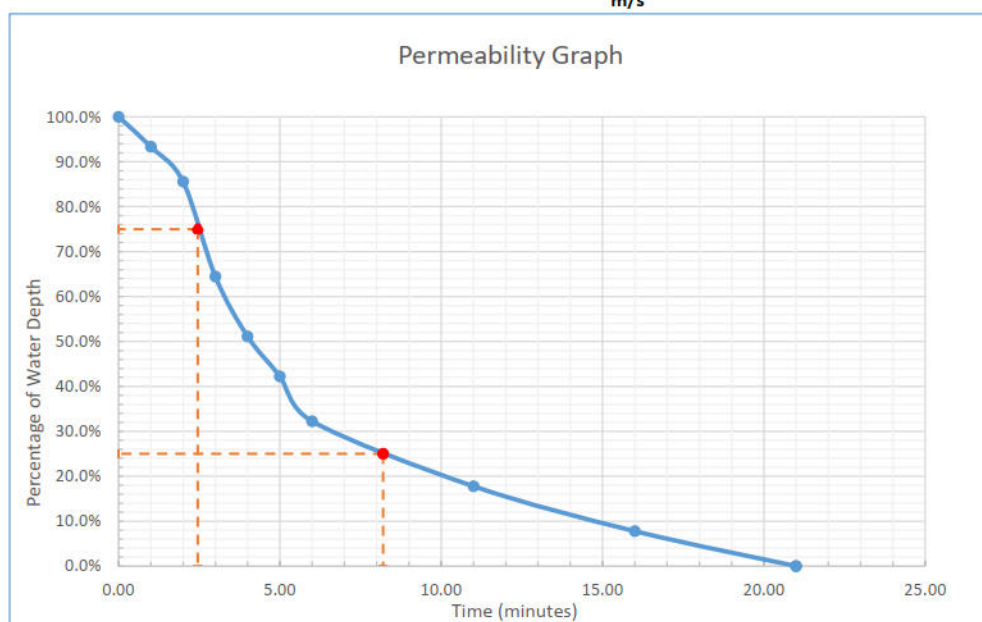m/s



Ref: CE25.2088

Trial Hole: TP105

Test 3

[illegible]

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE


Pit Size		Time in mins	
Length	1.80	2.1	75%
Width	0.60	9.3	25%
Depth	1.70		

Infiltration Rate

from 75%-25%

3.41E-04

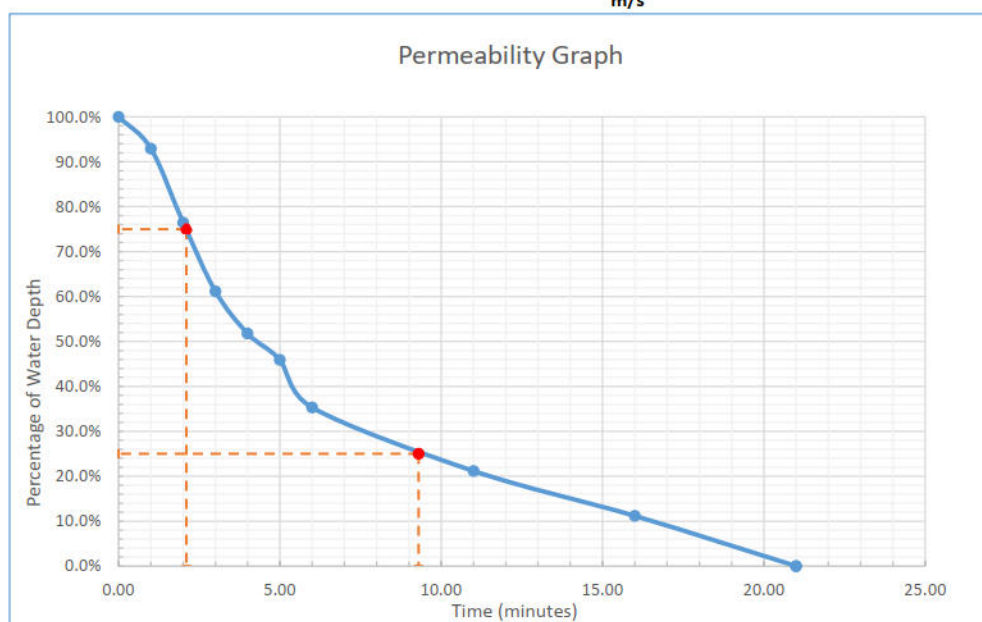m/s



Ref: CE25.2088

Trial Hole: TP106

Test 1


[illegible]

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

Pit Size		Time in mins	
Length	1.80	1.45	75%
Width	0.80	5.1	25%
Depth	1.70		

Infiltration Rate from 75%-25%

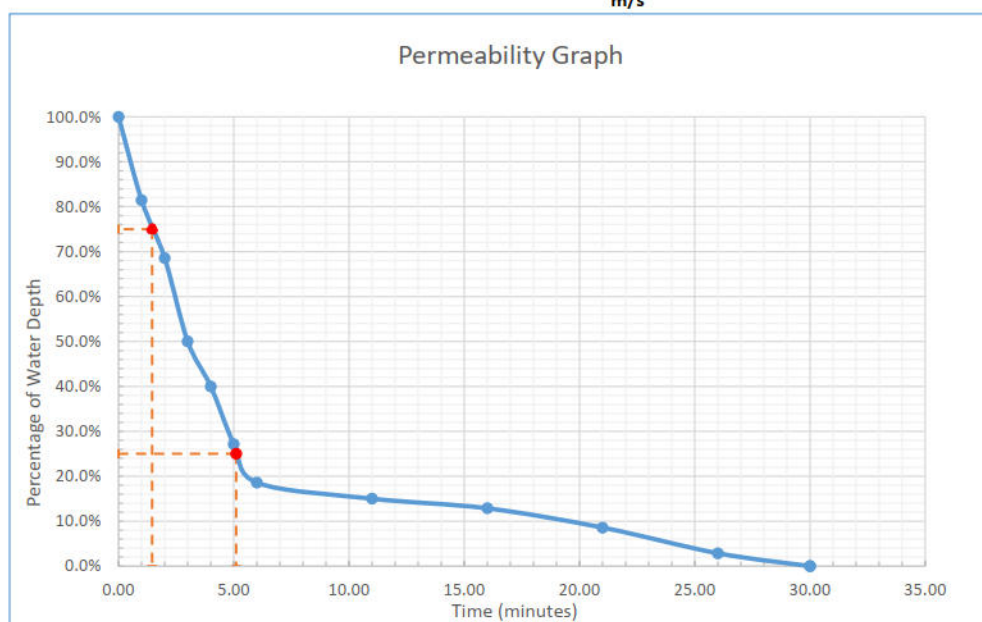7.06E-04
m/s






constructiveevaluation
site investigation • building pathology

Trial Hole: TP106

Test 3

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	5.33333E-05 m/s
---------------------------------	---------------------	---------------------------

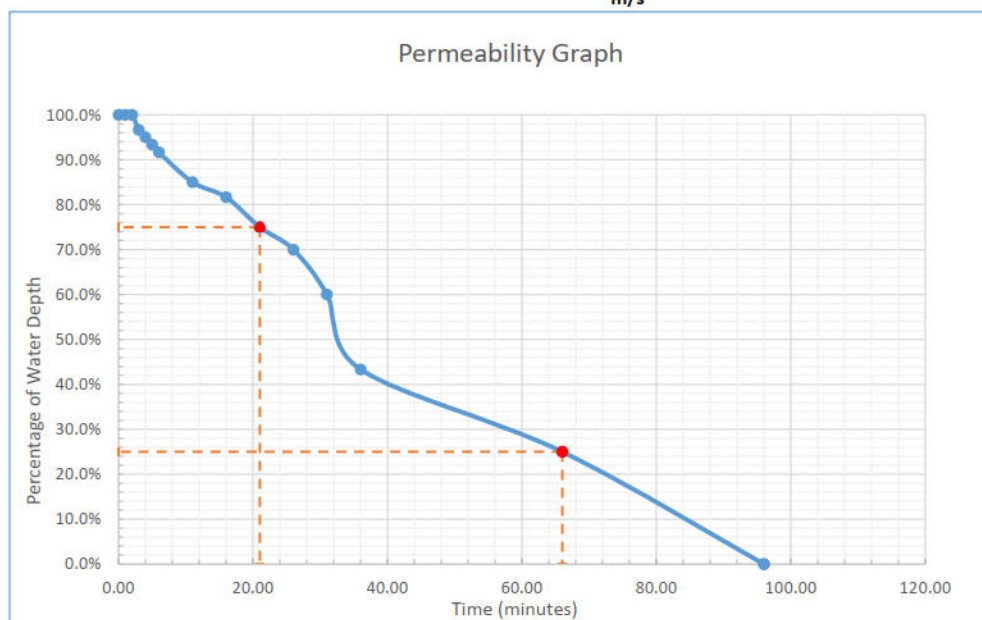



constructiveevaluation
site investigation • building pathology

Site: Hill View, Eastergate

Ref: CE25.2088

Trial Hole: TP107

Test 2

[illegible]

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE


Pit Size		Time in mins	
Length	2.10	2.05	75%
Width	0.60	8.6	25%
Depth	1.70		

Infiltration Rate

from 75%-25%

3.66E-04

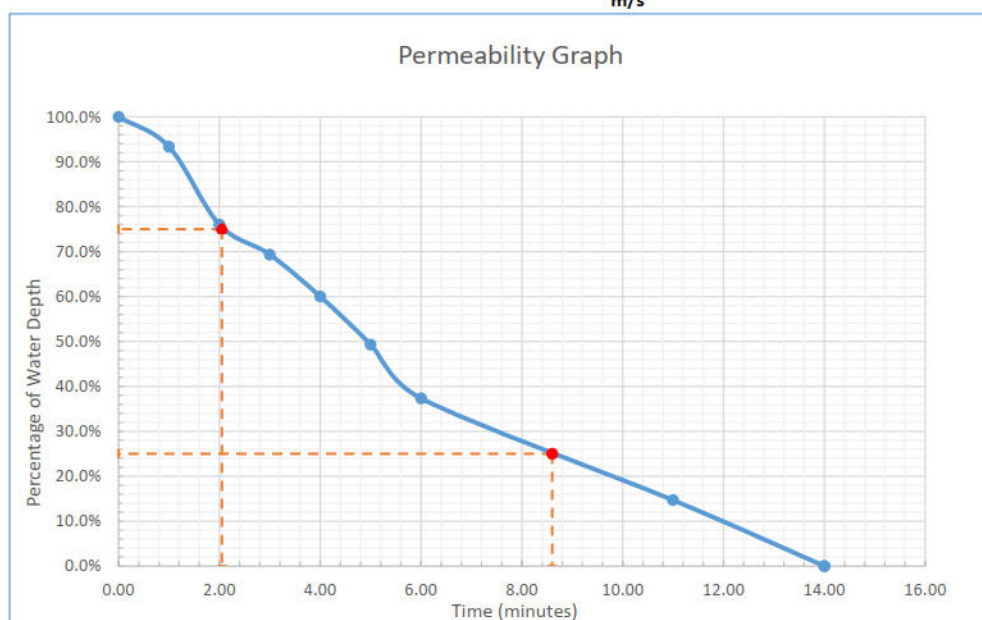m/s



Ref: CE25.2088




Test 3

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

from 75%-25%

3.43E-04

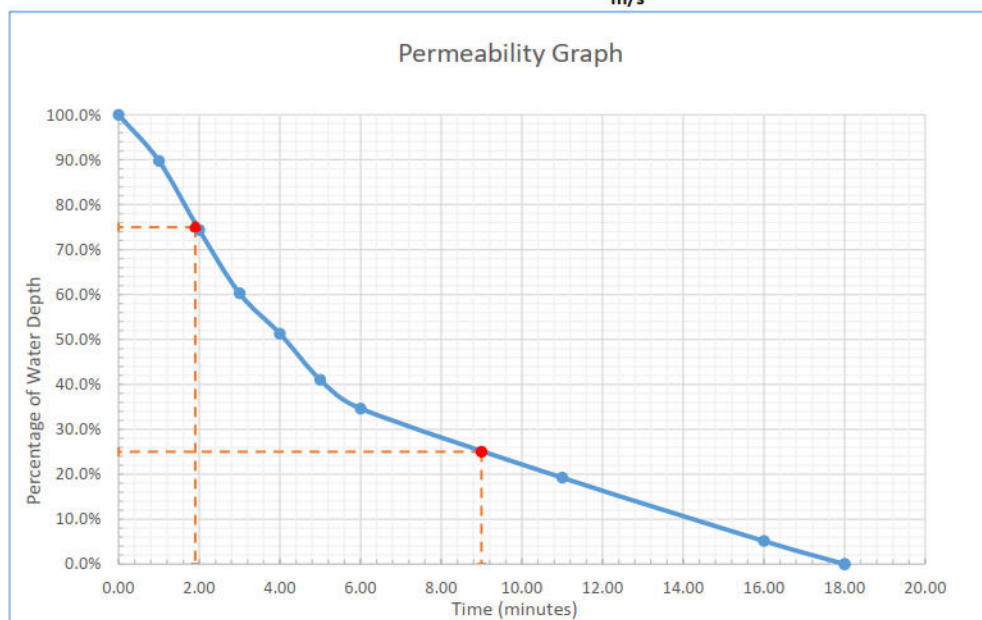m/s




constructiveevaluation
site investigation • building pathology

Trial Hole: TP108

Test 1

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	3.58E-04
		m/s

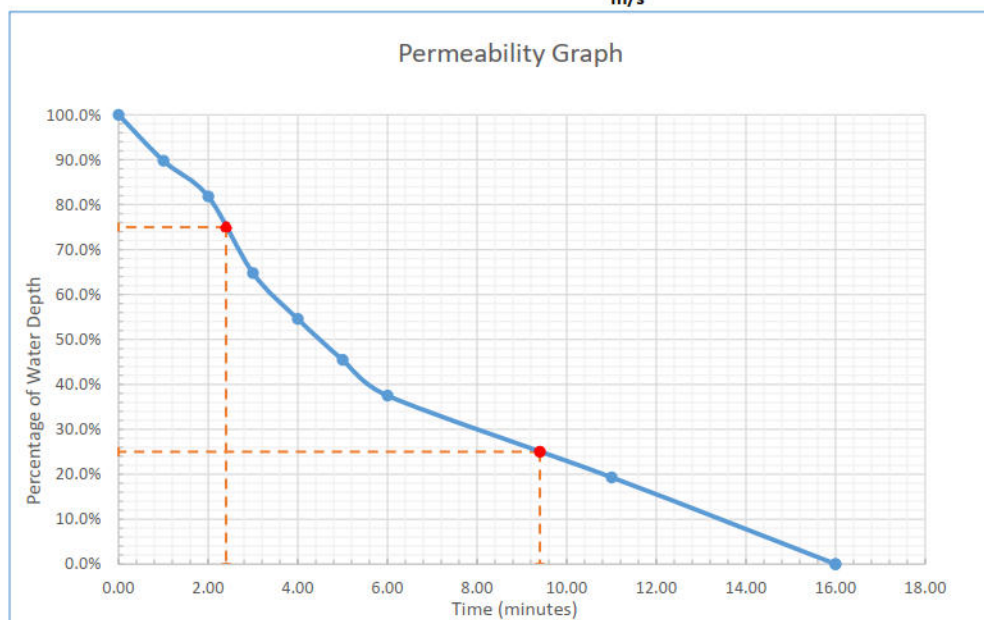


constructiveevaluation
site investigation • building pathology

Trial Hole: TP108

Test 2

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	2.11E-04
		m/s

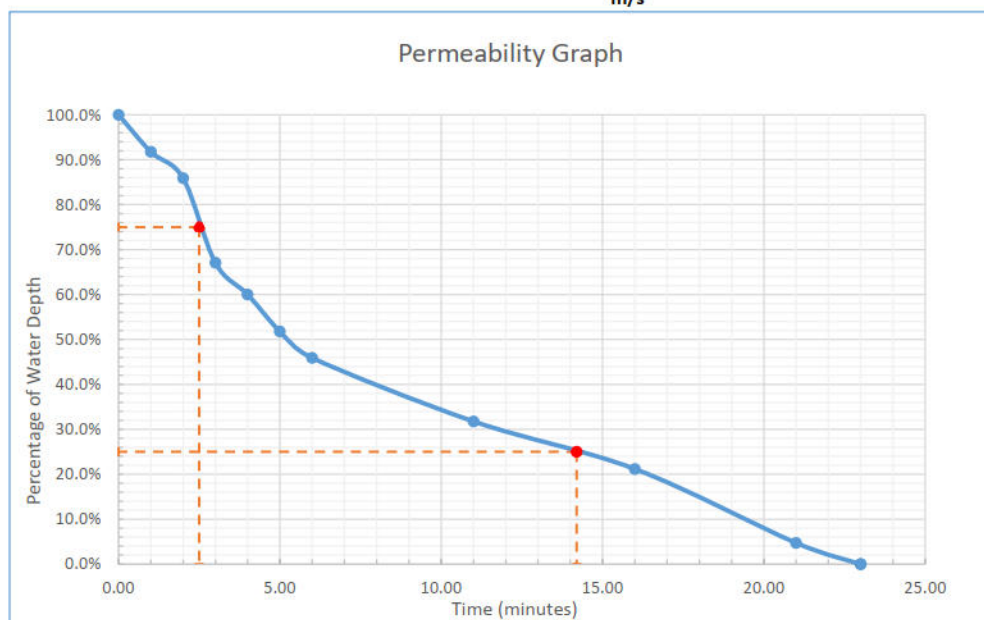


constructiveevaluation
site investigation • building pathology

Trial Hole: TP108

Test 3

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	4.27E-04
		m/s

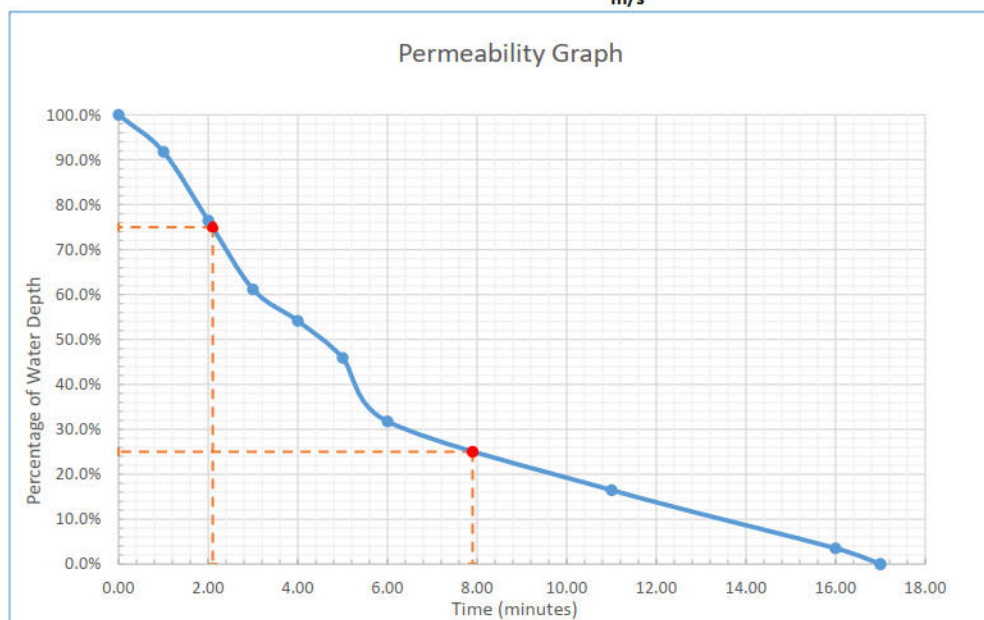


constructiveevaluation
site investigation • building pathology

Trial Hole: TP109

Test 1

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

<u>Infiltration Rate</u>	<u>from 75%-25%</u>	6.88895E-05
		m/s

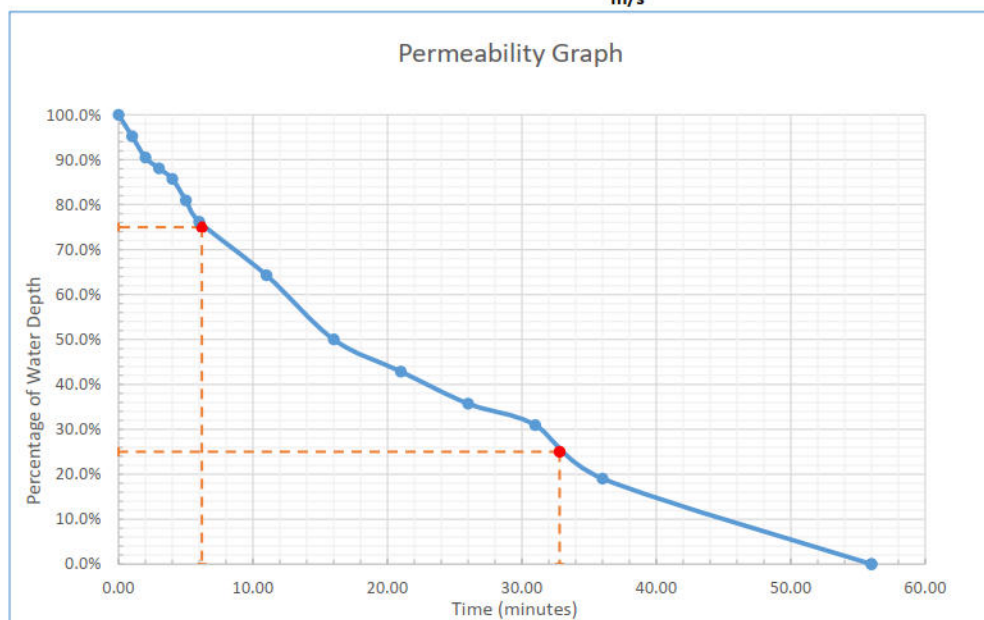





constructiveevaluation
site investigation • building pathology

Site: Hill View, Eastergate

Ref: CE25.2088

Trial Hole: TP01

Test 1

[illegible]

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE


Pit Size		Time in mins	
Length	1.90	2.5	75%
Width	0.70	26	25%
Depth	1.60		

Infiltration Rate

from 75%-25%

1.08E-04

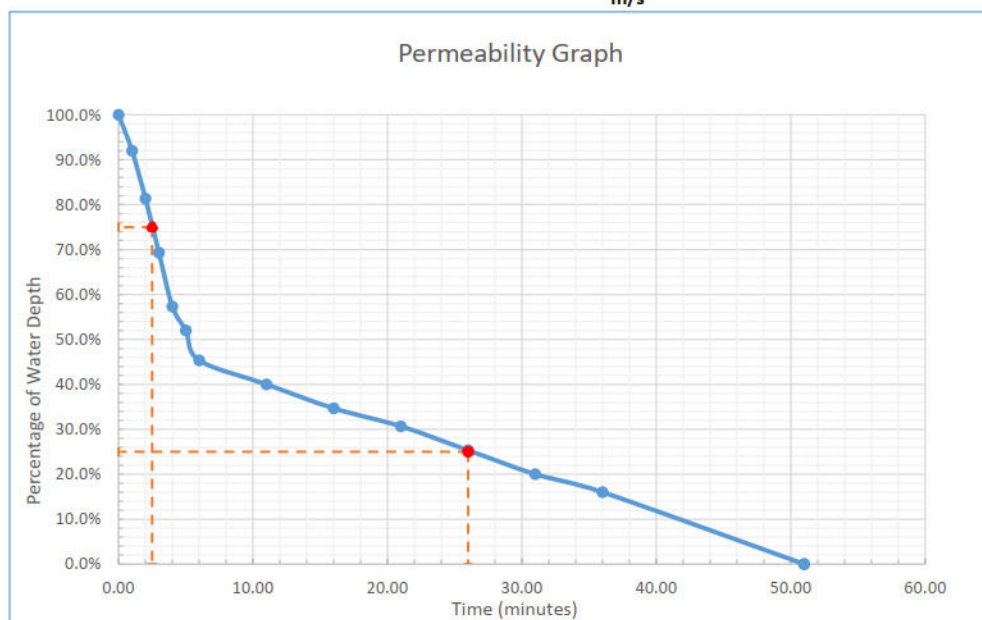m/s



Ref: CE25.2088

Trial Hole: TP01

Test 2


[illegible]

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

Pit Size		Time in mins	
Length	1.90	1.9	75%
Width	0.70	15.5	25%
Depth	1.60		

Infiltration Rate from 75%-25%

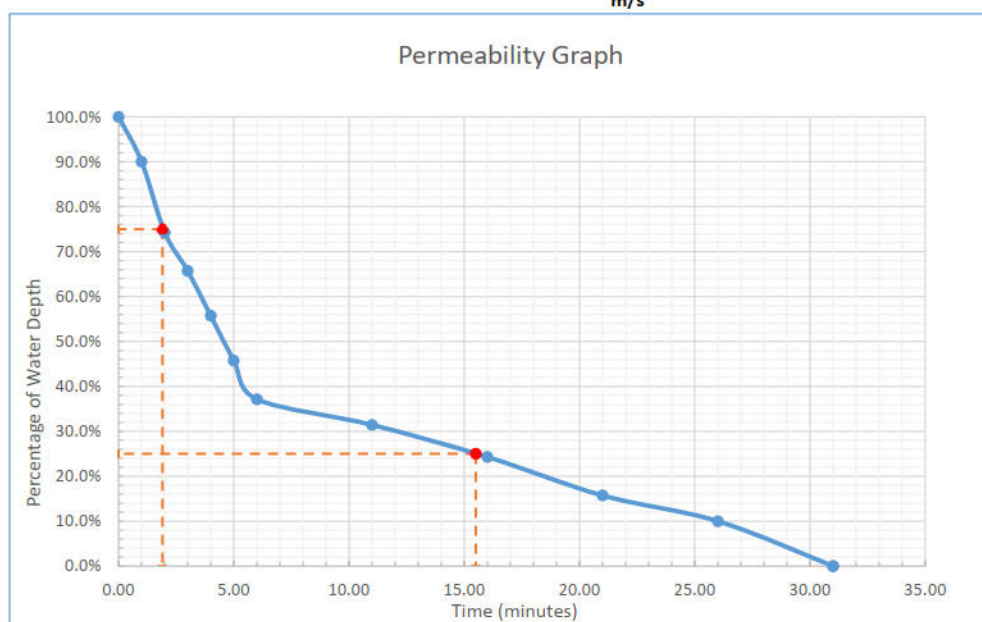1.81E-04
m/s









constructiveevaluation
site investigation • building pathology

Site: Hill View, Eastergate

Ref: CE25.2088

Trial Hole: TP02

Test 3

[illegible]

INFILTRATION CALCULATED FROM 75%-25% WATER DEPTH RANGE

Pit Size		Time in mins	
Length	1.90	3.5	75%
Width	0.70	19.5	25%
Depth	1.60		

Infiltration Rate

from 75%-25%

1.54E-04

m/s

