


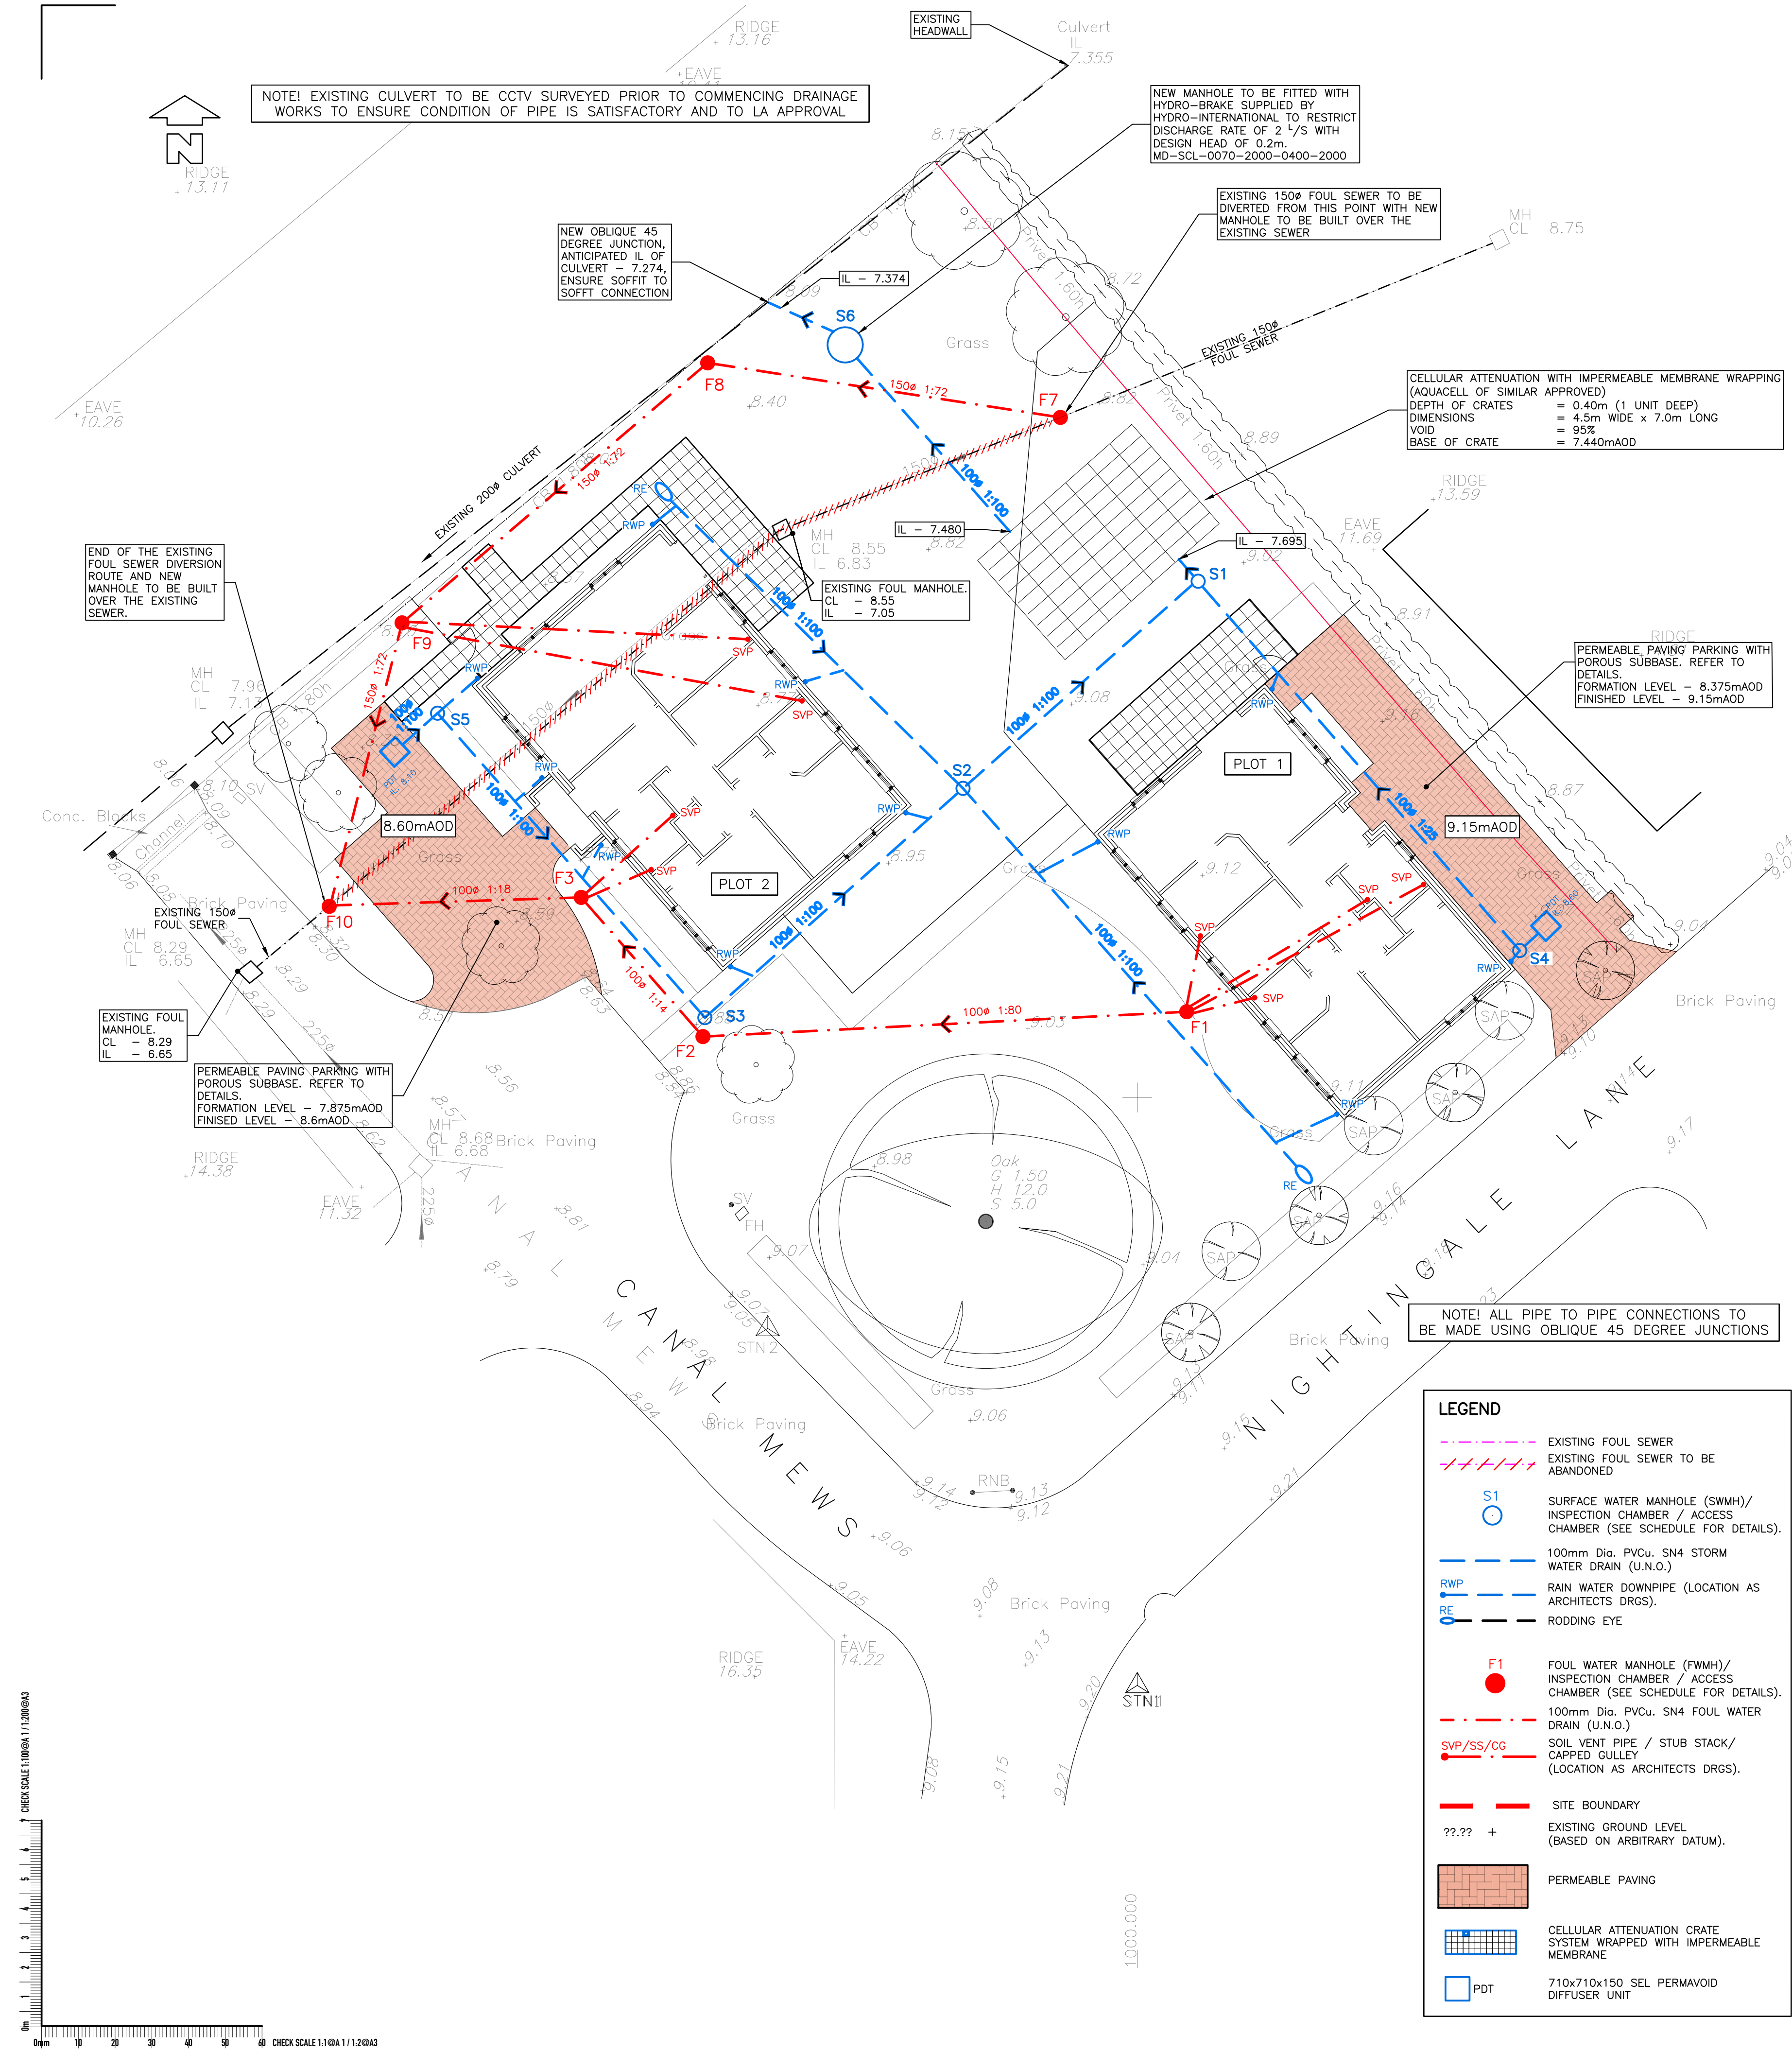

SUDS OPERATION & MAINTENANCE		
GENERAL		
MAINTENANCE SCHEDULE	REQUIRED ACTION	FREQUENCY
REGULAR MAINTENANCE	REMOVE SEDIMENT & DEBRIS FROM PRE-TREATMENT DEVICES & FLOOR OF INSPECTION TUBE OR CHAMBER	ANNUALLY
	CLEANING OF ANY GUTTERS & ANY FILTERS ON DOWNPIPES	ANNUALLY
	TRIMMING ANY ROOTS THAT MAY BE CAUSING BLOCKAGES	ANNUALLY (OR AS REQUIRED).
MONITORING	INSPECT SILT TRAPS AND NOTE RATE OF SEDIMENT ACCUMULATION	MONTHLY IN THE FIRST YEAR & THEN ANNUALLY
OPERATION AND MAINTENANCE REQUIREMENTS FOR PERMEABLE PAVING		
MAINTENANCE SCHEDULE	REQUIRED ACTION	TYPICAL FREQUENCY
REGULAR MAINTENANCE	BRUSHING AND VACUUMING (STANDARD COSMETIC SWEEP OVER WHOLE SURFACE)	ONCE A YEAR, AFTER AUTUMN LEAF FALL, OR REDUCED FREQUENCY AS REQUIRED, BASED ON SITE-SPECIFIC OBSERVATIONS OF CLOGGING OR MANUFACTURER'S RECOMMENDATIONS - PAY PARTICULAR ATTENTION TO AREAS WHERE WATER RUNS ONTO PVIOUS SURFACE FROM ADJACENT IMPERMEABLE AREAS AS THIS AREA IS MOST LIKELY TO COLLECT THE MOST SEDIMENT
	STABILISE AND MOW CONTRIBUTING AND ADJACENT AREAS	AS REQUIRED
OCCASIONAL MAINTENANCE	REMOVAL OF WEEDS OR MANAGEMENT USING GLYPHOSPATE APPLIED DIRECTLY INTO THE WEEDS BY AN APPLICATOR RATHER THAN SPRAYING	AS REQUIRED - ONCE PER YEAR ON LESS FREQUENTLY USED PAVEMENTS
REMEDIAL ACTIONS	REMEDIAL WORK TO ANY DEPRESSIONS, RUTTING AND CRACKED OR BROKEN BLOCKS CONSIDERED DETRIMENTAL TO THE STRUCTURAL PERFORMANCE OR A HAZARD TO USERS, AND REPLACE LOST JOINTING MATERIAL	AS REQUIRED
	REHABILITATION OF SURFACE AND UPPER SUB-STRUCTURES BY REMEDIAL SWEEPING	EVERY 10 TO 15 YEARS OR AS REQUIRED (IF INFILTRATION PERFORMANCE IS REDUCED DUE TO SIGNIFICANT CLOGGING)
MONITORING	INITIAL INSPECTION	MONTHLY FOR THREE MONTHS AFTER INSTALLATION
	INSPECT FOR EVIDENCE OF POOR OPERATION AND/OR WEED GROWTH - IF REQUIRED, TAKE REMEDIAL ACTION	THREE-MONTHLY, 48 HOURS AFTER LARGE STORMS IN FIRST SIX MONTHS
	INSPECT SILT ACCUMULATION RATES AND ESTABLISH APPROPRIATE BRUSHING FREQUENCIES	ANNUALLY
	MONITOR INSPECTION CHAMBERS	ANNUALLY
MONITORING	INSPECT TREATED TIMBER EDGING AND REPLACE AS AND WHEN REQUIRED.	ANNUALLY
OPERATION AND MAINTENANCE REQUIREMENTS FOR ATTENUATION STORAGE TANKS		
MAINTENANCE SCHEDULE	REQUIRED ACTION	TYPICAL FREQUENCY
REGULAR MAINTENANCE	INSPECT AND IDENTIFY ANY AREA THAT ARE NOT OPERATING CORRECTLY. IF REQUIRED, TAKE REMEDIAL ACTION	MONTHLY FOR 3 MONTHS, THEN ANNUALLY
	REMOVE DEBRIS FROM THE CATCHMENT SURFACE (WHERE IT MAY CAUSE RISK TO PERFORMANCE)	MONTHLY
	FOR SYSTEMS WHERE RAINFALL INFILTRATES INTO THE TANK FROM ABOVE, CHECK SURFACE OF FILTER FOR BLOCKAGE BY SEDIMENT, ALGAE OR OTHER MATTER. REMOVE AND REPLACE SURFACE INFILTRATION MEDIUM AS NECESSARY	ANNUALLY
	REMOVED SEDIMENT FROM PRE-TREATMENT STRUCTURES AND/OR INTERNAL FOREBAYS	ANNUALLY, OR AS REQUIRED
REMEDIAL ACTIONS	REPAIR/REHABILITATE INLETS, OUTLETS, OVERFLOWS AND VENTS	AS REQUIRED
MONITORING	INSPECT/CHECK ALL INLETS, OUTLETS, VENTS AND OVERFLOWS TO ENSURE THAT THEY ARE IN GOOD CONDITION AND OPERATING AS DESIGNED	ANNUALLY
	SURVEY INSIDE OF TANK FOR SEDIMENT BUILD-UP AND REMOVE IF NECESSARY	EVERY 5 YEARS OR AS REQUESTED

- NOTES
- © This drawing is the copyright of ARCH Associates Limited. It may not be copied, altered or reproduced without their written authority. This drawing must not be scaled. IF IN DOUBT ASK.
- GENERAL NOTES
- THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTS, ENGINEERS AND SPECIALISTS DRAWINGS AND DETAILS.
 - ALL DIMENSIONS TO BE TAKEN IN PREFERENCE TO SCALED DIMENSIONS.
 - ANY DISCREPANCIES BETWEEN THIS DRAWING AND OTHER INFORMATION IS TO BE BROUGHT TO THE ATTENTION OF THE ENGINEER PRIOR TO THE COMMENCEMENT OF THE WORKS ON SITE.
 - THE TOPOGRAPHY SURVEY SHOWN ON THIS DRAWING HAS BEEN PRODUCED BY STUART BAILEY LAND SURVEY ON JANUARY 2017, BASED ON ARBITRARY DATUM RATHER THAN THE TRUE DATUM INFORMATION. IT SHALL BE NOTED THAT ARCH ASSOCIATES TAKES NO RESPONSIBILITIES TO THIRD PARTIES PRODUCTS.
 - THE MAIN CONTRACTOR SHALL BE RESPONSIBLE FOR THE SETTING OUT AND ACCURACY OF ALL DIMENSIONS.
 - THE CONTRACTOR IS TO ENSURE THE STABILITY AND STRUCTURAL INTEGRITY OF THE EXISTING PROPERTY AT ALL TIMES DURING WORKS AND IS TO BE RESPONSIBLE FOR ALL PROPPING AND SHORING AS REQUIRED.
 - THE MAIN CONTRACTOR TO PROVIDE AND FIX SUITABLE BRACING AND PROPPING FOR ALL ELEMENTS IN THE TEMPORARY CONDITION DURING CONSTRUCTION STAGE, SUCH AS TO ENSURE STRUCTURE STABILITY AT ALL TIMES.
 - IT IS THE CONTRACTORS SOLE RESPONSIBILITY FOR ASCERTAINING SAFE DISPOSAL OF ANY OFF-SITE EXCAVATED SPOIL. NO CLAIM RESULTING FROM ABNORMAL TIP REQUIREMENTS WILL BE ENTERTAINED.
- DRAINAGE
- ALL MATERIALS AND WORKMANSHIP TO 'SEWERS FOR ADOPTION, 7th EDITION'
 - ALL MATERIALS AND WORKMANSHIP TO COMPLY WITH BS EN 752-1: 1996
 - WHEN USING VITRIFIED CLAY PIPEWORK WITH FLEXIBLE JOINTS, SUPERSTRENGTH SHALL BE USED. ALL ADAPTABLE WORKS SHALL USE PIPEWORK FOR NON-ADOPTED SYSTEM PVCU-SN4 CLASS PIPEWORK AND FITTINGS MAY BE SUBSTITUTED.
 - CONCRETE ENCASMENT, MINIMUM 150 BED AND HAUNCH, TO BE USED ON PIPEWORK UNDER ROADS WITH LESS THAN 1200 COVER TO CROWN.
 - UNLESS OTHERWISE STATED, ALL PIPEWORK TO BE BEDDED AND SURROUNDED IN 10mm SINGLE SIZE AGGREGATE UP TO 450mm DIAMETER. FOR LARGER PIPEWORK, 20mm SHALL BE USED.
 - REFER TO MANHOLE SCHEDULE FOR SIZES, COVERS ETC.
 - ALL MATERIALS TO COMPLY WITH THE RELEVANT BS-EN, LATEST EDITION, FOR PIPEWORK AND FITTING.
 - UPON COMPLETION, ALL WORKS TO BE THOROUGHLY CLEANED BY FLUSHING.

CDM REGULATIONS 2015		
ARCH ASSOCIATES HAVE CONSIDERED AND, WHERE REASONABLY PRACTICABLE, AVOIDED FORESEEABLE RISKS IN THE PREPARATION OF THE DESIGN SHOWN ON THIS AND RELATED DRAWINGS. SIGNIFICANT RISKS WHICH REMAIN AND ASSOCIATED CONTROL MEASURES ARE IDENTIFIED BELOW AND SHOULD BE GIVEN PARTICULAR ATTENTION BY THE MAIN CONTRACTOR ON SITE.		
ACTIVITY	HAZARD	CONTROL
NOTE: THE ABOVE ASSESSMENT RECORDS ONLY THOSE ELEMENTS CONSIDERED UNUSUAL, DIFFICULT TO MANAGE OR OUTSIDE OF THE ANTICIPATED EXPERTISE OF A COMPETENT CONTRACTOR		

COLOURED
DRAWING
REQUEST A COLOURED COPY IF
THIS STAMP IS NOT RED

THIS DRAWING IS TO BE
READ IN CONJUNCTION WITH
DRAWING No.SPR032-551

FOUL MANHOLE SCHEDULE							
REF	COVER LEVEL	INVERT LEVEL	DEPTH TO INVERT	SIZE	TYPE	COVER	COMMENTS
F1	9.150	8.400	0.750	450ø	TYPE 3	B125 300x300	
F2	8.900	7.600	1.300	450ø	TYPE 3	B125 300x300	
F3	8.850	7.150	1.700	450ø	TYPE 3	B125 450x450	
F7	8.820	~7.200	1.620	450ø	TYPE 3	B125 450x450	START OF THE DIVERSION ROUTE. NEW MANHOLE TO BE INSTALLED OVER THE EXISTING 150mm DIA. FOUL SEWER.
F8	8.200	7.030	1.170	450ø	TYPE 3	B125 450x450	
F9	8.200	6.830	1.370	450ø	TYPE 3	B125 450x450	
F10	8.330	6.700	1.630	450ø	TYPE 3	C250 450x450	END OF THE DIVERSION ROUTE. NEW MANHOLE TO BE INSTALLED OVER THE EXISTING 150mm DIA. FOUL SEWER.

SURFACE WATER MANHOLE SCHEDULE							
REF	COVER LEVEL	INVERT LEVEL	DEPTH TO INVERT	SIZE	TYPE	COVER	COMMENTS
S1	9.000	7.724	1.276	450ø	TYPE 3	B125 450x450	300MM SUMP/CATCHPIT
S2	8.850	7.830	1.020	450ø	TYPE 3	B125 450x450	
S3	8.900	7.945	0.955	450ø	TYPE 3	B125 450x450	
S4	9.100	8.400	0.700	450ø	TYPE 3	B125 450x450	300MM SUMP/CATCHPIT
S5	8.850	8.082	0.768	450ø	TYPE 3	B125 450x450	300MM SUMP/CATCHPIT
S6	8.300	7.395	0.905	1200ø	TYPE 2	C250 675x675	HYDRO-BRAKE SUPPLIED BY HYDRO-INTERNATIONAL TO RESTRICT FLOW RATE TO 2 1/2 S, WITH DESIGN HEAD AT 0.2m

P7	17.06.21	AMENDED TO SUIT LLFA COMMENTS	CH
P6	28.05.21	AMENDED TO SUIT LLFA COMMENTS	CH
P5	18.05.21	AMENDED TO SUIT LLFA COMMENTS	CH
P4	12.04.21	PLOT 1 UPDATED	JH
P3	09.04.21	SITE LAYOUT & DRAINAGE UPDATED	JH
P2	12.08.19	SITE LAYOUT & DRAINAGE UPDATED	JH
P1	12.12.18	PRELIMINARY ISSUE FOR COMMENT	PJM
Revision	Date	Description	By

ARCH ASSOCIATES
CONSULTING CIVIL AND STRUCTURAL ENGINEERS
The Town House, St. George's Square, Bishops Waltham, Southampton, Hampshire, SO22 1AF.
Telephone: 01489 890004 Email: admin@archassociates.co.uk Web: www.archassociates.co.uk

Client: SEAWARD PROPERTIES LTD.
Architect: STUDIO LACK ARCHITECTURE
Project Title: LAND OFF CANAL MEWS BARNHAM

Drawing Title: DRAINAGE STRATEGY

Scale: 1:125	Paper Size: A1	Date: NOV. 2018	Drawn By: PJM	Checked By: AWR
Project No: SPR032	Drawing No: 500	Revision: P7		