




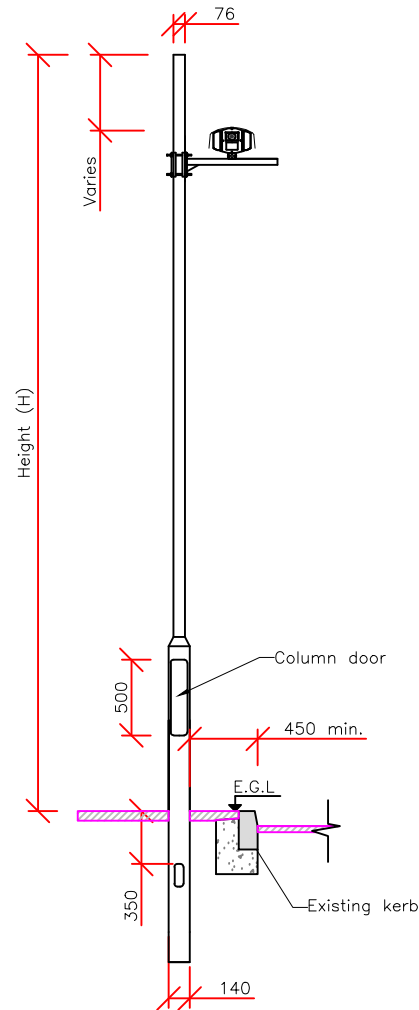

Lighting Column and Camera
General Arrangement Detail

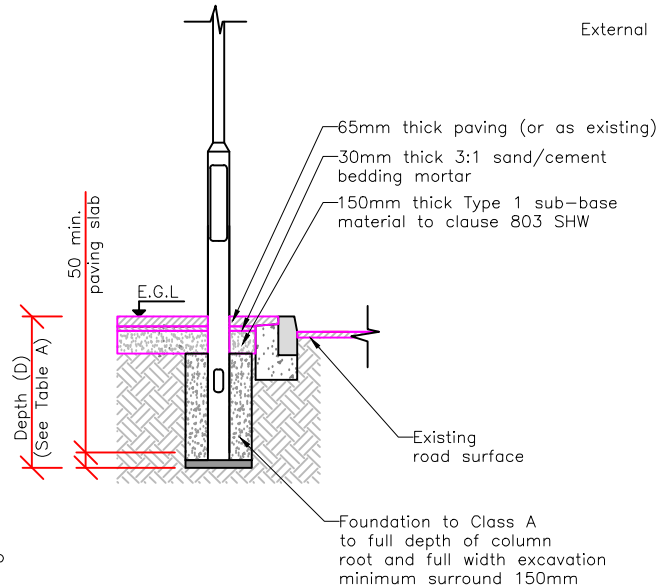

Column Foundation and
Reinstatement Details

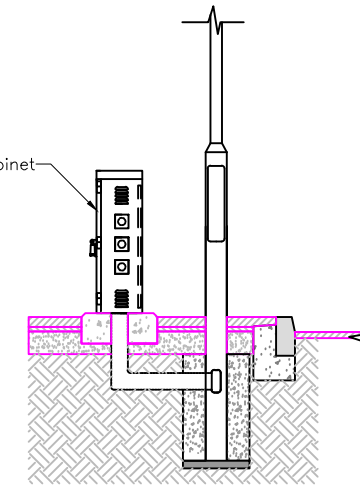

Lighting Column and Cabinet
General Arrangement Detail

TABLE A:	DEPTH (D) (mm)		
COLUMN HEIGHT (H) (mm)	G630 GOOD SOIL	G390 AVERAGE SOIL	G230 POOR SOIL
5000	800	1000	1200

Soil Type: (Factor G) (BS 5649 Part 2)

G630 Good: Compact, well graded sand and gravel, hard clay, well graded fine and coarse sand, decomposed granite rock and soil. Good material should be well drained and in locations where water will not stand.

G390 Average: Compact fine sand, medium clay, compact, well drained sandy loam, loose coarse sand and gravel. Average soils should be drained sufficiently well that water does not stand on surface.

G230 Poor: Soft clay, clay loam, poorly compacted sand, clays containing a large amount of silt and vegetable matter, and made ground. Poor soils will normally be wet and have poor drainage.

Notes:

- Contractors to check dimensions and notify any discrepancies or errors to the company immediately.
- Work to figured dimensions only and to be checked before commencement of work on site.
- Do not scale off this drawing.
- All dimensions in millimetres unless otherwise stated.
- For further details of external cabinet and base, refer to drawing number C-0000-004.

A	For Information	DAO	DAO	CL	01/06/2014
Rev	Purpose Of Issue	Dm	Ckd	App	Date

ParkingEye
car park solutions

Office Contact:
40 Eaton Avenue, Matrix Park
Buckshaw Village, Chorley,
Lancashire, PR7 7NA

Tel: 01772 450 970
Fax: 01772 450 979
Email: ops.civils@parkingeye.co.uk

Client: ParkingEye

Project: Standard Details

Title: ANPR Lighting Column General Arrangement

Purpose: Information Drawn: *B. Long* Date: 17/02/2017

Status: Information Checked: Date:

Scale @ A4: 1:50 Approved: *B. Long* Date: 17/02/2017

Drg. No: C-0000-001 Rev: A