




From: Sarah Burrow <Sarah.Burrow@arun.gov.uk>
Sent: 26 November 2019 14:20
To: Daniel Vick <Daniel.Vick@arun.gov.uk>
Cc: Planning.Responses <Planning.Responses@arun.gov.uk>
Subject: RE: Clifton Road,Bognor Regis,West Sussex- Surface Drainage - BR/204/189/DOC

Hi Dan,

As per my e-mail below, the applicant will have to address the points I have raised before I can recommend that the condition is discharged. This will mean carrying out appropriate testing, correcting their calculations and drawings (both layout and details), and most probably reconstructing the soakaway or installing additional one(s) to better serve the properties in accordance with the condition.

Kind Regards

Sarah

From: Daniel Vick <Daniel.Vick@arun.gov.uk>
Sent: 26 November 2019 14:01
To: Sarah Burrow <Sarah.Burrow@arun.gov.uk>
Subject: RE: Clifton Road,Bognor Regis,West Sussex- Surface Drainage - BR/204/189/DOC

Sarah,

Response from agent.

“One soak away has been installed as info sent to you
When will this condition be discharged?”

Dan

From: Daniel Vick
Sent: 26 November 2019 09:13
To: Sarah Burrow <Sarah.Burrow@arun.gov.uk>
Subject: RE: Clifton Road,Bognor Regis,West Sussex- Surface Drainage - BR/204/189/DOC

Sarah,

Thanks, I shall find out and let you know.

Dan

From: Sarah Burrow <Sarah.Burrow@arun.gov.uk>
Sent: 22 November 2019 11:19
To: Daniel Vick <Daniel.Vick@arun.gov.uk>
Cc: Planning.Responses <Planning.Responses@arun.gov.uk>
Subject: RE: Clifton Road, Bognor Regis, West Sussex- Surface Drainage - BR/204/189/DOC

Hi Dan,

I am assuming that this application and calculations are for ONE soakaway for the FOUR houses in the terrace. If the application is for one house, or for four soakaways (one per house) then please disregard my comments and I shall reassess the application.

1. The infiltration test that was completed on 4/11/2019 was not in accordance with BRE 365. The hole was not filled three times, nor is it to the depth of the proposed soakaway (0.5m vs a 1.2m depth pit). Furthermore, we encourage applicants to contact us to discuss an appropriate time to carry out infiltration testing which we prefer to be in January/February when the soil is at it's most saturated.
2. There has been no winter groundwater monitoring data submitted.
3. It is unclear which areas the applicant has used for different parts of the calculations. They will need to use the total impermeable area of 454m² for both inflow and outflow calculations if both the roofs and paved areas will drain to the soakaway. (I am happy for them to disregard the garden areas.) If the paved areas are to be drained using another method then I am happy for the soakaway calculations to just use the impermeable roof area of 202m². (But then I will need to see calcs for the method of drainage proposed for the paved areas.) Whatever area is used for the soakaway, it will have to be consistent for both inflow and outflow.
4. The applicant/agent appears to have only calculated the storage capacity for a 10 year storm. The soakaway should be sized to store for up to 1 in 100 year storm plus 40% to account for climate change.
5. The applicant will need to supply a drainage layout drawing which includes the location, levels and dimensions of the proposed soakaway. This should include levels and or falls of the pipes.
6. The applicant needs to submit drawing details for the soakaway, silt traps/catch pits and drainage channels.

If the applicant would like more information about the level of detail required then it is suggested they consult the Surface Water Drainage Checklist and Supplementary guidance as suggested by Laura Gibbons (links below). Alternatively they can contact this department directly at land.drainage@arun.gov.uk.

Checklist: <https://www.arun.gov.uk/download.cfm?doc=docm93jijm4n14642.pdf&ver=14992>

Guidance: <https://www.arun.gov.uk/surfacewater>

Unfortunately it is not possible to recommend discharge of conditions until the points above have been addressed.

Kind Regards

Sarah Burrow

From: Daniel Vick <Daniel.Vick@arun.gov.uk>
Sent: 21 November 2019 16:45
To: Sarah Burrow <Sarah.Burrow@arun.gov.uk>
Subject: FW: Clifton Road, Bognor Regis, West Sussex- Surface Drainage - BR/204/189/DOC


Sarah,

Please see the attached and comments below.

Dan


From: Ben Whitby [REDACTED]
Sent: 12 November 2019 12:43
To: Laura Gibbons <Laura.Gibbons@arun.gov.uk>; Daniel Vick <Daniel.Vick@arun.gov.uk>
Cc: Samantha Allen <Samantha.Allen@arun.gov.uk>
Subject: Fwd: Clifton Road,Bognor Regis,West Sussex- Surface Drainage

Ben J. Whitby BSc (Hons)
Director

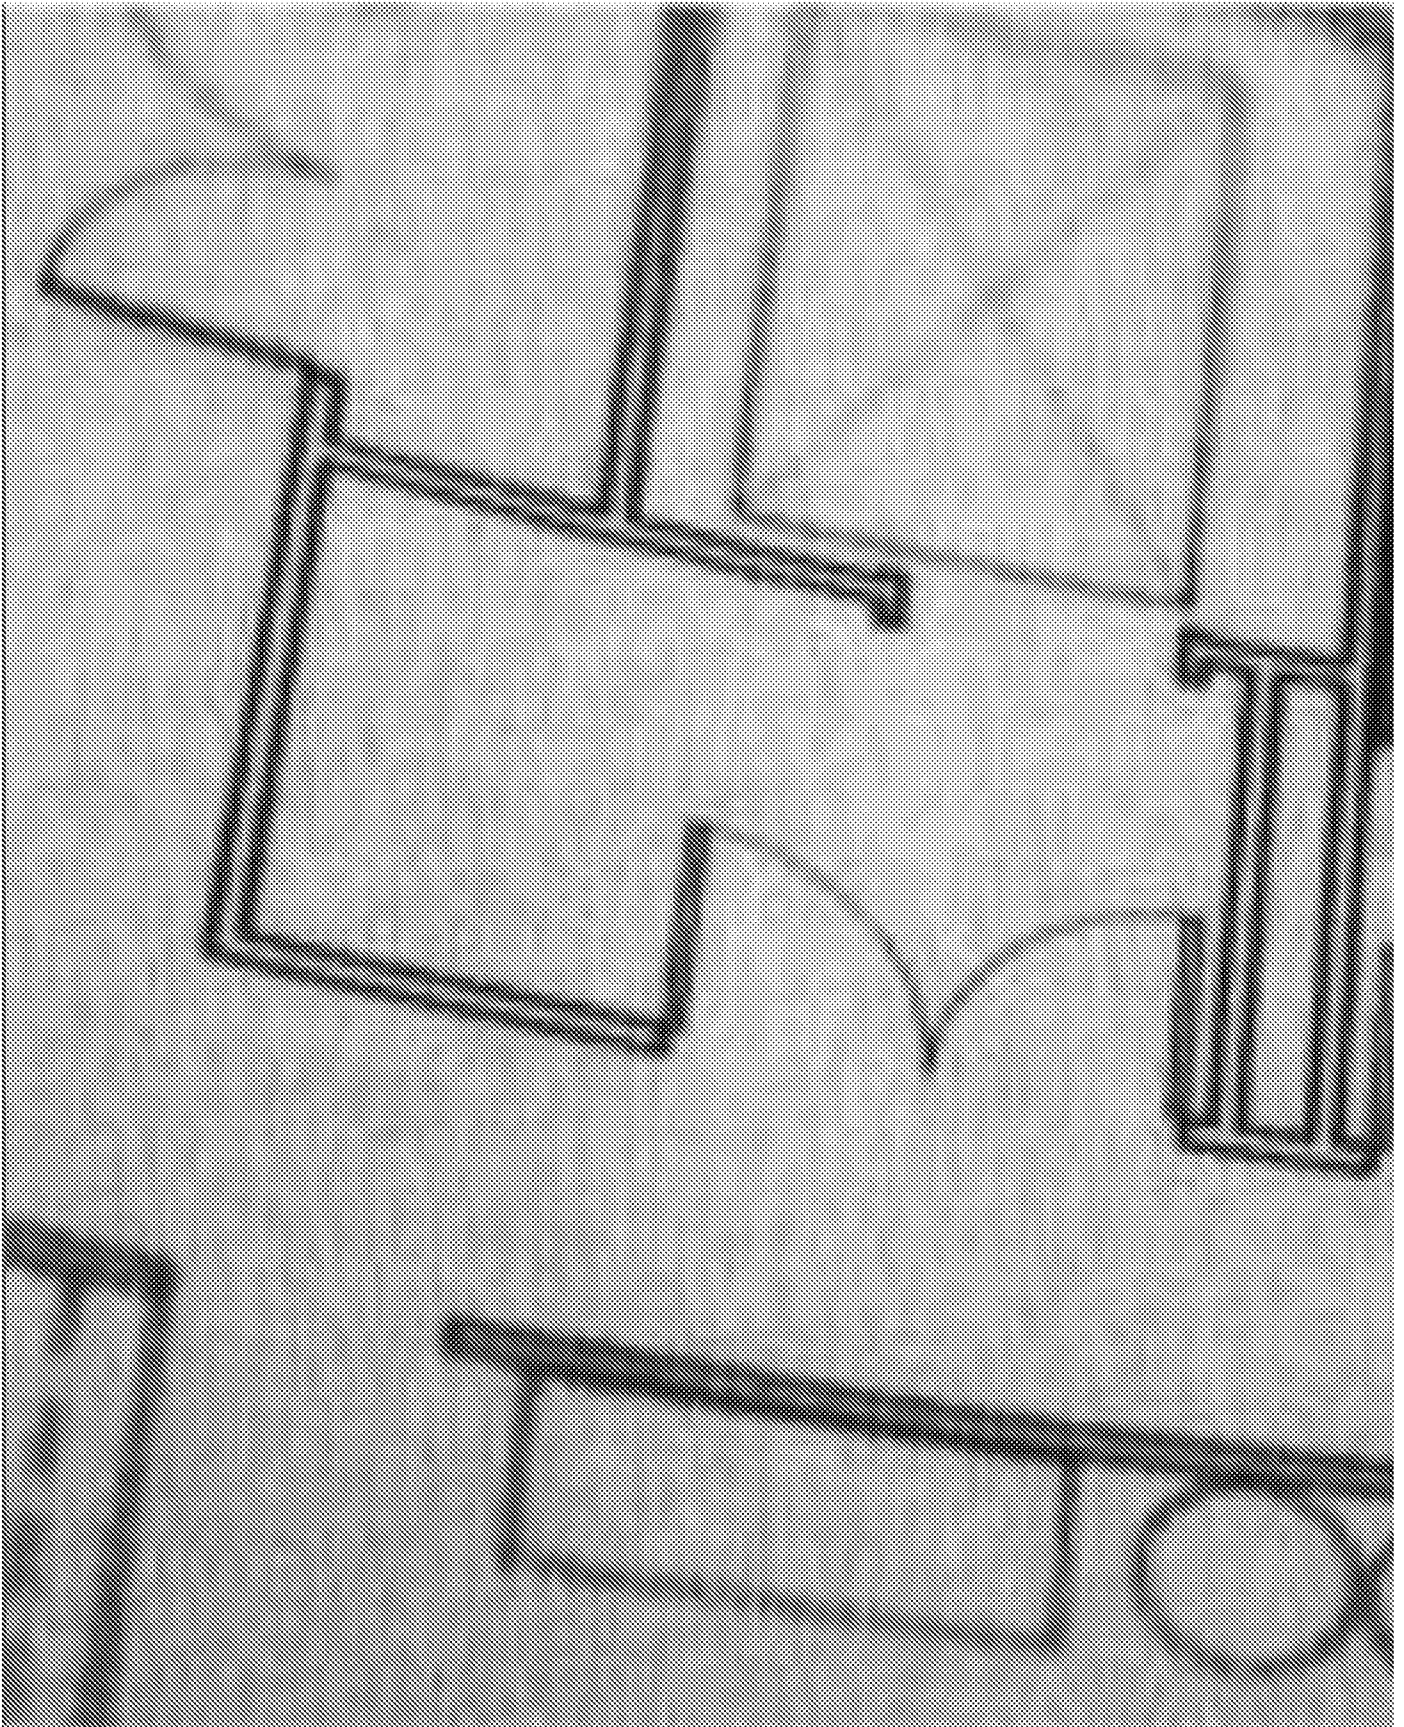

BJW Planning & Architectural Services

7 Erringham Road, Shoreham - By - Sea, West Sussex, BN43 5NQ.



From: Ben Whitby <[REDACTED]>
Date: 12 November 2019 at 12:13:57 GMT
To: Laura Gibbons <Laura.Gibbons@arun.gov.uk>
Cc: Daniel Vick <Daniel.Vick@arun.gov.uk>
Subject: Re: Clifton Road, Bognor Regis, West Sussex- Surface Drainage

thanks


Please find attached soakaway calculations as requested.

Please now discharge this final condition

thanks

Ben

Ben J. Whitby BSc (Hons)
Director

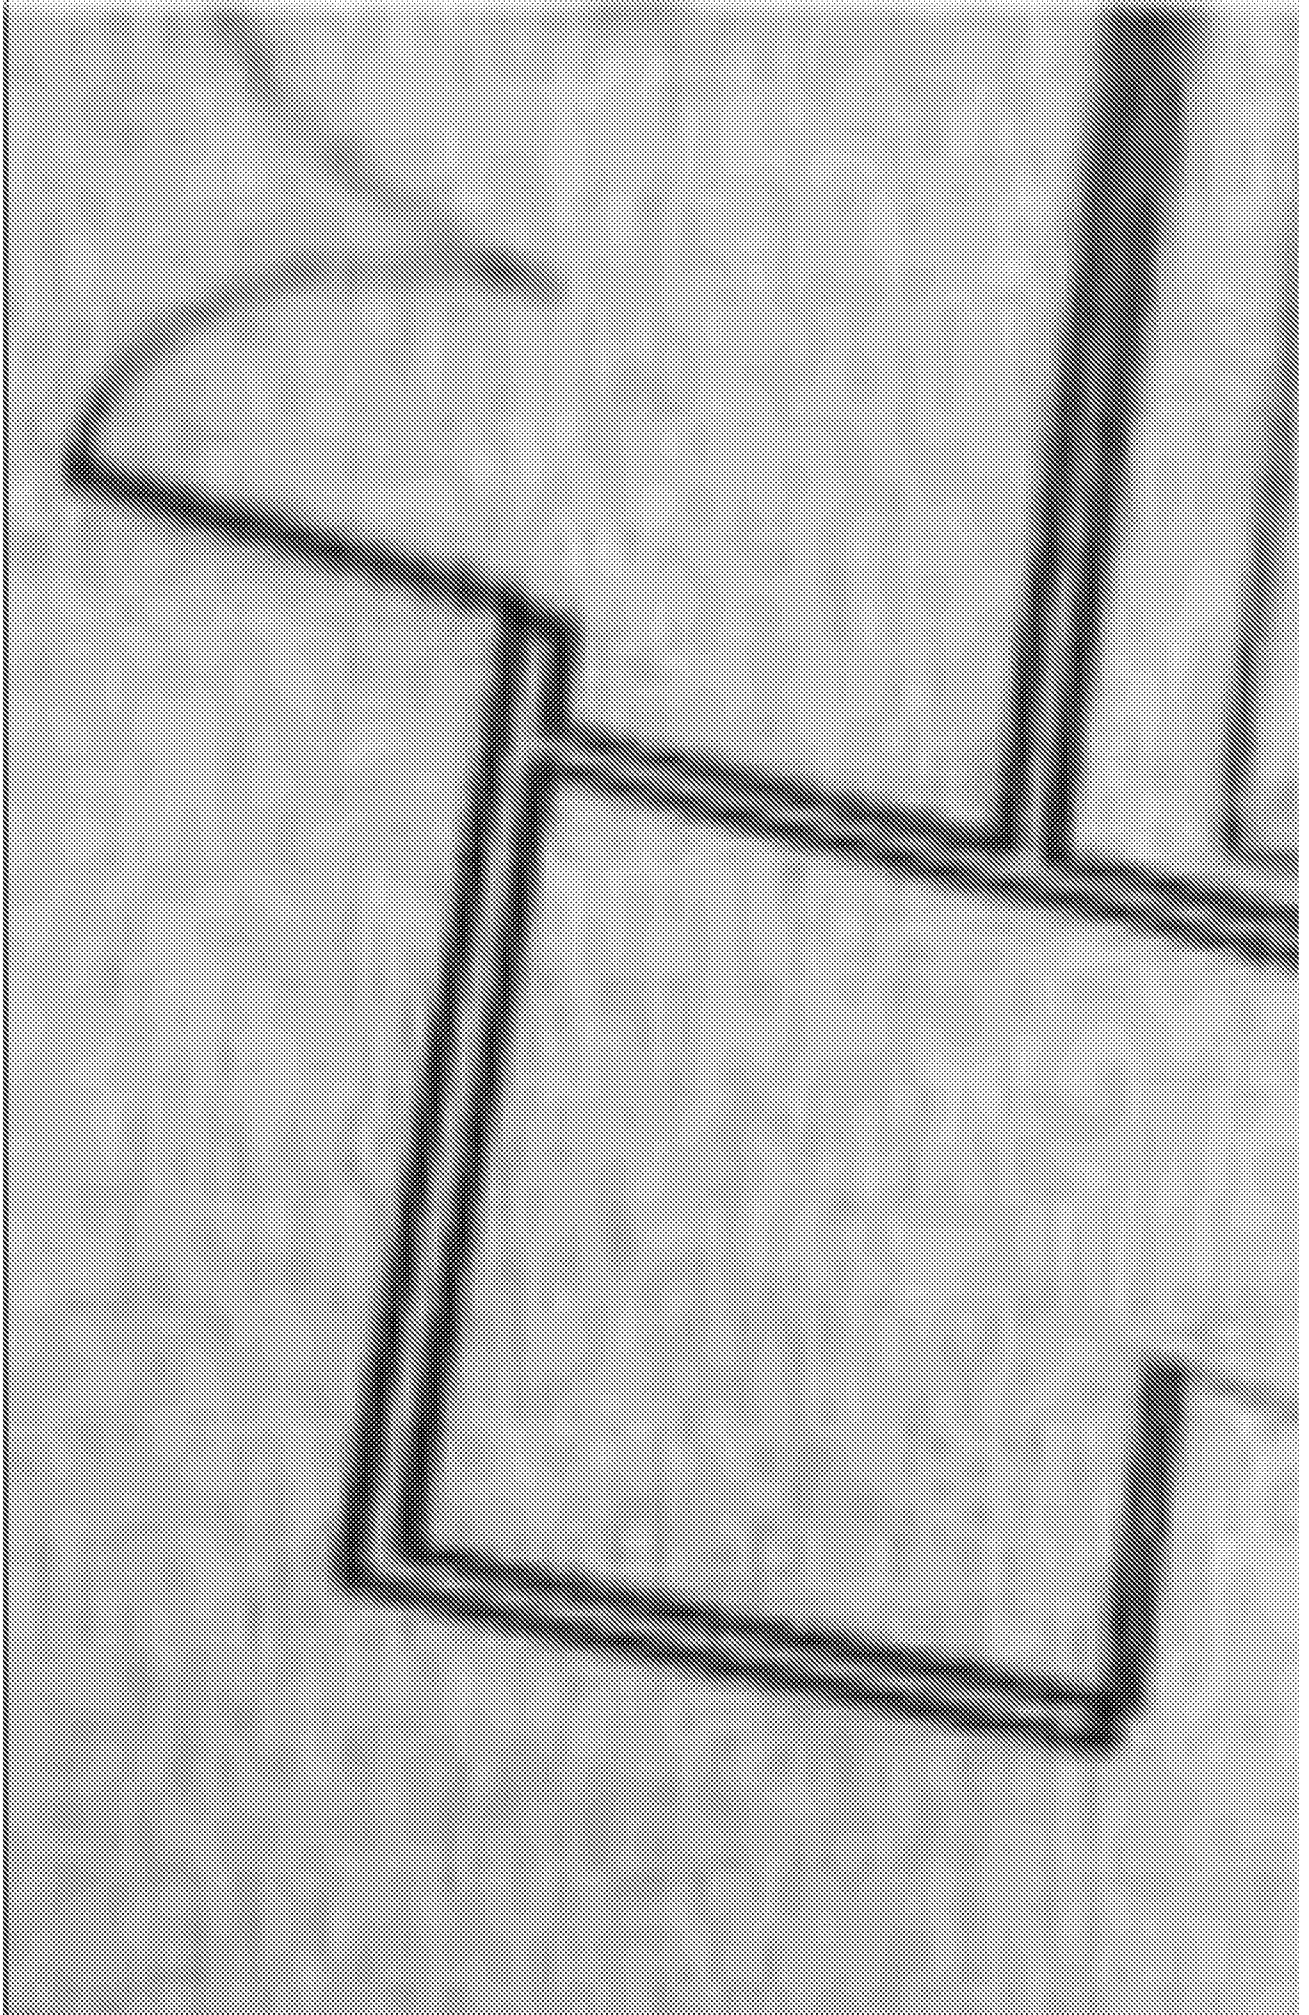

BJW Planning & Architectural Services

7 Erringham Road, Shoreham - By - Sea, West Sussex, BN43 5NQ.



On Wed, Oct 16, 2019 at 11:19 AM Laura Gibbons <Laura.Gibbons@arun.gov.uk> wrote:

Ben,

-

We require winter groundwater monitoring results and winter infiltration testing results to be supplied along with calculations evidencing that the soakaway is an appropriate size.

-

Please see our checklist (attached) for full details of our requirements.

-

Kind Regards,

-

Laura Gibbons, MEng, GMICE

Engineer (Drainage & Coastal)

-

-

Laura Gibbons | Engineer (Drainage & Coastal), Engineering Services, Arun District Council | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF

Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk

Arun is Working in Partnership with Chichester District Council

Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk.



...Save the environment - think before you print.

-

-

From: Ben Whitby

Sent: 15 October 2019 09:35

To: Laura Gibbons <Laura.Gibbons@arun.gov.uk>

Cc: Daniel Vick <Daniel.Vick@arun.gov.uk>

Subject: Fwd: Clifton Road, Bognor Regis, West Sussex- Surface Drainage

-

Dear Laura and Daniel,

-

surface has been discharged into new soakaway, not into existing.

-

The two existing soakaways were dug out and mass filled with concrete.

-

Please see attached photos from our ground worker Glen Oakley. All approved by building control etc.

-

We now look forward to the condition being discharged

-

many thanks

-

Ben Whitby


-

-

-

Ben J. Whitby BSc (Hons)

Director

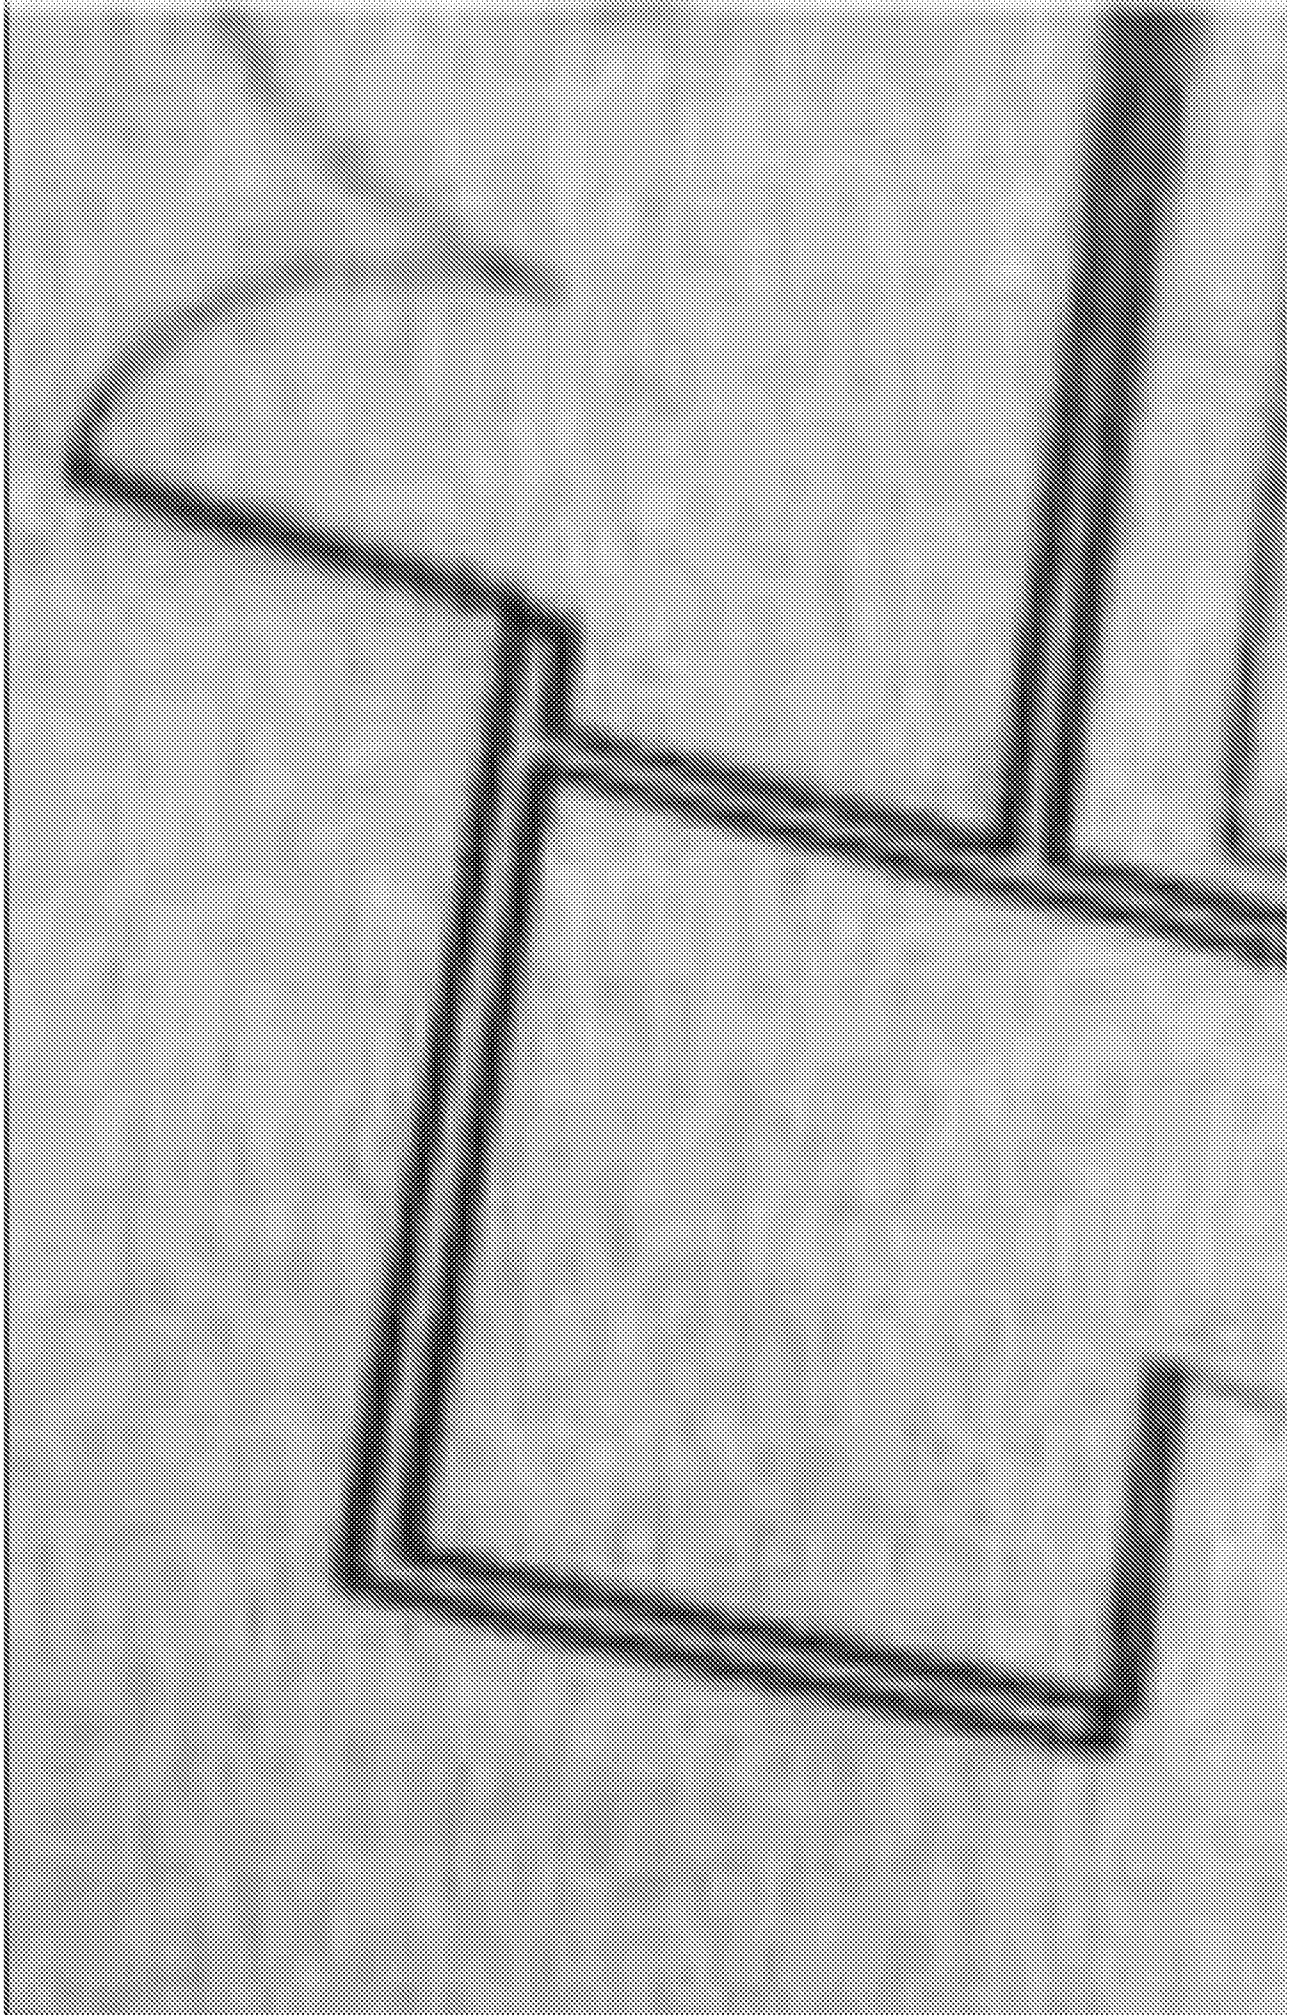

BJW Planning & Architectural Services

7 Erringham Road, Shoreham - By - Sea, West Sussex, BN43 5NQ.



-

----- Forwarded message -----

From: Glen Oakley <[redacted]>

Date: Mon, Oct 14, 2019 at 7:58 PM

Subject: Clifton Road,Bognor Regis,West Sussex- Surface Drainage

To: <[redacted]>

Hi Ben, foul / surface drainage was installed as to your drawings,surface has been discharged into new soak away,not into existing.The two existing soak aways were dud out and mass filled with concrete.

Sent from my iPad

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.
