

# MUB 062 560D4 IE2 Multibox

Item Number: 33543

Variant: 400V 3~ 50Hz - Y (Star) - 90° air flow



High efficient motor IE2

Speed-controllable via frequency converter

Integral cold conductor (PTC)

Low sound level

Flexible airflow direction due to removable panels

Installation in any mounting position

Easy to maintain and reliable


The MUB fans size 560D4-A2 are equipped with high efficient IE2 motors. The MUB fans have an impeller with backward curved blades, manufactured from aluminum. Speed control is only possible by using a frequency converter. Motor protection is done by cold conductors (PTC), which have to be connected to an external motor protection device. The casing consists of an aluminum frame with fiberglass reinforced plastic corners of PA6; highly shock-resistant. The double skin panels are manufactured from galvanized steel with 20 mm mineral wool insulation. To avoid condensation the profile is provided with a separate chamber to fix screws. The Multibox fans are delivered for straight through airflow but can easily be rebuilt due to removable panels. This allows flexible ventilation solutions. The MUB can also be used as extract- or supply air unit in air handling units. Installation in any mounting position is possible.

MUB with additional modules (filters, heaters etc.) are available as air handling units "K025, K042 or K062" on request!

Please note: Speed controll by voltage, i.e. voltage transformers, is not possible!

In accordance with Commission Regulation (EC) no 640/2009 of the European Parliament - eco-design requirements for electric motors - the new international efficiency classes are binding as of 16 June 2011. These guidelines defined by CEMEP and EPACT are regarded as international standard for energy-saving high-efficiency motors for frequencies of 50 or 60 Hz and make the use of IE2 motors mandatory.

With this new and more efficient technology we offer our customers many advantages such as environmentally friendly operation, reduced energy consumption and hence lower emissions. IE2 motors have a higher efficiency even in part load operation and allow optimum adjustment to the operating point. In addition, the IE2 motors generate less noise and develop less heat, which has a positive influence on the efficiency and the cooling requirement of the motor. Please note: IE2 motors cannot be speed controlled by voltage, i.e. voltage transformers.

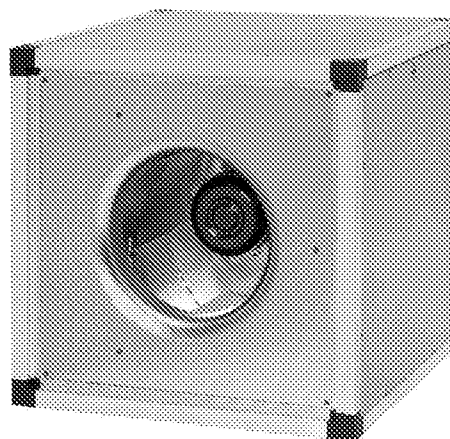

## Technical parameters


| Nominal data                                              |                    |        |
|-----------------------------------------------------------|--------------------|--------|
| Voltage (Nominal)                                         | 400                | V      |
| Frequency                                                 | 50                 | Hz     |
| Phase(s)                                                  | 3~                 |        |
| Motor circuit connection                                  | Y                  |        |
| Input power                                               | 2,437              | W      |
| Starting current                                          | 32.4               | A      |
| Input current                                             | 4.27               | A      |
| Impeller speed                                            | 1,450              | r.p.m. |
| Air flow                                                  | max 3.252          | m³/s   |
| Temperature of transported air                            | max 40             | °C     |
| Max temperature of transported air, when speed controlled | 40                 | °C     |
| Sound data                                                |                    |        |
| Sound pressure level at 3m (20m² Sabin)                   | 56                 | dB(A)  |
| Protection/Classification                                 |                    |        |
| Enclosure class, motor                                    | IP55               |        |
| Insulation class                                          | F                  |        |
| Data according to ErP                                     |                    |        |
| ErP ready                                                 | ErP 2016; ErP 2018 |        |
| Dimensions and weights                                    |                    |        |
| Weight                                                    | 92                 | kg     |
| Others                                                    |                    |        |
| Motor type                                                | AC                 |        |

Performance curve




| Hydraulic data           |               |
|--------------------------|---------------|
| Required air flow        | 1.80 m³/s     |
| Required static pressure | 715 Pa        |
| Working air flow         | 1.80 m³/s     |
| Working static pressure  | 715 Pa        |
| Air density              | 1.204 kg/m³   |
| Power                    | 2416.9 W      |
| Fan control - RPM        | 1444 rpm      |
| Current                  | 4.15 A        |
| SFP                      | 1.340 kW/m³/s |
| Control voltage          | 400.0 V       |
| Supply voltage           | 400 V         |

Dimension

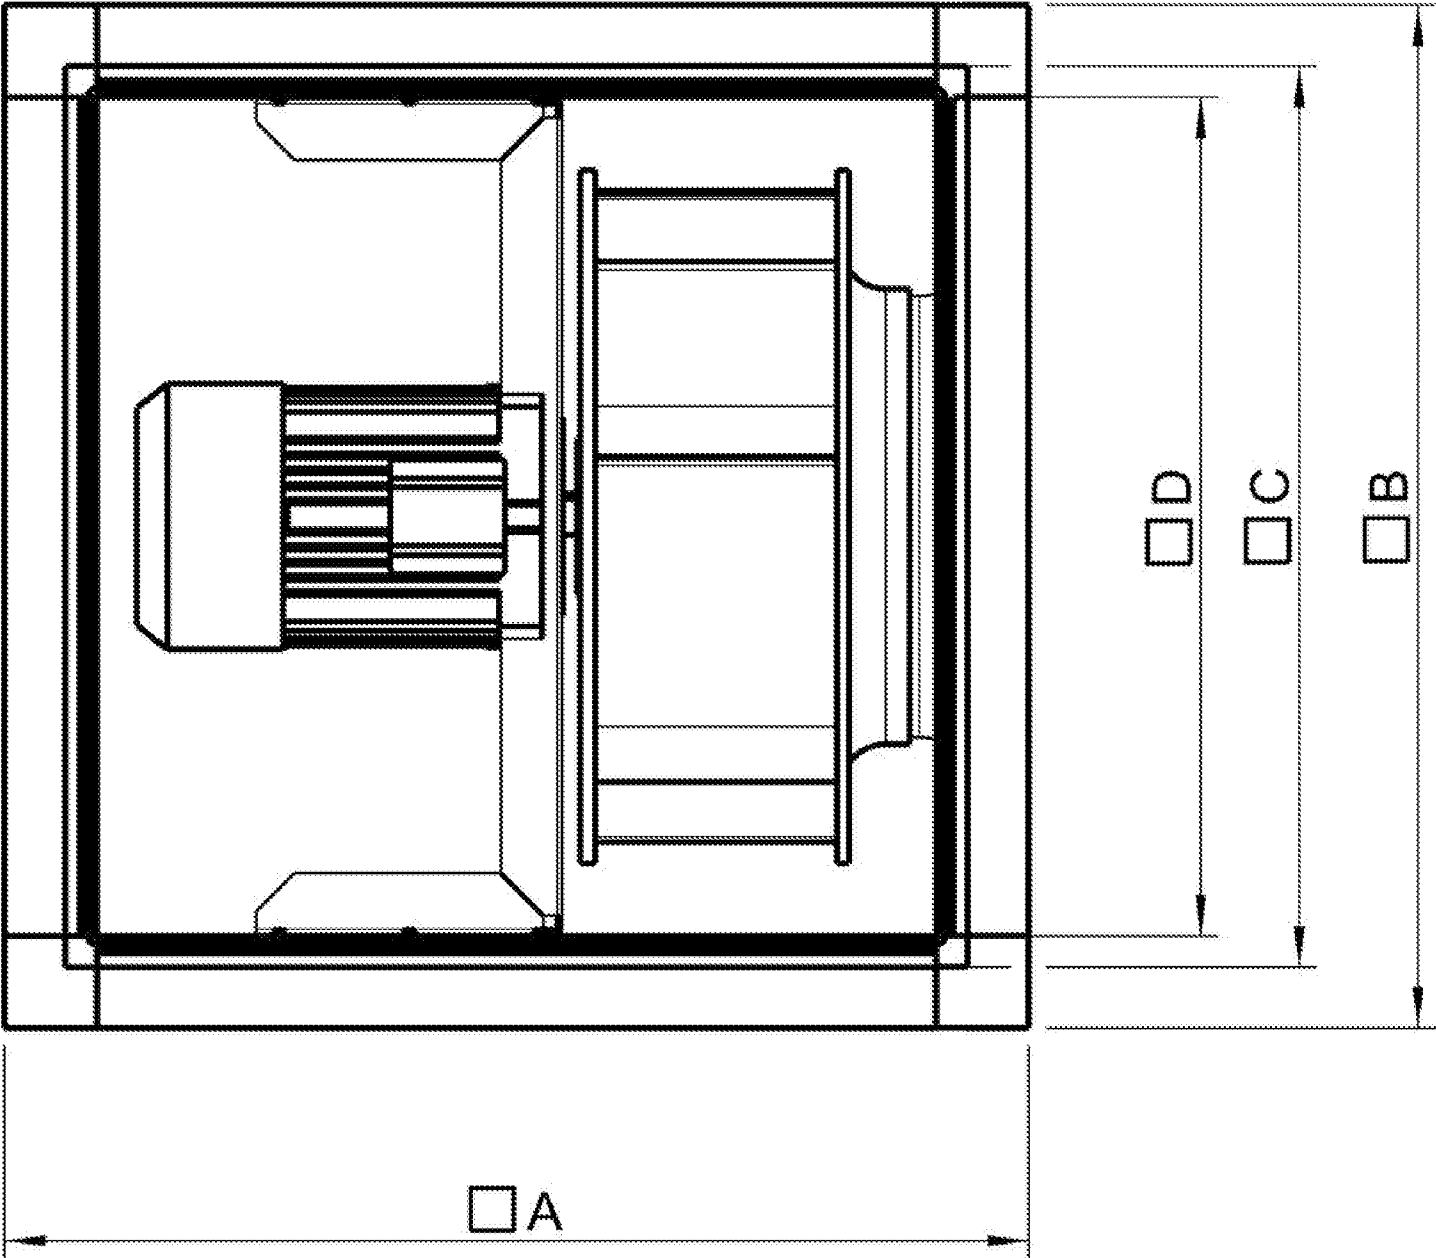


|             | □A  | □B  | □C  | □D  |
|-------------|-----|-----|-----|-----|
| MUB 062 560 | 800 | 800 | 720 | 678 |

**Dreiphasenmotor mit Kaltleiter**  
**Three phase motor with cold conductor**  
**Moteur triphasé avec résistance PTC**

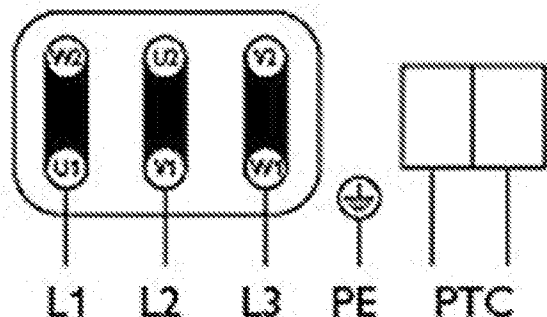

**3 x 230V**  
**D Schaltung**  
**Delta connection**  
**Branchement en triangle**

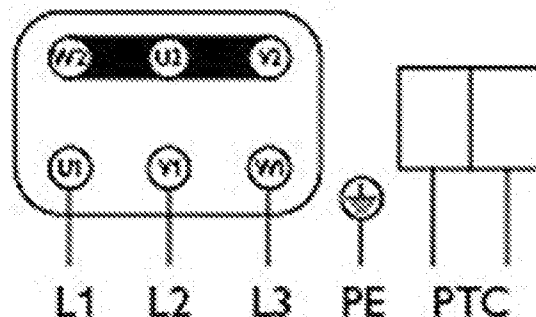

**3 x 400V**  
**Y Schaltung**  
**Star connection**  
**Branchement en étoile**

**Drehrichtungsänderung durch Vertauschen von 2 Phasen**  
**Changing of direction of rotation by interchanging of two phases**  
**Changement de sens de rotation par inversion de deux phases**

**Typenschild beachten! See label! Voir plaque!**

## Acoustic

Mid-frequency band, Hz

| 560D4                                                                       | Hz    | Tot | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 5k |
|-----------------------------------------------------------------------------|-------|-----|----|-----|-----|-----|----|----|----|----|
| LwA Inlet                                                                   | dB(A) | 78  | 65 | 67  | 71  | 73  | 72 | 69 | 64 | 57 |
| LwA Outlet                                                                  | dB(A) | 80  | 67 | 69  | 73  | 75  | 74 | 71 | 66 | 59 |
| LwA Surrounding                                                             | dB(A) | 63  | 50 | 52  | 56  | 58  | 57 | 54 | 49 | 42 |
| Measuring point: $q_v = 1,79 \text{ m}^3/\text{s}$ , $P_s = 717 \text{ Pa}$ |       |     |    |     |     |     |    |    |    |    |

## Ecodesign

| Product                 |                                  |       |
|-------------------------|----------------------------------|-------|
| Trade name              | Systemair                        |       |
| Product name            | MUB 062 560D4-A2<br>IE2 Multibox |       |
| Ecodesign               |                                  |       |
| ErP compliance          | 2018                             |       |
| Unit category           | NRVU                             |       |
| Drive                   | External MSD or<br>VSD           |       |
| Unit type               | UVU                              |       |
| Heat recovery type      | None                             |       |
| Temperature ratio (UVU) | Not applicable                   |       |
| qv nom                  | 1.789                            | m³/s  |
| P nom                   | 2.412                            | kW    |
| Ps nom                  | 717                              | Pa    |
| Fan efficiency          | 53                               | %     |
| External Leakage        | 5                                | %     |
| Sound power level LWA   | 63                               | dB(A) |

## Accessories

- CCM inlet MUB062 d560 (311782)
- CCM inlet MUB062 d630 (311783)
- CCM outlet MUB062 d560 (311684)
- CCM outlet MUB062 d630 (311681)
- CCMi outlet 062 d560 insul KIT (313847)
- CCMi outlet 062 d630 insul KIT (313846)
- FGV 062/716-716 flex. conn. (4186)
- FRQ-10A V2 (36228)
- FRQ5-10A+LED V2 (36230)
- FRQ5S-10A+LED V2 (36234)
- FRQS-10A V2 (36232)
- FXDM5AM Frequency inv. IP54 (31387)
- REV-5POL/05 incl. EMC KIT (34549)
- REV-5POL/05 ON/OFF (33979)
- RK-MUB-676x678-R (43677)
- RK-MUB-676x678-S (43681)
- RKT-MUB-676x678-S (43685)
- SD-MUB Vibration pad set (37324)
- SDM Service Door MUB 062 comp. (32573)
- TUNE-AHU-DE006-062-718x718-M0 (79882)
- U-EK230E Motor protection (30199)
- UGS 062/630 adapter flex. (4358)
- WSG 062 MUB complete (31486)

## Documents

- IMO\_MUB\_141026\_DE,EN,SE,DK,ES,RU\_001\_311722\_WEB.PDF
- EU DECLARATION OF CONFORMITY\_MUB\_EN\_001.PDF
- COMMISSIONING REPORT\_FANS\_160628\_EN\_001.PDF

## Specification

Multibox duct fan for easy and direct installation in duct systems.

Casing frame construction made of aluminium hollow profiles and plastic corners for highest impact resistance. Double skin galvanised steel panels, thermally and sound insulated with a 20 mm layer of mineral wool, smooth inner sides.

Free-running, backward curved circular impeller made of aluminium.

Impeller acc. to VDI 2060, balancing quality G 6.3, dynamically balanced in two planes.

Voltage controllable external rotor motor,

Standard motor IE2 (IP55), maintenance-free, the motor is placed inside the air flow for cooling. Integral thermal contacts (PTC) with leads to a motor protection device.

Terminal box fitted on the motor.

Multifunctional use, variable outlet direction, can be modified on site.

For extract and supply air.

Installation in any mounting position.

For indoor installation.

For outdoor installation with corresponding accessories.