


BUTLINS - BOGNOR REGIS

TEMPORARY VENUE

Design & Access Statement

November 2020

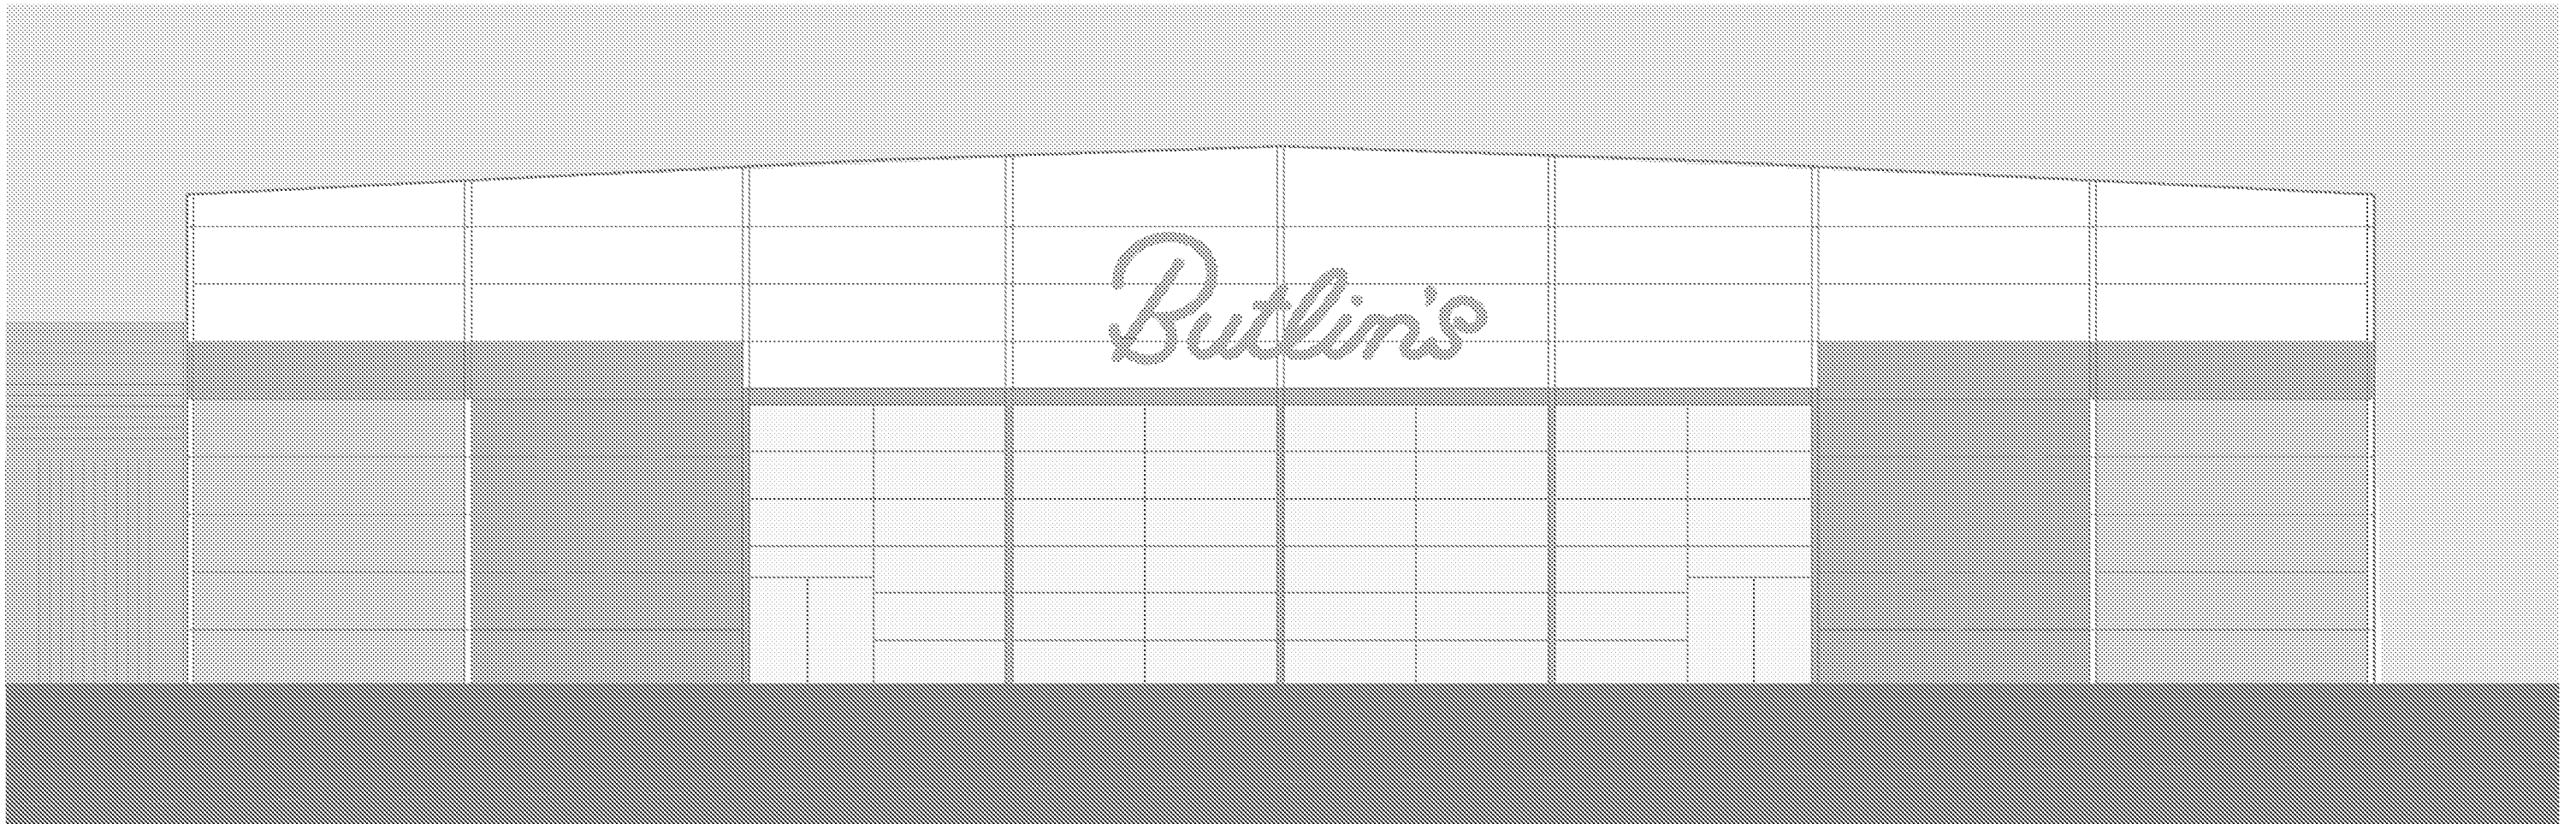

Contents

1.1	Summary	3
1.2	Project Description	3
1.3	Project Stakeholders	3
1.4	Project Team	3
2.1	Site Information	4
2.2	Existing Context	5
3.1	Proposed Concept	6
3.1	Proposed Concept plans	7
3.2	Venue Specifications	8
3.3	Venue Elevations	9
3.4	Means of Access	10

1.1 Summary

This Design and Access Statement is submitted on behalf of Butlins Skyline Ltd in support of the proposal for a temporary event venue at Butlins - Bognor Regis. The site is located in Butlins holiday resort on the south coast of England, in West Sussex.

The purpose of this statement is to communicate to the Local Planning Authority and other interested parties the process that has led to the development proposals and the design response.

The project objective is to minimise the current impact to resort capacity due to Covid-19 and social distancing rules. The resort is currently operating at less than 60% capacity due to restrictions in current entertainment venue space. The additional venue would generate an increase in performances and as a result allow the increase of resort capacity while still maintaining social distancing guidelines.

This Design and Access Statement is structured in the following order:

Process	The reasons for the application
Design	The design process in respect of use, amount, layout, scale and appearance of the development
Access	Inclusive access to the venue

1.2 Project Description

The project has been developed with the client and the design team to capture the principles of the Butlins Skyline's requirements, whilst taking account of the site and its context. Regular briefing sessions have been held with the Butlins Skyline and other key stakeholders to establish a considered, functional and high quality design. The final design proposal has been undertaken in consultation with a Butlins Skyline Executive Steering Group.

The proposed works are to include a new temporary entertainment venue with accompanying utility & toilet facilities

The new venue will sit to the south of the existing York building that houses the resort restaurants and to the west of the Hotshots building. Car parks wrap around the building to the south and west.

Further information, regarding these proposals, can be seen in more detail in the accompanying plans and sections.

1.3 Project Stakeholders

Butlins Skyline Ltd
1 Park Lane,
Hemel Hempstead HP2 4YL

1.4 Project Team

Architect:	WOO Architects The Mews 1a Birkenhead Street London WC1H 8BA
Cost Consultant:	Gardiner & Theobald LLP 10 South Crescent, Bloomsbury London, WC1E 7BD
Venue Supplier:	Star Live Milton Road Thurleigh Bedford MK44 2DF
MEP Engineer:	ME Engineers 2nd Floor 5-11 Lavington Street London, SE1 0NZ
Planning Consultant:	Walsingham Planning Limited Bourne House Cores End Road Bourne End, SL8 5AR

2.1 Site Information

The site is located on the sea front approximately 1km east of Bognor Regis Town Centre. It is bounded to the north by the University of Chichester, Bognor Campus and to the east by the village of Felpham. The southern boundary of the site runs along a seafront promenade, overlooking the beach and the English Channel.

The site is approximately 60 acres/23.4 hectares.

The main vehicle access to the site is on the North side, from Upper Bognor Road (B2259), with secondary access from the West, via Gloucester Road. There is limited pedestrian access to the seafront promenade from the resort, through the Gloucester Road entrance.

An additional access to the Wave hotel and car park is via the High Street, on the West side.



Diagram 1 : Site Access

2.2 Existing Context

The existing site conditions can be seen in the below images. The current site houses the old Splash Pool. This is being demolished to make way for the new temporary venue.

To the north of the new venue is the York Building, which houses the main restaurants, to the east is Hotshots, a sports-leisure bar, and to the south and west are existing car parks.



Image 1 : South View



Image 2: West View



Diagram 2 : Existing site

3.1 Proposed Concept

The purpose of this temporary venue is to enable performances to take place whilst complying with the relevant social distancing guidelines.

The proposed venue will be 40m x 65m - as indicated by the grey area on the plan - and will house a performance stage at the south end and loose socially distance audience seating throughout the space. The height of the venue will be 10m high, which is of a similar height to Hotshots that sits to the east of it. The venue is in keeping with the overall scale and proportion of the existing surrounding building on the resort.

An additional side buildings sit to the east of the venue. The building will house a bar and additional WC's is 20m x 20m x 6.8m high. To the south of the structure an area of 40m x 10m - indicated by the blue area on the plan - surrounded by a 3m high fence, will house the back of house for the performers.

The red dotted line indicates the footprint of the old pool and the extent of the demolition.

The proposed fixing method will be ground penetration via 2m stakes. These will be subject to underground surveys. If staking is not permissible a chemical anchor solution will be used.

The venue is to be prefabricated off site and constructed on site. The on-site construction is expected to be around four weeks.

The walls of the temporary venue are to be a Kingspan fixed panel system in shades of grey. The roof is constructed of aluminium trusses with a white PVC fabric roof.

This proposed wall system delivers a minimum of 27db reduction as standard. Between the buffer of the surrounding buildings and the high level of sound insulation, there will be minimal noise impact on the local neighbourhood.

The floor level will be circa 180 mm. All exit will have accessible ramps.

The proposed capacity for the venue is 860 people. It should also be noted that there will be no increase in the number of guests on site.

The proposed temporary venue is to be used for family entertainment.

Shows will run between the hours of 9am and 11pm.

It is estimated that 340 employees can be brought off furlough, and preventing potential redundancies, by the construction of this new venue.

3.1 Proposed Concept | plans

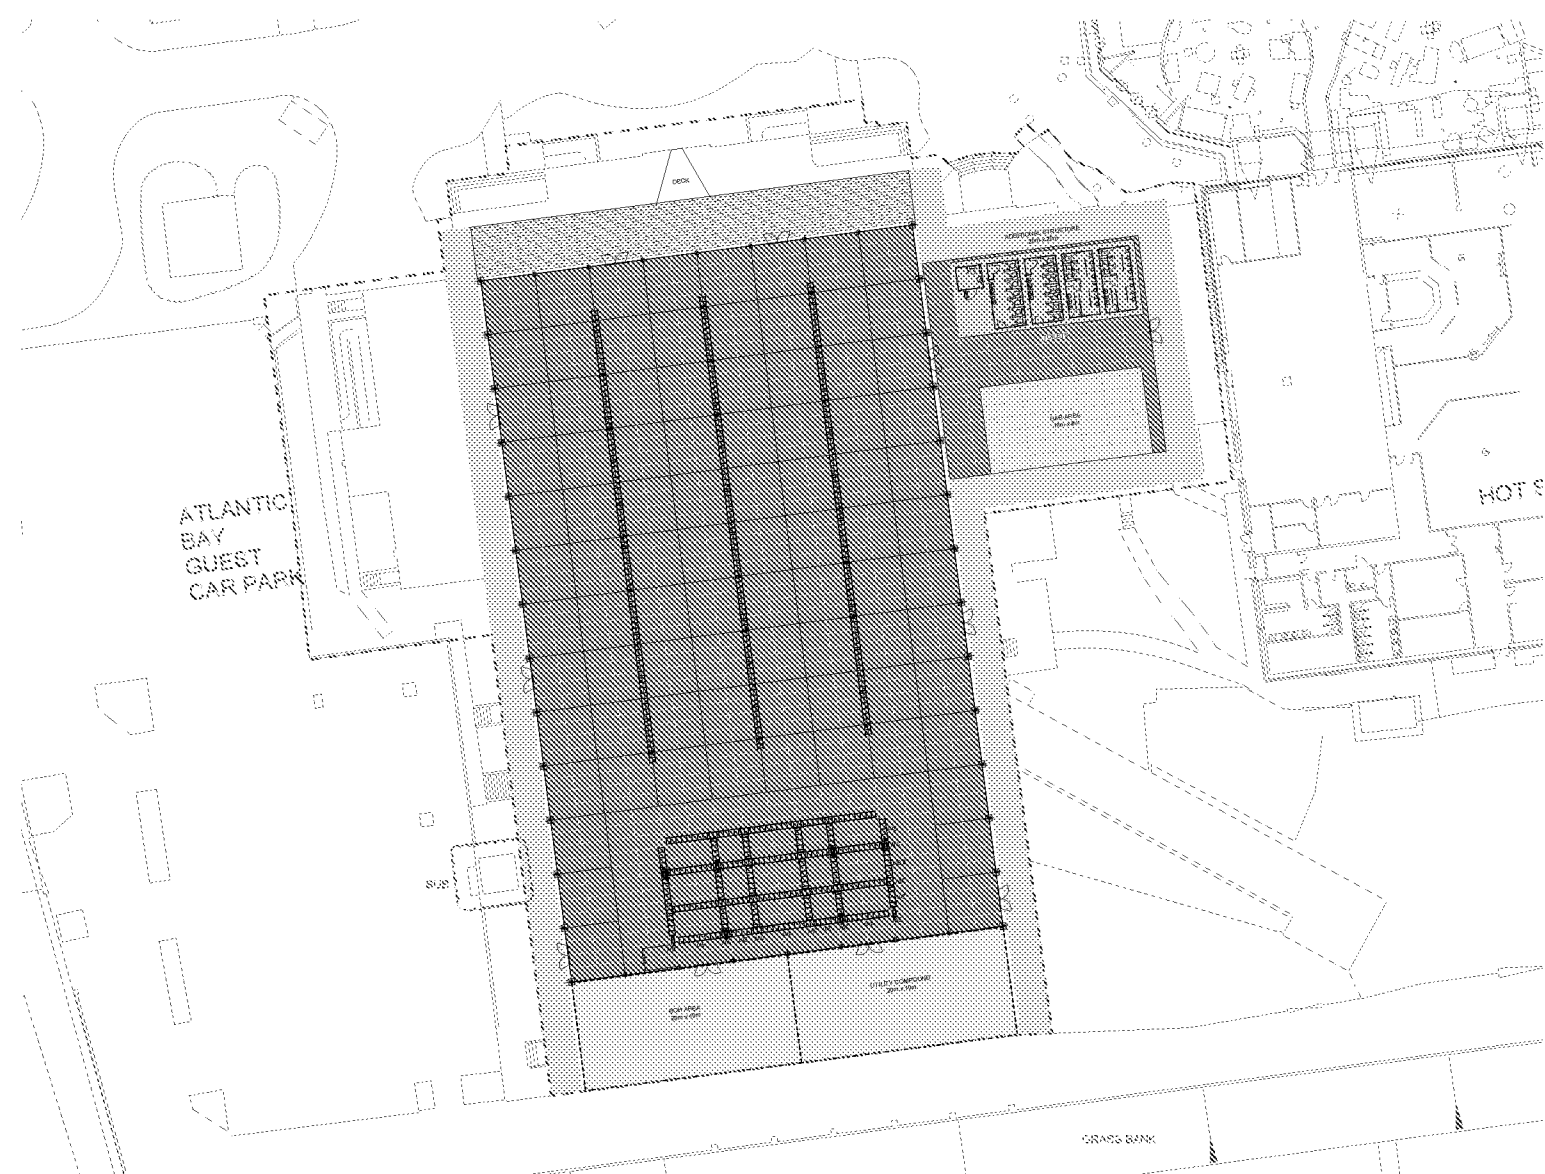


Diagram 3 : Temporary Venue location





Diagram 4 : WC's and Bar area


3.2 Venue Specifications

The structure provided by the contractor, Star Live, will be the I-novation system. The I-novation structure is a perfect solution for a temporary event venues. Some of the key specifications of the structure are as follows.


Structure Dimensions	65m x 40m
Bay Distance	5m
Roof Truss	European aircraft aluminium 6061t6 CNC
Side Columns	Aluminium
Anchoring	Ground Frame / Base Plates
Fabric Quality	PVC-coated polyester : thickness 0,65-0,75mm
Thermo Rood	Double Canvas 650gr/m2 - U=2.3
Side Panels	PVC/Glass frames
Associated Regulations	EN 13782 and EN regulations for permanent buildings
Proposed wall system	Kingspan KS1150TF fixed wall system
Floor system	Cassette floor system
Wall system colour	RAL 7035, 9006, 9007
Acoustic Specifications	The proposed wall system delivers a minimum 27db reduction as standard

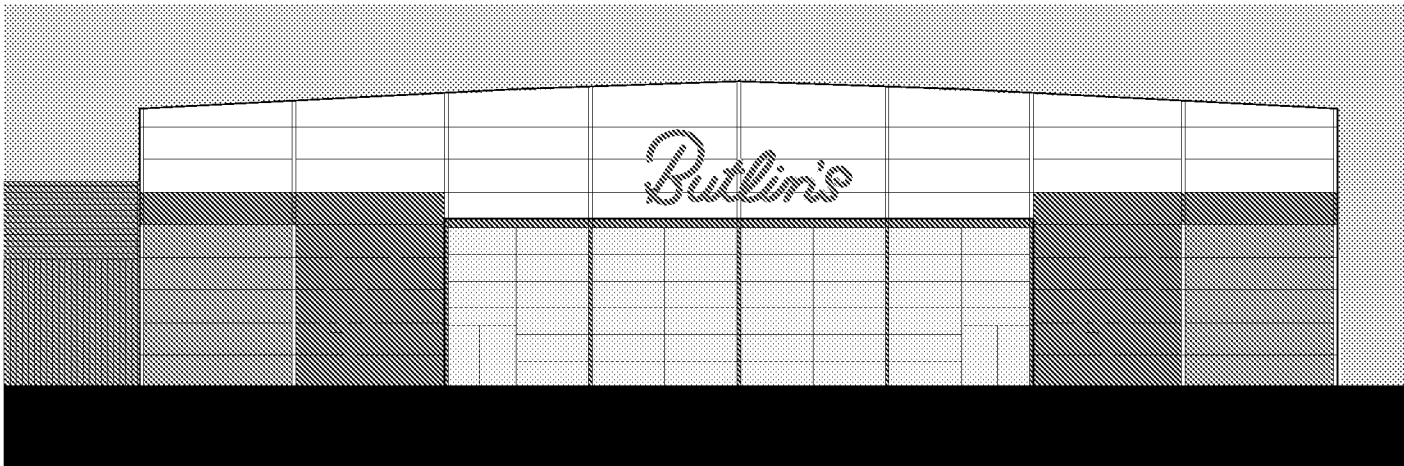


RAL 7035




RAL 9006



RAL 9007

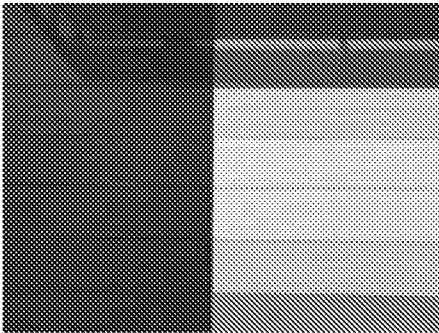

Wall pannel

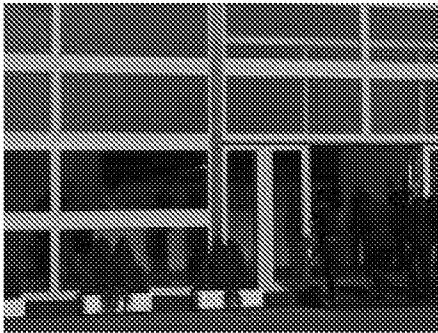


Window treatment




Roof fabric

3.3 Venue Elevations

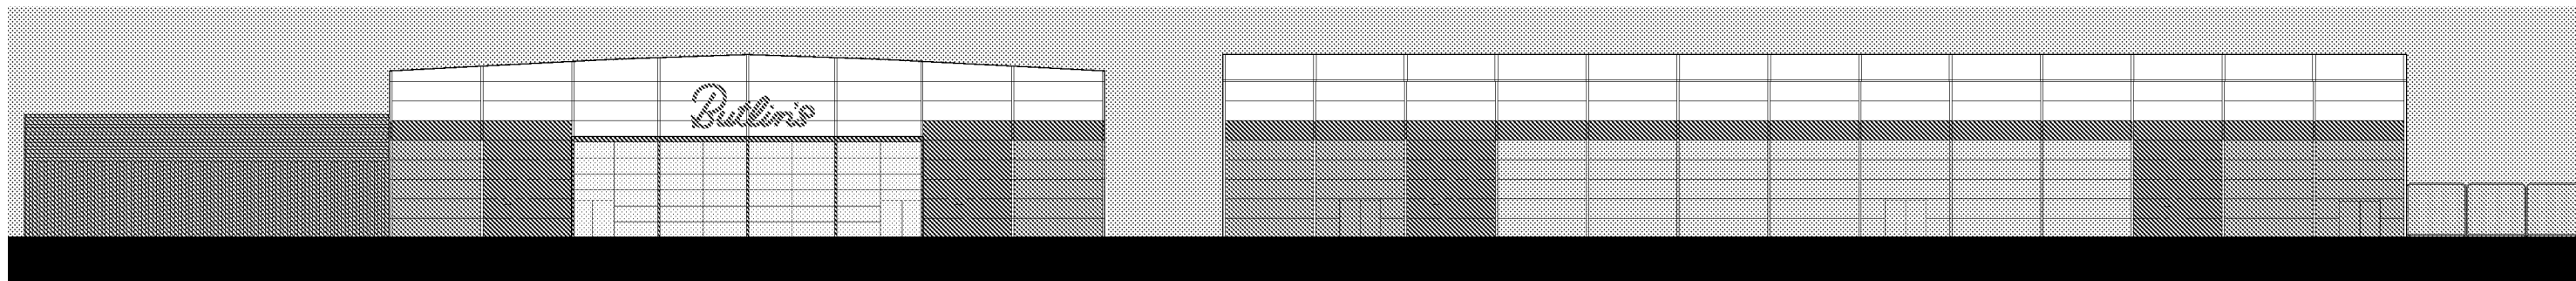

Exterior north and west elevations

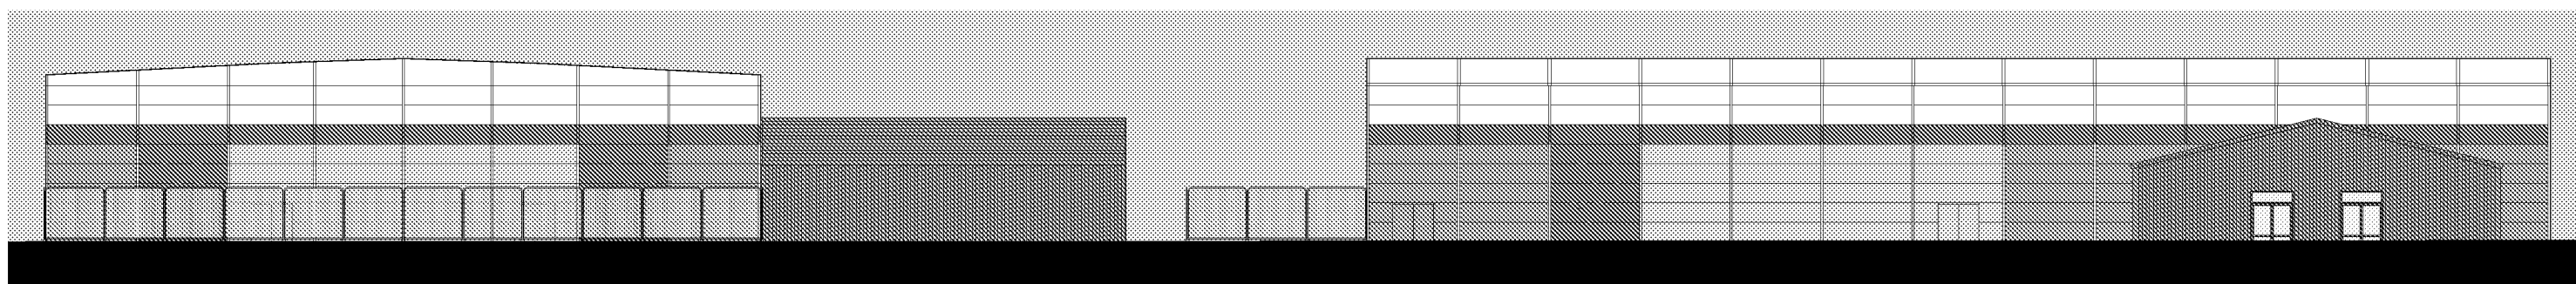

Exterior south and east elevations

3.4 Means of Access

There will be no change to the access arrangements on the resort. Cars will continue to enter the site through one of the three entrances - the main gate, Wave hotel or the Gloucester Road entrance.

As there are no additional accommodation units proposed as part of this application, there will not be any increase of traffic to the resort.

The temporary venue will not effect deliveries or the ability for fire trucks to access all areas of the resort. All deliveries to the resort will continue to come through the entrance at the south end of the resort.

The temporary venue will not cause any loss of parking spaces on the resort.

New additional WC's are to be build to the east side of the venue, including accessible WC's (blue area). The bar will also reside in this structure.

BOH is located on the south side of the venue (blue area).

No trees or hedges will be affected by the proposal.

The contractor, Star Live, are to install ramps at all emergency exits to meet accessibilty codes. The finished slopes will be at a gradient of no more than 1:12.



Diagram 5 : OPS Plans