



FALCOVERT-PLUS CYCLE RACK

The FalcoVert-Plus is a space-saving cycle rack design ideal for highly popular densities such as stations, cycle hubs, shopping centres, high streets and car parks etc.


Specification

- Close spacing of 305mm ensures maximum use of available space
- Suitable to store all types of cycle – from racing cycles to mountain bikes and cycles with extra wide tyres
- Available to store any number of cycles
- 50% of storage spaces are available for cycles with extra wide tyres
- Fully locates both wheels in a custom designed tapered steel trough to BS1716/51
- Manufactured from RHS sectional solid steel tube and rolled steel angle
- Fully welded and prefabricated
- All steelwork is fully hot dipped galvanised to ISO1461
- Extra locking hoop to frame
- Can be powder-coated to BS6497 in a huge range of RAL colours

Semi Vertical Requirements

- 1900 height clearance required
- 1390 depth required when loaded
- Minimum walkway of 1.6m recommended
- Allow 300mm for handlebars from left to right at each end

Falco provide full design, manufacture, supply and installation of the FalcoVert-Plus.

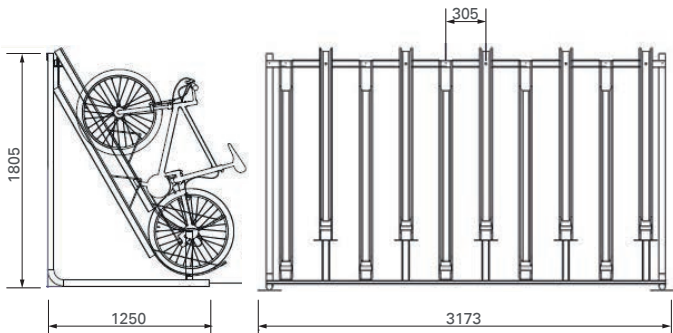

FalcoVert-Plus, part code 00.555.xxxUK

For more information about the innovative FalcoVert-Plus please contact our technical sales team on 01538 380080.

FALCOVERT-PLUS CYCLE RACK	
PART CODE	DESCRIPTION
00.555.XXXUK	FalcoVert-Plus semi-vertical cycle rack, single sided, XX spaces, high low c.t.c 305mm
00.555.003UK	FalcoVert-Plus semi vertical rack 3 place.
	Height 1,870mm, depth 1,052mm. Centre to centre 305mm. Galvanised steel frame.
	Midpoint locking loop. Surface Mounted.
	Supplied in parts for assembly on site