

Regulations Compliance Report

Approved Document L1A, 2013 Edition, England assessed by Stroma FSAP 2012 program, Version: 1.0.4.23
Printed on 17 January 2020 at 14:29:03

Project Information:

Assessed By: Colin Marshall (STRO004020)

Building Type: Semi-detached Bungalow

Dwelling Details:

NEW DWELLING CREATED BY CHANGE OF USE

Total Floor Area: 37.5m²

Site Reference : 34-36, Southdown Road

Plot Reference: YA-13-06 (new) SAP Design

Address : Ground Floor - new bungalow, 36, Southdown Road, BOGNOR REGIS, PO21 2JR

Client Details:

Name: Mr. & Mrs. Ellis

Address :

**This report covers items included within the SAP calculations.
It is not a complete report of regulations compliance.**

1a TER and DER

Fuel for main heating system: Mains gas

Fuel factor: 1.00 (mains gas)

Target Carbon Dioxide Emission Rate (TER) 26.1 kg/m²

Dwelling Carbon Dioxide Emission Rate (DER) 25.49 kg/m² **OK**

1b TFEE and DFEE

Target Fabric Energy Efficiency (TFEE) 70.2 kWh/m²

Dwelling Fabric Energy Efficiency (DFEE) 65.8 kWh/m² **OK**

2 Fabric U-values

Element	Average	Highest	
External wall	0.25 (max. 0.30)	0.25 (max. 0.70)	OK
Party wall	0.00 (max. 0.20)	-	OK
Floor	0.14 (max. 0.25)	0.14 (max. 0.70)	OK
Roof	0.16 (max. 0.20)	0.16 (max. 0.35)	OK
Openings	1.42 (max. 2.00)	1.50 (max. 3.30)	OK

2a Thermal bridging

Thermal bridging calculated from linear thermal transmittances for each junction

3 Air permeability

Air permeability at 50 pascals	4.00	
Maximum	10.0	OK

4 Heating efficiency

Main Heating system:	Boiler systems with radiators or underfloor heating - mains gas Data from manufacturer Combi boiler Efficiency 89.0 % SEDBUK2009 Minimum 88.0 %	OK
Secondary heating system:	None	

5 Cylinder insulation

Hot water Storage:	No cylinder	N/A
--------------------	-------------	------------

Regulations Compliance Report

6 Controls

Space heating controls	TTZC by plumbing and electrical services	OK
Hot water controls:	No cylinder thermostat	
	No cylinder	
Boiler interlock:	Yes	OK

7 Low energy lights

Percentage of fixed lights with low-energy fittings	75.0%	
Minimum	75.0%	OK

8 Mechanical ventilation

Not applicable

9 Summertime temperature

Overheating risk (South East England):	Slight	OK
Based on:		
Overshading:	More than average	
Windows facing: West	6.3m ²	
Roof windows facing: North	0.88m ²	
Roof windows facing: South	2.64m ²	
Ventilation rate:	4.00	
Blinds/curtains:	Dark-coloured curtain or roller blind	
	Closed 100% of daylight hours	

10 Key features

Party Walls U-value	0 W/m ² K
Photovoltaic array	

Predicted Energy Assessment




Ground Floor - new bungalow
36, Southdown Road
BOGNOR REGIS
PO21 2JR

Dwelling type:
Date of assessment:
Produced by:
Total floor area:

Semi-detached Bungalow
15 January 2020
Colin Marshall
37.5 m²

This is a Predicted Energy Assessment for a property which is not yet complete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, an Energy Performance Certificate is required providing information about the energy performance of the completed property.

Energy performance has been assessed using the SAP 2012 methodology and is rated in terms of the energy use per square metre of floor area, energy efficiency based on fuel costs and environmental impact based on carbon dioxide (CO₂) emissions.

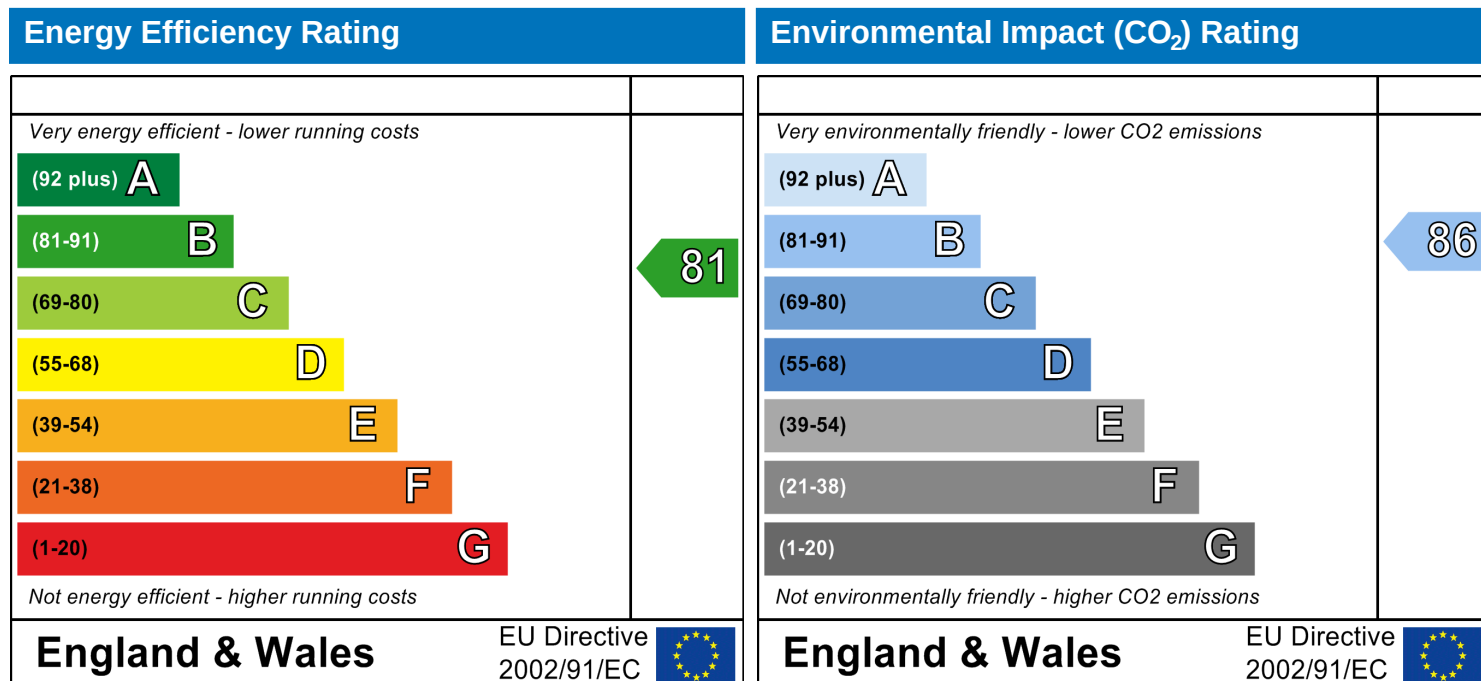

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

SAP Input

Property Details: YA-13-06 (new) SAP Design

Address: Ground Floor - new bungalow, 36, Southdown Road, BOGNOR REGIS, PO21 2JR
Located in: England
Region: South East England
UPRN:
Date of assessment: 15 January 2020
Date of certificate: 17 January 2020
Assessment type: New dwelling created by change of use
Transaction type: New dwelling
Tenure type: Unknown
Related party disclosure: No related party
Thermal Mass Parameter: Indicative Value Medium
Water use <= 125 litres/person/day: True
PCDF Version: 454

Property description:

Dwelling type: Bungalow
Detachment: Semi-detached
Year Completed: 2020
Floor Location: Floor area: Storey height:
 Floor 0 37.5 m² 2.95 m
Living area: 32.6 m² (fraction 0.869)
Front of dwelling faces: South

Opening types:

Name:	Source:	Type:	Glazing:	Argon:	Frame:
D - FRONT	Manufacturer	Solid			Wood
Glazed D	Manufacturer	Windows	low-E, En = 0.05, soft coat	Yes	PVC-U
RL	Manufacturer	Roof Windows	low-E, En = 0.05, soft coat	Yes	Wood
RL	Manufacturer	Roof Windows	low-E, En = 0.05, soft coat	Yes	Wood

Name:	Gap:	Frame Factor:	g-value:	U-value:	Area:	No. of Openings:
D - FRONT	mm	0.7	0	1.4	1.79	1
Glazed D	16mm or more	0.7	0.63	1.5	6.3	1
RL	16mm or more	0.7	0.63	1.3	0.88	1
RL	16mm or more	0.7	0.63	1.3	2.64	1

Name:	Type-Name:	Location:	Orient:	Width:	Height:
D - FRONT		new cavity	South	0	0
Glazed D		new cavity	West	0	0
RL		sloping roof	North	0.001	0
RL		sloping roof	South	0.001	0

Overshading: More than average

Opaque Elements:

Type:	Gross area:	Openings:	Net area:	U-value:	Ru value:	Curtain wall:	Kappa:
<u>External Elements</u>							
new cavity	37	8.09	28.91	0.25	0	False	N/A
sloping roof	35	3.52	31.48	0.16	0		N/A
horiz clg	6.75	0	6.75	0.16	0		N/A
ground	37.5			0.14			N/A
<u>Internal Elements</u>							
<u>Party Elements</u>							
new to new	17.1						N/A
existing to new	7						N/A

SAP Input

Thermal bridges:

Thermal bridges:	User-defined (individual PSI-values) Y-Value = 0.0477			
	Length	Psi-value		
	3.79	0.31	E1	Steel lintel with perforated steel base plate
	8.4	0.042	E4	Jamb
	14.5	0.055	E5	Ground floor (normal)
	14.5	0.02	E11	Eaves (insulation at rafter level)
	4.7	0.048	E16	Corner (normal)
	4.7	0.04	E18	Party wall between dwellings
	10.5	0.16	P1	Ground floor
	10.5	0.08	P5	Roof (insulation at rafter level)

Ventilation:

Pressure test:	Yes (As built)
Ventilation:	Natural ventilation (extract fans)
Number of chimneys:	0
Number of open flues:	0
Number of fans:	2
Number of passive stacks:	0
Number of sides sheltered:	1
Pressure test:	4 (Assessed dwelling is tested)

Main heating system:

Main heating system:	Boiler systems with radiators or underfloor heating
	Gas boilers and oil boilers
	Fuel: mains gas
	Info Source: Manufacturer Declaration
	Manufacturer's data
	Efficiency: 89.0% (SEDBUK2009)
	Condensing combi with automatic ignition
	Fuel Burning Type:
	Systems with radiators
	Central heating pump : 2013 or later
	Design flow temperature: Unknown
	Boiler interlock: Yes

Main heating Control:

Main heating Control:	Time and temperature zone control by suitable arrangement of plumbing and electrical services
	Control code: 2110

Secondary heating system:

Secondary heating system:	None
---------------------------	------

Water heating:

Water heating:	From main heating system
	Water code: 901
	Fuel :mains gas
	No hot water cylinder
	Solar panel: False

Others:

Electricity tariff:	Standard Tariff
In Smoke Control Area:	Unknown
Conservatory:	No conservatory
Low energy lights:	75%
Terrain type:	Low rise urban / suburban
EPC language:	English

SAP Input

Wind turbine: No

Photovoltaics: Photovoltaic 1
Installed Peak power: 0.15
Tilt of collector: 30°
Overshading: None or very little
Collector Orientation: South

Assess Zero Carbon Home: No

SAP WorkSheet: New dwelling created by change of use

User Details:

Assessor Name: Colin Marshall **Stroma Number:** STRO004020
Software Name: Stroma FSAP 2012 **Software Version:** Version: 1.0.4.23

Property Address: YA-13-06 (new) SAP Design

Address : Ground Floor - new bungalow, 36, Southdown Road, BOGNOR REGIS, PO21 2JR

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	37.5 (1a)	2.95 (2a)	110.63 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+.....(1n)	37.5 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+.....(3n)	110.63 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	0	0	0	0 (6a)
Number of open flues	0	0	0	0	0 (6b)
Number of intermittent fans				2	20 (7a)
Number of passive vents				0	0 (7b)
Number of flueless gas fires				0	0 (7c)

Air changes per hour

Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) =	20	÷ (5) =	0.18 (8)
<i>If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)</i>			
Number of storeys in the dwelling (ns)			0 (9)
Additional infiltration		[(9)-1]x0.1 =	0 (10)
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction <i>if both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35</i>			0 (11)
If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0			0 (12)
If no draught lobby, enter 0.05, else enter 0			0 (13)
Percentage of windows and doors draught stripped			0 (14)
Window infiltration	0.25 - [0.2 x (14) ÷ 100] =		0 (15)
Infiltration rate	(8) + (10) + (11) + (12) + (13) + (15) =		0 (16)
Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area			4 (17)
If based on air permeability value, then (18) = [(17) ÷ 20] + (8), otherwise (18) = (16)			0.38 (18)
<i>Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used</i>			
Number of sides sheltered			1 (19)
Shelter factor	(20) = 1 - [0.075 x (19)] =		0.92 (20)
Infiltration rate incorporating shelter factor	(21) = (18) x (20) =		0.35 (21)

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Monthly average wind speed from Table 7

(22)m=	5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7
--------	-----	---	-----	-----	-----	-----	-----	-----	---	-----	-----	-----

Wind Factor (22a)m = (22)m ÷ 4

(22a)m=	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18
---------	------	------	------	-----	------	------	------	------	---	------	------	------

SAP WorkSheet: New dwelling created by change of use

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.45	0.44	0.43	0.39	0.38	0.33	0.33	0.33	0.35	0.38	0.4	0.41
------	------	------	------	------	------	------	------	------	------	-----	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) x Fmv (equation (N5)) , otherwise (23b) = (23a)

0 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

0 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) x [1 - (23c) ÷ 100]

(24a)m= 0 0 0 0 0 0 0 0 0 0 0 0 (24a)

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m= 0 0 0 0 0 0 0 0 0 0 0 0 (24b)

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 x (23b), then (24c) = (23b); otherwise (24c) = (22b) m + 0.5 x (23b)

(24c)m= 0 0 0 0 0 0 0 0 0 0 0 0 (24c)

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² x 0.5]

(24d)m= 0.6 0.6 0.59 0.58 0.57 0.56 0.56 0.55 0.56 0.57 0.58 0.59 (24d)

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m= 0.6 0.6 0.59 0.58 0.57 0.56 0.56 0.55 0.56 0.57 0.58 0.59 (25)

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m²)	Openings m²	Net Area A ,m²	U-value W/m²K	A X U (W/K)	k-value kJ/m²·K	A X k kJ/K
Doors			1.79	x 1.4	= 2.506		(26)
Windows			6.3	x 1/[1/(1.5) + 0.04]	= 8.92		(27)
Rooflights Type 1			0.88	x 1/[1/(1.3) + 0.04]	= 1.144		(27b)
Rooflights Type 2			2.64	x 1/[1/(1.3) + 0.04]	= 3.432		(27b)
Floor			37.5	x 0.14	= 5.25		(28)
Walls	37	8.09	28.91	x 0.25	= 7.23		(29)
Roof Type1	35	3.52	31.48	x 0.16	= 5.04		(30)
Roof Type2	6.75	0	6.75	x 0.16	= 1.08		(30)
Total area of elements, m²			116.25				(31)
Party wall			17.1	x 0	= 0		(32)
Party wall			7	x 0	= 0		(32)

* for windows and roof windows, use effective window U-value calculated using formula 1/[(1/U-value)+0.04] as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U) (26)...(30) + (32) = 34.37 (33)

Heat capacity Cm = S(A x k) ((28)...(30) + (32) + (32a)...(32e) = 10550.77 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K Indicative Value: Medium 250 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K 5.55 (36)

if details of thermal bridging are not known (36) = 0.05 x (31)

Total fabric heat loss (33) + (36) = 39.91 (37)

SAP WorkSheet: New dwelling created by change of use

Ventilation heat loss calculated monthly

$$(38)m = 0.33 \times (25)m \times (5)$$

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(38)m=	21.93	21.79	21.65	20.99	20.87	20.3	20.3	20.19	20.52	20.87	21.12	21.38	(38)

Heat transfer coefficient, W/K

$$(39)m = (37) + (38)m$$

(39)m=	61.85	61.71	61.57	60.91	60.78	60.21	60.21	60.1	60.43	60.78	61.03	61.29	
Average = Sum(39) _{1...12} /12=												60.91	(39)

Heat loss parameter (HLP), W/m²K

$$(40)m = (39)m \div (4)$$

(40)m=	1.65	1.65	1.64	1.62	1.62	1.61	1.61	1.6	1.61	1.62	1.63	1.63	
Average = Sum(40) _{1...12} /12=												1.62	(40)

Number of days in month (Table 1a)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(41)m=	31	28	31	30	31	30	31	31	30	31	30	31	(41)

4. Water heating energy requirement:

kWh/year:

Assumed occupancy, N

$$\text{if TFA} > 13.9, N = 1 + 1.76 \times [1 - \exp(-0.000349 \times (TFA - 13.9)^2)] + 0.0013 \times (TFA - 13.9)$$

$$\text{if TFA} \leq 13.9, N = 1$$

1.34

(42)

Annual average hot water usage in litres per day $V_{d,average} = (25 \times N) + 36$

66.06

(43)

Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
--	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	--

Hot water usage in litres per day for each month $V_{d,m} = \text{factor from Table 1c} \times (43)$

(44)m=	72.67	70.03	67.38	64.74	62.1	59.46	59.46	62.1	64.74	67.38	70.03	72.67	
Total = Sum(44) _{1...12} =												792.75	(44)

Energy content of hot water used - calculated monthly = $4.190 \times V_{d,m} \times n_m \times DT_m / 3600$ kWh/month (see Tables 1b, 1c, 1d)

(45)m=	107.77	94.25	97.26	84.79	81.36	70.21	65.06	74.66	75.55	88.04	96.11	104.37	
Total = Sum(45) _{1...12} =												1039.43	(45)

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m=	16.16	14.14	14.59	12.72	12.2	10.53	9.76	11.2	11.33	13.21	14.42	15.65	(46)
--------	-------	-------	-------	-------	------	-------	------	------	-------	-------	-------	-------	------

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel

0

(47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day):

0

(48)

Temperature factor from Table 2b

0

(49)

Energy lost from water storage, kWh/year

$$(48) \times (49) =$$

0

(50)

b) If manufacturer's declared cylinder loss factor is not known:

Hot water storage loss factor from Table 2 (kWh/litre/day)

0

(51)

If community heating see section 4.3

Volume factor from Table 2a

0

(52)

Temperature factor from Table 2b

0

(53)

Energy lost from water storage, kWh/year

$$(47) \times (51) \times (52) \times (53) =$$

0

(54)

Enter (50) or (54) in (55)

0

(55)

Water storage loss calculated for each month

$$((56)m = (55) \times (41)m$$

(56)m=	0	0	0	0	0	0	0	0	0	0	0	0	(56)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

SAP WorkSheet: New dwelling created by change of use

If cylinder contains dedicated solar storage, (57)m = (56)m × [(50) – (H11)] ÷ (50), else (57)m = (56)m where (H11) is from Appendix H

(57)m=

0	0	0	0	0	0	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---

 (57)

Primary circuit loss (annual) from Table 3

0

 (58)

Primary circuit loss calculated for each month (59)m = (58) ÷ 365 × (41)m

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=

0	0	0	0	0	0	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---

 (59)

Combi loss calculated for each month (61)m = (60) ÷ 365 × (41)m

(61)m=

37.03	32.23	34.34	31.93	31.64	29.32	30.3	31.64	31.93	34.34	34.53	37.03
-------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------

 (61)

Total heat required for water heating calculated for each month (62)m = 0.85 × (45)m + (46)m + (57)m + (59)m + (61)m

(62)m=

144.8	126.48	131.6	116.72	113.01	99.53	95.36	106.3	107.48	122.38	130.64	141.4
-------	--------	-------	--------	--------	-------	-------	-------	--------	--------	--------	-------

 (62)

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRs and/or WWHRs applies, see Appendix G)

(63)m=

0	0	0	0	0	0	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---

 (63)

Output from water heater

(64)m=

144.8	126.48	131.6	116.72	113.01	99.53	95.36	106.3	107.48	122.38	130.64	141.4
-------	--------	-------	--------	--------	-------	-------	-------	--------	--------	--------	-------

Output from water heater (annual)_{1...12}

1435.69

 (64)

Heat gains from water heating, kWh/month $0.25 \times [0.85 \times (45)m + (61)m] + 0.8 \times [(46)m + (57)m + (59)m]$

(65)m=

45.09	39.4	40.92	36.18	34.96	30.67	29.21	32.73	33.1	37.86	40.59	43.96
-------	------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------

 (65)

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

(66)m=

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5	80.5

 (66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=

32.12	28.53	23.2	17.57	13.13	11.09	11.98	15.57	20.9	26.53	30.97	33.02
-------	-------	------	-------	-------	-------	-------	-------	------	-------	-------	-------

 (67)

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=

172.09	173.88	169.38	159.8	147.7	136.34	128.74	126.96	131.46	141.04	153.13	164.5
--------	--------	--------	-------	-------	--------	--------	--------	--------	--------	--------	-------

 (68)

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=

44.39	44.39	44.39	44.39	44.39	44.39	44.39	44.39	44.39	44.39	44.39	44.39
-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

 (69)

Pumps and fans gains (Table 5a)

(70)m=

3	3	3	3	3	3	3	3	3	3	3	3
---	---	---	---	---	---	---	---	---	---	---	---

 (70)

Losses e.g. evaporation (negative values) (Table 5)

(71)m=

-53.66	-53.66	-53.66	-53.66	-53.66	-53.66	-53.66	-53.66	-53.66	-53.66	-53.66	-53.66
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

 (71)

Water heating gains (Table 5)

(72)m=

60.6	58.63	55	50.24	46.99	42.6	39.26	44	45.97	50.89	56.37	59.09
------	-------	----	-------	-------	------	-------	----	-------	-------	-------	-------

 (72)

Total internal gains = (66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m

(73)m=

339.04	335.26	321.81	301.83	282.05	264.25	254.2	260.75	272.55	292.68	314.7	330.82
--------	--------	--------	--------	--------	--------	-------	--------	--------	--------	-------	--------

 (73)

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_ Table 6b	FF Table 6c	Gains (W)
--------------	---------------------------	------------------------	------------------	----------------	----------------	--------------

SAP WorkSheet: New dwelling created by change of use

West	0.9x	0.77	x	6.3	x	19.64	x	0.63	x	0.7	=	37.81	(80)
West	0.9x	0.77	x	6.3	x	38.42	x	0.63	x	0.7	=	73.97	(80)
West	0.9x	0.77	x	6.3	x	63.27	x	0.63	x	0.7	=	121.82	(80)
West	0.9x	0.77	x	6.3	x	92.28	x	0.63	x	0.7	=	177.67	(80)
West	0.9x	0.77	x	6.3	x	113.09	x	0.63	x	0.7	=	217.74	(80)
West	0.9x	0.77	x	6.3	x	115.77	x	0.63	x	0.7	=	222.9	(80)
West	0.9x	0.77	x	6.3	x	110.22	x	0.63	x	0.7	=	212.21	(80)
West	0.9x	0.77	x	6.3	x	94.68	x	0.63	x	0.7	=	182.29	(80)
West	0.9x	0.77	x	6.3	x	73.59	x	0.63	x	0.7	=	141.69	(80)
West	0.9x	0.77	x	6.3	x	45.59	x	0.63	x	0.7	=	87.78	(80)
West	0.9x	0.77	x	6.3	x	24.49	x	0.63	x	0.7	=	47.15	(80)
West	0.9x	0.77	x	6.3	x	16.15	x	0.63	x	0.7	=	31.1	(80)
Rooflights	0.9x	1	x	0.88	x	16.53	x	0.63	x	0.7	=	5.77	(82)
Rooflights	0.9x	1	x	2.64	x	42.87	x	0.63	x	0.7	=	44.92	(82)
Rooflights	0.9x	1	x	0.88	x	31.52	x	0.63	x	0.7	=	11.01	(82)
Rooflights	0.9x	1	x	2.64	x	78.81	x	0.63	x	0.7	=	82.57	(82)
Rooflights	0.9x	1	x	0.88	x	57.71	x	0.63	x	0.7	=	20.16	(82)
Rooflights	0.9x	1	x	2.64	x	120.36	x	0.63	x	0.7	=	126.11	(82)
Rooflights	0.9x	1	x	0.88	x	105.2	x	0.63	x	0.7	=	36.74	(82)
Rooflights	0.9x	1	x	2.64	x	165.54	x	0.63	x	0.7	=	173.45	(82)
Rooflights	0.9x	1	x	0.88	x	155.28	x	0.63	x	0.7	=	54.24	(82)
Rooflights	0.9x	1	x	2.64	x	197.07	x	0.63	x	0.7	=	206.5	(82)
Rooflights	0.9x	1	x	0.88	x	172.42	x	0.63	x	0.7	=	60.22	(82)
Rooflights	0.9x	1	x	2.64	x	199.89	x	0.63	x	0.7	=	209.45	(82)
Rooflights	0.9x	1	x	0.88	x	158.5	x	0.63	x	0.7	=	55.36	(82)
Rooflights	0.9x	1	x	2.64	x	191.02	x	0.63	x	0.7	=	200.15	(82)
Rooflights	0.9x	1	x	0.88	x	117.16	x	0.63	x	0.7	=	40.92	(82)
Rooflights	0.9x	1	x	2.64	x	167.43	x	0.63	x	0.7	=	175.43	(82)
Rooflights	0.9x	1	x	0.88	x	72.91	x	0.63	x	0.7	=	25.46	(82)
Rooflights	0.9x	1	x	2.64	x	136.3	x	0.63	x	0.7	=	142.82	(82)
Rooflights	0.9x	1	x	0.88	x	38.22	x	0.63	x	0.7	=	13.35	(82)
Rooflights	0.9x	1	x	2.64	x	90.75	x	0.63	x	0.7	=	95.09	(82)
Rooflights	0.9x	1	x	0.88	x	20.27	x	0.63	x	0.7	=	7.08	(82)
Rooflights	0.9x	1	x	2.64	x	52.47	x	0.63	x	0.7	=	54.98	(82)
Rooflights	0.9x	1	x	0.88	x	13.91	x	0.63	x	0.7	=	4.86	(82)
Rooflights	0.9x	1	x	2.64	x	35.93	x	0.63	x	0.7	=	37.65	(82)

Solar gains in watts, calculated for each month

(83)m = Sum(74)m ... (82)m

(83)m= 88.51 167.55 268.09 387.87 478.48 492.57 467.72 398.64 309.97 196.21 109.21 73.6 (83)

Total gains – internal and solar (84)m = (73)m + (83)m , watts

(84)m= 427.55 502.81 589.9 689.7 760.53 756.82 721.92 659.39 582.52 488.89 423.91 404.42 (84)

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 (°C)

21 (85)

Utilisation factor for gains for living area, h1,m (see Table 9a)

SAP WorkSheet: New dwelling created by change of use

(86)m=	0.98	0.96	0.92	0.82	0.66	0.49	0.36	0.41	0.65	0.88	0.96	0.98	(86)
--------	------	------	------	------	------	------	------	------	------	------	------	------	------

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m=	19.59	19.83	20.19	20.6	20.86	20.97	20.99	20.99	20.91	20.54	19.99	19.55	(87)
--------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	------

Temperature during heating periods in rest of dwelling from Table 9, Th2 (°C)

(88)m=	19.58	19.58	19.58	19.6	19.6	19.61	19.61	19.6	19.6	19.59	19.59	(88)
--------	-------	-------	-------	------	------	-------	-------	------	------	-------	-------	------

Utilisation factor for gains for rest of dwelling, h2,m (see Table 9a)

(89)m=	0.97	0.95	0.9	0.77	0.59	0.39	0.25	0.29	0.54	0.84	0.95	0.98	(89)
--------	------	------	-----	------	------	------	------	------	------	------	------	------	------

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

(90)m=	17.8	18.14	18.65	19.19	19.48	19.59	19.61	19.61	19.55	19.13	18.38	17.74	(90)
--------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

$$fLA = \text{Living area} \div (4) = 0.87 \quad (91)$$

Mean internal temperature (for the whole dwelling) = $fLA \times T1 + (1 - fLA) \times T2$

(92)m=	19.36	19.61	19.99	20.42	20.68	20.79	20.81	20.81	20.73	20.35	19.78	19.31	(92)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m=	19.36	19.61	19.99	20.42	20.68	20.79	20.81	20.81	20.73	20.35	19.78	19.31	(93)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

8. Space heating requirement

Set Ti to the mean internal temperature obtained at step 11 of Table 9b, so that Ti,m=(76)m and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains, hm:

(94)m=	0.97	0.95	0.9	0.8	0.65	0.48	0.35	0.39	0.63	0.86	0.95	0.98	(94)
--------	------	------	-----	-----	------	------	------	------	------	------	------	------	------

Useful gains, hmGm, W = (94)m x (84)m

(95)m=	415.32	477.77	532.65	552.15	492.28	360.09	250.71	260.25	365.61	421.83	403.86	394.73	(95)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2	(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	------

Heat loss rate for mean internal temperature, Lm, W = [(39)m x ((93)m - (96)m)]

(97)m=	931.19	907.57	830.69	701.59	545.87	372.54	253.55	264.87	400.6	592.82	773.71	926.11	(97)
--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	--------	------

Space heating requirement for each month, kWh/month = $0.024 \times [(97)m - (95)m] \times (41)m$

(98)m=	383.81	288.83	221.73	107.6	39.88	0	0	0	0	127.21	266.29	395.35	(98)
--------	--------	--------	--------	-------	-------	---	---	---	---	--------	--------	--------	------

$$\text{Total per year (kWh/year)} = \text{Sum}(98)_{1..5,9..12} = 1830.7 \quad (99)$$

Space heating requirement in kWh/m²/year

$$48.82 \quad (99)$$

9a. Energy requirements – Individual heating systems including micro-CHP

Space heating:

Fraction of space heat from secondary/supplementary system 0 (201)

Fraction of space heat from main system(s) (202) = 1 - (201) = 1 (202)

Fraction of total heating from main system 1 (204) = (202) x [1 - (203)] = 1 (204)

Efficiency of main space heating system 1 89.8 (206)

Efficiency of secondary/supplementary heating system, % 0 (208)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----------

Space heating requirement (calculated above)

383.81	288.83	221.73	107.6	39.88	0	0	0	0	127.21	266.29	395.35
--------	--------	--------	-------	-------	---	---	---	---	--------	--------	--------

(211)m = $\{[(98)m \times (204)]\} \times 100 \div (206)$ (211)

427.4	321.63	246.92	119.82	44.4	0	0	0	0	141.66	296.54	440.25
-------	--------	--------	--------	------	---	---	---	---	--------	--------	--------

$$\text{Total (kWh/year)} = \text{Sum}(211)_{1..5,10..12} = 2038.64 \quad (211)$$

SAP WorkSheet: New dwelling created by change of use

Space heating fuel (secondary), kWh/month

$$= \{[(98)m \times (201)]\} \times 100 \div (208)$$

(215)m=	0	0	0	0	0	0	0	0	0	0	0	0	
Total (kWh/year) =Sum(215) _{1...5,10...12} =													0 (215)

Water heating

Output from water heater (calculated above)

	144.8	126.48	131.6	116.72	113.01	99.53	95.36	106.3	107.48	122.38	130.64	141.4	
Efficiency of water heater													80.5 (216)
(217)m=	87.05	86.75	86.1	84.71	82.73	80.5	80.5	80.5	80.5	84.99	86.51	87.15	(217)

Fuel for water heating, kWh/month

$$(219)m = (64)m \times 100 \div (217)m$$

(219)m=	166.35	145.81	152.85	137.79	136.59	123.64	118.46	132.05	133.51	144	151.01	162.25	
Total = Sum(219a) _{1...12} =													1704.31 (219)

Annual totals

	kWh/year	kWh/year
Space heating fuel used, main system 1		2038.64
Water heating fuel used		1704.31
Electricity for pumps, fans and electric keep-hot		
central heating pump:	30	(230c)
Total electricity for the above, kWh/year	sum of (230a)...(230g) =	30 (231)
Electricity for lighting		226.92 (232)
Electricity generated by PVs		-129.54 (233)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year	Fuel Price (Table 12)	Fuel Cost £/year
Space heating - main system 1	(211) x	3.48	70.94 (240)
Space heating - main system 2	(213) x	0	0 (241)
Space heating - secondary	(215) x	13.19	0 (242)
Water heating cost (other fuel)	(219)	3.48	59.31 (247)
Pumps, fans and electric keep-hot	(231)	13.19	3.96 (249)
(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a			
Energy for lighting	(232)	13.19	29.93 (250)
Additional standing charges (Table 12)			120 (251)
	one of (233) to (235) x	13.19	-17.09 (252)

Appendix Q items: repeat lines (253) and (254) as needed

Total energy cost	(245)...(247) + (250)...(254) =	267.06 (255)
--------------------------	---------------------------------	--------------

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)		0.42 (256)
Energy cost factor (ECF)	[(255) x (256)] ÷ [(4) + 45.0] =	1.36 (257)
SAP rating (Section 12)		81.03 (258)

SAP WorkSheet: New dwelling created by change of use

12a. CO2 emissions – Individual heating systems including micro-CHP

	Energy kWh/year	Emission factor kg CO2/kWh		Emissions kg CO2/year
Space heating (main system 1)	(211) x	0.216	=	440.35 (261)
Space heating (secondary)	(215) x	0.519	=	0 (263)
Water heating	(219) x	0.216	=	368.13 (264)
Space and water heating	(261) + (262) + (263) + (264) =			808.48 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	0.519	=	15.57 (267)
Electricity for lighting	(232) x	0.519	=	117.77 (268)
Energy saving/generation technologies Item 1		0.519	=	-67.23 (269)
Total CO2, kg/year		sum of (265)...(271) =		874.58 (272)
CO2 emissions per m²		(272) ÷ (4) =		23.32 (273)
El rating (section 14)				86 (274)

13a. Primary Energy

	Energy kWh/year	Primary factor		P. Energy kWh/year
Space heating (main system 1)	(211) x	1.22	=	2487.14 (261)
Space heating (secondary)	(215) x	3.07	=	0 (263)
Energy for water heating	(219) x	1.22	=	2079.26 (264)
Space and water heating	(261) + (262) + (263) + (264) =			4566.4 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	3.07	=	92.1 (267)
Electricity for lighting	(232) x	0	=	696.64 (268)
Energy saving/generation technologies Item 1		3.07	=	-397.7 (269)
'Total Primary Energy		sum of (265)...(271) =		4957.44 (272)
Primary energy kWh/m²/year		(272) ÷ (4) =		132.2 (273)