



REPORT REFERENCE:

IMP5932

ENVIRONMENTAL NOISE IMPACT ASSESSMENT

PRoPG Planning and Noise

British Standard 8233: 2014

British Standard 4142: 2014

CLIENT:

Look Design and Build

SITE:

9 - 11 Station Road

Bognor Regis

PO21 1QD

SURVEY DATES:

25th February - 1st March 2021

Impact Acoustics Ltd

1 King John Avenue, Bournemouth, Dorset, BH11 9RS


impactacoustics.co.uk

Report by Mr. B. J. Scrivener MIOA.

1	EXECUTIVE SUMMARY	6
1.1	INSTRUCTION	6
1.2	SCOPE OF REPORT.....	6
1.3	SUMMARY OF RESULTS	6
1.4	COMMERCIAL NOISE	7
1.4.1	Daytime (07:00 – 23:00)	7
1.4.2	Night Time (23:00 – 23:00)	7
1.5	ASSESSMENT CONCLUSION	7
1.6	POTENTIAL FAÇADE NOISE LEVELS.....	8
1.6.1	Daytime (07:00-23:00).....	8
1.6.2	Night Time (23:00-07:00).....	8
1.7	RISK ASSESSMENT	8
1.7.1	Daytime (07:00-23:00).....	8
1.7.2	Night Time (23:00-07:00).....	8
1.8	CONCLUSION SUMMARY	9
1.8.1	Plant Noise BS 4142: 2014	9
1.8.2	Ambient Noise BS 8233: 2014.....	9
2	INTRODUCTION.....	10
2.1	PLANNING PRACTICE GUIDANCE AND NOISE.....	10
2.1.1	Professional Practice Guidance on Planning & Noise.	11
2.2	BRITISH STANDARD 8233: 2014.....	12
2.3	BS 4142: 2014 PLANT NOISE FROM PROPOSED GROUND FLOOR COMMERCIAL.....	12
2.4	NATIONAL PLANNING POLICY FRAMEWORK 2019 (NPPF) AND NOISE POLICY STATEMENT FOR ENGLAND 2010 (NPSE).	13
2.4.1	“Significant adverse” and “adverse”	13
2.4.2	NOEL – No Observed Effect Level.....	13
2.4.3	LOAEL – Lowest Observed Adverse Effect Level	13
2.4.4	SOAEL – Significant Observed Adverse Effect Level	13
3	SITE LOCATION.....	14
3.1	POSITION OF SITE IN WIDER AREA.....	14
3.2	PROPOSED DEVELOPMENT.....	15
4	PROCEDURE	18
5	APPARATUS	19
5.1	NORSONIC NOISE METER S/N 31471 ENVIRONMENTAL TESTING – POSITION 1	19
5.2	140 NOISE METER S/N 1403140 ENVIRONMENTAL TESTING – POSITION 2.....	19
6	RESULTS	20
6.1	DOWNLOADED RESULTS, AND AVERAGES.	20
6.1.1	25 th - 26 th February 2021 - Position 1.....	20
6.1.2	26 th - 27 th February 2021 - Position 1.....	20

6.1.3	27 th - 28 th February 2021 - Position 1	20
6.1.4	28 th February - 1 st March 2021 - Position 1	20
6.1.5	25 th - 26 th February 2021 - Position 2	21
6.1.6	26 th - 27 th February 2021 - Position 1	21
6.1.7	27 th - 28 th February 2021 - Position 1	21
6.1.8	28 th February - 1 st March 2021 - Position 1	21
6.2	COVID-19 FACTORING	22
6.2.1	Position 1	22
6.2.2	Position 2	22
7	PROPG PLANNING & NOISE STAGE 1	23
7.1	STAGE 1: INITIAL SITE NOISE RISK ASSESSMENT	23
7.2	POTENTIAL FAÇADE NOISE LEVELS	24
7.2.1	Daytime (07:00-23:00)	24
7.2.2	Night Time (23:00-07:00)	24
7.3	RISK ASSESSMENT	24
7.3.1	Daytime (07:00-23:00)	24
7.3.2	Night Time (23:00-07:00)	24
8	PROPG PLANNING & NOISE STAGE 2 - ELEMENT 1 – GOOD ACOUSTIC DESIGN	25
9	ELEMENT 2 – INTERNAL NOISE LEVEL GUIDELINES	26
9.1	DISCUSSION OF RESULTS	26
9.2	EXISTING NOISE LEVELS – DAYTIME (07:00 – 23:00)	26
9.3	EXISTING NOISE LEVELS – NIGHT TIME (23:00 – 07:00)	26
9.4	PROPOSED NOISE LEVELS – DAYTIME (07:00 – 23:00)	27
9.5	PROPOSED NOISE LEVELS – NIGHT TIME (23:00 – 07:00)	27
9.6	RECOMMENDATIONS	28
9.7	CALCULATION PROCEDURE TO BS 8233: 2014	28
9.8	GROUND FLOOR BEDROOM	29
9.9	FIRST FLOOR BEDROOM	30
9.10	SECOND FLOOR BEDROOM	31
9.11	GLAZING (R_{w1})	32
9.12	WALLS (R_{ew})	32
9.13	ROOF (R_{rr})	32
9.14	GLAZING & VENTILATION ASSESSMENT	32
9.15	NIGHT NOISE GUIDELINES EUROPE 2009	33
10	ELEMENT 3 – EXTERNAL AMENITY AREA NOISE ASSESSMENT	36
10.1	OUTDOOR LIVING AREAS	36
11	COMMERCIAL NOISE ASSESSMENT	37
11.1	EXISTING PLANT	37
11.2	CALCULATED FAÇADE LEVELS FROM TESCO'S PLANT	37

12	BS4142: 2014 NOISE ASSESSMENT	38
12.1	SCOPE OF BRITISH STANDARD 4142: 2014	38
12.2	TERMS AND DEFINITIONS	38
12.3	ASSESSMENT POSITION	38
12.4	CALCULATIONS	38
12.5	RATING LEVELS (CHARACTER CORRECTION)	39
12.6	SUBJECTIVE METHOD	39
12.7	ASSESSMENT CRITERION.....	40
12.8	NOISE METER FLOOR	40
12.9	BS 4142: 2014 PENALTIES.....	40
12.10	ASSESSMENTS	41
12.10.1	Daytime (07:00 – 23:00)	41
12.10.2	Night Time (23:00 – 07:00)	42
12.11	ASSESSMENT CONCLUSION	42
13	ELEMENT 4 – ASSESSMENT OF OTHER RELEVANT ISSUES	43
14	ACOUSTIC DESIGN STATEMENT.....	44
15	RECOMMENDATION TO DECISION MAKER.....	45
16	CONCLUSION	46
16.1	SUMMARY OF RESULTS	46
16.2	COMMERCIAL NOISE	46
16.2.1	Daytime (07:00 – 23:00)	46
16.2.2	Night Time (23:00 – 23:00)	46
16.3	ASSESSMENT CONCLUSION	47
16.4	POTENTIAL FAÇADE NOISE LEVELS.....	47
16.4.1	Daytime (07:00-23:00)	47
16.4.2	Night Time (23:00-07:00)	47
16.5	RISK ASSESSMENT	47
16.5.1	Daytime (07:00-23:00)	47
16.5.2	Night Time (23:00-07:00)	47
16.6	CONCLUSION SUMMARY	48
16.6.1	Plant Noise BS 4142: 2014	48
16.6.2	Ambient Noise BS 8233: 2014	48
17	UNCERTAINTY	49
17.1	UNCERTAINTY BUDGET	49
18	RESULTS	50
18.1	25 TH - 26 TH FEBRUARY 2021 – POSITION 1.....	50
18.2	26 TH - 27 TH FEBRUARY 2021 – POSITION 1.....	51
18.3	27 TH - 28 TH FEBRUARY 2021 – POSITION 1.....	52
18.4	28 TH FEBRUARY - 1 ST MARCH 2021 – POSITION 1.....	53
18.5	25 TH - 26 TH FEBRUARY 2021 – POSITION 2.....	54

18.6	26 TH - 27 TH FEBRUARY 2021 – POSITION 2.....	55
18.7	27 TH - 28 TH FEBRUARY 2021 – POSITION 2.....	56
18.8	28 TH FEBRUARY - 1 ST MARCH 2021 – POSITION 2.....	57
18.9	25 TH - 26 TH FEBRUARY 2021 - BACKGROUND NOISE LEVEL.....	58
18.10	26 TH - 27 TH FEBRUARY 2021 - BACKGROUND NOISE LEVEL.....	59
18.11	27 TH - 28 TH FEBRUARY 2021 - BACKGROUND NOISE LEVEL.....	60
18.12	28 TH FEBRUARY - 1 ST MARCH 2021 - BACKGROUND NOISE LEVEL.....	61
19	ENVIRONMENTAL CONDITIONS	62

1 EXECUTIVE SUMMARY

1.1 Instruction

Impact Acoustics Ltd have been instructed by Look Design and Build to undertake a background noise survey to British Standard 8233: 2014 and BS 4142: 2014 to determine the impact of existing noise sources on the proposed accommodation scheme at 9 - 11 Station Road, Bognor Regis, PO21 1QD.

1.2 Scope of Report

The measurements will be undertaken in accordance with ISO 1996 – Part 2: 2017 to determine the existing background noise levels and British Standard 8233: 2014 will be used to determine the impact of existing traffic on the internal noise environment within the proposed residential dwellings. This report aims to establish the following:

- Existing background noise levels within the area;
- Assess the potential internal noise levels on the proposed rooms;
- Provide specifications for the ventilation and window glazing with the proposed rooms.
- Assess any commercial noise from the nearby commercial plant.

1.3 Summary of Results

A background noise survey was undertaken from 25th February 2021 to the 1st March 2021 at two positions, one at the front and one at the rear of the site to establish the underlying background noise levels. The recorded measurements are as follows:

Assessment Position	Date Start	Date Finish	Daytime LAeq	Night Time LAeq
Position 1 Front	25/02/2021	01/03/2021	69.5	64.5
Position 2 Rear	25/02/2021	01/03/2021	62.5	62.0

Assessment Position	Date Start	Date Finish	Daytime LA90	Night Time LA90
Position 2 Rear	25/02/2021	01/03/2021	46	37

1.4 Commercial Noise

1.4.1 Daytime (07:00 – 23:00)

Rating Level	6 dB	9.1	The acoustic feature correction is added to the specific noise level
Background Noise Level $L_{A90,1 \text{ hour}}$	46 dB	8.1	Modal Background Noise Level (0700 – 2300)
Assessment Level	-40 dB	11	The background level is subtracted from the rating level.
Conclusion BS 4142:2014 _[1]	+10 dB Significant Adverse Effects, +5 dB Adverse Effects, +0 dB Low Impact		
Assessment	- 40 dB		
Conclusion	The assessment level is at No Observed Effect Level		

1.4.2 Night Time (23:00 – 23:00)

Rating Level	6 dB	9.1	The acoustic feature correction is added to the specific noise level
Background Noise Level $L_{A90,1 \text{ hour}}$	37 dB	8.1	Modal Background Noise Level (2300 – 0700)
Assessment Level	-31 dB	11	The background level is subtracted from the rating level.
Conclusion BS 4142:2014 _[1]	+10 dB Significant Adverse Effects, +5 dB Adverse Effects, +0 dB Low Impact		
Assessment	-31 dB		
Conclusion	The assessment level is at No Observed Effect Level		

1.5 Assessment Conclusion

It can be seen from the above assessments that with the existing Tesco's Store external plant as it stands, it is likely to cause a low impact to the proposed residential units. Therefore, no further remedial works are required at this stage.

1.6 Potential Façade Noise Levels

1.6.1 Daytime (07:00-23:00)

Time Period	Highest Potential Façade Noise Level	Noise Risk Category
		2 - Medium
Average Daytime (07:00-23:00)	$L_{Aeq, 16\text{ HOUR}}$ 69.5 dB	63 - 70 dB

1.6.2 Night Time (23:00-07:00)

Time Period	Highest Potential Façade Noise Level	Noise Risk Category
		2 - Medium
Average Night Time (23:00-07:00)	$L_{Aeq, 16\text{ HOUR}}$ 59.5 dB	55 - 60 dB
	Maximum (10 Times) – L_{Amax} 64.1 dB	>60 dB (10 Times in 8 Hours)

1.7 Risk Assessment

1.7.1 Daytime (07:00-23:00)

Risk Assessment Category	Risk Assessment
2 - Medium	As noise levels increase, the site is likely to be less suitable from a noise perspective and any subsequent application may be refused unless a good acoustic design process is followed and is demonstrated in an ADS which confirms how the adverse impacts of noise will be mitigated and minimised, and which clearly demonstrate that a significant adverse noise impact will be avoided in the finished development.

1.7.2 Night Time (23:00-07:00)

Risk Assessment Category	Risk Assessment
2 - Medium	As noise levels increase, the site is likely to be less suitable from a noise perspective and any subsequent application may be refused unless a good acoustic design process is followed and is demonstrated in an ADS which confirms how the adverse impacts of noise will be mitigated and minimised, and which clearly demonstrate that a significant adverse noise impact will be avoided in the finished development.

The above table demonstrates this site is located within Noise Risk Category 2 for daytime and Category 2 for night time which suggests a medium level of risk.

1.8 Conclusion Summary

1.8.1 Plant Noise BS 4142: 2014

The operation of the existing external plant has been assessed to establish if the development will have a demonstrable adverse effect in terms of noise that outweigh the benefits of the development. Measurements have been undertaken in accordance with British Standard 4142:2014 and ISO 1996 – Part 2: 2017. This report has established the existing background noise levels at the closest proposed residential façade on the site and the assessment of the impact these nearby residential properties. The resulting emissions from the site running on a worst case scenario show no conflict with 'low impact' criteria and give a strong indication that complaint and impact on the local amenity is unlikely.

1.8.2 Ambient Noise BS 8233: 2014

The dominant noise source on the overall site is road traffic. Levels have been recorded and assessments made in accordance with the relevant standards. Internal criteria's have been set and calculations made in order to determine the minimum construction details required in order to meet the desired level within the proposed residential dwellings and satisfy the local council's requirements.

National Planning Policy Framework 2019 suggests that planning permission should be granted unless any adverse impacts of doing so would significantly and demonstrably outweigh the benefits, when assessed against the policies in the framework taken as a whole, or specific policies in the framework indicate the application should be restricted.

Based on the calculations and assessments made within this report it is the professional opinion of Impact Acoustics Ltd that the proposed development can demonstrate compliance with the National Planning Policy Framework 2019, NPPF & NPSE and that, with regards to sound, planning permission can be granted.

2 INTRODUCTION

Impact Acoustics Ltd have been instructed by Look Design and Build to undertake a background noise survey to British Standard 8233: 2014 and BS 4142: 2014 to determine the impact of existing noise sources on the proposed accommodation scheme at 9 - 11 Station Road, Bognor Regis, PO21 1QD.

Ambient noise levels were measured between 25th February 2021 and the 1st March 2021. This report by Impact Acoustics Ltd gives the results of these measurements and an assessment in accordance with government planning guidelines and relevant standards together with mitigation measures as required.

With regards to external ambient noise, environmental noise levels are to be monitored at the site in accordance with British Standard 7445: 2003 'Description and measurement of environmental noise assessments and assessments made in-line with PROPG: Planning and Noise.

2.1 Planning Practice Guidance and Noise

March 2014 saw the publication of the Planning Practice Guidance for Noise (PPG-Noise) and this was subsequently updated in December 2014. The Planning Practice Guidance and Noise sets out details of how potential noise impacts should be evaluated.

'Local planning authorities' plan-making and decision taking should take account of the acoustic environment and in doing so consider:

- *whether or not a significant adverse effect is occurring or likely to occur;*
- *whether or not an adverse effect is occurring or likely to occur; and*
- *whether or not a good standard of amenity can be achieved.*

In line with the Explanatory Note of the Noise Policy Statement for England, this would include identifying whether the overall effect of the noise exposure (including the impact during the construction phase wherever applicable) is, or would be, above or below the significant observed adverse effect level and the lowest observed adverse effect level for the given situation. As noise is a complex technical issue, it may be appropriate to seek experienced specialist assistance when applying this policy.'


In accordance with Stage 2: Full Assessment, Other Noise Sources, detailed calculations and assessments should be carried out pertaining to these as PPG Noise does not provide advice and guidance when taking these elements into consideration.

2.1.1 Professional Practice Guidance on Planning & Noise.

The Professional Practice Guidance (PRoPG) on Planning and Noise for New Residential Development was published in May 2017 by the Association of Noise Consultants (ANC), Institute of Acoustics (IOA) and Chartered Institute of Environmental Health (CIEH). This document was developed in order to offer professional guidance on recommended strategies to the management of noise for use in the associated planning applications for specific sites. This furthermore, provides a numerical acoustic standard in accordance with the Government's planning and noise policies.

This document has been developed to ensure the developers adopts a good acoustic design process to ensure protection for future residents from the potential harmful effects from noise. The PRoPG denotes that it *'does not constitute an official government code of practice and neither replaces nor provides an authoritative interpretation of the law or government policy on which users should take their own advice as appropriate'*.

The PRoPG adopts a twin-stage approach, firstly providing an 'Initial Noise Risk Assessment' of the proposed development site before undertaking a detailed approach of a noise impact assessment. The results from the initial noise risk assessment are an indication of the general acoustic environment of the proposed development and demonstrate how detailed the noise impact assessment will need to be in order to mitigate any acoustic issues.

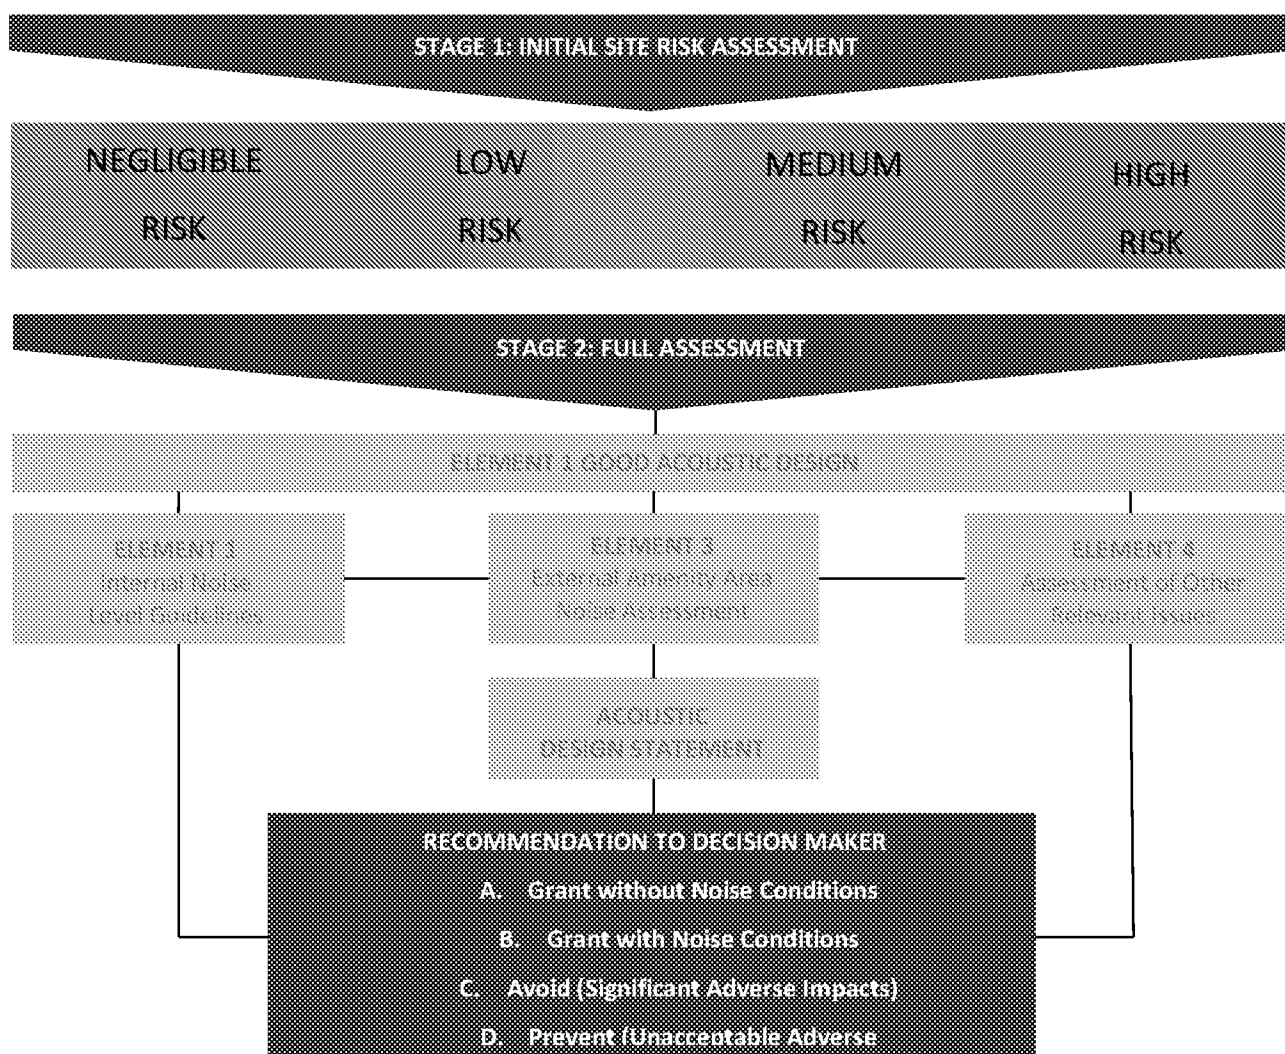

2.2 British Standard 8233: 2014

Calculations are to be made in accordance with BS 8233: 2014 Sound Insulation and Noise Reduction for Buildings Code of Practice.

BS 8233: 2014 set the following parameters as target levels that should be designed to within rooms such as Living Rooms and Bedrooms.

Indoor ambient noise levels in spaces when they are unoccupied and privacy is also important		
Objective	Typical situations	Design Range L _{Aeq,t} dB
Typical noise levels for acoustic privacy in shared spaces	Living room	35 – 40
NOTE: See Noise control in building services [28] and BS EN ISO 3382.		

Indoor ambient noise levels for dwellings			
Activity	Location	07:00 – 23:00	23:00 – 07:00
Resting	Living Room	35 dB L _{Aeq} 16 HOUR	--
Dining	Dining Room / Area	40 dB L _{Aeq} 16 HOUR	--
Sleeping (daytime resting)	Bedroom	35 dB L _{Aeq} 16 HOUR	30 dB L _{Aeq} 8 HOUR

Calculations and assessments are therefore to be carried out in order to satisfy the above requirements of BS8233: 2014.

2.3 BS 4142: 2014 Plant Noise from Proposed Ground Floor Commercial

British Standard 4142: 2014 is to be adopted for the basis of this background noise level assessment. A BS 4142: 2014 noise assessment will be carried out in order to demonstrate the predicted acoustic impact the existing plant, at the rear of the site, could have on the nearest affected proposed residential properties, and if necessary, make suitable recommendations in order to demonstrate that these units will not have a significant and demonstrable adverse impact on the nearest noise sensitive premises in accordance with the National Planning Policy Framework, once remedial works are completed. BS 4142: 2014 supersedes the 1997 version and has been developed to move more in-line with the National Planning Policy Framework 2019 (NPPF) and the Noise Policy Statement for England 2010 (NPSE).

2.4 National Planning Policy Framework 2019 (NPPF) and Noise Policy Statement for England 2010 (NPSE).

References and evaluations are to be made to the National Planning Policy Framework 2019 (NPPF) and the Noise Policy Statement for England 2010 (NPSE). The purpose of this document is to include all aspects of environmental noise within assessments i.e. environmental noise, neighbour noise and neighbourhood noise. Noise is to be considered alongside other relevant issues relating to the site and should not be considered in isolation, according to the NPSE. There are several key phrases within the NPSE aims and these are discussed below.

2.4.1 “Significant adverse” and “adverse”

There are two established concepts from toxicology that are currently being applied to noise impacts, for example, by the World Health Organisation. They are:

2.4.2 NOEL – No Observed Effect Level

This is the level below which no effect can be detected. In simple terms, below this level, there is no detectable effect on health and quality of life due to the noise.

2.4.3 LOAEL – Lowest Observed Adverse Effect Level

This is the level above which adverse effects on health and quality of life can be detected.

Extending these concepts for the purpose of this NPSE leads to the concept of a significant observed adverse effect level.

2.4.4 SOAEL – Significant Observed Adverse Effect Level


This is the level above which significant adverse effects on health and quality of life occur.


It is not possible to have a single objective noise-based measure that defines SOAEL that is applicable to all sources of noise in all situations. Consequently, the SOAEL is likely to be different for different noise sources, for different receptors and at different times. It is acknowledged that further research is required to increase our understanding of what may constitute a significant adverse impact on health and quality of life from noise. However, not having specific SOAEL values in the NPSE provides the necessary policy flexibility until further evidence and suitable guidance is available.

Finally, assessments and references are to be made to the World Health Organisation Night Time Noise Guidance 2009.


3.2 Proposed Development

The proposed development is shown below.

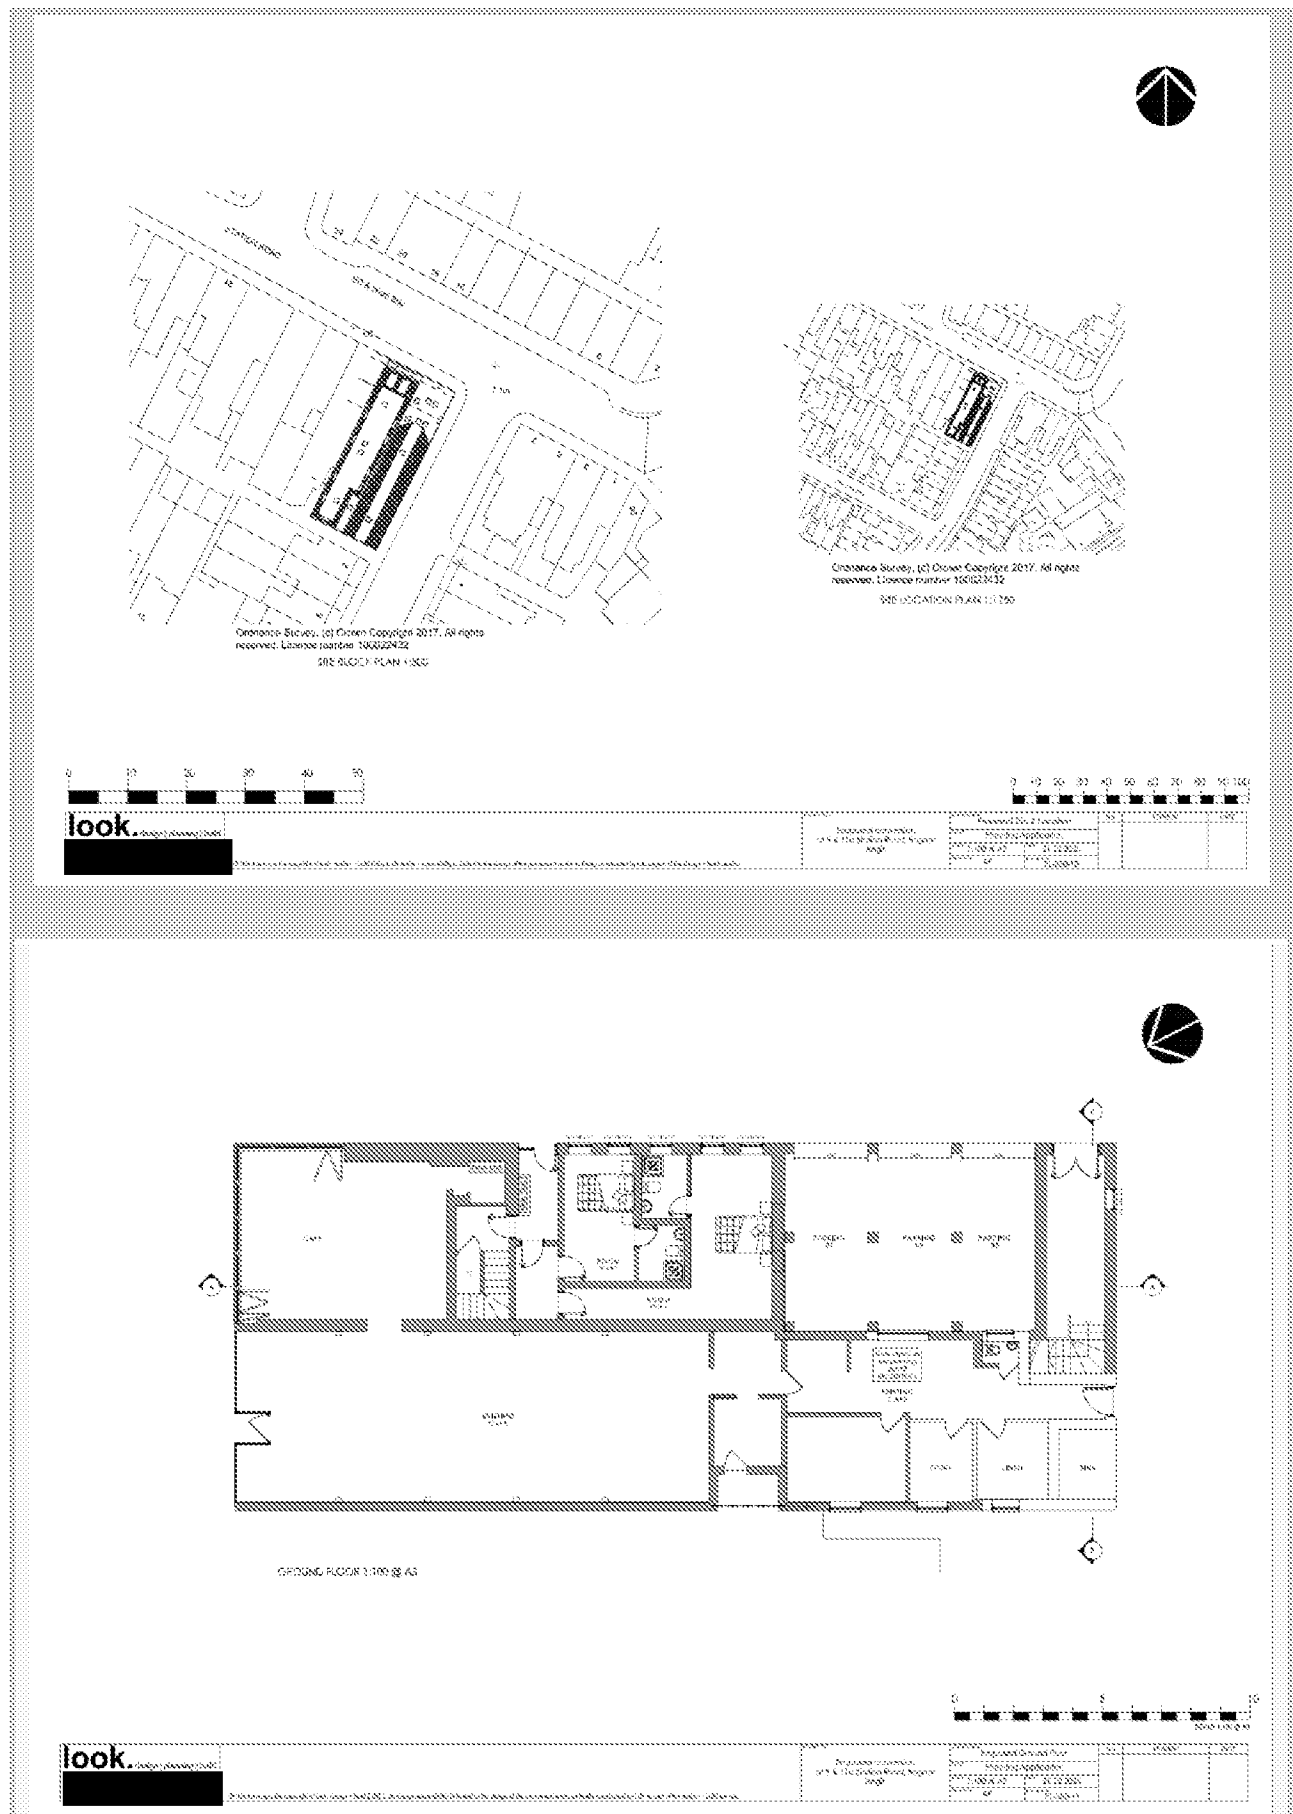

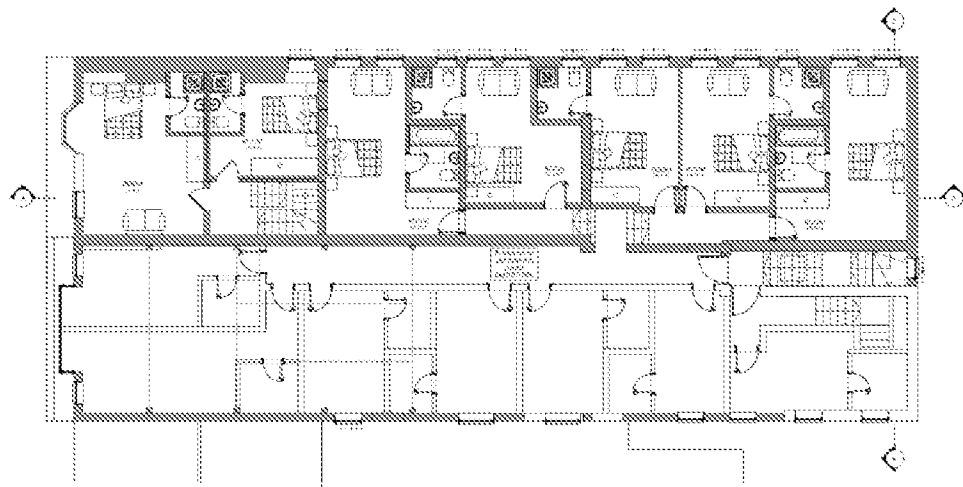


FIRST FLOOR 1:100 @ A2



Copyright © 2021 Impact Acoustics Ltd. All rights reserved. This document is the property of Impact Acoustics Ltd. and is not to be reproduced or distributed without the written consent of Impact Acoustics Ltd.

Project Name	Impact Acoustics Ltd.	10	10
Project Location	100 Station Road, Bognor Regis	10	10
Project Date	10/03/2021	10	10
Project Ref	100-100	10	10

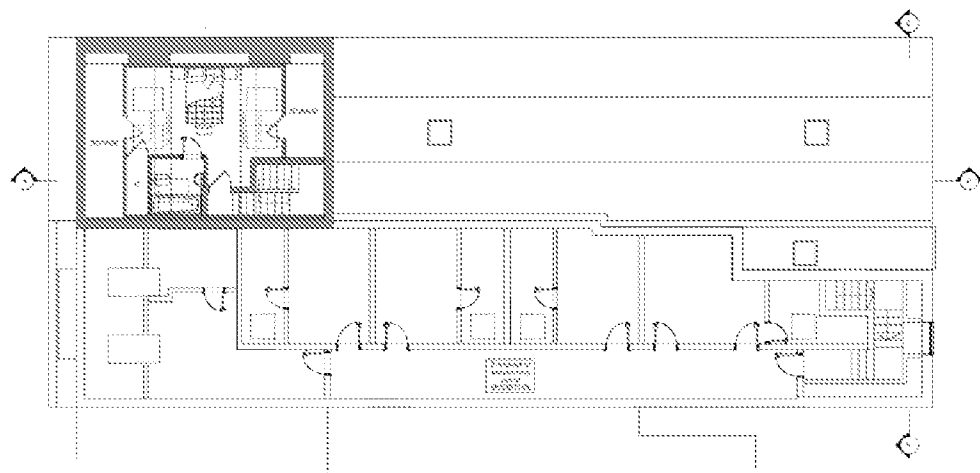


SECOND FLOOR 1:100 @ A2



Copyright © 2021 Impact Acoustics Ltd. All rights reserved. This document is the property of Impact Acoustics Ltd. and is not to be reproduced or distributed without the written consent of Impact Acoustics Ltd.

Project Name	Impact Acoustics Ltd.	10	10
Project Location	100 Station Road, Bognor Regis	10	10
Project Date	10/03/2021	10	10
Project Ref	100-100	10	10

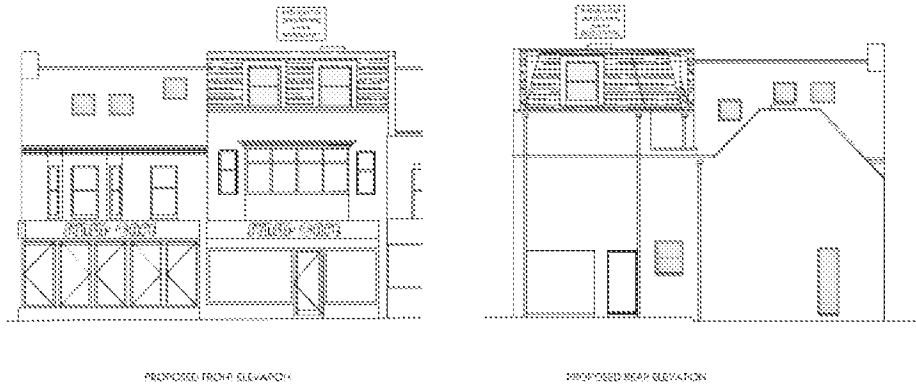


look

look
[Redacted]


Proposed elevation
0.9 m (3 ft) above ground level
[Redacted]

Proposed elevation
0.9 m (3 ft) above ground level
[Redacted]


Proposed elevation
0.9 m (3 ft) above ground level
[Redacted]

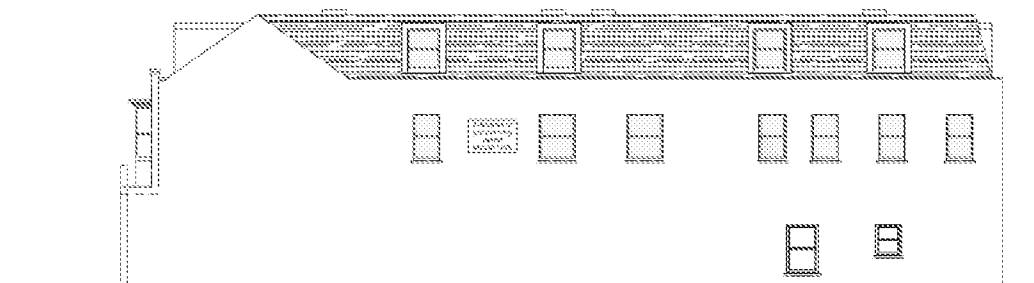

PROPOSED WESTERN ELEVATION

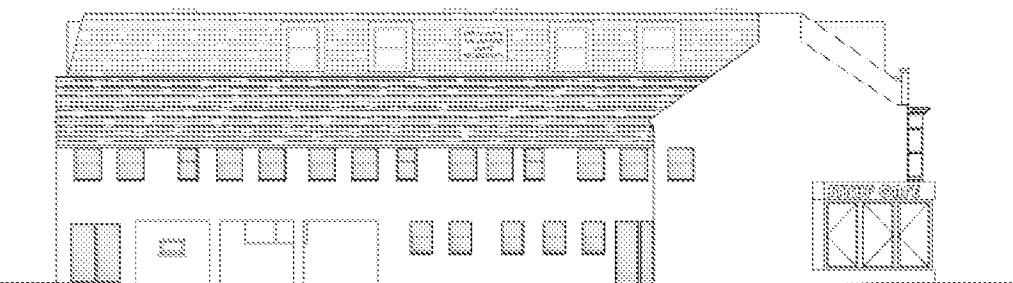

PROPOSED EASTERN ELEVATION



look

look
[Redacted]

Proposed elevation
0.9 m (3 ft) above ground level
[Redacted]

Proposed elevation
0.9 m (3 ft) above ground level
[Redacted]

Proposed elevation
0.9 m (3 ft) above ground level
[Redacted]

4 PROCEDURE

External noise levels were recorded over a typical period and analysis date extrapolated between 07:00 hrs 25th February 2021 and 07:00 hrs on 1st March 2021 at 2 positions as detailed on the attached plan sketch layout.

Position 1 was located at the front facade on the site in order to capture the noise levels associated with the local roads and position 2 was located at the rear side façade in order to capture the noise levels associated with the ambient noise and existing plant. Sample measurements were recorded over continuous 15 minute samples and from this data the hourly LAeq daytime values have been evaluated. Sound Pressure Levels were recorded on the following setting along with a full octave band frequency analysis measured simultaneously and between 31.5 Hz and 16.0 kHz.

Daytime 07:00 – 23:00		Night Time 23:00 – 07:00	
LAeq 1 HOUR dB	LA10 1 HOUR dB	LAeq 15 MINUTES dB	LA10 15 MINUTES dB
LAMAX 1 HOUR dB	LA50 1 HOUR dB	LAMAX 15 MINUTES dB	LA50 15 MINUTES dB
LAMIN 1 HOUR dB	LA90 1 HOUR dB	LAMIN 15 MINUTES dB	LA90 15 MINUTES dB

Calculations have been made in accordance with BS 8233: 2014 'Sound Insulation and Reduction of Buildings - Code of Practice'. Recommendations were made for any additional acoustics measures to conform to these standards.

From the downloaded recorded results, the daytime and night time periods were assessed and used within the above calculations as LAeq 16 HOUR dB levels for daytime and LAeq 8 HOUR dB levels for night time. These are detailed within this report. All data averaged throughout the day has been done so on a logarithmic basis to give accurate LAeq 16 Hour dB daytime and LAeq 8 Hour dB night time noise levels.

Finally, it should be noted that calculations are carried out with façade levels corrected from the recorded noise levels to the calculated façade levels.

5 APPARATUS

The equipment was calibrated using a sound pressure level of 114.0 dB at an octave band centre frequency of 1000Hz with reference to $2 \times 10^{-5} \text{ Nm}^{-2}$ before and after the tests and the equipment set to have no inaccuracy greater than 0.2dB.

All the following equipment was calibrated in accordance with the laboratory accreditation requirements of the United Kingdom Accreditation Service (UKAS) on the following dates.

5.1 Norsonic noise meter s/n 31471 environmental testing – Position 1

Description	Make	Type	Serial No.	Calibration Intervals	Last Calibrated	Next Due Calibration
Integrated Sound Level Meter	Norsonic	118	<u>31471</u>	2 YEARS	28.10.2019	28.10.2021
12.5mm Microphone (with windshield)	Norsonic	1225	<u>57535</u>	2 YEARS	28.10.2019	28.10.2021
Microphone Pre – Amplifier	Norsonic	1206	<u>30687</u>	2 YEARS	28.10.2019	28.10.2021

5.2 140 noise meter s/n 1403140 environmental testing – Position 2

Description	Make	Type	Serial No.	Calibration Intervals	Last Calibrated	Next Due Calibration
Integrated Sound Level Meter	Norsonic	140	<u>1403140</u>	2 YEARS	05.04.2019	05.04.2021
12.5mm Microphone (with windshield)	Norsonic	<u>GRAS</u> <u>40AF</u>	<u>114650</u>	2 YEARS	05.04.2019	05.04.2021
Microphone Pre – Amplifier	Norsonic	1201	<u>30327</u>	2 YEARS	05.04.2019	05.04.2021

Full calibration certificates are available upon request.

6 RESULTS

6.1 Downloaded results, and averages.

6.1.1 25th - 26th February 2021 - Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	64.4	89.7	73.0	72.0	61.3	60.8	59.9	59.0	57.6	55.8	45.6	32.9
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	59.5	86.7	67.4	63.3	53.6	56.4	55.3	53.9	52.4	51.3	42.5	32.8

6.1.2 26th - 27th February 2021 - Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	64.3	92.9	74.3	71.8	62.5	61.9	60.2	58.7	57.4	55.3	45.9	32.8
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	56.1	81.7	63.7	62.3	50.0	52.3	52.3	51.2	49.6	46.1	35.3	29.7

6.1.3 27th - 28th February 2021 - Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	64.5	97.6	73.6	71.3	61.8	62.0	60.7	58.6	57.5	56.1	46.5	33.3
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	55.4	84.5	62.2	60.6	49.7	52.3	50.8	50.5	48.9	45.5	34.6	19.8

6.1.4 28th February - 1st March 2021 - Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	63.6	89.6	72.6	70.3	62.0	60.8	59.4	58.2	56.4	54.8	45.5	33.0
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	57.6	91.2	64.8	62.6	52.0	54.5	52.1	52.5	51.1	48.9	39.2	26.4

The following noise levels have been corrected for the highest recorded façade levels and used within the BS 8233: 2014 calculations

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	64.5	97.6	73.6	71.3	61.8	62.0	60.7	58.6	57.5	56.1	46.5	33.3
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	59.5	86.7	67.4	63.3	53.6	56.4	55.3	53.9	52.4	51.3	42.5	32.8

6.1.5 25th - 26th February 2021 - Position 2

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	57.5	90.4	62.2	60.1	56.8	51.5	49.1	51.6	50.9	51.6	36.6	21.5
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	57.0	95.3	60.4	52.8	48.5	47.7	45.8	51.2	50.8	51.8	31.7	16.1

6.1.6 26th - 27th February 2021 - Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	57.1	88.7	62.9	60.7	56.5	51.2	49.3	51.0	50.6	51.3	35.2	21.5
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	52.2	80.5	52.1	50.6	46.8	41.6	39.4	45.7	47.2	46.4	28.3	11.5

6.1.7 27th - 28th February 2021 - Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	56.2	82.8	62.4	59.9	56.9	51.7	48.9	50.3	49.8	49.6	33.4	20.8
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	50.5	85.1	51.2	48.6	44.5	40.7	40.1	44.2	45.4	44.4	27.9	12.5

6.1.8 28th February - 1st March 2021 - Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	56.1	88.2	60.3	58.8	57.6	52.6	49.7	50.2	49.2	49.3	34.2	20.8
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	54.0	83.5	55.6	52.9	49.8	46.6	43.7	47.1	48.5	48.6	31.1	17.8

The following noise levels have been corrected for the highest recorded façade levels and used within the BS 8233: 2014 calculations

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	57.5	90.4	62.2	60.1	56.8	51.5	49.1	51.6	50.9	51.6	36.6	21.5
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	57.0	95.3	60.4	52.8	48.5	47.7	45.8	51.2	50.8	51.8	31.7	16.1

6.2 COVID-19 Factoring

Impact Acoustics have undertaken several noise assessments during the Pandemic COVID 19 lockdown and used comparisons between recorded road traffic noise vs collected road traffic data from the Department for Transport direct database. These have indicated increases of no more than +3.5 dB(A) to recorded levels as a results of the decreased traffic flow. Unfortunately there is no direct traffic data available for this site and therefore to safeguard the site, a further 5 dB(A) has been added to the recorded data to take into account the potentially decreased traffic flow levels and their associated noise levels.

Therefore, the above levels have been uplifted to the following values:-

6.2.1 Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	69.5	102.6	78.6	76.3	66.8	67	65.7	63.6	62.5	61.1	51.5	38.3
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	64.5	91.7	72.4	68.3	58.6	61.4	60.3	58.9	57.4	56.3	47.5	37.8

6.2.2 Position 2

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	62.5	95.4	67.2	65.1	61.8	56.5	54.1	56.6	55.9	56.6	41.6	26.5
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	62.0	100.3	65.4	57.8	53.5	52.7	50.8	56.2	55.8	56.8	36.7	21.1


With regards to background noise levels and to further safeguard the development and surrounding environment, the recorded LA90 background noise levels will remain unchanged.

7 PROPG PLANNING & NOISE STAGE 1

7.1 Stage 1: Initial Site Noise Risk Assessment

The Stage 1, Initial Noise Risk Assessment, compares the recorded ambient noise levels obtained from the acoustic survey and correlates these against the risk scale within the Pro PG Document in order to evaluate any potential adverse effects the site is currently exposed to with regards to noise.

The outcome of the Stage 1 assessment will determine the level of detail required within Stage 2 in order to demonstrate suitable mitigations can be introduced to ensure continuing compliance with the relevant standards, local planning policies and Pro PG. The following table demonstrates the Initial Risk Assessment Noise Levels as detailed within PROPG Figure.1:-

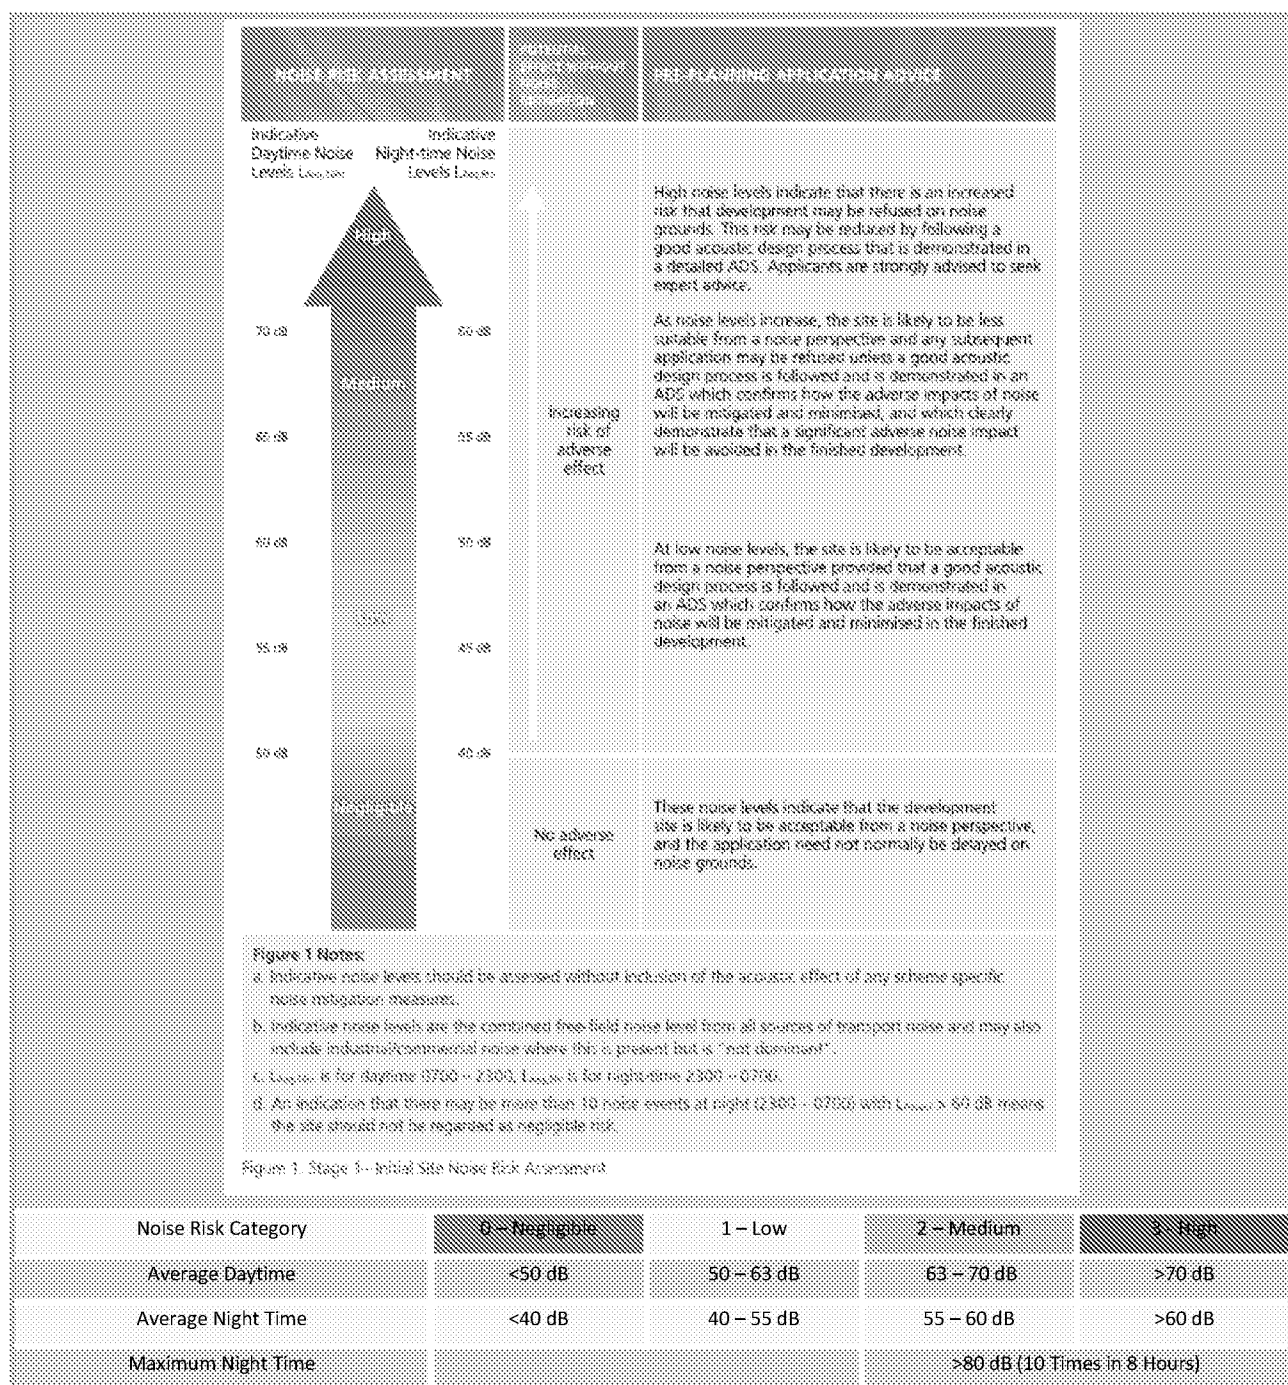

Based on the data collected from the aforementioned noise survey, the following PROPG Stage 1 assessments can be made:-

7.2 Potential Façade Noise Levels

7.2.1 Daytime (07:00-23:00)

Time Period	Highest Potential Façade Noise Level	Noise Risk Category
		2 - Medium
Average Daytime (07:00-23:00)	$L_{Aeq, 16\text{ HOUR}}$ 69.5 dB	63 - 70 dB

7.2.2 Night Time (23:00-07:00)

Time Period	Highest Potential Façade Noise Level	Noise Risk Category
		2 - Medium
Average Night Time (23:00-07:00)	$L_{Aeq, 16\text{ HOUR}}$ 59.5 dB	55 - 60 dB
	Maximum (10 Times) – L_{Amax} 64.1 dB	>60 dB (10 Times in 8 Hours)

7.3 Risk Assessment

7.3.1 Daytime (07:00-23:00)

Risk Assessment Category	Risk Assessment
2 - Medium	As noise levels increase, the site is likely to be less suitable from a noise perspective and any subsequent application may be refused unless a good acoustic design process is followed and is demonstrated in an ADS which confirms how the adverse impacts of noise will be mitigated and minimised, and which clearly demonstrate that a significant adverse noise impact will be avoided in the finished development.

7.3.2 Night Time (23:00-07:00)

Risk Assessment Category	Risk Assessment
2 - Medium	As noise levels increase, the site is likely to be less suitable from a noise perspective and any subsequent application may be refused unless a good acoustic design process is followed and is demonstrated in an ADS which confirms how the adverse impacts of noise will be mitigated and minimised, and which clearly demonstrate that a significant adverse noise impact will be avoided in the finished development.

The above table demonstrates this site is located within Noise Risk Category 2 for daytime and Category 2 for night time which suggests a medium level of risk.

8 PROPG PLANNING & NOISE STAGE 2 - ELEMENT 1 – GOOD ACOUSTIC DESIGN


Given the size and orientation of the proposed site, it is recommended that the developer adopt, where practically possible, a good acoustic design which should include careful consideration of the positioning of the proposed properties together with thoughts being taken as to internal layouts to minimise noise sensitive rooms facing onto dominant noise sources within the local areas.

9 ELEMENT 2 – INTERNAL NOISE LEVEL GUIDELINES

9.1 Discussion of Results

It can be seen from the attached graph and downloaded results that the external noise levels have followed the expected path and remained fairly constant throughout the day. The levels then gradually dropped off as the evening progressed and began to rise when morning traffic levels increased.

9.2 Existing Noise Levels – Daytime (07:00 – 23:00)

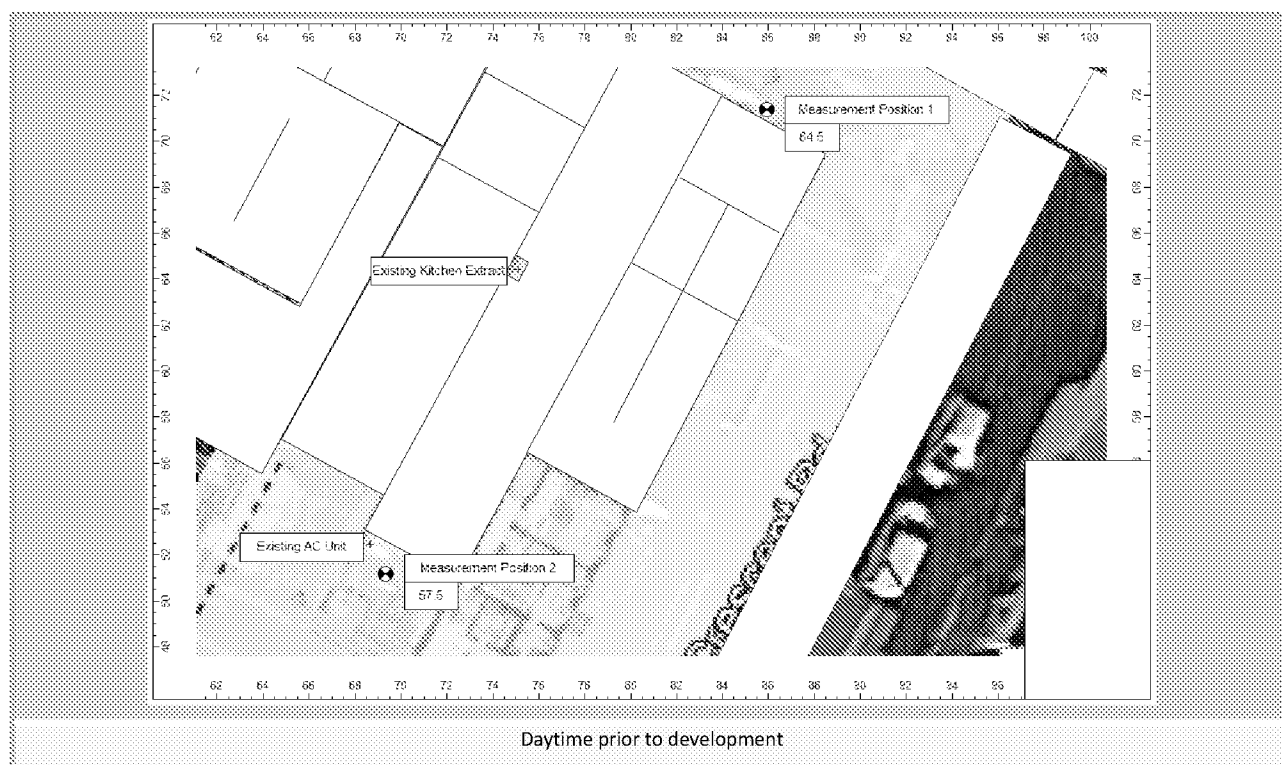

9.3 Existing Noise Levels – Night Time (23:00 – 07:00)



9.4 Proposed Noise levels – Daytime (07:00 – 23:00)



9.5 Proposed Noise levels – Night Time (23:00 – 07:00)



9.6 Recommendations

For the purpose of this assessment, the corresponding façade levels will be used within the BS 8233: 2014 calculations in order to evaluate the worst case scenario and select the correct window specification.

Therefore, in order to achieve the required noise levels of $L_{Aeq\ 16\ HOUR}$ 35 dB for habitable rooms daytime and $L_{Aeq\ 8\ HOUR}$ 30 dB for Bedroom at night within the proposed, the following additional acoustic measures have been calculated.

It should be noted that the calculations have been made with the proposed windows closed. Additional calculations were made for the top floor due to the influence of sound transmission into the various rooms via the roof / ceiling i.e. an increased impeding façade. Inputted levels into the calculation sheets have been corrected for distance attenuation and free field in accordance with the aforementioned British Standard.

9.7 Calculation Procedure to BS 8233: 2014

The following calculations have been carried out in order to determine the required window and ventilation specification in order to meet the requirements of BS 8233: 2014.

9.8 Ground Floor Bedroom

Proposed Window Configuration		10mm / 16mm / 4mm with MVHR				
Leqff	The equivalent continuous sound pressure level outside the room elements under consideration					
A0	The reference absorption area of 10m2 and is independent of frequency					
Sf	The total façade area of the room in question					
Swi	The area of the windows in the room					
Sew	The area of the external wall of the room					
Srr	The area of the ceiling of the room (if applicable)					
S	The total area of the elements through which sound enters the room					
Dne	The insulation value of the trickle ventilator (if applicable)					
Rwi	The sound reduction index of the window					
Rew	The sound reduction index of the external wall					
Rrr	The sound reduction index of the ceiling/roof (if applicable)					
A	The equivalent absorption area of the receiving room where A=0.163V/T					
Formula	$Leq2=Leqff+10\log[A0/S*10^{(-Dne/10)}+Swi/S*10^{(-Rwi/10)}+Sew/10*10^{(-Rew/10)}+Srr/S*10^{(-Rrr/10)}]+10\log(S/A)+3$					
Note	The expected Precision of the Calculation is +/- 2dB					
	Octave Band Centre Frequency (Hz)					
	125	250	500	1000	2000	4000
Sf	7	7	7	7	7	7
Sr	0	0	0	0	0	0
Swi	1.6	1.6	1.6	1.6	1.6	1.6
Sew	5.4	5.4	5.4	5.4	5.4	5.4
Srr	0	0	0	0	0	0
S	7	7	7	7	7	7
A0	10	10	10	10	10	10
V	36	36	36	36	36	36
T (BS8233)	0.50	0.50	0.50	0.50	0.50	0.50
A	11.0	14.0	16.0	16.0	15.0	14.0
Daytime Leqff	66.8	67.0	65.7	63.6	62.5	61.1
Night time Leqff	58.6	61.4	60.3	58.9	57.4	56.3
Dne	40.0	44.0	45.0	51.0	56.0	56.0
Rwi	24.0	21.0	32.0	37.0	42.0	43.0
Rew	40.0	44.0	45.0	51.0	56.0	56.0
Rrr	28.0	34.0	40.0	45.0	49.0	49.0
Predicted dB(A) Level Within The Above Room During Daytime Hours (07:00-23:00)			LAeq 16 HOUR		32.8	dB(A)
Predicted dB(A) Level Within The Above Room During Night Time Hours (23:00-07:00)			LAeq 8 HOUR		27.2	dB(A)

9.9 First Floor Bedroom

Proposed Window Configuration			10mm / 16mm Argon / 6.8mm Pilkington Optiphon with MVHR			
Leqff	The equivalent continuous sound pressure level outside the room elements under consideration					
A0	The reference absorption area of 10m2 and is independent of frequency					
Sf	The total façade area of the room in question					
Swi	The area of the windows in the room					
Sew	The area of the external wall of the room					
Srr	The area of the ceiling of the room (if applicable)					
S	The total area of the elements through which sound enters the room					
Dne	The insulation value of the trickle ventilator (if applicable)					
Rwi	The sound reduction index of the window					
Rew	The sound reduction index of the external wall					
Rrr	The sound reduction index of the ceiling/roof (if applicable)					
A	The equivalent absorption area of the receiving room where A=0.163V/T					
Formula	$Leq2=Leqff+10\log[A0/S*10^{(-Dne/10)}+Swi/S*10^{(-Rwi/10)}+Sew/10*10^{(-Rew/10)}+Srr/S*10^{(-Rrr/10)}]+10\log(S/A)+3$					
Note	The expected Precision of the Calculation is +/- 2dB.					
	Octave Band Centre Frequency (Hz)					
	125	250	500	1000	2000	4000
Sf	12.5	12.5	12.5	12.5	12.5	12.5
Sr	0	0	0	0	0	0
Swi	3.6	3.6	3.6	3.6	3.6	3.6
Sew	8.9	8.9	8.9	8.9	8.9	8.9
Srr	0	0	0	0	0	0
S	12.5	12.5	12.5	12.5	12.5	12.5
A0	10	10	10	10	10	10
V	50.4	50.4	50.4	50.4	50.4	50.4
T (BS8233)	0.50	0.50	0.50	0.50	0.50	0.50
A	11.0	14.0	16.0	16.0	15.0	14.0
Daytime Leqff	66.8	67.0	65.7	63.6	62.5	61.1
Night time Leqff	58.6	61.4	60.3	58.9	57.4	56.3
Dne	40.0	44.0	45.0	51.0	56.0	56.0
Rwi	21	28	37	48	48	54
Rew	40.0	44.0	45.0	51.0	56.0	56.0
Rrr	28.0	34.0	40.0	45.0	49.0	49.0
Predicted dB(A) Level Within The Above Room During Daytime Hours (07:00-23:00)			L _{Aeq} 16 HOUR		32.2	dB(A)
Predicted dB(A) Level Within The Above Room During Night Time Hours (23:00-07:00)			L _{Aeq} 8 HOUR		25.8	dB(A)

9.10 Second Floor Bedroom

Proposed Window Configuration			10mm / 16mm / 4mm with MVHR			
Leqff	The equivalent continuous sound pressure level outside the room elements under consideration					
A0	The reference absorption area of 10m2 and is independent of frequency					
Sf	The total façade area of the room in question					
Swi	The area of the windows in the room					
Sew	The area of the external wall of the room					
Srr	The area of the ceiling of the room (if applicable)					
S	The total area of the elements through which sound enters the room					
Dne	The insulation value of the trickle ventilator (if applicable)					
Rwi	The sound reduction index of the window					
Rew	The sound reduction index of the external wall					
Rrr	The sound reduction index of the ceiling/roof (if applicable)					
A	The equivalent absorption area of the receiving room where A=0.163V/T					
Formula	$Leq2=Leqff+10\log[A0/S*10^{(-Dne/10)}+Swi/S*10^{(-Rwi/10)}+Sew/10*10^{(-Rew/10)}+Srr/S*10^{(-Rrr/10)}]+10\log(S/A)+3$					
Note	The expected Precision of the Calculation is +/- 2dB					
	Octave Band Centre Frequency (Hz)					
	125	250	500	1000	2000	4000
Sf	10	10	10	10	10	10
Sr	16	16	16	16	16	16
Swi	1.5	1.5	1.5	1.5	1.5	1.5
Sew	8.5	8.5	8.5	8.5	8.5	8.5
Srr	16	16	16	16	16	16
S	26	26	26	26	26	26
A0	10	10	10	10	10	10
V	29	29	29	29	29	29
T (BS8233)	0.50	0.50	0.50	0.50	0.50	0.50
A	11.0	14.0	16.0	16.0	15.0	14.0
Daytime Leqff	66.8	67.0	65.7	63.6	62.5	61.1
Night time Leqff	58.6	61.4	60.3	58.9	57.4	56.3
Dne	40.0	44.0	45.0	51.0	56.0	56.0
Rwi	24	21	32	37	42	43
Rew	39.0	48.0	55.0	60.0	59.0	61.0
Rrr	39.0	48.0	55.0	60.0	59.0	61.0
Predicted dB(A) Level Within The Above Room During Daytime Hours (07:00-23:00)			L _{Aeq} 16 HOUR		32.7	dB(A)
Predicted dB(A) Level Within The Above Room During Night Time Hours (23:00-07:00)			L _{Aeq} 8 HOUR		27.0	dB(A)

9.11 Glazing (R_{wi})

Octave Band Frequency	125	250	500	1000	2000	4000	Rw dB
10mm / 16mm / 4mm	24	21	32	37	42	43	35.0
6mm / 16mm Argon / 6.8mm Pilkington Optiphon	21	28	37	48	48	54	40.0

9.12 Walls (R_{ew})

Octave Band Frequency	125	250	500	1000	2000	4000	Rw dB
Brick and Concrete Block	40.0	44.0	45.0	51.0	56.0	56.0	50.0

9.13 Roof (R_{rr})

Octave Band Frequency	125	250	500	1000	2000	4000	Rw dB
Standard Roof	39	48	55	60	59	61	57.0
Standard Pitched Roof	44.0	51.0	57.0	61.0	58.0	63.0	59.0

The above are minimum construction attenuation values and should alternative methods be selected; these should be equal to or greater than the above corresponding values. Calculations carried out have indicated the following specifications should be installed for this site.

9.14 Glazing & Ventilation Assessment

The development should be designed with a 10mm glass / 16mm air gap / 4mm glass double glazed windows and an MVHR unit to all rooms on the ground and second floors, a 10mm glass / 16mm Argon gap / 6.8mm Pilkington Optiphon glass double glazed windows and an MVHR unit to the first floor windows to ensure the internal noise levels are acceptable in terms of the assessment to British Standard 8233: 2014.

9.15 Night Noise Guidelines Europe 2009

The Night Noise Guidelines 2009 make direct reference to the World Health Organisations Guidelines for Community Noise 1999 with recommended guideline criteria of L_{Aeq} 30 dB indoors for continuous noise. The document goes on to explain that sleep disturbance correlates best with L_{Amax} and effects have been observed at 45 dB or less. This is particularly true if the background noise level is low. Noise events exceeding 45 dB(A) should therefore be limited.

Pro PG: Planning and Noise Appendix A 'Dealing with Noise Events' A.17 states that:-

Various studies have linked the L_{Amax} from individual noise events to behavioural awakenings. For example one study found that the "Probability of sleep stage changes to wake/S1 from railway noise increased significantly from 6.5% at 35 dB(A) to 20.5% at 80 dB(A) $L_{Amax,F}$ whilst another study concluded that "noise disturbance of sleep may be expected to become significant once the outdoor L_{Aeq} exceeds 55 dB provided peak noise levels do not exceed 75 to 80 dB. Higher L_{Aeq} values up to 60 dB may be allowed providing the peak levels do not exceed 85 dB, and the number of such events is less than about 20 per night". Based on these studies it can be concluded that at night (2300 - 0700 hrs) a significant effect on sleep disturbance e.g. behavioural awakening, is likely to occur where the maximum sound level at the façade of a building with partially open windows is above:

85 dB $L_{Amax,F}$ (where the number of events exceeding this value is ≤ 20);

or

80 dB $L_{Amax,F}$ (where the number of events exceeding this value is > 20).

Pro PG: Planning and Noise Appendix A 'Dealing with Noise Events' A.18 goes on to explain that:-

A.18 The main body of sleep research is consistent with a careful interpretation of the viewpoint set out in the World Health Organisation Guidelines which for the ordinary population is that:

- *Impacts on sleep can be detected from relatively low level maximum noise events, however the degree of resulting harm may not be significant.*
- *'Effects' on sleep (such as EEG awakenings and sleep stage changes) occur spontaneously in the general population many times per night regardless of any impacts due to noise.*
- *The smaller the number of noise events, the louder the maximum noise level that can be tolerated without adverse effects upon sleep; subject to an upper limit.*
- *At relatively low levels e.g. around 45 dB $L_{Amax,F}$ when sufficient number of such events take place during the night the adverse effects of individual noise events are likely to be limited to sleep disturbance in the form of changes in sleep state or perhaps some EEG awakenings.*
- *It normally requires noise levels higher than 45 dB $L_{Amax,F}$ before significant adverse effects such as behavioural awakenings, difficulty getting to sleep, premature awakening or difficulty getting back to sleep generally occur and the latest field research on and aircraft noise suggest that it requires internal L_{Amax} noise levels of around 65 dB before noise induced awakenings become distinguishable from spontaneous awakenings).*

Therefore the following tabulated results from the worst night have been calculated and demonstrate compliance with the requirements of Pro PG.

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES – POSITION 2

Date / Time	LAeq	LAmaz	LAmaz,F 80 - 85 dB	LAmaz,F > 85 dB
23:00 - 23:15	44.3	61.5		
23:15 - 23:30	44.9	65.2		
23:30 - 23:45	39.6	56.9		
23:45 - 00:00	41.5	59.8		
00:00 - 00:15	40.3	56.0		
00:15 - 00:30	42.0	59.8		
00:30 - 00:45	42.9	63.1		
00:45 - 01:00	39.9	57.5		
01:00 - 01:15	41.3	61.9		
01:15 - 01:30	57.5	83.0	83.0	
01:30 - 01:45	36.6	52.2		
01:45 - 02:00	35.7	56.1		
02:00 - 02:15	33.9	41.2		
02:15 - 02:30	36.2	54.5		
02:30 - 02:45	40.6	56.9		
02:45 - 03:00	39.9	56.5		
03:00 - 03:15	36.6	54.3		
03:15 - 03:30	40.5	61.4		
03:30 - 03:45	39.6	56.4		
03:45 - 04:00	37.7	54.3		
04:00 - 04:15	41.6	63.0		
04:15 - 04:30	42.3	63.1		
04:30 - 04:45	40.6	57.1		
04:45 - 05:00	41.5	66.3		
05:00 - 05:15	61.0	95.3	95.3	95.3
05:15 - 05:30	53.4	76.3		
05:30 - 05:45	46.3	64.1		
05:45 - 06:00	50.8	67.7		
06:00 - 06:15	57.4	77.0		
06:15 - 06:30	59.2	83.9	83.9	
06:30 - 06:45	64.4	88.6	88.6	88.6
06:45 - 07:00	70.2	86.9	86.9	86.9
Total Event Count			5	3
Pro PG Annex Event Quantity Criteria			>20	<20
Pro PG Criteria Assessment			Achieved	Achieved

With the proposed glazing and ventilation strategies implemented on this site, the following calculated internal levels have been evaluated accordingly:-

Item		Night Time (23:00-07:00)	Description
1	Recorded External Noise Level	69.5	Recorded Noise Level at the Monitoring Position
2	Calculated Highest Façade Level	69.5	Highest recorded façade level of the proposed development closest to the above associated monitoring position
3	Façade Correction	-0	Difference between Recorded and Calculated (Item 1 and 2)
4	Calculated Façade Attenuation	-42.3	Calculated façade attenuation taken from the highest recorded LAeq 8 HOUR dB night time noise level, minus the highest calculated internal noise level taken from the BS 8233 calculations.
5	L _{Amax} 45 dB Criteria	45	L _{Amax} 45 dB Criteria taken from WHO Guidelines. BS 8233 does not reference L _{Amax} dB noise level criteria.
6	Calculated Façade Level Outside	87.3	Addition of Items 4 and 5 to give a resultant target level for the 11th Percentile
7	11 th Percentile Recorded L _{Amax}	64.1	11th Percentile Recorded L _{Amax}
8	L _{Amax} Criteria Achieved	YES	If Item 7 is less than 6, then the site is likely to be compliant. If not, further calculations are required

The above table demonstrates that the upgraded glazing and ventilation will result in the internal L_{Amax} 45 dB criteria being achieved.

10 ELEMENT 3 – EXTERNAL AMENITY AREA NOISE ASSESSMENT

10.1 Outdoor Living Areas

The World Health Organisation 'Guidelines for Community Noise' gives guidance as to desirable noise levels that should be achieved within outdoor living areas such as gardens, patios and verandas etc.

Table 1: Guideline values for community noise in specific environments, details the desirable target noise levels within various areas.

Outdoor Living Area	
Serious Annoyance, daytime and evening	$L_{Aeq\ 16\ HOUR}$ 55 dB
Moderate Annoyance, daytime and evening	$L_{Aeq\ 16\ HOUR}$ 50 dB

The development does not include for outdoor living spaces.


11 COMMERCIAL NOISE ASSESSMENT

11.1 Existing Plant

The existing air conditioning unit and kitchen extract located on the site are to be decommissioned as the new development replaces these.

The only other remaining plant at the rear of the premises that could affect the proposed development is the roof mounted plant from the Tesco's Express Store two doors down. Sound Pressure levels were recorded from the plant during typical operations and a sound pressure level of 54 dB(A). This equates to a sound power level of 65 dB(A) and this has been inputted into the following CADNA A 3D model. The plant is likely to operate during night time hours and therefore night time assessments have also been made. The resultant noise levels at the proposed residential development has been calculated as 6 dB(A). This is so far below the background noise levels that no penalty corrections have been applied.

11.2 Calculated Façade Levels from Tesco's Plant

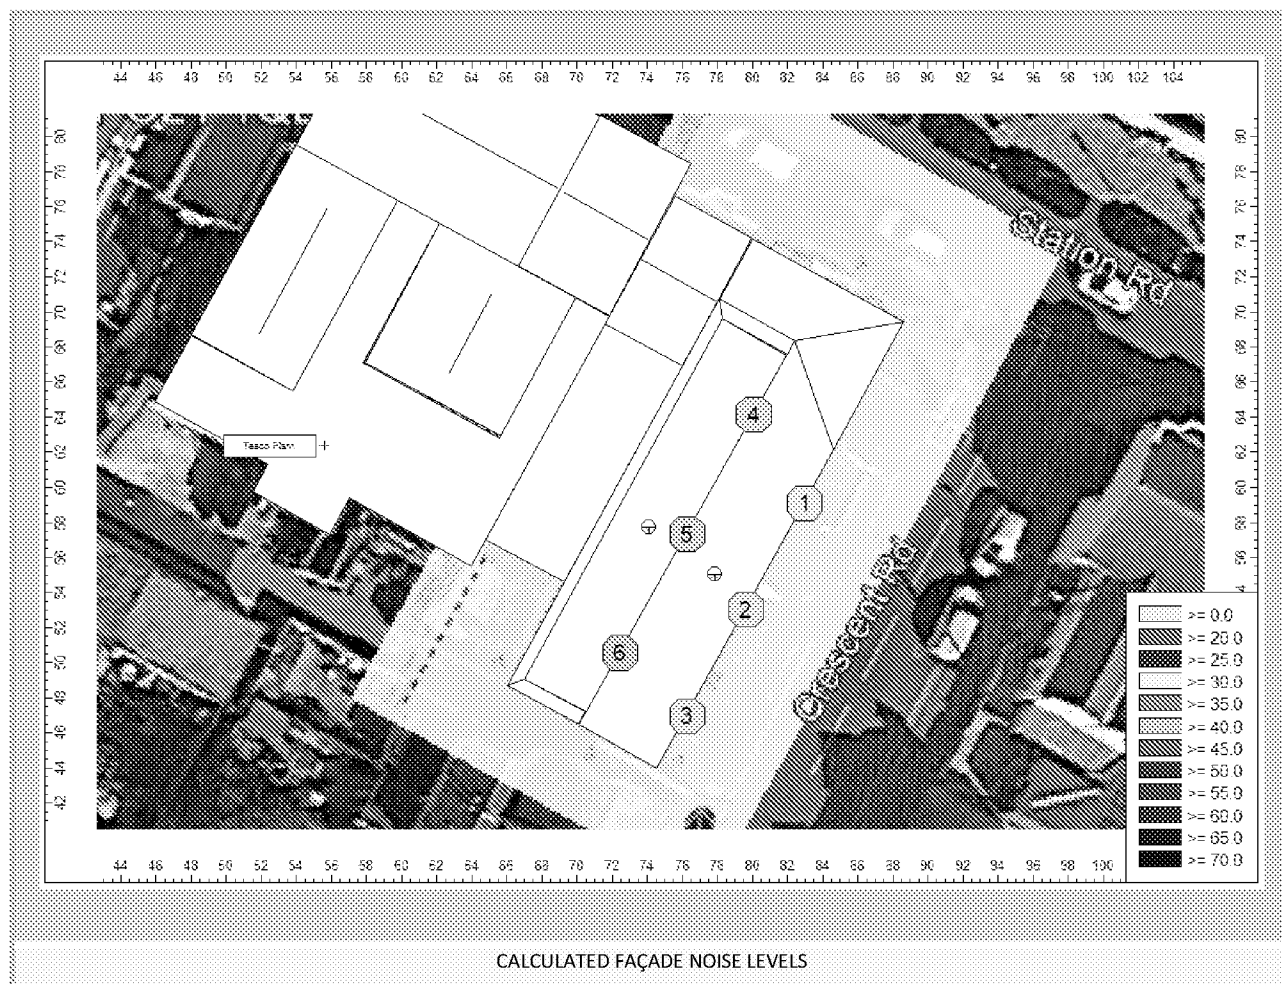

Based on the above calculations, the following assessments can be made:-

12 BS4142: 2014 NOISE ASSESSMENT

12.1 Scope of British Standard 4142: 2014

In the assessment of the existing surrounding commercial premises, consideration has been given to the scope of British Standard 4142:2014, which in section 1, details applicability of this standard to rating assessing sound of an industrial and/or commercial nature. It is considered appropriate that both the background noise levels and the rating noise levels obtained fall within the scope of British Standard 4142:2014 by using outdoor sound levels to assess the effect of sound on local residents.

12.2 Terms and Definitions

Symbol	Term	Definition
AP	Assessment Position	Position externally at the façade property under investigation at which the assessment is undertaken which is usually 1m from the 1 st floor bedroom window.
EP	Equivalent Position	Position at which the background noise levels are measured if there is no access to the assessment position or if source under investigation is audible.
$L_s = L_{Aeq, T}$	Specific Level	The average continuous equivalent sound pressure level of the source at the assessment position.
$L_{A, T}$	Rating Level	The average continuous equivalent sound pressure level of the source at the assessment position with a correction to account for the characteristic features.
$L_r = L_{Aeq, T}$	Residual Level	The average continuous equivalent sound pressure level at the assessment position without the source operating.
$L_{Aeq, T}$	Background Level	The sound pressure level that is not exceeded 90% of the time at the assessment position.
$L_a = L_{Aeq, T}$	Ambient Level	The totally encompassing sound at the assessment position including the residual and specific noise.

12.3 Assessment Position

The assessment position was established as the worst case scenario at the proposed residential dwellings.

12.4 Calculations

The specific noise levels are calculated at the assessment position located at the residential property above the site using the calculations detailed within ISO 9613 Part 1 and 2: 1996. These calculations take the manufacturers sound power levels into account for a variety of factors including source directivity, distance, atmospheric absorption, ground absorption and the effects of any barriers and determine the resultant noise levels at the assessment position.

12.5 Rating Levels (Character Correction)

It is appropriate to add a character correction where there is a new source that cannot be measured in line with BS4142:2014. There are 3 methods for approaching this.

- a) Subjective method
- b) Objective method (for tonality)
- c) Reference method

12.6 Subjective Method

The subjective method establishes a rating penalty that is added to the specific noise level if any of the following is present at the assessment position. If a tone is expected to be present a character correction of 0 dB to 6 dB is added depending on how perceptible it is at noise sensitive locations.

BS4142:2014 – Section 9.2 Subjective Method	Perceptibility to noise sensitive facades	Correction
Tonality Ranging from not tonal to prominently tonal	Not tonal	+0
	Just perceptible	+2
	Clearly perceptible	+4
	Highly perceptible	+6

If the source is expected to be impulsive a character correction of 0 dB to 9 dB is added depending on how perceptible it is at noise sensitive locations.

BS4142:2014 – Section 9.2 Subjective Method	Perceptibility to noise sensitive facades	Correction
Impulsivity Considering both the rapidity and any overall change in sound levels	Not impulsive	+0
	Just perceptible	+3
	Clearly perceptible	+6
	Highly perceptible	+9

When the sound features are neither tonal nor impulsive, a character correction of +3 is added for the readily distinctive quality against the acoustic environment or for the intermittency of the source.

BS4142:2014 – Section 3.2 Subjective Method	Perceptibility to noise sensitive features	Correction
Readily Distinctive	Is not present	+0
	Is present	+3
Intermittency	Is not present	+0
	Is present	+3

12.7 Assessment Criterion

The significance of the resulting noise on the residential property depends on the margin by which it exceeds the background noise levels. British Standard 4142: 2014 provides the following guidance within section 11.

Difference	Assessment of Impact
+10 dB	Indication of a significant adverse impact
+5 dB	Indication of an adverse impact
+0 dB	Indication of low impact

12.8 Noise Meter Floor

BS 4142: 2014 suggests that Care is necessary in circumstances where background sound levels are low to ensure that self-generated and electrical noise within the measurement system does not unduly influence reported values, which might be the case if the measured background sound levels are less than 10 dB above the noise floor of the measuring system. The floor of a typical class 1 noise meter is in the region of 14 dB(A) and therefore measurements of less than 24 dB(A) should be assessed with care.

12.9 BS 4142: 2014 Penalties

Whilst BS 4142: 2014 allows receptor assessments to be made to achieve levels equal to prevailing background noise levels, it also ensures that appropriate and more stringent penalties are applied to the specific noise level to ensure the correct level of protection for the local residents.

However, the resultant noise levels at the proposed residential development has been calculated as 6 dB(A). This is so far below the background noise levels that no penalty corrections have been applied.

12.10 Assessments

12.10.1 Daytime (07:00 – 23:00)

Rating Industrial Noise affecting Mixed Industrial and Residential Areas			British Standard 4142:2014 Daytime (07:00 to 23:00)	
Source	Operating Times		Source Position	
	07:00 to 23:00 7 days per week Worst case scenario		See Plans	
Assessment Position	9 – 11 STATION ROAD, BOGNOR REGIS			
Background Position	At the assessment position			
Item	Calculation	Class	Commentary	
Specific Noise Level $L_{Aeq,1\text{ hour}}$	6 dB	7	Calculated using ISO 9613:1996 _[3] .	
Tonality	+0 dB	8.1	Tonality Characteristic	
Impulsivity	+0 dB	8.1	Impulsivity Characteristic	
Intermittency	+0 dB	8.1	Intermittency Characteristic	
Rating Level	6 dB	9.1	The acoustic feature correction is added to the specific noise level	
Background Noise Level $L_{A90,1\text{ hour}}$	46 dB	8.1	Modal Background Noise Level (0700 – 2300)	
Assessment Level	-40 dB	11	The background level is subtracted from the rating level.	
Conclusion BS 4142:2014 _[1]	+10 dB Significant Adverse Effects, +5 dB Adverse Effects, +0 dB Low Impact			
Assessment	-40 dB			
Conclusion	The assessment level is at No Observed Effect Level			

12.10.2 Night Time (23:00 – 07:00)

Rating Industrial Noise affecting Mixed Industrial and Residential Areas			British Standard 4142:2014 Daytime (23:00 to 07:00)	
Source	Operating Times		Source Position	
	23:00 to 07:00 7 days per week Worst case scenario		See Plans	
Assessment Position	9 – 11 STATION ROAD, BOGNOR REGIS			
Background Position	At the assessment position			
Item	Calculation	Class	Commentary	
Specific Noise Level $L_{Aeq,1\text{ hour}}$	6 dB	7	Calculated using ISO 9613:1996 _[3] .	
Tonality	+0 dB	8.1	Tonality Characteristic	
Impulsivity	+0 dB	8.1	Impulsivity Characteristic	
Intermittency	+0 dB	8.1	Intermittency Characteristic	
Rating Level	6 dB	9.1	The acoustic feature correction is added to the specific noise level	
Background Noise Level $L_{A90,1\text{ hour}}$	37 dB	8.1	Modal Background Noise Level (2300 – 0700)	
Assessment Level	-31 dB	11	The background level is subtracted from the rating level.	
Conclusion BS 4142:2014 _[11]	+10 dB Significant Adverse Effects, +5 dB Adverse Effects, +0 dB Low Impact			
Assessment	-31 dB			
Conclusion	The assessment level is at No Observed Effect Level			

12.11 Assessment Conclusion

It can be seen from the above assessments that with the existing Tesco's Store external plant as it stands, it is likely to cause a low impact to the proposed residential units. Therefore, no further remedial works are required at this stage.

13 ELEMENT 4 – ASSESSMENT OF OTHER RELEVANT ISSUES

The National Planning Policy Framework 2019 (NPPF) and assessments to the Noise Policy Statement for England 2010 (NPSE) should be made in conjunction with each other. Paragraphs 180 - 183 of the National Planning Policy Framework 2019 (NPPF) states the following:

Paragraph 180 Planning policies and decisions should also ensure that new development is appropriate for its location taking into account the likely effects (including cumulative effects) of pollution on health, living conditions and the natural environment, as well as the potential sensitivity of the site or the wider area to impacts that could arise from the development. In doing so they should:

- a) Mitigate and reduce to a minimum potential adverse impacts resulting from noise from new development – and avoid noise giving rise to significant adverse impacts on health and the quality of life.
- b) Identify and protect tranquil areas which have remained relatively undisturbed by noise and are prized for their recreational and amenity value for this reason.

Paragraph 181 Planning policies and decisions should sustain and contribute towards compliance with relevant limit values or national objectives for pollutants. So far as possible these opportunities should be considered at the plan-making stage, to ensure a strategic approach and limit the need for issues to be reconsidered when determining individual applications.

Paragraph 182 Planning policies and decisions should ensure that new development can be integrated effectively with existing businesses and community facilities (such as places of worship, pubs, music venues and sports clubs). Existing businesses and facilities should not have unreasonable restrictions placed on them as a result of development permitted after they were established. Where the operation of an existing business or community facility could have a significant adverse effect on new development (including changes of use) in its vicinity, the applicant (or ‘agent of change’) should be required to provide suitable mitigation before the development has been completed.

Paragraph 183 The focus of planning policies and decisions should be on whether proposed development is an acceptable use of land, rather than the control of processes or emissions (where these are subject to separate pollution control regimes). Planning decisions should assume that these regimes will operate effectively. Equally, where a planning decision has been made on a particular development, the planning issues should not be revisited through the permitting regimes operated by pollution control authorities

The Noise Policy Statement for England gives various levels of effect as detailed within this report.

With the glazing / ventilation specifications achieved within this report, the development can be implemented within the guidelines of the aforementioned documents and ensure a conclusion of **NOEL – No Observed Effect Level**. This is the level below which no effect can be detected. In simple terms, below this level, there is no detectable effect on health and quality of life due to the noise.

14 ACOUSTIC DESIGN STATEMENT

Good Acoustic Design	Given the size and orientation of the proposed site, it is recommended that the developer adopted, where practically possible, a good acoustic design which should include careful consideration of the positioning of the proposed properties together with thoughts being taken as to internal layouts to minimise noise sensitive rooms facing onto dominant noise sources within the local areas.
Internal Noise Levels	Calculations have been carried out and assessments made to BS 8233: 2014 together with design specifications supplied for the required glazing and ventilation specifications required across the development to ensure compliance.
L _{Amax} dB Noise Levels	Assessments and calculations demonstrate that the L _{Amax} dB Levels are within the criteria set out within PRoPG
NPPF & NPSE	With the glazing / ventilation specifications achieved within this report, the development can be implemented within the guidelines of the aforementioned documents and ensure a conclusion of NOEL – No Observed Effect Level . This is the level below which no effect can be detected. In simple terms, below this level, there is no detectable effect on health and quality of life due to the noise.
OVERALL OUTCOME	NOEL – No Observed Effect Level

15 RECOMMENDATION TO DECISION MAKER

Levels have been recorded and assessments made in accordance with the relevant standards. Internal criteria's have been set and calculations made in order to determine the minimum construction details required in order to meet the desired level within the proposed residential dwellings and satisfy the local council's requirements.

National Planning Policy Framework 2019 suggests that planning permission should be granted unless any adverse impacts of doing so would significantly and demonstrably outweigh the benefits, when assessed against the policies in the framework taken as a whole, or specific policies in the framework indicate the application should be restricted.

Based on the calculations and assessments made within this report it is the professional opinion of Impact Acoustics Ltd that the proposed development can demonstrate compliance with the National Planning Policy Framework 2019, NPPF & NPSE and that, with regards to sound, planning permission can be granted using the following parameters.

As indicated in Section 2 of PRoPG, following the PRoPG approach will lead to the choice of one of four possible recommendations from the noise practitioner to the decision maker:

- A. Planning consent may be granted without any need for noise conditions;
- B. Planning consent may be granted subject to the inclusion of suitable noise conditions;
- C. Planning consent should be refused on noise grounds in order to avoid significant adverse effects ("avoid"); or
- D. Planning consent should be refused on noise grounds in order to prevent unacceptable adverse effects ("prevent").

RECOMMENDATION TO DECISION MAKER

B: Grant with Noise Conditions

16 CONCLUSION

16.1 Summary of Results

A background noise survey was undertaken from 25th February 2021 to the 1st March 2021 at two positions, one at the front and one at the rear of the site to establish the underlying background noise levels. The recorded measurements are as follows:

Assessment Position	Date Start	Date Finish	Daytime LAeq	Night Time LAeq
Position 1 Front	25/02/2021	01/03/2021	69.5	64.5
Position 2 Rear	25/02/2021	01/03/2021	62.5	62.0

Assessment Position	Date Start	Date Finish	Daytime LA90	Night Time LA90
Position 2 Rear	25/02/2021	01/03/2021	46	37

16.2 Commercial Noise

16.2.1 Daytime (07:00 – 23:00)

Rating Level	6 dB	9.1	The acoustic feature correction is added to the specific noise level
Background Noise Level LA90,1 hour	46 dB	8.1	Modal Background Noise Level (0700 – 2300)
Assessment Level	-40 dB	11	The background level is subtracted from the rating level.
Conclusion BS 4142:2014 _[1]	+10 dB Significant Adverse Effects, +5 dB Adverse Effects, +0 dB Low Impact		
Assessment	- 40 dB		
Conclusion	The assessment level is at No Observed Effect Level		

16.2.2 Night Time (23:00 – 23:00)

Rating Level	6 dB	9.1	The acoustic feature correction is added to the specific noise level
Background Noise Level LA90,1 hour	37 dB	8.1	Modal Background Noise Level (2300 – 0700)
Assessment Level	-31 dB	11	The background level is subtracted from the rating level.
Conclusion BS 4142:2014 _[1]	+10 dB Significant Adverse Effects, +5 dB Adverse Effects, +0 dB Low Impact		
Assessment	-31 dB		
Conclusion	The assessment level is at No Observed Effect Level		

16.3 Assessment Conclusion

It can be seen from the above assessments that with the existing Tesco's Store external plant as it stands, it is likely to cause a low impact to the proposed residential units. Therefore, no further remedial works are required at this stage.

16.4 Potential Façade Noise Levels

16.4.1 Daytime (07:00-23:00)

Time Period	Highest Potential Façade Noise Level	Noise Risk Category
Average Daytime (07:00-23:00)	$L_{Aeq, 16 \text{ HOUR}}$ 69.5 dB	2 - Medium 63 - 70 dB

16.4.2 Night Time (23:00-07:00)

Time Period	Highest Potential Façade Noise Level	Noise Risk Category
Average Night Time (23:00-07:00)	$L_{Aeq, 16 \text{ HOUR}}$ 59.5 dB	2 - Medium 55 - 60 dB
	Maximum (10 Times) – L_{Amax} 64.1 dB	>80 dB (10 Times in 8 Hours)

16.5 Risk Assessment

16.5.1 Daytime (07:00-23:00)

Risk Assessment Category	Risk Assessment
2 - Medium	As noise levels increase, the site is likely to be less suitable from a noise perspective and any subsequent application may be refused unless a good acoustic design process is followed and is demonstrated in an ADS which confirms how the adverse impacts of noise will be mitigated and minimised, and which clearly demonstrate that a significant adverse noise impact will be avoided in the finished development.

16.5.2 Night Time (23:00-07:00)

Risk Assessment Category	Risk Assessment
2 - Medium	As noise levels increase, the site is likely to be less suitable from a noise perspective and any subsequent application may be refused unless a good acoustic design process is followed and is demonstrated in an ADS which confirms how the adverse impacts of noise will be mitigated and minimised, and which clearly demonstrate that a significant adverse noise impact will be avoided in the finished development.

The above table demonstrates this site is located within Noise Risk Category 2 for daytime and Category 2 for night time which suggests a medium level of risk.

16.6 Conclusion Summary

16.6.1 Plant Noise BS 4142: 2014

The operation of the existing external plant has been assessed to establish if the development will have a demonstrable adverse effect in terms of noise that outweigh the benefits of the development. Measurements have been undertaken in accordance with British Standard 4142:2014 and ISO 1996 – Part 2: 2017. This report has established the existing background noise levels at the closest proposed residential façade on the site and the assessment of the impact these nearby residential properties. The resulting emissions from the site running on a worst case scenario show no conflict with 'low impact' criteria and give a strong indication that complaint and impact on the local amenity is unlikely.

16.6.2 Ambient Noise BS 8233: 2014

The dominant noise source on the overall site is road traffic. Levels have been recorded and assessments made in accordance with the relevant standards. Internal criteria's have been set and calculations made in order to determine the minimum construction details required in order to meet the desired level within the proposed residential dwellings and satisfy the local council's requirements.

National Planning Policy Framework 2019 suggests that planning permission should be granted unless any adverse impacts of doing so would significantly and demonstrably outweigh the benefits, when assessed against the policies in the framework taken as a whole, or specific policies in the framework indicate the application should be restricted.

Based on the calculations and assessments made within this report it is the professional opinion of Impact Acoustics Ltd that the proposed development can demonstrate compliance with the National Planning Policy Framework 2019, NPPF & NPSE and that, with regards to sound, planning permission can be granted.

17 UNCERTAINTY

In line with the requirements of section 10 of British Standard 4142: 2014 it is expected that the reported expanded uncertainty with a confidence limit of 95% and assuming a convergence of $k=2$ is likely to be ± 2.1 dB. Uncertainty, in this instance has been minimised by undertaking longer background noise measurements over a 96-hour period.

17.1 Uncertainty Budget

Sources of Uncertainty	Uncertainty Notes	Commentary	Value (half Width)	Convert to Same Units (dB)	Distribution Divisor			Standard Uncertainty (u) dB
					Normal	Rectangular	Other	
Measurement Position	Choice of position ,	1m in 20m		0.2		rect($\sqrt{3}$)		0.13
	microphone orientation	Type 1 0 - 30deg	0.4		Normal			0.50
Instrumentation	Calibration	Calibration Drift	0.1		Normal			0.10
	Accuracy and precision (type 1)	Type 1 practical	1.9			rect($\sqrt{3}$)		0.50
Background Noise Level	Timing of Measurement							
Background Noise Level	Modal Analysis Day	Calculated Standard Deviation	3.7				s/ $\sqrt{n}$	0.39
Background Noise Level	Modal Analysis Night	Calculated Standard Deviation	2.2				s/ $\sqrt{n}$	0.16
Combined Uncertainty (root sum of squares)								1.05
Expanded Uncertainty U = Kuc (95% Confidence K =2)								2.1
Final Answer Expressed as Value $\pm$ U dB with a confidence Level of 95%								
REFERENCE: Uncertainty Budget Calculated in line with M3003: The Expression of Uncertainty and Confidence in Measurement Edition 3, November 2012 and A Good Practice Guide on the Sources and Magnitude of Uncertainty Arising in the Practical Measurement of Environmental Noise N J Craven, G Kerry Edition 1a – May 2007.								


18 RESULTS

18.1 25th - 26th February 2021 – Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 18 HOUR & Corresponding LAmaz 18 HOUR	64.4	89.7	73.0	72.0	61.3	60.8	59.9	59.0	57.6	55.8	45.6	32.9
NIGHTTIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	59.5	86.7	67.4	63.3	53.6	56.4	55.3	53.9	52.4	51.3	42.5	32.8

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
07:00 - 08:00	67.0	89.7	73.3	72.0	61.1	63.0	62.5	61.2	60.1	59.3	49.9	38.1
08:00 - 09:00	65.8	819	72.4	74.3	61.2	61.6	61.4	59.9	60.2	56.4	45.7	30.4
09:00 - 10:00	67.9	86.6	73.8	75.4	62.4	63.4	64.0	62.5	60.6	59.5	49.8	38.7
10:00 - 11:00	62.7	79.2	72.6	70.9	58.2	58.7	57.1	57.8	56.1	53.9	44.1	30.2
11:00 - 12:00	64.3	82.9	73.7	72.5	59.5	61.3	59.8	59.1	57.4	55.4	45.9	31.0
12:00 - 13:00	65.3	80.9	72.4	71.6	59.9	61.6	61.2	59.9	57.7	56.8	45.9	33.3
13:00 - 14:00	64.5	89.7	73.5	73.4	60.3	60.8	59.6	59.1	57.5	56.6	44.9	29.9
14:00 - 15:00	63.9	78.5	73.9	71.2	60.6	59.6	59.9	58.5	57.0	55.4	46.1	33.4
15:00 - 16:00	64.1	84.6	73.3	71.4	60.7	59.1	58.7	59.2	57.9	54.5	44.1	27.8
16:00 - 17:00	63.6	95.2	72.7	71.7	61.0	60.9	59.5	58.7	56.7	53.7	44.8	34.1
17:00 - 18:00	63.2	85.4	73.9	72.2	59.9	58.9	58.1	58.3	56.9	53.7	43.6	30.2
18:00 - 19:00	63.3	85.4	73.9	71.5	59.0	59.0	59.1	58.4	56.5	54.2	43.8	28.7
19:00 - 20:00	61.6	78.4	73.8	72.2	58.8	57.5	56.1	56.9	55.0	52.5	43.0	31.0
20:00 - 21:00	63.5	85.5	73.4	69.1	60.1	60.3	58.9	58.0	57.3	54.3	44.1	32.2
21:00 - 22:00	59.0	75.2	68.6	67.2	55.3	54.5	53.4	54.5	52.5	49.3	39.3	24.1
22:00 - 23:00	63.2	87.5	67.2	69.1	68.0	63.9	58.5	56.9	56.4	53.1	42.0	25.3

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
23:00 - 23:15	55.8	75.3	61.8	61.1	49.8	49.6	49.8	51.5	49.8	45.5	35.4	17.7
23:15 - 23:30	54.9	75.2	59.5	62.7	53.7	49.9	48.6	50.5	48.8	44.5	33.9	24.9
23:30 - 23:45	53.1	75.4	57.4	59.4	48.5	46.7	46.5	49.4	47.3	40.8	30.7	17.1
23:45 - 00:00	57.0	80.3	58.9	60.4	52.4	53.0	50.8	50.8	49.9	50.8	41.4	20.9
00:00 - 00:15	54.3	74.1	62.1	61.0	49.7	48.8	48.8	50.6	47.9	42.6	31.3	14.0
00:15 - 00:30	53.9	79.1	62.2	60.3	50.5	48.6	49.0	49.7	47.1	43.6	32.8	15.8
00:30 - 00:45	50.2	74.1	55.6	58.9	48.6	48.5	46.6	45.2	43.0	39.5	29.1	14.6
00:45 - 01:00	53.8	74.7	59.9	59.7	47.0	47.5	47.1	49.7	48.2	42.9	30.4	14.7
01:00 - 01:15	55.2	77.9	59.7	57.7	52.8	48.2	48.4	50.2	49.4	46.6	37.0	20.9
01:15 - 01:30	49.5	70.5	57.0	55.3	42.4	42.8	42.9	45.0	44.1	39.3	26.8	12.2
01:30 - 01:45	42.5	66.8	50.4	51.7	39.4	39.7	40.0	38.0	34.0	30.9	19.8	11.8
01:45 - 02:00	47.7	72.2	54.7	56.6	43.6	43.6	42.1	43.7	41.1	37.1	27.7	13.2
02:00 - 02:15	38.0	50.7	51.0	51.7	38.6	36.6	34.7	33.1	30.4	24.2	15.3	11.3
02:15 - 02:30	45.8	64.4	54.0	53.3	42.3	40.3	39.9	41.9	39.5	35.1	23.5	12.0
02:30 - 02:45	50.2	72.7	52.3	56.3	43.7	43.2	43.0	45.6	44.1	41.9	30.5	26.0
02:45 - 03:00	42.3	61.4	52.1	52.6	40.2	41.3	40.0	36.8	33.8	31.4	22.9	13.4
03:00 - 03:15	42.0	67.9	53.6	51.4	38.9	44.1	41.2	35.9	31.5	28.0	15.4	11.4
03:15 - 03:30	51.1	72.6	58.9	57.6	46.2	43.4	45.8	45.6	45.3	42.7	32.8	14.2
03:30 - 03:45	45.9	68.6	53.3	56.0	48.3	47.8	41.0	39.6	37.8	36.6	26.8	12.7
03:45 - 04:00	40.4	57.0	54.7	51.6	39.0	36.4	35.3	36.6	33.9	25.4	15.6	11.3
04:00 - 04:15	46.2	64.5	56.0	54.8	40.8	41.1	40.4	41.8	40.6	34.7	23.4	12.1
04:15 - 04:30	52.9	74.0	55.6	56.5	44.2	44.8	45.2	48.6	47.8	41.5	29.1	15.9
04:30 - 04:45	52.8	73.0	57.1	58.0	50.6	52.1	48.6	47.6	46.1	41.4	31.6	15.6
04:45 - 05:00	50.0	68.9	55.5	56.5	45.2	43.7	45.2	46.1	43.8	37.5	27.1	13.5
05:00 - 05:15	64.9	84.0	67.6	63.4	59.2	62.7	59.5	59.6	57.9	56.8	47.2	29.0
05:15 - 05:30	60.7	78.3	67.2	65.0	56.5	56.9	54.2	55.2	54.4	53.1	42.2	26.3
05:30 - 05:45	60.2	82.0	71.1	67.5	54.9	55.0	53.8	56.1	53.7	49.7	40.3	25.4
05:45 - 06:00	62.8	82.2	74.3	69.7	59.0	58.0	56.4	57.9	56.1	54.4	47.6	32.3
06:00 - 06:15	60.3	82.4	74.5	67.6	55.9	56.3	55.7	55.3	53.7	51.1	40.0	32.8
06:15 - 06:30	61.1	76.3	69.9	68.2	54.0	54.1	53.3	56.5	55.3	52.2	39.7	22.7
06:30 - 06:45	68.7	86.1	78.0	70.9	62.0	66.2	66.0	61.9	60.7	61.2	53.3	45.5
06:45 - 07:00	68.9	86.7	70.4	69.7	61.0	66.7	65.3	62.9	61.5	60.8	52.1	42.8

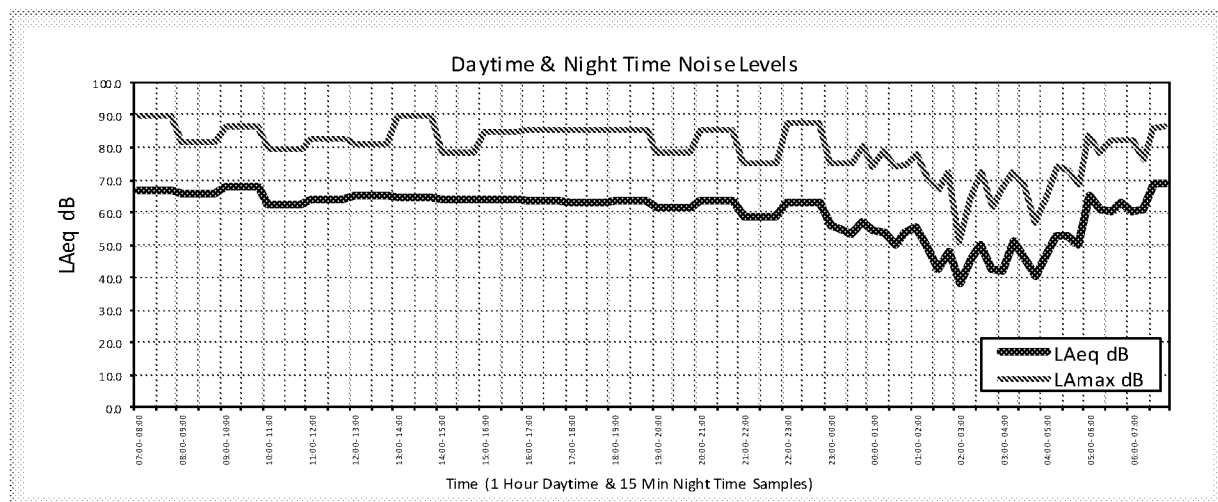


18.2 26th - 27th February 2021 – Position 1

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmx	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmx 16 HOUR	64.3	92.9	74.3	71.8	62.5	61.9	60.2	58.7	57.4	55.3	45.9	32.8
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmx 8 HOUR	56.1	81.7	63.7	62.3	50.0	52.3	52.3	51.2	49.6	46.1	35.3	29.7

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmx	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
07:00 - 08:00	65.4	84.2	72.7	71.1	59.6	62.0	62.2	59.3	58.3	57.1	47.6	32.6
08:00 - 09:00	64.1	82.7	73.3	71.4	59.5	60.7	59.8	58.8	57.3	55.1	46.4	30.4
09:00 - 10:00	64.0	82.6	74.3	71.4	59.9	60.4	60.6	58.4	57.1	55.5	46.0	32.1
10:00 - 11:00	64.3	80.1	76.2	72.5	63.0	60.1	59.9	58.6	57.7	55.7	46.5	31.0
11:00 - 12:00	65.9	92.9	73.6	70.2	62.7	61.8	62.1	60.1	59.2	57.2	47.6	33.5
12:00 - 13:00	65.3	82.6	75.0	72.1	63.0	62.2	62.3	59.5	57.9	56.3	47.7	32.3
13:00 - 14:00	64.8	83.4	75.2	72.1	62.9	61.5	59.9	59.6	58.4	55.1	45.2	34.4
14:00 - 15:00	65.1	83.6	75.3	72.9	64.4	65.1	62.1	58.9	57.4	55.7	46.0	33.9
15:00 - 16:00	65.6	83.8	74.9	72.3	61.4	62.1	61.9	60.1	58.7	56.3	48.5	36.0
16:00 - 17:00	64.7	86.7	73.8	72.8	62.0	61.8	60.4	59.3	57.8	55.7	46.1	32.3
17:00 - 18:00	65.1	92.1	74.7	72.7	61.3	62.8	59.7	59.2	59.2	56.1	45.7	34.5
18:00 - 19:00	63.3	78.8	76.1	73.3	62.5	61.3	56.1	58.0	56.4	54.7	45.3	31.9
19:00 - 20:00	63.6	82.0	76.6	74.3	61.0	60.6	58.1	58.5	56.8	55.1	45.1	32.3
20:00 - 21:00	61.2	81.0	71.6	68.4	57.6	57.0	55.9	56.4	54.8	51.5	41.3	30.7
21:00 - 22:00	60.6	82.8	68.3	68.3	62.4	62.4	54.9	55.5	53.2	49.9	40.0	27.4
22:00 - 23:00	61.9	84.8	67.5	68.5	67.2	63.4	56.6	56.1	54.4	52.2	41.0	32.9

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmx	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
23:00 - 23:15	57.2	72.6	69.6	67.5	52.2	51.7	51.4	53.0	50.6	47.3	36.3	19.3
23:15 - 23:30	55.9	77.7	62.5	62.8	50.8	50.0	49.2	51.8	49.9	45.1	33.6	19.4
23:30 - 23:45	53.3	73.5	58.5	58.5	46.2	46.2	46.2	49.4	47.6	41.8	30.1	14.3
23:45 - 00:00	52.6	73.7	58.4	58.6	45.5	46.3	46.5	48.8	46.5	40.8	29.6	15.4
00:00 - 00:15	55.4	72.6	64.6	63.8	51.2	51.6	49.0	51.1	49.4	44.6	32.8	23.9
00:15 - 00:30	56.4	75.8	62.4	62.1	53.0	51.8	50.2	52.2	50.4	45.6	35.2	18.3
00:30 - 00:45	56.1	77.0	61.6	60.9	51.4	52.9	50.1	51.6	50.0	45.9	34.4	18.0
00:45 - 01:00	56.1	75.2	59.9	61.6	50.7	53.7	51.2	51.3	49.7	45.7	34.5	19.6
01:00 - 01:15	48.7	68.7	55.5	56.5	43.0	44.1	42.9	45.0	42.5	36.9	25.6	13.5
01:15 - 01:30	47.5	70.4	56.2	56.6	42.8	41.3	41.1	43.6	41.8	34.8	22.3	11.9
01:30 - 01:45	50.7	70.3	58.4	58.2	44.6	44.8	43.9	46.4	44.6	41.5	31.1	16.2
01:45 - 02:00	54.2	71.4	63.6	61.4	48.8	48.7	47.5	49.5	47.6	46.0	36.6	20.0
02:00 - 02:15	53.6	72.7	65.7	60.6	47.7	47.5	46.8	49.0	47.7	44.7	34.1	18.2
02:15 - 02:30	47.3	66.9	56.7	54.9	43.7	41.7	41.0	43.0	41.0	38.2	27.0	12.9
02:30 - 02:45	46.5	71.0	56.2	62.7	44.3	41.8	39.6	40.9	39.8	38.1	30.0	13.8
02:45 - 03:00	42.2	62.4	48.9	53.0	40.8	40.6	38.5	37.4	34.7	31.0	23.1	16.5
03:00 - 03:15	55.0	79.4	55.2	54.2	53.0	53.8	49.7	49.1	48.7	45.4	38.1	18.9
03:15 - 03:30	49.0	72.1	51.5	56.0	41.2	43.9	42.1	44.6	43.5	37.7	25.4	13.4
03:30 - 03:45	41.1	58.1	49.4	52.3	39.7	37.9	36.4	36.2	35.3	28.4	16.7	11.4
03:45 - 04:00	51.3	73.3	53.1	54.3	44.2	48.8	46.1	47.5	44.7	38.4	26.3	13.3
04:00 - 04:15	50.3	72.6	56.1	57.0	43.9	43.7	43.8	45.1	44.7	41.4	32.5	16.2
04:15 - 04:30	51.8	71.4	54.1	56.2	48.2	49.2	44.8	47.3	46.1	40.6	28.9	13.5
04:30 - 04:45	47.1	68.8	50.7	52.0	41.0	42.3	41.0	43.4	41.3	33.6	21.2	12.3
04:45 - 05:00	51.2	71.0	56.1	59.5	46.0	46.1	45.5	47.6	44.7	39.1	28.1	13.7
05:00 - 05:15	50.6	73.8	51.9	53.5	46.0	45.6	45.3	46.3	44.2	40.4	30.6	15.8
05:15 - 05:30	52.4	70.0	63.3	66.2	51.2	51.6	49.0	46.6	44.8	41.9	30.9	16.7
05:30 - 05:45	60.8	80.0	67.5	63.7	53.6	56.2	55.2	56.1	54.3	51.9	41.4	22.0
05:45 - 06:00	60.0	75.8	63.7	63.7	51.6	53.5	53.5	55.7	54.2	50.3	38.4	21.5
06:00 - 06:15	60.3	79.1	68.4	65.9	52.9	55.8	54.2	55.2	54.4	51.1	40.6	23.8
06:15 - 06:30	61.6	75.9	71.2	68.4	54.4	55.0	56.6	57.1	55.3	51.8	39.8	35.2
06:30 - 06:45	61.8	77.6	69.7	66.3	53.6	59.9	60.4	55.7	54.0	50.6	39.6	43.8
06:45 - 07:00	62.8	81.7	67.9	67.5	55.5	60.4	62.4	56.0	54.5	52.2	41.5	25.7

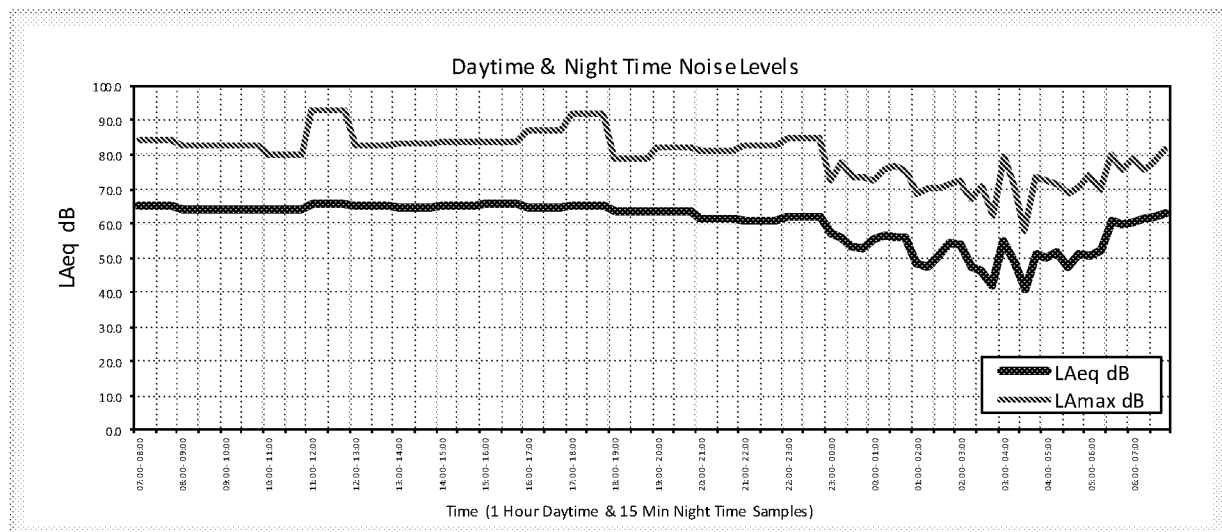


18.3 27th - 28th February 2021 – Position 1

NOISE LEVEL SUMMARY ASSESSMENT		Octave Band Centre Frequency (Hz)										
Date / Time	L _{Aeq}	L _{Amax}	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 L_{Aeq} 16 HOUR & Corresponding L_{Amax} 16 HOUR	64.5	97.6	73.6	71.3	61.8	62.0	60.7	58.6	57.5	56.1	46.5	33.3
NIGHT TIME 23:00 - 07:00 L_{Aeq} 8 HOUR & Corresponding L_{Amax} 8 HOUR	55.4	84.5	62.2	60.6	49.7	52.3	50.8	50.5	48.9	45.5	34.6	19.8

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES		Octave Band Centre Frequency (Hz)										
Date / Time	L _{Aeq}	L _{Amax}	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
07:00 - 08:00	66.7	85.2	70.8	70.6	62.2	65.8	63.6	60.6	58.9	58.3	48.5	34.4
08:00 - 09:00	67.6	97.6	72.3	69.5	58.3	60.3	60.7	60.6	61.8	61.7	51.4	38.0
09:00 - 10:00	64.8	83.0	74.6	70.0	57.9	60.5	60.3	57.8	57.7	58.7	45.3	30.5
10:00 - 11:00	64.7	87.6	75.2	71.4	62.6	62.5	62.1	58.4	57.3	55.9	46.4	34.3
11:00 - 12:00	63.8	83.9	72.6	71.0	59.3	61.1	61.0	58.3	56.6	53.5	43.8	31.9
12:00 - 13:00	63.9	81.5	74.1	72.5	60.8	60.6	60.6	58.4	56.6	54.9	45.0	30.3
13:00 - 14:00	65.0	89.5	75.1	73.2	63.1	62.5	62.4	59.2	57.6	55.0	46.4	37.6
14:00 - 15:00	64.1	84.9	74.2	72.4	62.3	62.7	60.7	58.7	56.8	54.2	44.3	31.0
15:00 - 16:00	65.8	87.7	73.9	72.9	64.9	65.0	63.2	59.6	58.4	55.9	45.6	31.8
16:00 - 17:00	65.2	84.1	73.3	72.0	65.4	64.2	62.3	59.1	57.4	55.4	47.5	32.1
17:00 - 18:00	64.0	85.3	74.7	72.1	62.4	61.3	59.9	58.7	56.7	54.5	49.7	32.5
18:00 - 19:00	63.6	88.8	74.8	72.0	61.1	59.1	57.6	59.2	57.3	54.9	46.2	32.0
19:00 - 20:00	63.8	85.9	74.6	71.7	61.9	60.4	58.9	58.4	57.7	54.4	44.4	30.7
20:00 - 21:00	62.7	86.1	71.8	69.9	62.2	61.7	57.9	57.2	56.2	53.1	43.3	35.2
21:00 - 22:00	60.2	81.4	70.5	66.7	56.7	56.2	55.4	55.6	53.7	50.3	39.7	25.3
22:00 - 23:00	59.8	86.5	69.3	66.6	56.9	54.9	54.6	54.7	53.1	51.6	38.5	21.9

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES		Octave Band Centre Frequency (Hz)										
Date / Time	L _{Aeq}	L _{Amax}	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
23:00 - 23:15	57.5	73.2	62.8	65.1	54.8	55.5	51.9	53.0	50.9	47.2	36.0	18.0
23:15 - 23:30	55.4	72.9	60.5	60.9	49.5	49.0	48.7	51.4	49.7	44.5	34.1	19.4
23:30 - 23:45	56.4	75.3	65.9	62.8	52.6	51.8	51.1	52.3	49.9	45.1	39.9	19.0
23:45 - 00:00	57.0	84.5	60.6	65.6	52.4	49.4	48.9	51.8	52.2	47.2	37.0	22.8
00:00 - 00:15	55.8	72.7	59.0	57.7	45.7	50.0	49.6	52.0	49.8	44.8	33.4	16.5
00:15 - 00:30	52.9	72.8	57.1	60.1	51.5	51.8	46.8	48.3	46.8	41.7	30.3	15.9
00:30 - 00:45	54.1	78.5	54.5	61.5	47.1	47.0	47.2	49.1	48.2	45.9	33.7	18.9
00:45 - 01:00	50.9	71.1	55.9	56.0	43.1	44.8	45.3	46.9	44.8	39.6	28.6	14.3
01:00 - 01:15	52.0	76.3	59.7	61.0	51.1	50.6	45.6	46.9	44.9	43.9	36.5	23.1
01:15 - 01:30	47.9	64.8	54.8	59.8	46.4	43.8	42.5	43.6	41.4	36.7	25.6	12.6
01:30 - 01:45	53.9	74.1	61.6	60.0	48.5	48.2	47.4	49.1	47.8	45.2	34.9	19.1
01:45 - 02:00	53.6	75.3	66.8	59.6	48.6	48.1	46.8	50.1	47.6	43.0	30.8	23.3
02:00 - 02:15	41.6	58.0	50.0	51.1	38.9	39.9	38.7	37.6	33.2	26.3	16.0	11.3
02:15 - 02:30	47.4	71.5	52.4	53.9	40.5	41.6	41.1	43.7	41.6	34.0	21.6	11.7
02:30 - 02:45	49.1	70.3	58.5	58.6	49.8	48.1	44.4	44.2	41.6	39.2	29.6	14.5
02:45 - 03:00	44.4	72.7	55.6	57.3	43.7	41.6	40.3	38.6	37.0	36.1	24.1	13.0
03:00 - 03:15	43.7	62.4	56.4	56.6	43.2	41.7	39.3	39.2	36.7	31.0	18.7	11.7
03:15 - 03:30	50.3	73.8	55.0	54.2	42.5	47.5	45.4	45.6	44.0	40.1	28.4	14.8
03:30 - 03:45	58.3	79.3	59.6	62.2	52.8	56.2	53.1	52.2	51.3	51.3	39.4	24.0
03:45 - 04:00	47.8	71.2	54.1	53.4	41.4	42.2	42.1	44.0	41.0	37.7	27.3	14.3
04:00 - 04:15	49.5	72.8	53.6	54.0	41.0	41.8	42.5	45.4	44.0	38.0	26.7	13.0
04:15 - 04:30	51.6	72.8	56.1	56.6	42.6	44.6	44.8	47.7	46.1	39.6	27.2	13.4
04:30 - 04:45	50.4	68.6	56.6	58.2	42.7	45.4	44.3	46.3	44.5	39.4	26.0	13.1
04:45 - 05:00	52.0	74.5	54.8	54.2	45.7	46.0	46.1	48.3	45.8	39.9	27.7	12.7
05:00 - 05:15	52.3	72.4	58.2	55.7	47.6	45.9	45.6	48.2	46.8	40.9	30.2	14.8
05:15 - 05:30	54.7	71.8	61.6	58.2	48.1	48.8	48.5	50.3	49.0	44.1	32.9	15.5
05:30 - 05:45	56.2	71.7	64.2	62.4	51.6	50.4	49.5	51.6	50.2	47.1	37.1	19.7
05:45 - 06:00	57.5	71.6	62.8	64.2	51.3	55.0	51.8	52.7	51.1	47.8	35.9	24.3
06:00 - 06:15	60.9	80.7	64.9	62.9	53.7	58.3	56.1	55.5	54.0	52.6	41.3	23.8
06:15 - 06:30	60.0	77.6	72.6	62.1	51.2	56.0	55.3	55.1	53.6	50.1	36.6	21.8
06:30 - 06:45	61.4	77.3	66.3	65.7	55.4	59.7	59.3	56.0	54.1	49.6	38.6	24.7
06:45 - 07:00	59.8	73.7	65.1	61.2	49.2	59.2	58.3	53.8	52.3	47.9	36.3	25.0

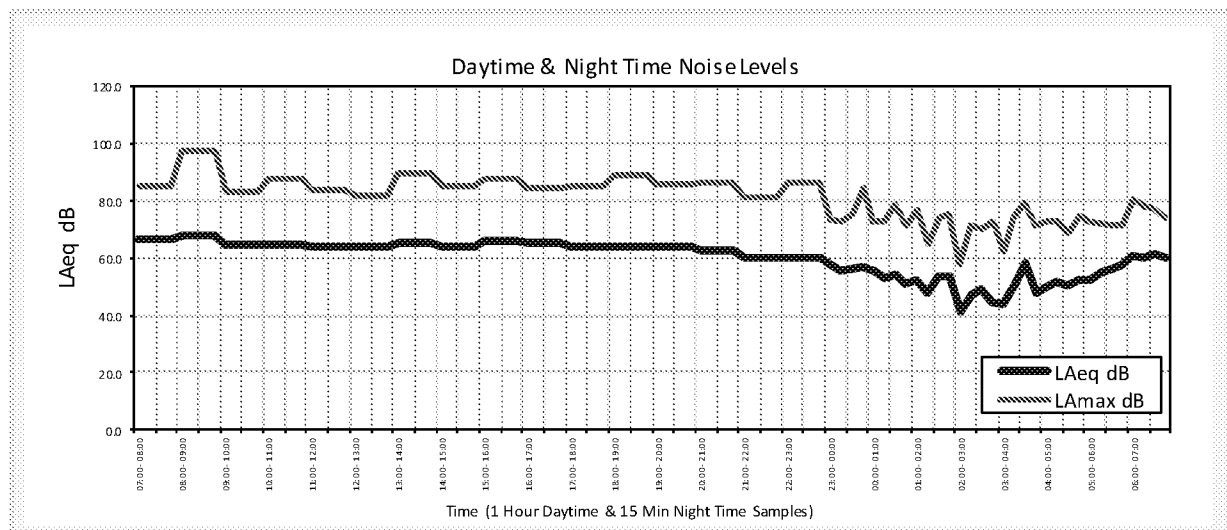


18.4 28th February - 1st March 2021 – Position 1

NOISE LEVEL SUMMARY ASSESSMENT		Octave Band Centre Frequency (Hz)										
Date / Time	L _{Aeq}	L _{Amax}	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 L_{Aeq} 16 HOUR & Corresponding L_{Amax} 16 HOUR	63.6	89.6	72.6	70.3	62.0	60.8	59.4	58.2	56.4	54.8	45.5	33.0
NIGHT TIME 23:00 - 07:00 L_{Aeq} 8 HOUR & Corresponding L_{Amax} 8 HOUR	57.6	91.2	64.8	62.6	52.0	54.5	52.1	52.5	51.1	48.9	39.2	26.4

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES		Octave Band Centre Frequency (Hz)										
Date / Time	L _{Aeq}	L _{Amax}	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
07:00 - 08:00	66.4	85.6	67.7	68.0	60.4	63.9	62.5	60.0	58.8	59.2	50.4	40.8
08:00 - 09:00	60.8	76.8	69.0	69.0	56.6	58.7	57.9	54.6	54.0	51.6	42.2	28.6
09:00 - 10:00	63.1	87.7	72.5	67.7	56.8	58.5	57.8	57.2	56.5	56.2	46.6	32.4
10:00 - 11:00	63.5	84.2	73.8	71.6	66.3	62.1	59.5	57.9	56.9	53.6	43.4	27.2
11:00 - 12:00	65.4	89.6	74.2	71.9	61.5	61.6	62.2	59.5	57.6	57.8	49.3	32.1
12:00 - 13:00	63.3	80.9	74.0	71.9	62.5	60.9	60.2	58.2	56.9	52.9	43.1	31.9
13:00 - 14:00	63.5	80.8	74.7	71.3	60.7	59.8	59.2	58.3	56.2	54.7	47.4	30.8
14:00 - 15:00	65.4	87.5	73.7	72.4	66.2	63.7	61.8	59.7	57.8	56.6	47.3	31.9
15:00 - 16:00	64.8	86.8	73.5	71.8	66.4	64.3	60.7	59.6	57.1	55.1	45.0	33.2
16:00 - 17:00	65.8	89.6	73.2	70.9	61.7	62.0	61.0	61.2	59.0	56.9	45.3	32.5
17:00 - 18:00	64.3	85.8	74.0	71.4	60.6	60.1	59.1	59.4	57.8	55.4	44.4	32.6
18:00 - 19:00	62.7	83.1	73.4	70.4	59.1	59.1	57.7	58.0	56.1	53.4	44.0	34.2
19:00 - 20:00	62.6	85.6	72.7	70.2	60.3	59.9	58.9	57.6	55.5	52.8	42.3	30.6
20:00 - 21:00	59.5	74.6	70.2	68.6	56.0	55.5	53.5	54.8	53.3	50.2	40.3	24.0
21:00 - 22:00	58.8	77.7	70.1	65.8	60.1	55.6	53.8	53.7	52.0	49.7	40.8	24.0
22:00 - 23:00	55.2	77.3	64.5	61.7	49.2	49.6	49.3	50.6	48.9	45.9	36.3	32.0

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES		Octave Band Centre Frequency (Hz)										
Date / Time	L _{Aeq}	L _{Amax}	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
23:00 - 23:15	56.3	76.7	69.8	63.3	53.0	51.1	50.4	50.9	49.8	48.5	39.2	22.1
23:15 - 23:30	55.0	75.2	57.4	58.7	49.3	48.6	48.4	51.3	49.0	43.9	33.1	17.1
23:30 - 23:45	54.1	74.5	60.8	60.7	47.1	49.6	49.7	49.7	48.0	42.5	30.9	15.1
23:45 - 00:00	48.7	70.6	57.8	55.2	42.6	44.3	43.0	44.8	42.5	36.1	24.3	12.7
00:00 - 00:15	52.3	73.6	64.0	62.3	46.1	46.9	46.6	47.9	45.9	42.5	33.1	18.7
00:15 - 00:30	55.6	81.8	60.3	60.5	44.8	46.2	46.0	48.3	48.7	51.1	41.8	21.5
00:30 - 00:45	51.0	71.5	57.1	62.1	48.1	46.5	44.3	46.7	44.6	40.8	31.7	14.4
00:45 - 01:00	59.2	91.2	58.6	57.5	50.6	53.0	52.0	54.6	51.8	52.4	39.5	21.8
01:00 - 01:15	50.3	73.0	52.9	54.3	44.9	45.7	44.8	46.0	43.2	41.2	31.1	14.0
01:15 - 01:30	56.1	86.1	55.2	60.9	57.8	55.1	49.5	50.3	49.8	48.0	35.9	19.5
01:30 - 01:45	50.0	69.6	60.5	55.5	49.0	49.0	44.3	45.4	42.3	41.6	31.0	13.0
01:45 - 02:00	45.8	68.1	54.8	52.8	41.6	43.7	41.4	41.2	38.5	35.7	25.4	12.2
02:00 - 02:15	48.2	69.7	56.7	55.0	43.8	44.2	43.4	43.7	41.3	38.9	28.2	13.8
02:15 - 02:30	46.1	64.4	54.2	55.5	45.9	43.3	42.1	41.5	39.1	34.1	23.6	12.2
02:30 - 02:45	40.2	61.0	50.7	50.7	39.3	40.2	37.9	35.8	30.9	24.2	14.7	11.3
02:45 - 03:00	44.8	64.3	51.3	52.1	41.3	46.0	43.9	37.0	35.1	33.5	23.1	12.7
03:00 - 03:15	48.4	70.5	52.6	53.4	41.5	45.6	44.2	43.3	41.4	39.1	30.6	18.2
03:15 - 03:30	49.1	72.3	52.6	53.0	43.9	42.2	41.8	42.7	42.6	42.9	33.7	19.8
03:30 - 03:45	46.1	65.7	56.4	53.5	45.5	47.3	40.9	40.3	38.5	36.9	27.8	13.6
03:45 - 04:00	47.8	70.9	55.3	55.9	48.1	49.9	42.6	42.4	40.4	36.2	26.4	12.9
04:00 - 04:15	49.1	71.2	55.8	54.2	42.6	42.1	42.4	44.8	43.7	38.2	26.0	13.2
04:15 - 04:30	49.4	70.2	55.1	52.6	42.0	44.1	43.7	45.5	43.3	37.7	26.2	13.8
04:30 - 04:45	50.6	70.2	58.2	55.9	42.4	43.8	44.1	46.5	44.7	40.6	31.4	15.5
04:45 - 05:00	54.8	71.7	60.8	63.0	49.2	48.2	48.0	50.0	48.5	46.8	38.6	20.1
05:00 - 05:15	53.3	72.3	59.7	59.7	47.2	48.4	47.3	48.6	47.3	44.2	34.0	18.6
05:15 - 05:30	59.5	76.8	66.9	69.4	56.5	55.0	52.9	54.9	53.3	50.0	39.4	20.5
05:30 - 05:45	60.1	77.8	68.5	67.6	55.6	53.7	53.5	55.6	54.0	51.1	40.8	23.4
05:45 - 06:00	62.3	81.3	68.8	67.2	56.7	59.2	56.9	57.7	56.4	52.9	49.1	31.9
06:00 - 06:15	64.7	86.8	65.9	63.8	57.9	62.3	59.5	59.3	57.8	56.6	45.0	31.9
06:15 - 06:30	63.9	85.5	69.2	67.5	55.5	58.5	57.2	58.4	56.7	54.9	42.4	25.0
06:30 - 06:45	65.2	83.7	74.8	69.6	58.7	63.3	60.5	59.8	58.2	56.6	46.4	39.3
06:45 - 07:00	62.4	79.4	70.2	65.9	54.9	61.4	58.4	57.0	55.6	52.0	39.7	23.9

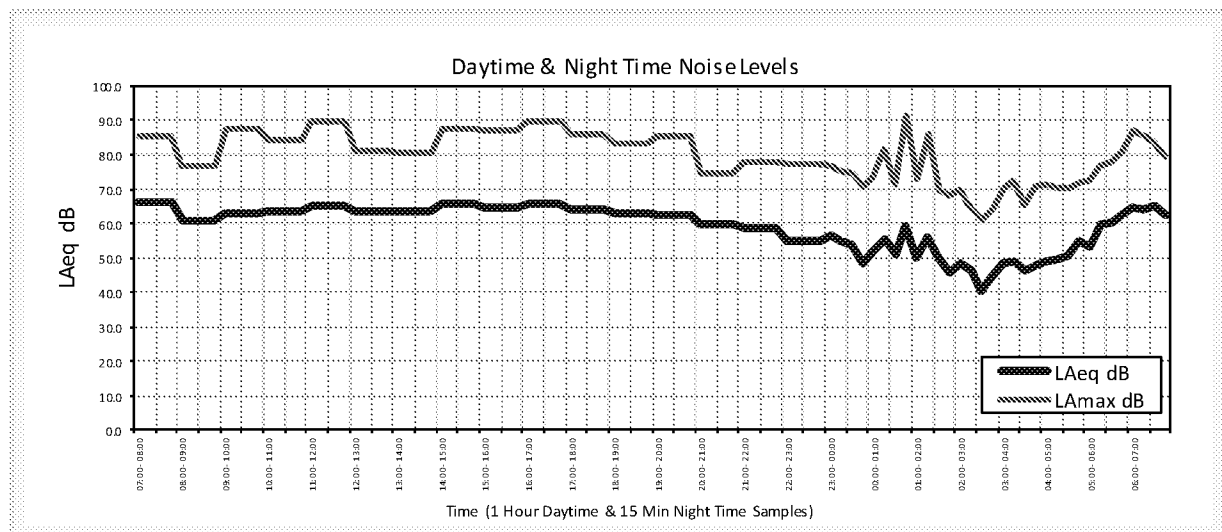


18.5 25th - 26th February 2021 – Position 2

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	57.5	90.4	62.2	60.1	56.8	51.5	49.1	51.6	50.9	51.6	36.6	21.5
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	57.0	95.3	60.4	52.8	48.5	47.7	45.8	51.2	50.8	51.8	31.7	16.1

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
07:00 - 08:00	62.9	84.0	60.6	59.6	56.1	53.6	51.9	56.4	56.5	57.7	39.2	24.7
08:00 - 09:00	56.6	76.5	62.0	60.6	57.1	51.2	49.1	51.4	50.2	49.0	34.2	18.0
09:00 - 10:00	56.3	76.5	60.7	60.0	58.3	50.0	48.8	50.6	50.0	49.3	32.4	15.3
10:00 - 11:00	54.8	74.7	61.0	60.3	57.3	52.1	48.5	48.8	47.4	48.0	34.4	20.7
11:00 - 12:00	55.3	75.3	63.0	61.2	57.1	50.5	48.6	49.5	48.2	48.9	36.7	21.6
12:00 - 13:00	56.5	75.4	62.8	60.5	56.6	51.6	50.2	51.3	49.3	49.2	33.5	19.2
13:00 - 14:00	57.1	76.8	62.2	61.2	57.0	50.9	49.7	51.6	50.2	50.4	32.1	17.4
14:00 - 15:00	62.2	90.4	62.9	61.0	57.4	51.3	50.5	54.9	55.4	57.7	45.0	30.4
15:00 - 16:00	57.3	82.3	62.0	61.0	56.9	50.6	48.7	52.5	51.0	49.5	32.4	16.1
16:00 - 17:00	57.7	77.4	61.9	60.1	54.2	51.6	47.9	53.0	51.7	49.6	32.9	14.5
17:00 - 18:00	60.8	84.6	64.0	61.7	55.4	51.5	50.1	54.9	53.6	55.7	39.9	22.3
18:00 - 19:00	53.7	76.6	64.8	60.7	54.8	50.6	50.2	47.9	46.3	45.1	30.9	16.6
19:00 - 20:00	50.9	65.5	62.5	59.3	53.6	48.3	46.3	45.7	43.7	42.0	28.2	14.0
20:00 - 21:00	50.6	69.7	60.5	56.9	53.7	48.6	46.7	45.0	43.3	41.2	27.0	12.3
21:00 - 22:00	48.3	66.3	63.0	56.6	50.6	46.5	44.2	42.9	41.2	38.8	24.7	13.8
22:00 - 23:00	54.3	79.8	57.7	56.6	61.9	56.1	48.2	47.4	46.6	45.2	30.3	13.1

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
23:00 - 23:15	44.3	61.5	53.5	48.8	45.3	41.9	39.4	40.1	37.4	32.7	20.6	16.7
23:15 - 23:30	44.9	65.2	52.3	51.1	46.2	42.2	39.8	41.0	37.7	33.6	19.2	10.5
23:30 - 23:45	39.6	56.9	51.0	46.9	43.5	38.1	35.7	35.1	32.0	27.4	14.6	10.1
23:45 - 00:00	41.5	59.8	45.3	47.3	46.1	40.8	37.3	35.9	34.1	31.8	18.9	10.1
00:00 - 00:15	40.3	56.0	47.6	46.8	43.2	39.0	36.1	35.9	32.7	28.4	15.1	10.0
00:15 - 00:30	42.0	59.8	48.7	48.4	44.1	39.4	37.6	37.5	34.6	31.7	18.2	10.1
00:30 - 00:45	42.9	63.1	48.1	48.2	45.7	41.1	39.5	36.8	35.8	33.7	19.9	10.5
00:45 - 01:00	39.9	57.5	47.5	49.8	43.2	36.6	34.6	35.3	33.1	29.3	15.0	10.0
01:00 - 01:15	41.3	61.9	47.4	45.2	45.6	37.1	35.4	36.1	34.9	32.5	18.2	10.2
01:15 - 01:30	57.5	83.0	55.4	51.0	45.9	48.9	50.4	49.9	51.6	52.1	38.2	22.5
01:30 - 01:45	36.6	52.2	43.6	45.6	42.5	37.4	34.4	31.1	25.8	25.0	13.6	10.0
01:45 - 02:00	35.7	56.1	43.5	44.5	40.9	36.3	32.7	30.6	26.2	23.2	12.6	10.0
02:00 - 02:15	33.9	41.2	43.0	44.4	41.1	35.6	31.8	27.8	22.3	20.7	11.8	10.0
02:15 - 02:30	36.2	54.6	43.3	44.5	41.2	35.6	32.6	29.7	25.4	20.6	14.7	10.0
02:30 - 02:45	40.6	56.9	43.3	45.6	42.9	36.3	33.5	32.5	30.2	27.0	18.4	10.1
02:45 - 03:00	39.9	56.5	46.0	44.8	41.1	35.4	32.2	31.4	29.4	26.6	16.9	10.0
03:00 - 03:15	36.6	54.3	43.1	42.9	39.8	33.9	30.5	26.8	23.1	20.6	16.0	10.0
03:15 - 03:30	40.5	61.4	45.7	45.8	41.7	36.9	34.3	33.8	33.9	34.2	18.7	10.1
03:30 - 03:45	39.6	56.4	42.1	44.6	42.1	37.0	32.4	28.7	26.7	26.8	18.4	10.0
03:45 - 04:00	37.7	54.3	43.7	44.2	40.7	34.9	31.4	28.2	25.0	24.4	16.9	10.0
04:00 - 04:15	41.6	63.0	51.0	46.8	40.3	36.4	34.3	34.3	34.4	36.7	20.8	10.2
04:15 - 04:30	42.3	63.1	48.5	46.4	42.6	37.5	35.6	37.3	36.0	34.5	17.6	10.2
04:30 - 04:45	40.6	57.1	47.5	48.4	44.3	37.4	34.3	33.6	31.8	25.7	18.6	10.1
04:45 - 05:00	41.5	66.3	44.7	47.5	43.3	37.6	35.8	35.7	34.8	34.1	19.5	10.1
05:00 - 05:15	61.0	95.3	72.8	58.1	56.6	54.2	53.1	55.1	55.6	53.8	36.8	18.6
05:15 - 05:30	53.4	76.3	70.1	60.3	55.3	52.2	50.7	47.5	44.7	44.7	32.2	17.5
05:30 - 05:45	46.3	64.1	53.9	53.2	46.4	42.0	40.4	41.3	40.1	37.3	22.1	10.5
05:45 - 06:00	50.8	67.7	57.7	56.1	50.9	45.3	43.1	44.9	44.5	43.8	26.9	12.2
06:00 - 06:15	57.4	77.0	57.9	56.4	50.2	46.7	46.8	49.2	52.5	51.8	33.9	16.0
06:15 - 06:30	59.2	83.9	59.4	54.5	47.1	43.4	41.9	51.1	54.2	54.0	31.0	11.5
06:30 - 06:45	64.4	88.6	56.5	57.5	51.6	50.4	48.7	59.2	57.7	58.7	36.2	18.3
06:45 - 07:00	70.2	86.9	61.1	61.0	56.8	60.0	57.2	64.1	63.4	65.0	43.8	27.7

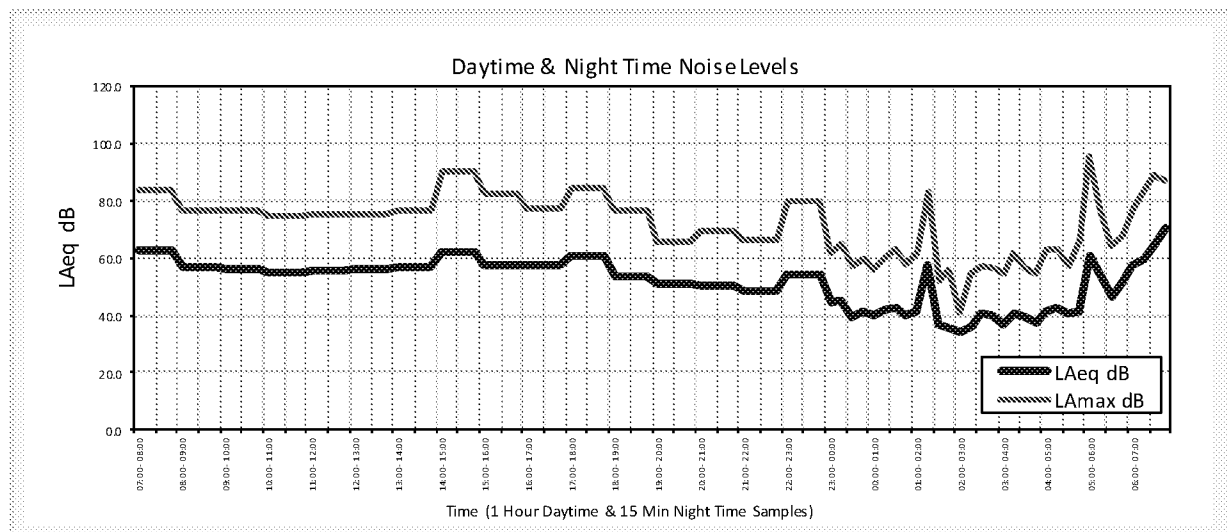


18.6 26th - 27th February 2021 – Position 2

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	57.1	88.7	62.9	60.7	56.5	51.2	49.3	51.0	50.6	51.3	35.2	21.5
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	52.2	80.5	52.1	50.6	46.8	41.6	39.4	45.7	47.2	46.4	28.3	11.5

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
07:00 - 08:00	62.3	87.0	62.8	61.8	58.5	54.5	52.7	56.2	55.5	56.9	39.9	21.4
08:00 - 09:00	55.4	71.8	61.4	60.4	55.6	50.0	48.0	50.2	48.8	48.2	32.2	15.9
09:00 - 10:00	57.9	88.1	61.0	60.2	56.4	51.3	50.4	49.2	52.4	52.3	38.3	24.4
10:00 - 11:00	54.6	75.6	62.1	60.8	57.1	49.6	47.9	49.4	47.9	46.9	31.3	15.0
11:00 - 12:00	56.4	82.7	62.3	60.6	57.8	52.0	49.0	50.3	50.2	49.4	34.6	19.1
12:00 - 13:00	55.2	76.2	62.1	60.3	58.2	50.6	48.5	49.7	48.2	48.0	31.7	21.1
13:00 - 14:00	57.7	78.7	64.7	61.8	57.2	52.0	49.8	51.5	50.4	52.1	34.4	16.4
14:00 - 15:00	60.1	84.3	63.1	61.4	57.7	52.2	48.7	54.4	53.8	53.9	32.6	14.8
15:00 - 16:00	57.8	80.4	62.6	60.4	58.2	51.8	49.3	52.5	51.5	50.6	31.9	16.3
16:00 - 17:00	55.8	75.4	63.8	61.3	55.8	50.3	48.3	50.1	49.6	48.4	32.3	16.4
17:00 - 18:00	60.4	88.7	63.7	61.6	55.9	53.0	52.7	52.6	53.1	56.0	38.6	27.9
18:00 - 19:00	56.9	86.5	64.1	61.1	54.6	50.7	49.9	49.3	50.5	51.5	40.5	27.7
19:00 - 20:00	53.5	74.6	65.8	62.3	55.6	51.0	48.4	48.2	46.5	44.8	29.7	18.6
20:00 - 21:00	52.6	78.4	63.5	59.1	54.3	49.1	47.6	47.1	45.9	44.4	29.1	16.3
21:00 - 22:00	50.7	77.0	59.9	57.7	54.1	50.7	45.2	44.9	43.0	42.7	25.7	16.4
22:00 - 23:00	47.1	64.7	57.4	56.9	48.9	44.4	42.6	42.0	40.0	37.8	22.8	11.7

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
23:00 - 23:15	45.5	65.1	55.4	54.1	46.3	41.4	40.4	41.4	38.4	35.4	19.5	10.3
23:15 - 23:30	45.2	63.0	50.3	53.8	52.2	41.7	39.6	40.0	38.2	35.7	20.3	11.1
23:30 - 23:45	42.9	60.2	51.5	48.2	44.5	40.2	38.4	37.4	36.5	33.5	19.9	12.9
23:45 - 00:00	42.9	58.4	51.4	49.1	45.1	40.7	38.3	37.7	35.8	33.4	19.2	10.2
00:00 - 00:15	44.9	62.2	53.5	51.6	46.5	42.6	39.8	40.3	38.0	34.4	18.6	10.3
00:15 - 00:30	43.3	63.4	53.0	48.1	47.0	41.4	38.4	38.4	36.0	33.2	17.7	10.2
00:30 - 00:45	41.9	60.6	46.1	47.0	46.3	41.9	37.8	36.7	34.0	31.5	16.1	10.0
00:45 - 01:00	44.0	64.3	47.9	48.8	47.2	41.5	38.6	39.5	37.1	33.7	18.2	10.1
01:00 - 01:15	41.0	61.5	48.3	46.6	45.0	40.3	36.7	36.4	33.1	29.8	15.5	10.0
01:15 - 01:30	39.5	55.8	46.0	45.7	44.8	39.5	35.1	34.0	31.6	29.5	16.2	10.0
01:30 - 01:45	39.4	52.9	45.5	45.4	44.9	39.3	34.9	34.0	31.0	29.7	15.4	10.0
01:45 - 02:00	41.9	62.7	51.1	47.2	45.3	40.3	37.1	37.2	34.4	32.1	17.3	10.1
02:00 - 02:15	43.7	64.1	55.8	48.7	46.6	41.1	38.0	38.5	37.0	34.8	19.1	10.3
02:15 - 02:30	41.3	60.0	50.5	46.7	44.8	39.4	35.6	36.2	34.3	32.3	16.9	10.2
02:30 - 02:45	40.3	62.4	47.7	49.0	44.6	38.7	34.4	35.3	33.2	30.7	16.9	10.1
02:45 - 03:00	38.7	46.4	43.5	46.6	45.4	40.0	35.7	32.3	28.9	28.6	15.0	10.0
03:00 - 03:15	41.0	60.9	43.4	47.2	47.6	40.6	36.7	35.2	33.3	30.7	16.8	10.0
03:15 - 03:30	38.6	53.9	43.0	45.8	44.6	39.4	34.7	32.4	30.2	28.7	14.7	10.0
03:30 - 03:45	38.0	43.9	42.1	45.2	44.6	39.4	34.2	31.6	28.5	28.5	14.7	10.0
03:45 - 04:00	41.2	61.4	45.8	46.2	44.5	39.8	36.2	36.5	33.7	31.2	17.1	10.0
04:00 - 04:15	43.0	58.6	46.6	46.7	44.2	39.7	36.3	35.8	34.4	38.3	20.9	10.3
04:15 - 04:30	42.0	54.9	43.0	45.2	44.8	39.9	35.2	33.9	32.1	37.9	20.1	10.0
04:30 - 04:45	43.2	60.1	45.7	45.6	45.0	39.5	35.2	34.5	33.6	39.8	21.1	10.2
04:45 - 05:00	44.0	63.4	45.5	48.2	45.8	40.5	37.2	37.6	35.3	39.0	21.0	10.2
05:00 - 05:15	42.9	61.6	44.2	46.0	46.4	41.4	37.2	35.2	33.7	38.1	20.4	10.1
05:15 - 05:30	43.7	62.2	56.5	51.3	45.8	40.9	37.4	37.5	36.3	37.5	20.8	10.3
05:30 - 05:45	48.4	64.7	55.6	52.9	48.1	43.1	41.4	42.6	41.5	42.1	24.1	10.5
05:45 - 06:00	52.1	70.6	54.1	51.8	46.5	43.4	41.4	45.0	45.7	46.2	24.4	10.7
06:00 - 06:15	55.6	78.7	52.9	54.6	48.3	43.3	41.6	48.0	50.9	49.7	29.4	12.2
06:15 - 06:30	61.4	78.3	57.8	53.6	48.7	46.7	46.2	52.2	56.8	56.2	39.0	18.1
06:30 - 06:45	62.1	80.0	57.8	57.9	50.3	45.3	45.4	55.7	57.6	54.9	34.4	14.2
06:45 - 07:00	61.9	80.5	55.6	53.7	49.5	44.3	43.3	56.0	55.5	56.5	38.8	16.2

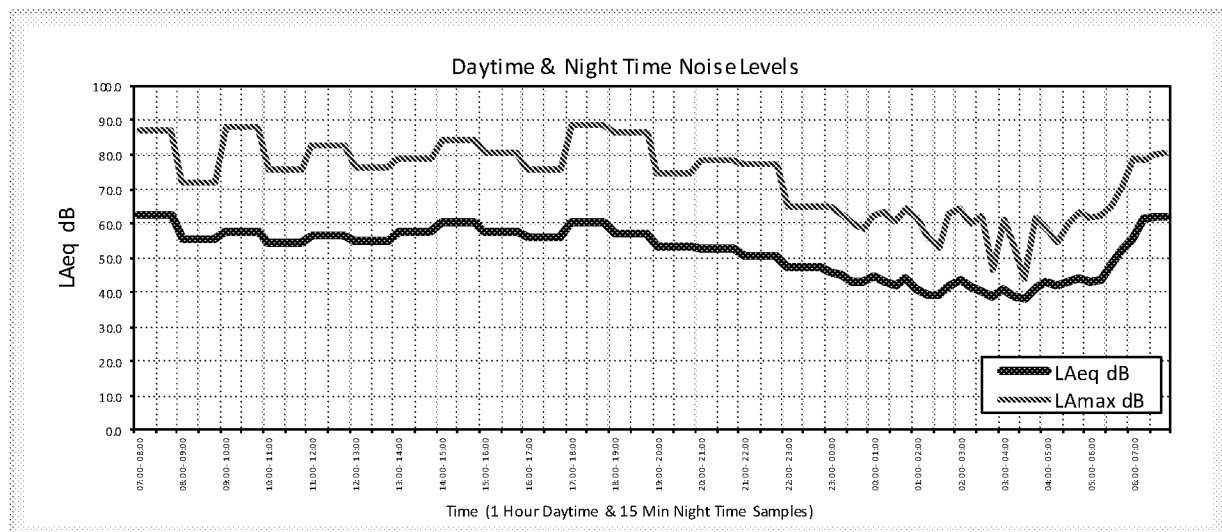


18.7 27th - 28th February 2021 – Position 2

NOISE LEVEL SUMMARY ASSESSMENT			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LAeq 16 HOUR & Corresponding LAmaz 16 HOUR	56.2	82.8	62.4	59.9	56.9	51.7	48.9	50.3	49.8	49.6	33.4	20.8
NIGHT TIME 23:00 - 07:00 LAeq 8 HOUR & Corresponding LAmaz 8 HOUR	50.5	85.1	51.2	48.6	44.5	40.7	40.1	44.2	45.4	44.4	27.9	12.5

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
07:00 - 08:00	63.1	81.6	60.5	58.7	57.0	56.4	52.0	56.5	56.6	57.7	39.4	21.7
08:00 - 09:00	55.7	76.9	59.4	57.4	54.6	48.6	46.3	50.1	49.3	49.4	37.4	24.5
09:00 - 10:00	55.1	77.4	60.1	58.8	54.7	48.5	46.2	48.5	49.8	48.2	32.2	14.7
10:00 - 11:00	54.7	75.4	61.8	60.5	56.3	50.5	48.4	49.1	48.3	47.2	32.3	16.1
11:00 - 12:00	54.3	73.1	60.6	60.2	57.4	50.7	48.2	48.9	47.4	46.3	31.7	17.8
12:00 - 13:00	54.3	76.5	61.3	60.5	56.2	50.3	48.1	48.8	47.2	46.9	31.9	16.3
13:00 - 14:00	56.5	77.1	66.8	61.6	57.4	51.9	51.5	51.2	49.4	48.5	33.3	20.8
14:00 - 15:00	56.3	75.7	62.4	62.1	57.1	50.3	47.5	51.2	50.0	48.6	32.5	24.8
15:00 - 16:00	54.9	78.7	61.3	59.8	58.6	51.7	49.6	49.2	48.2	46.3	32.0	18.7
16:00 - 17:00	58.3	82.8	61.7	60.7	60.3	53.4	51.3	51.1	52.3	51.8	34.1	20.1
17:00 - 18:00	56.9	76.8	64.0	61.0	56.7	51.7	49.6	51.3	50.5	49.6	31.5	23.6
18:00 - 19:00	54.9	75.1	64.1	60.7	55.6	50.5	49.2	48.2	47.9	48.7	33.2	23.3
19:00 - 20:00	53.6	75.8	65.1	59.6	55.2	49.6	49.0	47.7	46.7	45.5	30.9	20.3
20:00 - 21:00	53.6	76.5	62.4	59.8	59.9	55.2	48.7	47.3	45.0	43.7	29.9	19.1
21:00 - 22:00	49.9	70.4	60.3	56.4	51.6	47.2	45.2	44.9	42.6	40.7	25.4	19.7
22:00 - 23:00	49.4	74.0	56.6	55.7	54.0	47.9	44.5	44.1	41.7	40.5	26.2	13.2

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES			Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LAmaz	31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
23:00 - 23:15	45.8	61.2	53.7	51.3	48.5	43.4	41.0	41.2	38.7	35.6	20.2	10.9
23:15 - 23:30	45.3	63.7	52.6	49.3	44.0	40.0	39.5	40.8	39.4	34.8	25.0	10.6
23:30 - 23:45	57.7	81.8	63.2	54.7	48.2	48.4	50.6	49.7	52.1	52.3	38.5	23.1
23:45 - 00:00	44.9	67.9	49.2	48.7	46.2	44.2	39.4	40.2	38.3	33.8	19.5	11.4
00:00 - 00:15	44.5	64.3	46.6	46.5	43.7	40.3	39.2	40.3	38.2	33.2	16.4	10.1
00:15 - 00:30	44.2	61.9	48.9	48.4	44.0	40.4	39.1	40.0	37.5	33.9	16.6	10.3
00:30 - 00:45	43.3	64.8	46.4	48.7	42.8	38.8	37.9	38.8	36.9	33.7	16.0	10.6
00:45 - 01:00	41.1	62.3	47.1	47.2	41.7	38.9	37.4	36.9	33.5	28.9	14.9	10.2
01:00 - 01:15	41.4	58.5	49.4	47.3	43.5	39.1	37.3	37.3	33.5	29.9	17.0	10.2
01:15 - 01:30	42.7	63.8	47.5	48.4	42.3	38.9	37.7	38.2	36.3	32.3	16.7	10.2
01:30 - 01:45	45.3	66.1	50.1	49.0	43.6	40.7	39.5	40.0	38.9	37.6	22.3	11.5
01:45 - 02:00	41.1	59.3	46.1	46.3	42.7	38.6	36.9	36.9	33.6	29.8	14.3	10.0
02:00 - 02:15	37.1	44.8	42.3	43.4	40.1	36.7	34.9	33.2	26.9	21.1	11.7	10.0
02:15 - 02:30	38.8	57.6	44.9	46.0	42.7	38.3	35.4	34.1	30.5	26.6	13.8	10.0
02:30 - 02:45	36.9	54.7	42.8	45.5	44.4	36.6	33.9	31.8	27.1	23.3	12.3	10.0
02:45 - 03:00	40.3	63.0	45.0	46.4	43.1	38.5	35.2	36.3	32.6	29.3	15.9	10.1
03:00 - 03:15	39.4	59.3	47.3	45.8	42.7	36.9	35.0	35.1	31.7	28.8	14.1	10.0
03:15 - 03:30	40.5	61.2	43.5	46.3	41.3	37.2	36.2	35.2	32.8	32.5	16.0	10.3
03:30 - 03:45	42.8	63.0	45.6	47.3	44.6	40.5	38.8	36.8	35.3	35.0	18.4	10.1
03:45 - 04:00	37.2	55.0	42.8	42.8	39.5	35.7	34.3	33.0	28.1	25.3	13.2	10.0
04:00 - 04:15	40.3	62.6	47.0	46.6	38.8	35.6	35.2	35.9	33.2	31.2	16.6	10.1
04:15 - 04:30	39.9	57.3	43.3	46.0	42.5	38.1	36.5	35.4	32.0	27.6	13.1	10.0
04:30 - 04:45	43.9	64.8	47.1	48.0	43.8	39.5	38.3	37.9	36.4	37.7	21.3	10.3
04:45 - 05:00	44.2	62.5	44.3	45.2	44.5	39.1	37.9	37.9	34.8	39.4	20.0	10.0
05:00 - 05:15	44.9	63.5	45.7	51.5	45.1	38.4	37.4	37.7	35.8	40.9	24.5	10.3
05:15 - 05:30	43.3	64.7	50.4	46.7	43.1	39.1	38.1	38.5	36.1	34.9	17.8	10.0
05:30 - 05:45	46.1	64.2	47.3	48.5	45.3	40.3	39.1	41.2	39.6	38.2	20.1	10.2
05:45 - 06:00	54.2	72.0	51.0	51.0	45.3	41.6	40.1	45.3	50.0	48.2	27.3	10.9
06:00 - 06:15	57.3	76.9	51.1	51.9	46.5	42.0	41.0	47.5	53.9	50.0	30.4	11.7
06:15 - 06:30	57.0	78.8	48.1	49.1	45.2	40.5	40.1	49.8	52.8	49.7	30.3	12.9
06:30 - 06:45	56.7	82.3	50.2	50.3	49.0	42.9	41.7	50.4	50.0	51.8	37.9	12.3
06:45 - 07:00	59.6	85.1	52.0	48.2	45.4	41.3	40.8	54.6	53.4	53.5	32.5	12.1

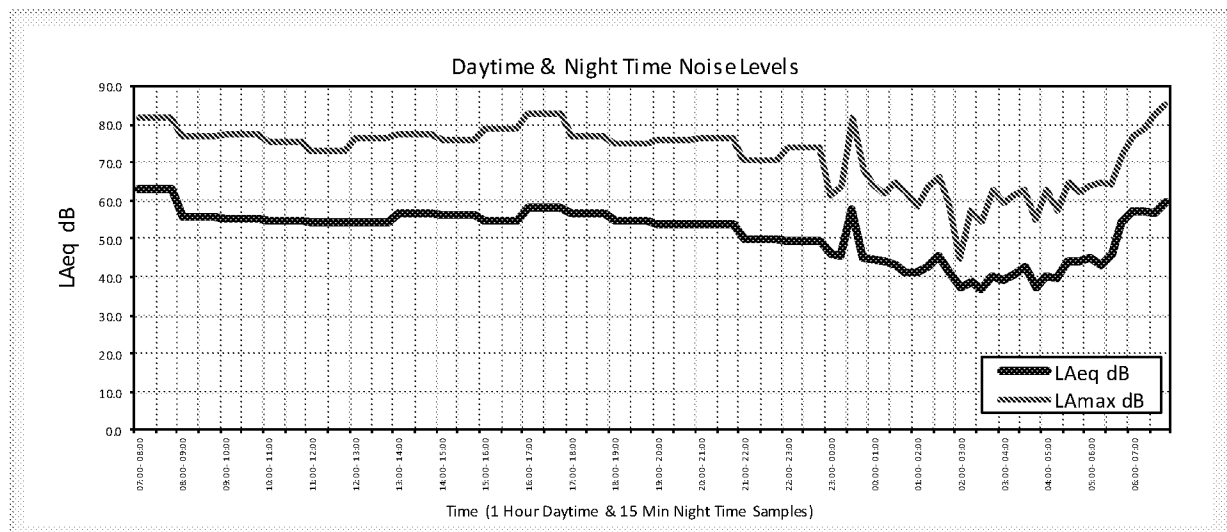


18.8 28th February - 1st March 2021 – Position 2

NOISE LEVEL SUMMARY ASSESSMENT					Octave Band Centre Frequency (Hz)							
Date / Time	L _{Aeq}	L _{Amax}	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 L_{Aeq} 16 HOUR & Corresponding L_{Amax} 16 HOUR	56.1	88.2	60.3	58.8	57.6	52.6	49.7	50.2	49.2	49.3	34.2	20.8
NIGHTTIME 23:00 - 07:00 L_{Aeq} 8 HOUR & Corresponding L_{Amax} 8 HOUR	54.0	83.5	55.6	52.9	49.8	46.6	43.7	47.1	48.5	48.6	31.1	17.8


DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES												
Date / Time	LAeq	LAmax	Octave Band Centre Frequency (Hz)									
			31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
07:00 - 08:00	57.0	74.6	58.0	57.1	54.2	52.0	49.6	50.1	51.1	50.5	34.3	18.7
08:00 - 09:00	52.6	73.1	56.1	54.9	53.8	45.7	43.2	46.9	46.5	45.9	33.6	15.1
09:00 - 10:00	59.2	82.0	57.7	56.0	54.1	46.2	44.2	54.3	52.4	53.3	33.8	17.7
10:00 - 11:00	56.5	83.0	59.9	59.1	58.9	51.7	50.1	49.8	49.0	50.7	33.1	15.8
11:00 - 12:00	54.0	77.3	61.8	60.2	56.9	51.6	48.9	48.0	46.2	47.2	32.1	21.4
12:00 - 13:00	56.0	77.0	61.0	58.8	56.1	50.9	51.0	49.1	49.3	49.6	39.3	29.3
13:00 - 14:00	58.0	81.8	61.6	59.9	57.1	52.8	51.0	52.3	51.3	51.3	38.3	24.2
14:00 - 15:00	60.5	88.2	61.2	63.2	65.3	60.7	56.0	53.8	52.6	52.5	38.1	22.6
15:00 - 16:00	56.2	77.1	61.6	60.5	60.1	53.9	50.0	50.5	49.1	48.1	32.4	15.3
16:00 - 17:00	57.5	80.6	60.5	59.0	57.9	53.4	51.2	51.8	50.9	50.1	32.1	17.8
17:00 - 18:00	57.9	79.3	62.9	60.1	54.8	49.7	48.1	52.0	51.6	51.7	34.0	18.0
18:00 - 19:00	54.0	81.5	62.2	56.6	55.0	50.4	49.2	47.7	46.1	47.7	30.4	15.9
19:00 - 20:00	50.9	71.9	60.9	58.2	53.6	48.1	47.0	45.4	43.6	41.8	26.8	12.7
20:00 - 21:00	49.8	67.1	58.7	57.2	51.3	47.2	45.2	44.5	42.7	41.1	27.3	12.9
21:00 - 22:00	50.9	73.6	56.8	54.8	53.9	48.5	47.2	44.4	43.1	43.3	29.9	13.5
22:00 - 23:00	45.7	62.7	57.0	52.9	46.7	43.1	41.2	40.8	38.8	35.4	21.3	10.9


NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES												
Date / Time	LAeq	LAmax	Octave Band Centre Frequency (Hz)									
			31.5	63	125	250	500	1.0 k	2.0 k	4.0 k	8.0 k	16.0 k
23:00 - 23:15	46.5	63.9	55.4	51.6	48.9	43.7	41.5	41.6	39.5	37.2	23.1	14.9
23:15 - 23:30	42.9	59.1	47.6	46.5	46.9	41.6	38.6	38.2	35.0	32.5	17.8	10.2
23:30 - 23:45	45.0	65.7	60.2	54.1	47.8	43.9	41.7	39.8	37.0	34.8	21.1	10.4
23:45 - 00:00	43.0	60.9	48.5	48.3	45.6	41.6	38.4	38.5	35.1	33.0	18.1	10.5
00:00 - 00:15	43.9	61.7	49.2	48.4	46.3	41.4	38.4	39.0	36.7	35.0	21.4	10.2
00:15 - 00:30	43.4	62.8	53.0	54.8	46.1	41.7	38.3	38.3	36.3	33.1	19.0	10.3
00:30 - 00:45	43.5	63.3	49.7	48.9	46.1	41.4	38.5	38.5	36.5	33.7	19.7	10.3
00:45 - 01:00	43.2	68.8	49.9	47.3	46.7	42.3	38.5	37.0	35.4	35.6	20.6	10.4
01:00 - 01:15	41.3	56.2	47.7	46.6	45.0	40.5	36.8	35.4	34.1	32.4	18.5	10.3
01:15 - 01:30	42.5	65.5	47.6	48.1	51.5	43.9	36.9	35.4	34.2	32.9	20.1	10.4
01:30 - 01:45	39.4	56.6	46.3	45.7	44.8	40.0	36.0	33.6	30.5	29.7	15.3	10.0
01:45 - 02:00	39.5	55.1	46.6	45.4	44.6	39.9	36.3	33.8	30.3	29.7	15.4	10.0
02:00 - 02:15	42.8	62.4	50.2	47.5	45.5	40.8	38.7	36.7	35.7	34.0	19.1	10.3
02:15 - 02:30	41.2	61.3	47.5	46.5	45.0	40.4	37.5	35.9	33.1	31.3	17.0	10.1
02:30 - 02:45	38.7	44.5	46.7	45.2	44.5	39.6	36.0	33.0	28.8	28.2	14.7	10.0
02:45 - 03:00	38.7	46.5	46.4	45.5	44.6	39.5	35.8	32.7	28.9	28.5	14.8	10.0
03:00 - 03:15	40.5	60.2	48.9	45.7	44.2	39.7	36.4	35.6	32.8	30.3	15.9	10.0
03:15 - 03:30	39.5	54.9	48.5	45.6	44.5	39.3	35.8	33.6	30.9	30.6	16.0	10.1
03:30 - 03:45	42.4	62.0	50.7	45.4	44.6	40.0	36.1	37.0	34.2	35.9	16.7	10.0
03:45 - 04:00	40.0	56.7	51.3	46.4	45.2	40.4	36.2	34.3	31.5	30.2	15.8	10.0
04:00 - 04:15	40.9	58.2	48.6	46.4	44.3	39.5	36.6	35.7	33.4	31.1	16.4	10.1
04:15 - 04:30	40.3	56.7	48.5	45.6	44.7	39.5	36.3	34.8	31.8	31.6	16.7	10.0
04:30 - 04:45	45.1	62.1	51.5	48.5	45.6	40.0	37.6	37.3	35.8	41.3	23.6	10.4
04:45 - 05:00	47.1	65.2	49.5	51.0	46.5	41.7	40.0	40.8	39.5	41.8	24.7	10.9
05:00 - 05:15	47.7	68.9	54.6	50.5	46.8	42.4	40.8	40.7	41.3	42.1	25.5	11.8
05:15 - 05:30	49.2	68.9	54.1	55.6	49.8	44.4	42.3	43.5	42.7	42.2	26.0	11.4
05:30 - 05:45	51.5	69.2	54.1	54.3	51.9	47.7	45.7	46.0	44.7	44.1	28.4	12.2
05:45 - 06:00	57.5	76.3	57.7	53.5	48.7	45.2	43.3	45.8	54.1	50.7	33.1	12.7
06:00 - 06:15	63.8	83.5	66.8	63.4	60.9	59.3	56.0	55.5	57.9	58.2	44.1	31.7
06:15 - 06:30	59.4	80.7	56.4	52.9	49.7	46.2	44.4	54.3	54.1	51.5	31.7	12.1
06:30 - 06:45	61.2	81.4	60.8	58.9	53.4	47.7	46.6	54.9	54.9	55.8	34.9	16.4
06:45 - 07:00	64.1	82.5	57.8	56.8	50.3	47.7	46.1	56.8	56.3	59.4	37.0	15.4

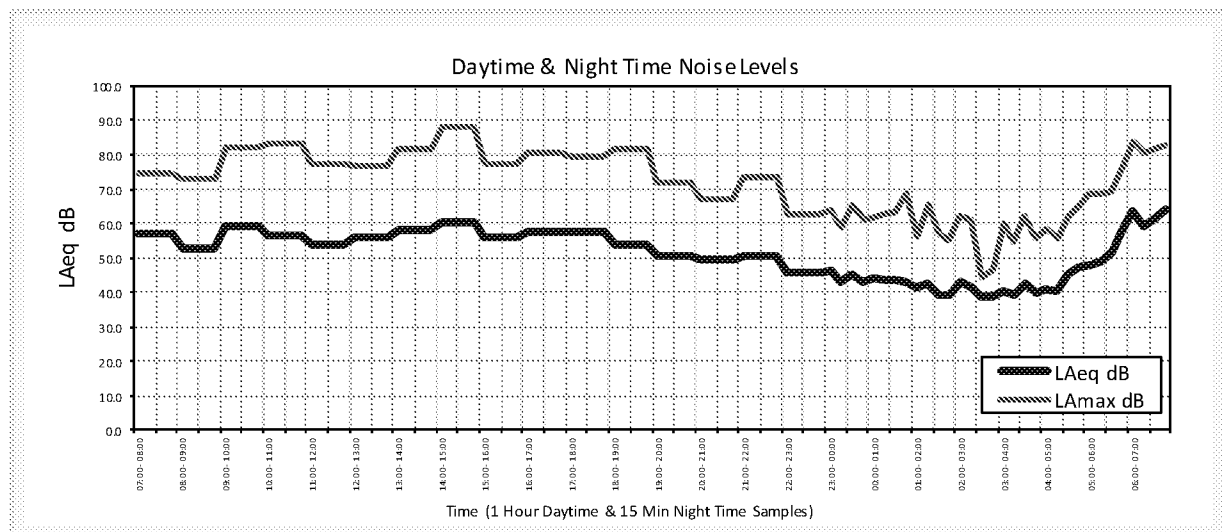

18.9 25th - 26th February 2021 - Background Noise Level

NOISE LEVEL SUMMARY ASSESSMENT						Octave Band Centre Frequency (Hz)						
Date / Time	LAeq	LA90	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LA90 1 HOUR & Corresponding LAeq 1 HOUR	56.0	48.0	62.0	61.0	57.0	51.0	49.0	51.0	50.0	49.0	32.0	15.0
NIGHT TIME 23:00 - 07:00 LAeq 15 MIN & Corresponding LAeq 15 MIN	41.0	30.0	48.0	45.0	46.0	37.0	34.0	36.0	34.0	34.0	19.0	10.0
DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES												
Date / Time	LAeq	LA90	Octave Band Centre Frequency (Hz)									
			31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
07:00 - 08:00	62.9	47.2	60.6	59.6	56.1	53.6	51.9	56.4	56.5	57.7	39.2	24.7
08:00 - 09:00	56.6	47.7	62.0	60.6	57.1	51.2	49.1	51.4	50.2	49.0	34.2	18.0
09:00 - 10:00	56.3	47.1	60.7	60.0	58.3	50.0	48.8	50.6	50.0	49.3	32.4	15.3
10:00 - 11:00	54.8	47.1	61.0	60.3	57.3	52.1	48.5	48.8	47.4	48.0	34.4	20.7
11:00 - 12:00	55.3	47.9	63.0	61.2	57.1	50.5	48.6	49.5	48.2	48.9	36.7	21.6
12:00 - 13:00	56.5	48.2	62.8	60.5	56.6	51.6	50.2	51.3	49.3	49.2	33.5	19.2
13:00 - 14:00	57.1	47.8	62.2	61.2	57.0	50.9	49.7	51.6	50.2	50.4	32.1	17.4
14:00 - 15:00	62.2	47.8	62.9	61.0	57.4	51.3	50.5	54.9	55.4	57.7	45.0	30.4
15:00 - 16:00	57.3	46.6	62.0	61.0	56.9	50.6	48.7	52.5	51.0	49.5	32.4	16.1
16:00 - 17:00	57.7	45.3	61.9	60.1	54.2	51.6	47.9	53.0	51.7	49.6	32.9	14.5
17:00 - 18:00	60.8	47.7	64.0	61.7	55.4	51.5	50.1	54.9	53.6	55.7	39.9	22.3
18:00 - 19:00	53.7	44.1	64.8	60.7	54.8	50.6	50.2	47.9	46.3	45.1	30.9	16.6
19:00 - 20:00	50.9	44.1	62.5	59.3	53.6	48.3	46.3	45.7	43.7	42.0	28.2	14.0
20:00 - 21:00	50.6	42.4	60.5	56.9	53.7	48.6	46.7	45.0	43.3	41.2	27.0	12.3
21:00 - 22:00	48.3	40.4	63.0	55.6	50.6	46.5	44.2	42.9	41.2	38.8	24.7	13.8
22:00 - 23:00	54.3	39.0	57.7	56.6	61.9	56.1	48.2	47.4	46.6	45.2	30.3	13.1
NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES												
Date / Time	LAeq	LA90	Octave Band Centre Frequency (Hz)									
			31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
23:00 - 23:15	44.3	37.7	53.5	48.8	45.3	41.9	39.4	40.1	37.4	32.7	20.6	16.7
23:15 - 23:30	44.9	36.9	52.3	51.1	46.2	42.2	39.8	41.0	37.7	33.6	19.2	10.5
23:30 - 23:45	39.6	33.2	51.0	46.9	43.5	38.1	35.7	35.1	32.0	27.4	14.6	10.1
23:45 - 00:00	41.5	32.8	45.3	47.3	46.1	40.8	37.3	35.9	34.1	31.8	16.9	10.1
00:00 - 00:15	40.3	34.1	47.6	46.8	43.2	39.0	36.1	35.9	32.7	28.4	15.1	10.0
00:15 - 00:30	42.0	34.3	48.7	48.4	44.1	39.4	37.6	37.5	34.6	31.7	16.2	10.1
00:30 - 00:45	42.9	32.0	48.1	48.2	45.7	41.1	39.5	36.8	35.8	33.7	19.9	10.5
00:45 - 01:00	39.9	31.1	47.5	49.8	43.2	36.6	34.6	35.3	33.1	29.3	16.0	10.0
01:00 - 01:15	41.3	31.6	47.4	45.2	45.6	37.1	35.4	36.1	34.9	32.5	16.2	10.2
01:15 - 01:30	57.5	35.6	55.4	51.0	45.9	48.9	50.4	49.9	51.6	52.1	38.2	22.6
01:30 - 01:45	36.6	35.2	43.6	45.6	42.5	37.4	34.4	31.1	25.8	25.0	13.6	10.0
01:45 - 02:00	35.7	28.8	43.5	44.5	40.9	36.3	32.7	30.6	26.2	23.2	12.6	10.0
02:00 - 02:15	33.9	28.9	43.0	44.4	41.1	35.6	31.8	27.8	22.3	20.7	11.8	10.0
02:15 - 02:30	36.2	31.0	43.3	44.5	41.2	35.6	32.6	29.7	25.4	29.6	14.7	10.0
02:30 - 02:45	40.6	30.6	43.3	45.6	42.9	36.3	33.5	32.5	30.2	37.0	16.4	10.1
02:45 - 03:00	39.9	30.3	46.0	44.8	41.1	35.4	32.2	31.4	29.4	36.6	16.9	10.0
03:00 - 03:15	36.6	28.1	43.1	42.9	39.8	33.9	30.5	26.8	23.1	33.6	16.0	10.0
03:15 - 03:30	40.5	30.3	45.7	45.8	41.7	36.9	34.3	33.8	33.9	34.2	18.7	10.1
03:30 - 03:45	39.6	29.1	42.1	44.6	42.1	37.0	32.4	28.7	26.7	36.8	16.4	10.0
03:45 - 04:00	37.7	29.7	43.7	44.2	40.7	34.9	31.4	28.2	25.0	34.4	16.9	10.0
04:00 - 04:15	41.6	29.6	51.0	46.8	40.3	36.4	34.3	34.3	34.4	36.7	20.8	10.2
04:15 - 04:30	42.3	29.6	48.5	46.4	42.6	37.5	35.6	37.3	36.0	34.5	17.6	10.2
04:30 - 04:45	40.6	30.2	47.5	48.4	44.3	37.4	34.3	33.6	31.8	35.7	16.6	10.1
04:45 - 05:00	41.5	32.0	44.7	47.5	43.3	37.6	35.8	35.7	34.8	34.1	19.5	10.1
05:00 - 05:15	61.0	36.1	72.8	58.1	56.6	54.2	53.1	55.1	55.6	53.8	36.8	16.6
05:15 - 05:30	53.4	35.5	70.1	60.3	55.3	52.2	50.7	47.5	44.7	44.7	32.2	17.5
05:30 - 05:45	46.3	37.4	53.9	53.2	46.4	42.0	40.4	41.3	40.1	37.3	22.1	10.5
05:45 - 06:00	50.8	39.0	57.7	56.1	50.9	45.3	43.1	44.9	44.5	43.8	26.9	12.2
06:00 - 06:15	57.4	43.0	57.9	55.4	50.2	46.7	46.8	49.2	52.5	51.8	33.9	16.0
06:15 - 06:30	59.2	43.3	59.4	54.5	47.1	43.4	41.9	51.1	54.2	54.0	31.0	11.5
06:30 - 06:45	64.4	46.6	58.5	57.5	51.6	50.4	48.7	59.2	57.7	58.7	36.2	16.3
06:45 - 07:00	70.2	47.9	61.1	61.0	56.8	60.0	57.2	64.1	63.4	65.0	43.8	27.7

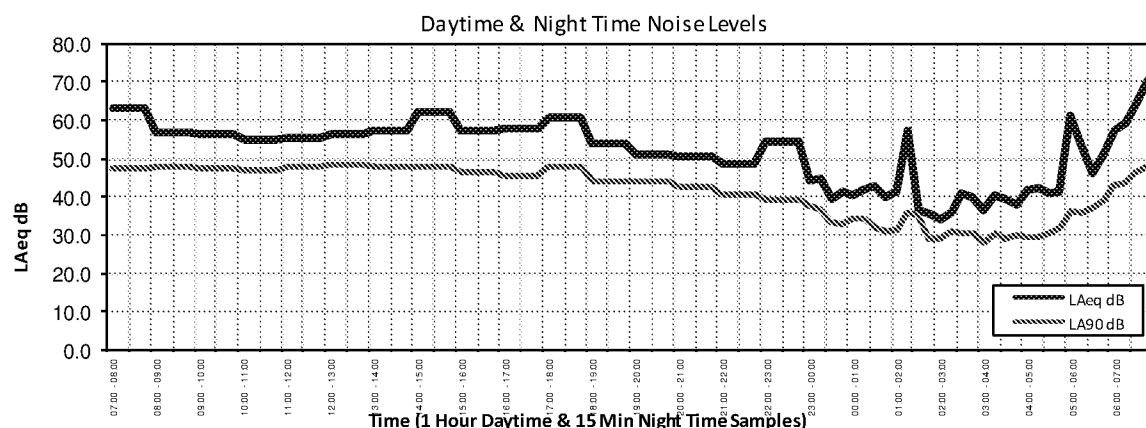

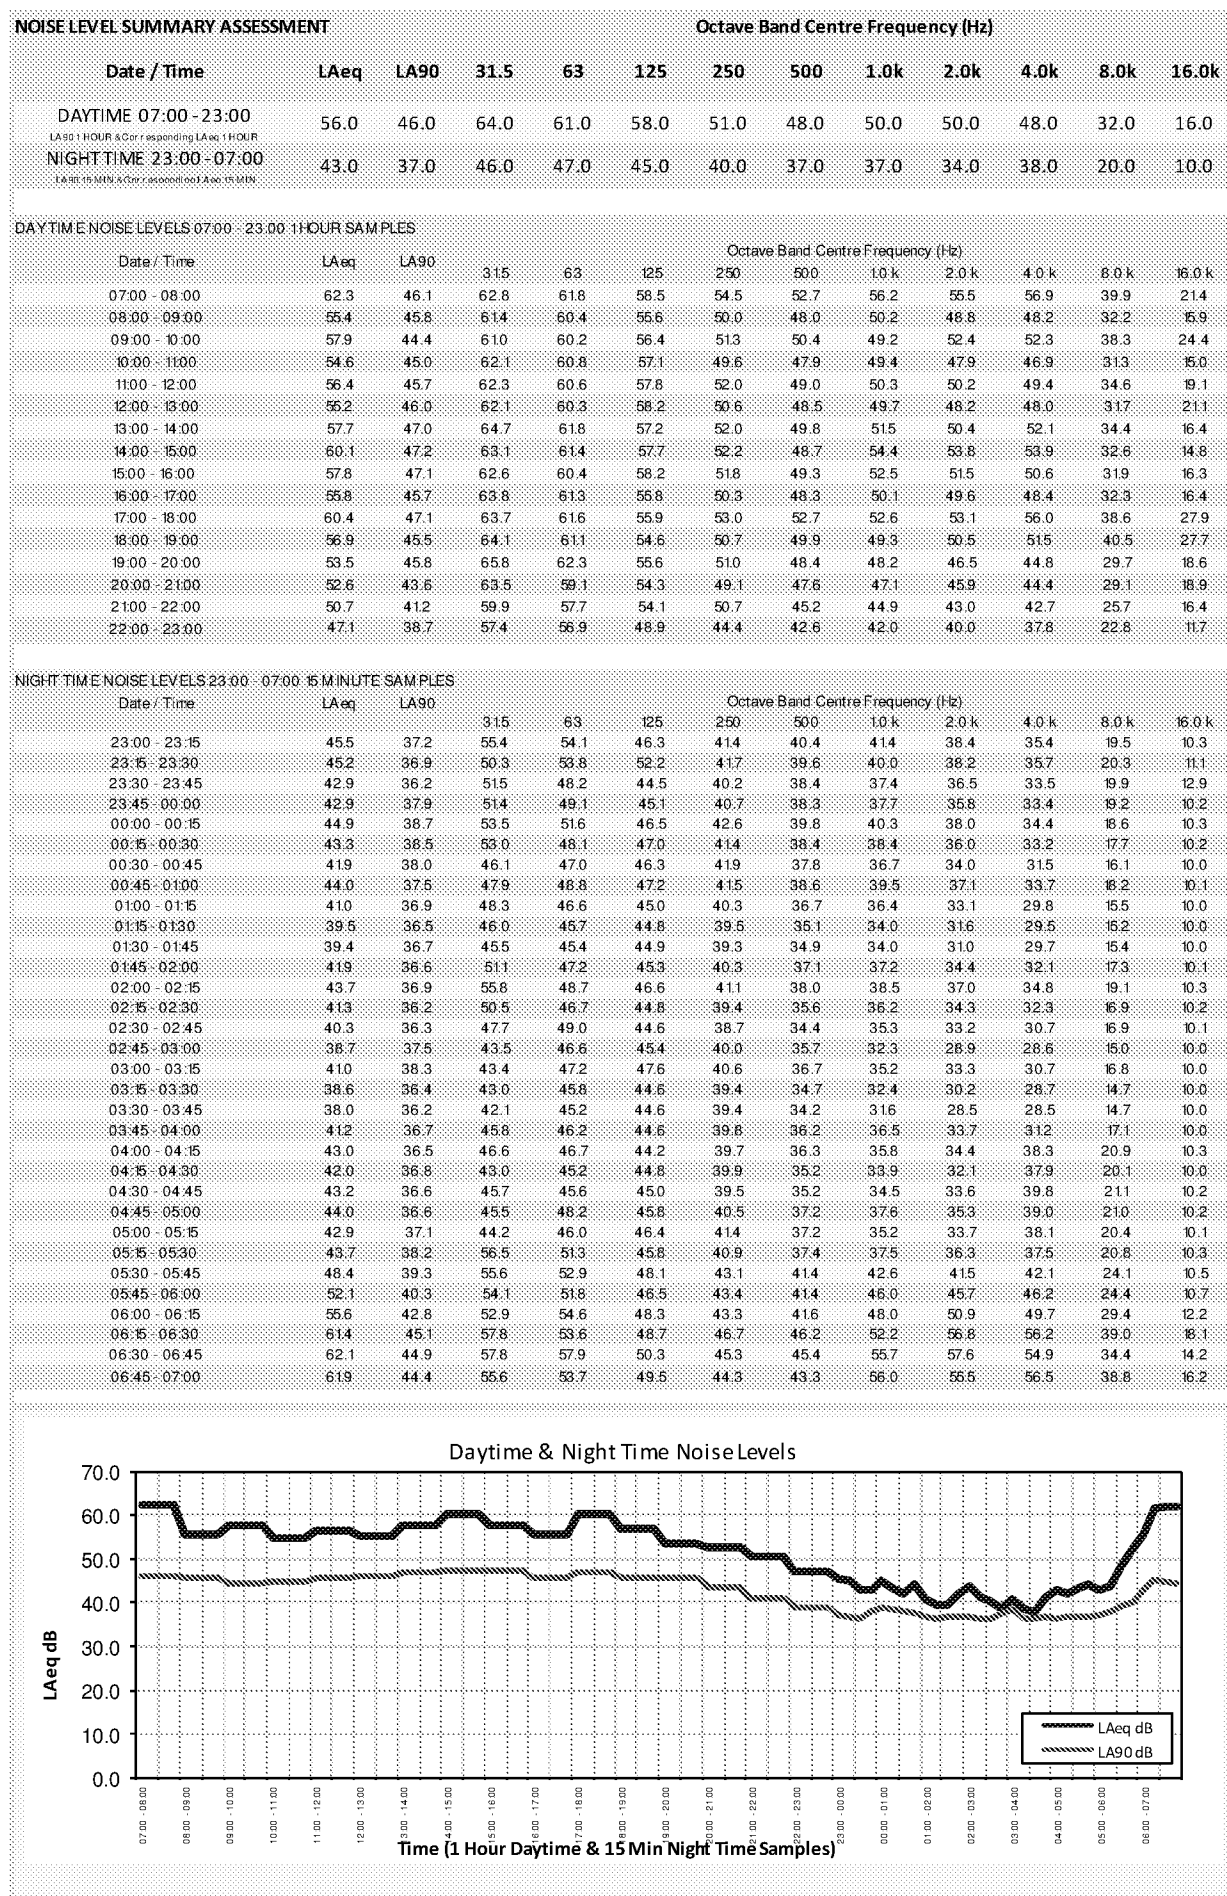
18.10 26th - 27th February 2021 - Background Noise Level

18.11 27th - 28th February 2021 - Background Noise Level

NOISE LEVEL SUMMARY ASSESSMENT											
		Octave Band Centre Frequency (Hz)									
Date / Time	LAeq	LA90	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k 16.0k
DAYTIME 07:00 - 23:00 LA90 1 HOUR & Corresponding LAeq 1 HOUR	56.0	45.0	62.0	60.0	57.0	50.0	48.0	49.0	50.0	49.0	32.0 20.0
NIGHT TIME 23:00 - 07:00 LAeq 15 MIN & Corresponding LAeq 15 MIN	44.0	35.0	47.0	46.0	44.0	39.0	39.0	40.0	36.0	35.0	20.0 10.0

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES											
Date / Time	LAeq	LA90	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k 16.0k
07:00 - 08:00	63.1	46.4	60.5	58.7	57.0	56.4	52.0	56.5	56.6	57.7	39.4 21.7
08:00 - 09:00	55.7	44.9	59.4	57.4	54.6	48.6	46.3	50.1	49.3	49.4	37.4 24.5
09:00 - 10:00	55.1	45.0	60.1	58.8	54.7	48.5	46.2	48.5	49.8	48.2	32.2 14.7
10:00 - 11:00	54.7	45.0	61.8	60.5	56.3	50.5	48.4	49.1	48.3	47.2	32.3 16.1
11:00 - 12:00	54.3	46.2	60.6	60.2	57.4	50.7	48.2	48.9	47.4	46.3	31.7 17.8
12:00 - 13:00	54.3	45.5	61.3	60.5	56.2	50.3	48.1	48.8	47.2	46.9	31.9 16.3
13:00 - 14:00	56.5	48.3	66.8	61.6	57.4	51.9	51.5	51.2	49.4	48.5	33.3 20.8
14:00 - 15:00	56.3	45.6	62.4	62.1	57.1	50.3	47.5	51.2	50.0	48.6	32.5 24.8
15:00 - 16:00	54.9	46.2	61.3	59.8	58.6	51.7	49.6	49.2	48.2	46.3	32.0 18.7
16:00 - 17:00	58.3	44.9	61.7	60.7	60.3	53.4	51.3	51.1	52.3	51.8	34.1 20.1
17:00 - 18:00	56.9	46.4	64.0	61.0	56.7	51.7	49.6	51.3	50.5	49.6	31.5 23.6
18:00 - 19:00	54.9	45.4	64.1	60.7	55.6	50.5	49.2	48.2	47.9	48.7	33.2 23.3
19:00 - 20:00	53.6	45.3	65.1	59.6	55.2	49.6	49.0	47.7	46.7	45.5	30.9 20.3
20:00 - 21:00	53.6	45.3	62.4	59.8	59.9	55.2	48.7	47.3	45.0	43.7	29.9 19.1
21:00 - 22:00	49.9	43.2	60.3	55.4	51.6	47.2	45.2	44.9	42.6	40.7	25.4 19.7
22:00 - 23:00	49.4	41.4	56.6	55.7	54.0	47.9	44.5	44.1	41.7	40.5	26.2 13.2

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES											
Date / Time	LAeq	LA90	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k 16.0k
23:00 - 23:15	45.8	38.9	53.7	51.3	48.5	43.4	41.0	41.2	38.7	35.6	20.2 10.9
23:15 - 23:30	45.3	38.6	52.6	49.3	44.0	40.0	39.5	40.8	39.4	34.8	25.0 10.6
23:30 - 23:45	57.7	39.0	63.2	54.7	48.2	48.4	50.6	49.7	52.1	52.3	38.5 23.1
23:45 - 00:00	44.9	38.8	49.2	48.7	46.2	44.2	39.4	40.2	38.3	33.8	19.5 11.4
00:00 - 00:15	44.5	36.2	46.6	46.5	43.7	40.3	39.2	40.3	38.2	33.2	16.4 10.1
00:15 - 00:30	44.2	36.3	48.9	48.4	44.0	40.4	39.1	40.0	37.5	33.9	16.6 10.3
00:30 - 00:45	43.3	35.6	46.4	48.7	42.8	38.8	37.9	38.8	36.9	33.7	16.0 10.6
00:45 - 01:00	41.1	35.0	47.1	47.2	41.7	38.9	37.4	36.9	33.5	28.9	14.9 10.2
01:00 - 01:15	41.4	34.8	49.4	47.3	43.5	39.1	37.3	37.3	33.5	29.9	17.0 10.2
01:15 - 01:30	42.7	35.0	47.5	48.4	42.3	38.9	37.7	38.2	36.3	32.3	16.7 10.2
01:30 - 01:45	45.3	35.3	50.1	49.0	43.6	40.7	39.5	40.0	38.9	37.6	22.3 11.5
01:45 - 02:00	41.1	35.0	46.1	46.3	42.7	38.6	36.9	36.9	33.6	29.8	14.3 10.0
02:00 - 02:15	37.1	34.6	42.3	43.4	40.1	36.7	34.9	33.2	26.9	21.1	11.7 10.0
02:15 - 02:30	38.8	33.7	44.9	46.0	42.7	38.3	35.4	34.1	30.5	26.6	13.8 10.0
02:30 - 02:45	36.9	33.0	42.8	45.5	44.4	36.6	33.9	31.8	27.1	23.3	12.3 10.0
02:45 - 03:00	40.3	33.0	45.0	46.4	43.1	38.5	35.2	35.3	32.6	29.3	15.9 10.1
03:00 - 03:15	39.4	33.3	47.3	45.8	42.7	36.9	35.0	35.1	31.7	28.8	14.1 10.0
03:15 - 03:30	40.5	33.9	43.5	46.3	41.3	37.2	36.2	35.2	32.8	32.5	16.0 10.3
03:30 - 03:45	42.8	34.7	45.6	47.3	44.6	40.5	38.8	36.8	35.3	35.0	18.4 10.1
03:45 - 04:00	37.2	34.2	42.8	42.8	39.5	35.7	34.3	33.0	28.1	25.3	13.2 10.0
04:00 - 04:15	40.3	34.5	47.0	46.6	38.8	35.6	35.2	35.9	33.2	31.2	16.6 10.1
04:15 - 04:30	39.9	36.3	43.3	46.0	42.5	38.1	36.5	35.4	32.0	27.8	13.1 10.0
04:30 - 04:45	43.9	38.3	47.1	48.0	43.8	39.5	38.3	37.9	36.4	37.7	21.3 10.3
04:45 - 05:00	44.2	38.2	44.3	45.2	44.5	39.1	37.9	37.9	34.8	39.4	20.0 10.0
05:00 - 05:15	44.9	36.9	45.7	51.5	45.1	38.4	37.4	37.7	35.8	40.9	24.5 10.3
05:15 - 05:30	43.3	36.9	50.4	46.7	43.1	39.1	38.1	38.5	36.1	34.9	17.8 10.0
05:30 - 05:45	46.1	37.9	47.3	48.5	45.3	40.3	39.1	41.2	39.6	38.2	20.1 10.2
05:45 - 06:00	54.2	39.8	51.0	51.0	45.3	41.6	40.1	45.3	50.0	48.2	27.3 10.9
06:00 - 06:15	57.3	41.4	51.1	51.9	46.5	42.0	41.0	47.5	53.9	50.0	30.4 11.7
06:15 - 06:30	57.0	40.9	48.1	49.1	45.2	40.5	40.1	49.8	52.8	49.7	30.3 12.9
06:30 - 06:45	56.7	41.0	50.2	50.3	49.0	42.9	41.7	50.4	50.0	51.8	37.9 12.3
06:45 - 07:00	59.6	41.0	52.0	48.2	45.4	41.3	40.8	54.6	53.4	53.5	32.5 12.1

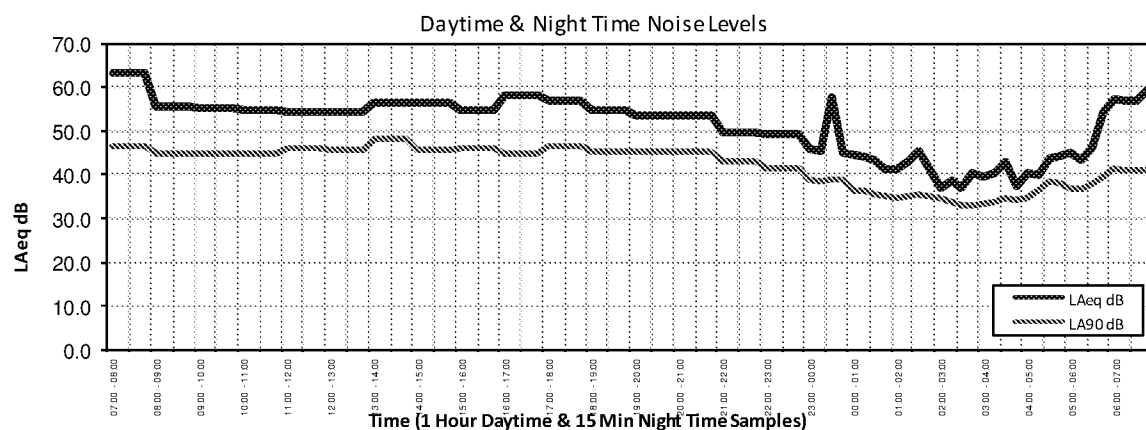


18.12 28th February - 1st March 2021 - Background Noise Level


NOISE LEVEL SUMMARY ASSESSMENT		Octave Band Centre Frequency (Hz)										
Date / Time	LAeq	LA90	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
DAYTIME 07:00 - 23:00 LA90 1 HOUR & Corresponding LAeq 1 HOUR	57.0	45.0	62.0	59.0	54.0	52.0	50.0	52.0	51.0	50.0	34.0	18.0
NIGHT TIME 23:00 - 07:00 LAeq 15 MIN & Corresponding LAeq 15 MIN	42.0	38.0	49.0	46.0	45.0	40.0	36.0	37.0	35.0	33.0	15.0	10.0

DAYTIME NOISE LEVELS 07:00 - 23:00 1 HOUR SAMPLES		Octave Band Centre Frequency (Hz)										
Date / Time	LAeq	LA90	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
07:00 - 08:00	57.0	42.1	58.0	57.1	54.2	52.0	49.6	50.1	51.1	50.5	34.3	18.7
08:00 - 09:00	52.6	43.4	56.1	54.9	53.8	45.7	43.2	46.9	46.5	45.9	33.6	15.1
09:00 - 10:00	59.2	44.3	57.7	56.0	54.1	46.2	44.2	54.3	52.4	53.3	33.8	17.7
10:00 - 11:00	56.5	44.8	59.9	59.1	58.9	51.7	50.1	49.8	49.0	50.7	33.1	15.8
11:00 - 12:00	54.0	45.8	61.8	60.2	56.9	51.6	48.9	48.0	46.2	47.2	32.1	21.4
12:00 - 13:00	56.0	47.1	61.0	59.8	56.1	50.9	51.0	49.1	49.3	49.6	39.3	29.3
13:00 - 14:00	58.0	47.4	61.6	59.9	57.1	52.8	51.0	52.3	51.3	51.3	38.3	24.2
14:00 - 15:00	60.5	48.3	61.2	63.2	65.3	60.7	56.0	53.8	52.6	52.5	38.1	22.6
15:00 - 16:00	56.2	46.8	61.6	60.5	60.1	53.9	50.0	50.5	49.1	48.1	32.4	15.3
16:00 - 17:00	57.5	45.6	60.5	59.0	57.9	53.4	51.2	51.8	50.9	50.1	32.1	17.8
17:00 - 18:00	57.9	45.7	62.9	60.1	54.8	49.7	48.1	52.0	51.6	51.7	34.0	18.0
18:00 - 19:00	54.0	44.8	62.2	58.6	55.0	50.4	49.2	47.7	46.1	47.7	30.4	15.9
19:00 - 20:00	50.9	43.8	60.9	58.2	53.6	48.1	47.0	45.4	43.6	41.8	26.8	12.7
20:00 - 21:00	49.8	41.9	58.7	57.2	51.3	47.2	45.2	44.5	42.7	41.1	27.3	12.9
21:00 - 22:00	50.9	41.1	56.8	54.8	53.9	48.5	47.2	44.4	43.1	43.3	29.9	13.5
22:00 - 23:00	45.7	39.9	57.0	52.9	46.7	43.1	41.2	40.8	38.8	35.4	21.3	10.9

NIGHT TIME NOISE LEVELS 23:00 - 07:00 15 MINUTE SAMPLES		Octave Band Centre Frequency (Hz)										
Date / Time	LAeq	LA90	31.5	63	125	250	500	1.0k	2.0k	4.0k	8.0k	16.0k
23:00 - 23:15	46.5	39.8	55.4	51.6	48.9	43.7	41.5	41.6	39.5	37.2	23.1	14.9
23:15 - 23:30	42.9	39.4	47.6	46.5	46.9	41.6	38.6	38.2	35.0	32.5	17.8	10.2
23:30 - 23:45	45.0	39.9	60.2	54.1	47.8	43.9	41.7	39.8	37.0	34.8	21.1	10.4
23:45 - 00:00	43.0	39.4	48.5	48.3	45.6	41.6	38.4	38.5	35.1	33.0	18.1	10.5
00:00 - 00:15	43.9	38.3	49.2	48.4	46.3	41.4	38.4	39.0	36.7	35.0	21.4	10.2
00:15 - 00:30	43.4	38.3	53.0	54.8	48.1	41.7	38.3	38.3	36.3	33.1	19.0	10.3
00:30 - 00:45	43.5	38.7	49.7	48.9	46.1	41.4	38.5	38.5	36.5	33.7	19.7	10.3
00:45 - 01:00	43.2	38.3	49.9	47.3	46.7	42.3	38.5	37.0	35.4	35.6	20.6	10.4
01:00 - 01:15	41.3	37.5	47.7	46.6	45.0	40.5	36.8	35.4	34.1	32.4	18.5	10.3
01:15 - 01:30	42.5	37.4	47.6	48.1	51.5	43.9	36.9	35.4	34.2	32.9	20.1	10.4
01:30 - 01:45	39.4	37.5	46.3	45.7	44.8	40.0	36.0	33.6	30.5	29.7	15.3	10.0
01:45 - 02:00	39.5	37.7	46.6	45.4	44.6	39.9	36.3	33.8	30.3	29.7	15.4	10.0
02:00 - 02:15	42.8	37.9	50.2	47.5	45.5	40.8	38.7	36.7	35.7	34.0	19.1	10.3
02:15 - 02:30	41.2	37.7	47.5	46.5	45.0	40.4	37.5	35.9	33.1	31.3	17.0	10.1
02:30 - 02:45	38.7	37.4	46.7	45.2	44.5	39.6	36.0	33.0	28.8	28.2	14.7	10.0
02:45 - 03:00	38.7	37.5	46.4	45.5	44.6	39.5	35.8	32.7	28.9	28.5	14.8	10.0
03:00 - 03:15	40.5	37.2	48.9	45.7	44.2	39.7	36.4	35.6	32.8	30.3	15.9	10.0
03:15 - 03:30	39.5	37.3	48.5	45.6	44.5	39.3	35.8	33.6	30.9	30.6	16.0	10.1
03:30 - 03:45	42.4	37.6	50.7	45.4	44.6	40.0	36.1	37.0	34.2	35.9	16.7	10.0
03:45 - 04:00	40.0	37.3	51.3	46.4	45.2	40.4	36.2	34.3	31.5	30.2	15.8	10.0
04:00 - 04:15	40.9	37.3	48.6	46.4	44.3	39.5	36.6	35.7	33.4	31.1	16.4	10.1
04:15 - 04:30	40.3	37.7	48.5	45.6	44.7	39.5	36.3	34.8	31.8	31.6	16.7	10.0
04:30 - 04:45	45.1	38.5	51.5	48.5	45.6	40.0	37.6	37.3	35.8	41.3	23.6	10.4
04:45 - 05:00	47.1	39.3	49.5	51.0	48.5	41.7	40.0	40.8	39.5	41.8	24.7	10.9
05:00 - 05:15	47.7	39.2	54.6	50.5	46.8	42.4	40.8	40.7	41.3	42.1	25.5	11.8
05:15 - 05:30	49.2	40.3	54.1	55.6	49.8	44.4	42.3	43.5	42.7	42.2	28.0	11.4
05:30 - 05:45	51.5	41.4	54.1	54.3	51.9	47.7	45.7	46.0	44.7	44.1	28.4	12.2
05:45 - 06:00	57.5	43.7	57.7	53.5	48.7	45.2	43.3	45.8	54.1	50.7	33.1	12.7
06:00 - 06:15	63.8	45.1	66.8	63.4	60.9	59.3	56.0	55.5	57.9	58.2	44.1	31.7
06:15 - 06:30	59.4	44.9	56.4	52.9	49.7	46.2	44.4	54.3	54.1	51.5	31.7	12.1
06:30 - 06:45	61.2	45.6	60.8	58.9	53.4	47.7	46.6	54.9	54.9	55.8	34.9	16.4
06:45 - 07:00	64.1	45.6	57.8	56.8	50.3	47.7	46.1	56.8	56.3	59.4	37.0	15.4

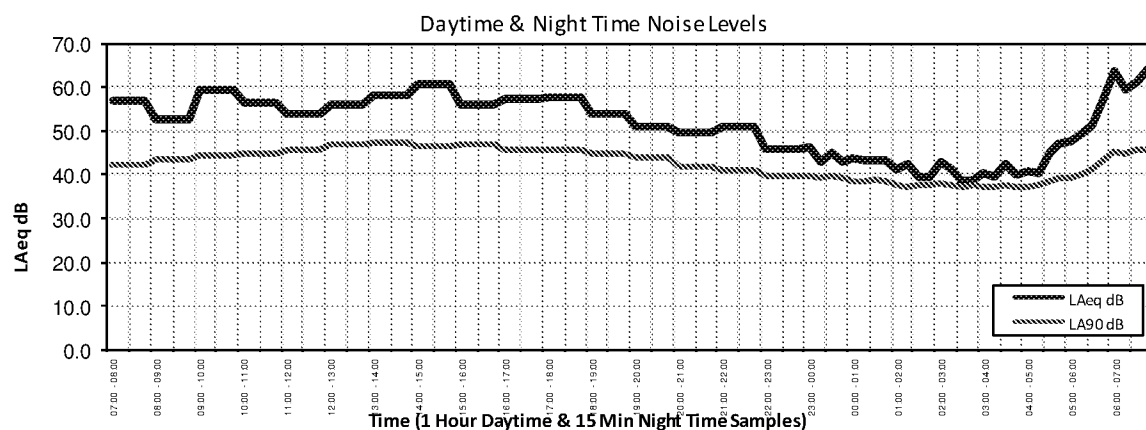

19 ENVIRONMENTAL CONDITIONS

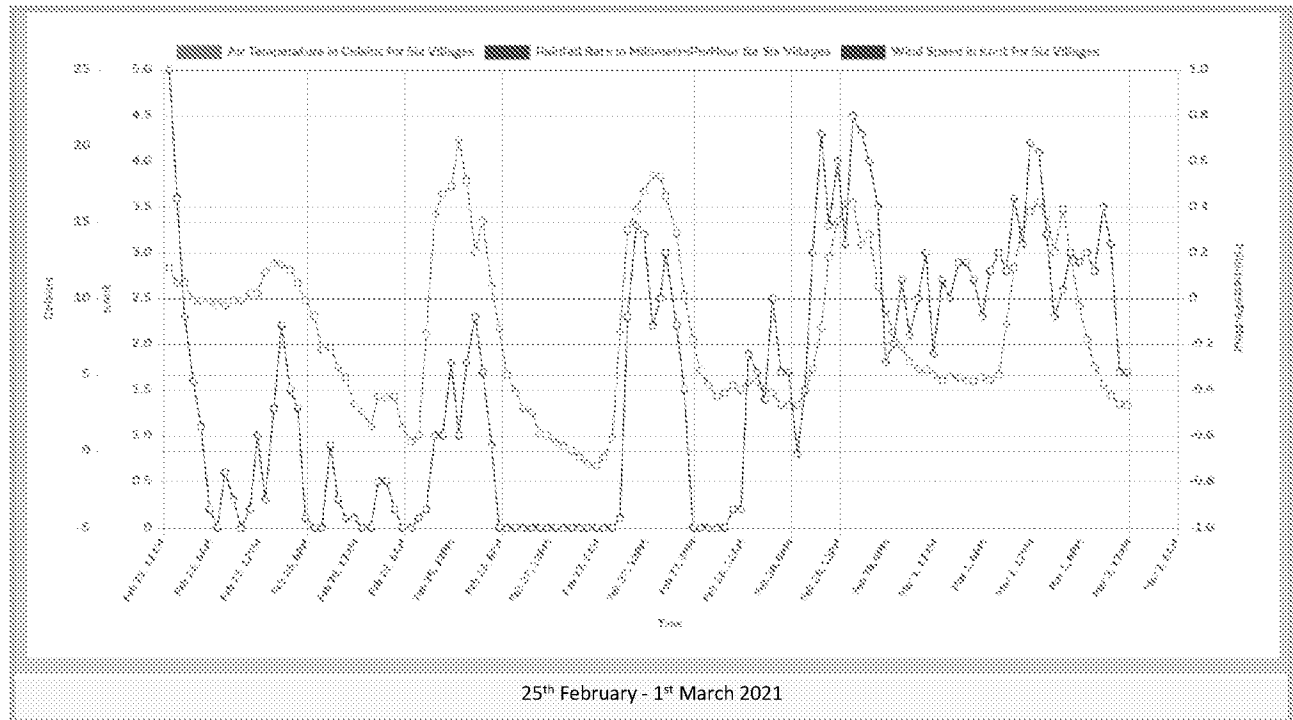

END OF REPORT#