



CUPA 12

*Non-carbonated slate formed by tectonic compression.
Grey slate with a smooth matt surface.*





Quarry La Campa. Folgoso del Caurel
(Lugo) Spain.




Operating since 1972.



Sizes: 20x20 - 60x45 cm
Thickness: 3,5 - 5 - 6 mm



Formats

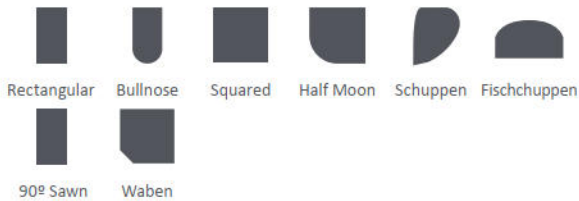

Selections



Technical specifications

ABSORPTION	CARBONATE NON CARBONATED	MOR CHARACTERISTIC	SO ₂ EXPOSURE TEST	THERMAL CYCLE TEST	FREEZE THAW TEST
0,16% Code : W1 (< 0,4%)	0,23% Complies (< 1,5%)	Longitudinal 57 MPA Transverse 56 MPA	S1	T1	Fullfil < 0,6%

International certifications



European Standard: EN 12326 | French Specifications: NF 02/09 N° 17704 | Bre Specification: BREG EN EPD000232