

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	1.185	10.000
Flush-Flo™	0.120	3.787
Kick-Flo®	0.143	3.740
Mean Flow		6.765

Hydro-Brake® Optimum Flow Control including:

- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet
- Indicative Weight: 0 kg



hydro-int.com/patents

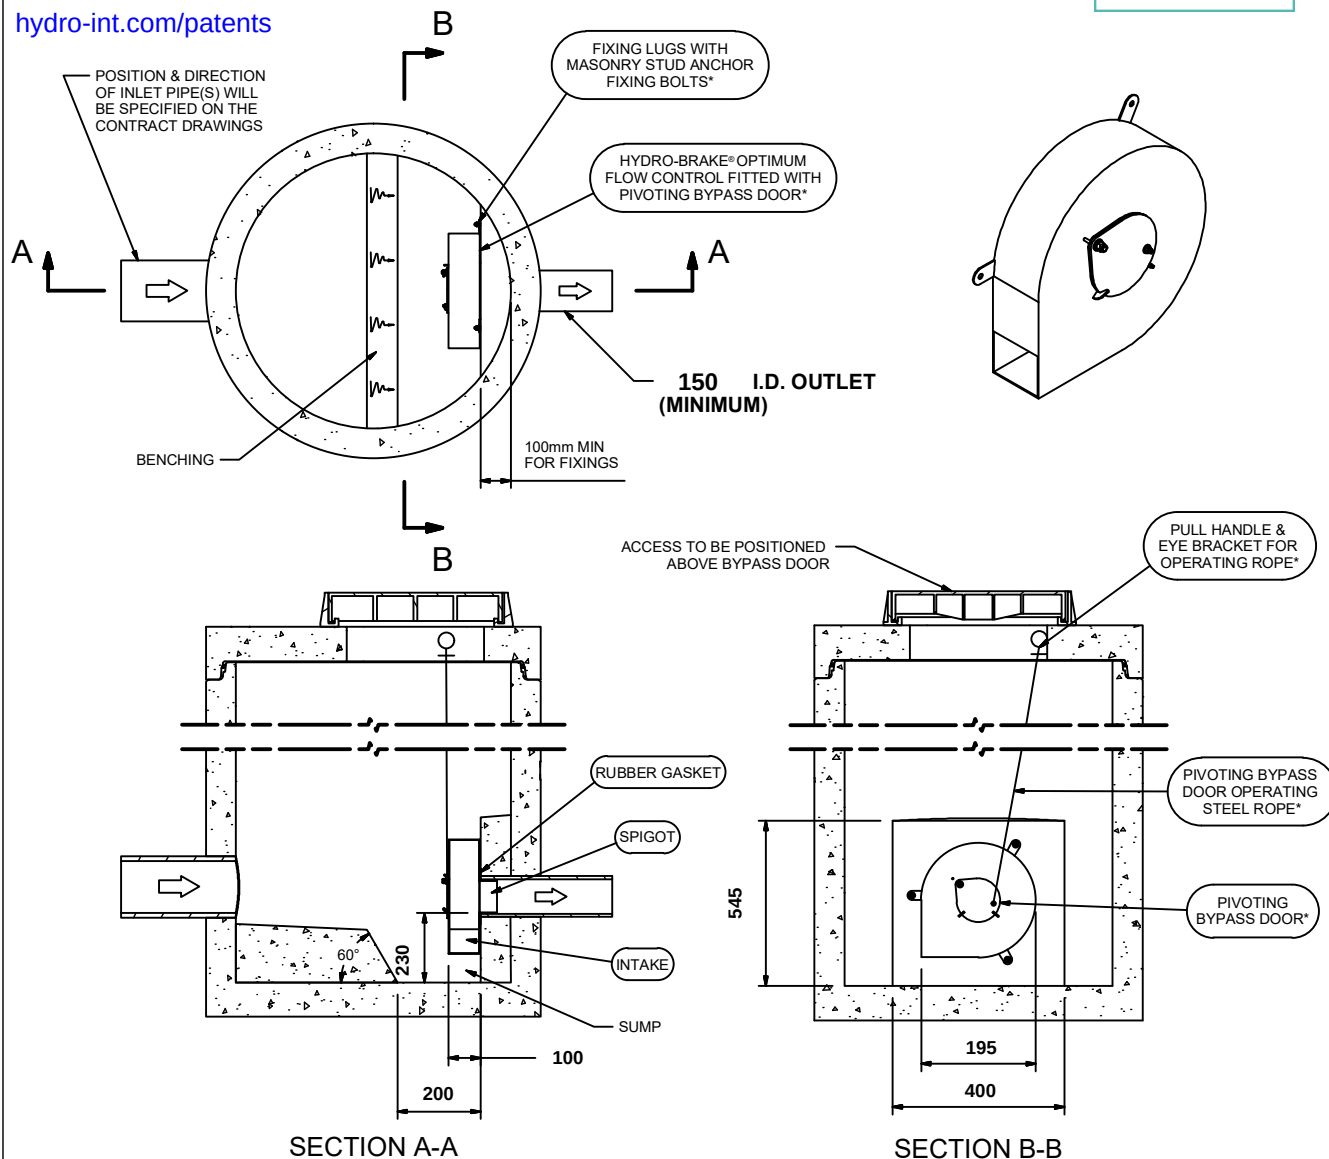

IMPORTANT:

○ LIMIT OF HYDRO INTERNATIONAL SUPPLY

THE DEVICE WILL BE HANDLED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS

* WHERE SUPPLIED

HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SCU-0095-1000-1185-1000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International
A CRH COMPANY

DATE	21/03/2024 15:19	SCU-0095-1000-1185-1000 Hydro-Brake® Optimum
SITE	Climping	
DESIGNER	Meagan Weedon	
REF	5139 - S163	