
- Ensure no materials or equipment are stored between proposed garage and trees.
- Footprint of garage to be excavated by approximately 200mm below current ground level (approximate original ground level) then additional excavation to perimeter is to be carried out
- In the event that any tree roots with a diameter of more than 25mm are found during the excavation an Arboriculturist is to be consulted to ensure the trees health and stability is maintained.

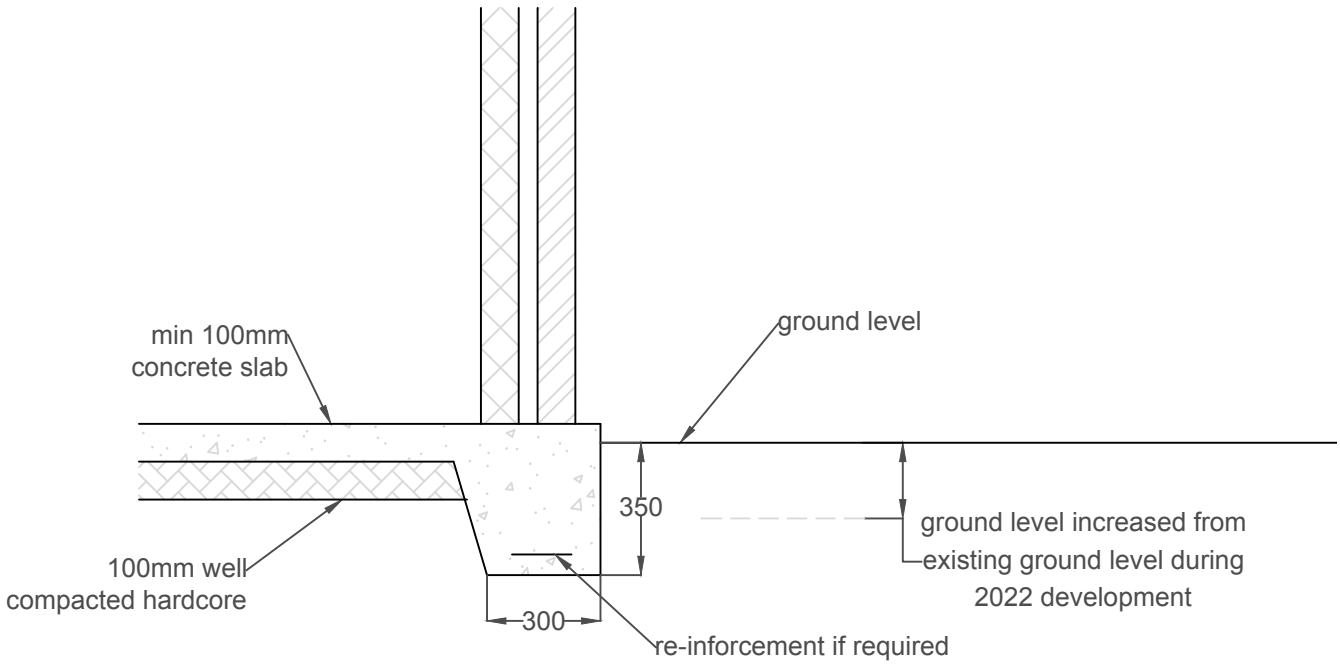

Detail (1:20)

Client:	Mr B Donald
Project Address:	Magnolia House Horsemere Green Lane Ford West Sussex
Drawing Title:	Foundation Detail
Drawing Number:	1362.02
Scale:	As stated printed @ A4
Date:	23/01/2023

ARUN DISTRICT COUNCIL CM/2/23/HH