


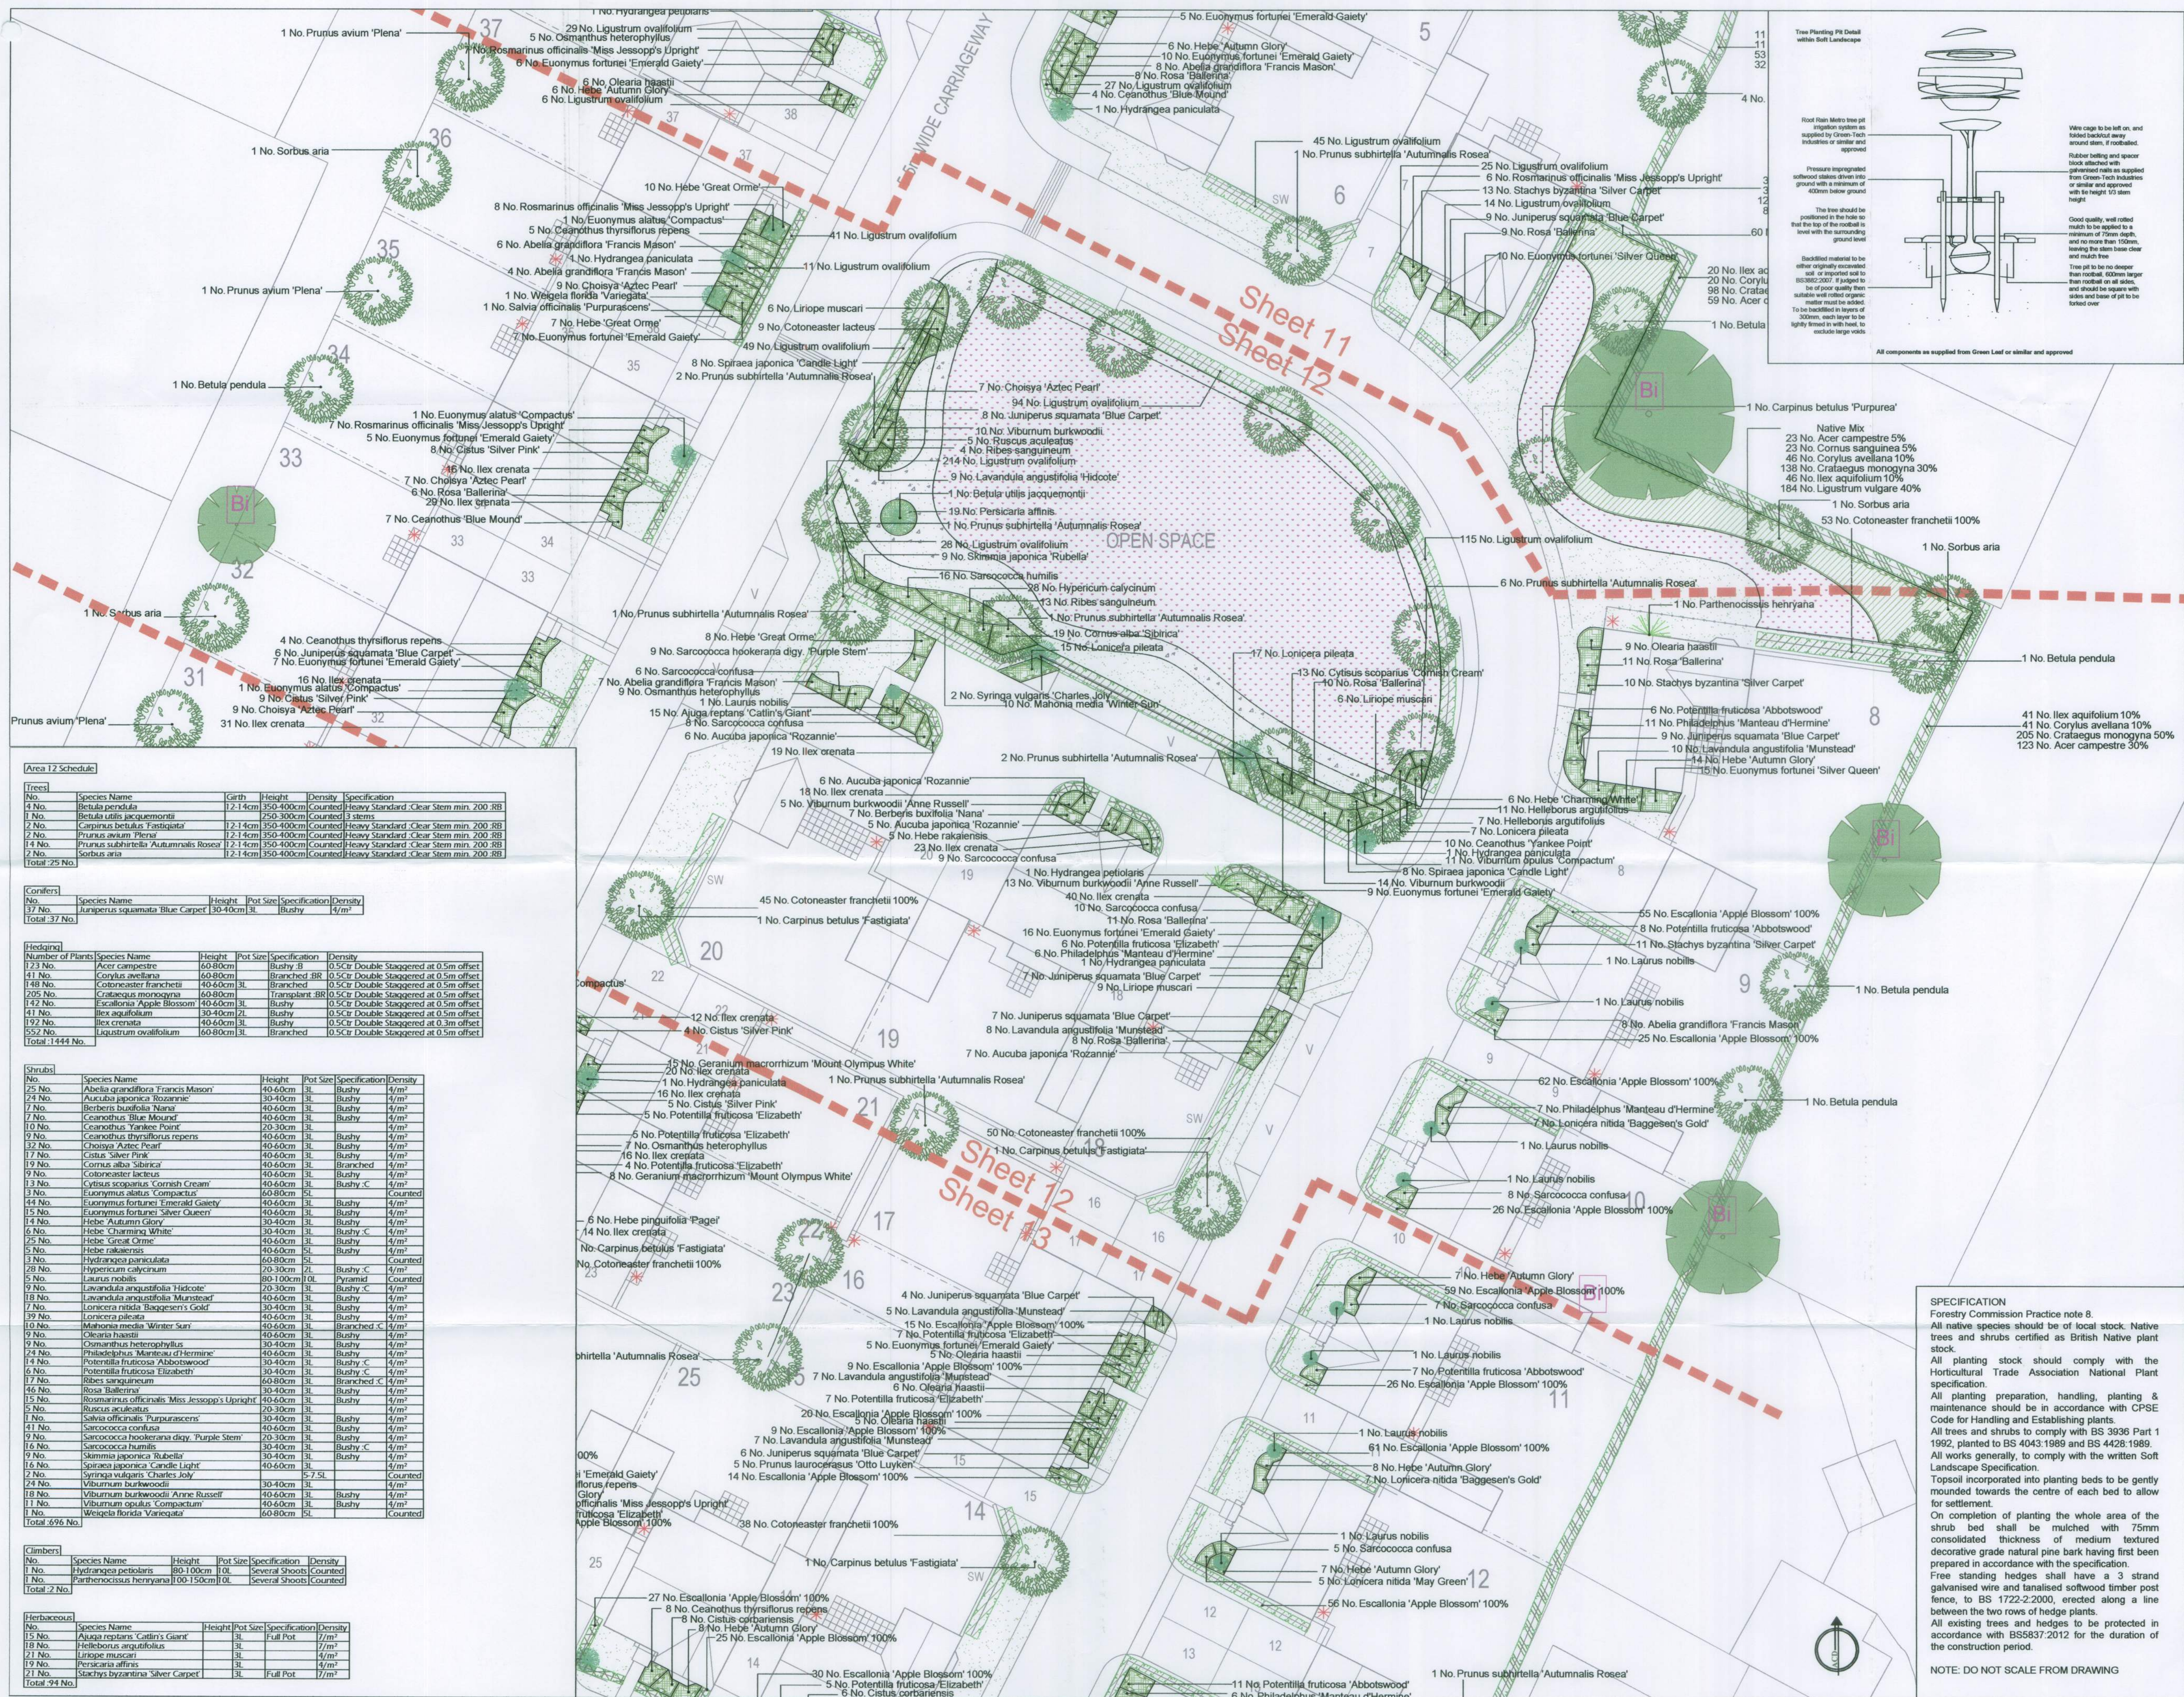

Legend

- Existing trees to be retained and protected during construction
- Trees to be removed
- Proposed tree. See detail on sheet
- Proposed conifer
- Proposed specimen shrub planting

Approximate position for a climber. Climbing plants to be trained up adjacent wall/ fence/ pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting

Proposed ornamental hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 0.6m height

Proposed ornamental hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1.2m height

Proposed native hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. After year five it should be maintained at 2m height (chamfered edge).

Proposed shrub planting to receive 75mm bark mulch after planting operations

Proposed native shrub planting to be planted in groups of 3 - 5 with an even distribution throughout the bed receive 75mm bark mulch after planting operations

Proposed grass areas to receive good quality amenity grass turf laid in line with good horticultural practices

Local grasslands retained with areas disturbed by construction to be re-seeded with good quality grass mix with 20% WF3 Wild Flower Meadow mix

Approximate position of Bat boxes by Schwegerl or similar approved

Approximate position of Bird boxes by Schwegerl or similar approved

Proposed tarmac pathway

Cut Lines

C	17.05.13	Layout change	JCL
B	27.11.12	Gateway detail added	DKM
A	21.11.12	Layout change	DKM
Rev	Date	Details	Drawn

ACD

Ecology

Arboriculture

Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rothmore Rail Business Centre, Grange Lane, Malmesbury,
Wiltshire, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Tunners, Lower Street, Haslemere, Surrey,
GU27 2PE
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southgate Street, Winchester, Hampshire, SO23 9EF
Tel: 01962 855604

www.acdlandscape.co.uk

BARRATT HOMES

scheme: Brook Nursery,
Barnham

client: Barratt Homes

drawing: Landscape proposals

date: 13/11/2012

scale: 1:200@A1

drawing no: BSH18222 12C

drawn: DKM checked: AW

Copyright of ACD Landscape Architects Ltd. All rights reserved in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2012. Copyright of this plan remains with ACD until all fees have been paid in full.

SPECIFICATION

Forestry Commission Practice note 8.

All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.

All planting stock should comply with the Horticultural Trade Association National Plant specification.

All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.

All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4228:1989.

All works generally, to comply with the written Soft Landscape Specification.

Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.

On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.

Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722-2:2000, erected along a line between the two rows of hedge plants.

All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING