SPECIFICATION
Forestry Commission Practice note 8.
All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.
All planting stock should comply with the Horticultural Trade Association National Plant specification.
All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.
All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989.
All works generally, to comply with the written Soft Landscape Specification.
Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.
On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.
Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722-2:2000, erected along a line between the two rows of hedge plants.
All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

Area 13 Schedule

Trees

No.	Species Name	Girth	Height	Density	Specification
2 No.	Betula pendula	12-14cm	350-400cm	Counted	Heavy Standard :Clear Stem min. 200 :RB
13 No.	Carpinus betulus 'Fastigiata'	12-14cm	350-400cm	Counted	Heavy Standard :Clear Stem min. 200 :RB
1 No.	Prunus avium 'Plena'	12-14cm	350-400cm	Counted	Heavy Standard :Clear Stem min. 200 :RB
3 No.	Prunus subhirtella 'Autumnalis Rosea'	12-14cm	350-400cm	Counted	Heavy Standard :Clear Stem min. 200 :RB
2 No.	Sorbus aria	12-14cm	350-400cm	Counted	Heavy Standard :Clear Stem min. 200 :RB

Total :21 No.

Conifers

No.	Species Name	Height	Pot Size	Specification	Density
5 No.	Juniperus scopulorum 'Skyrocket'	100-125cm	5L	Leader & laterals	Counted
18 No.	Juniperus squamata 'Blue Carpet'	30-40cm	3L	Bushy	4/m²

Total :23 No.

Hedging

Number of Plants	Species Name	Height	Pot Size	Specification	Density
481 No.	Cotoneaster franchetii	40-60cm	3L	Branched	0.5Ctr Double Staggered at 0.5m offset
536 No.	Escallonia 'Apple Blossom'	40-60cm	3L	Bushy	0.5Ctr Double Staggered at 0.5m offset
254 No.	Ilex crenata	40-60cm	3L	Bushy	0.5Ctr Double Staggered at 0.3m offset

Total :1271 No.

Shrubs

No.	Species Name	Height	Pot Size	Specification	Density
8 No.	Ceanothus 'Blue Mound'	40-60cm	3L	Bushy	4/m²
27 No.	Ceanothus thyrsiflorus repens	40-60cm	3L	Bushy	4/m²
13 No.	Choisya 'Aztec Pearl'	40-60cm	3L	Bushy	4/m²
23 No.	Cistus 'Silver Pink'	40-60cm	3L	Bushy	4/m²
33 No.	Cistus corbariensis	30-40cm	3L	Bushy :C	4/m²
1 No.	Euonymus alatus 'Compactus'	60-80cm	5L		Counted
31 No.	Euonymus fortunei 'Emerald Gaiety'	40-60cm	3L	Bushy	4/m²
56 No.	Hebe 'Autumn Glory'	30-40cm	3L	Bushy	4/m²
6 No.	Hebe pinguifolia 'Pagei'	30-40cm	3L	Bushy	4/m²
2 No.	Hydrangea paniculata	60-80cm	5L		Counted
4 No.	Laurus nobilis	80-100cm	10L	Pyramid	Counted
20 No.	Lavandula angustifolia 'Hidcote'	20-30cm	3L	Bushy :C	4/m²
19 No.	Lavandula angustifolia 'Munstead'	40-60cm	3L	Bushy	4/m²
7 No.	Lonicera nitida 'Baggesen's Gold'	30-40cm	3L	Bushy	4/m²
5 No.	Lonicera nitida 'May Green'	30-40cm	3L	Bushy :C	4/m²
41 No.	Olearia haastii	40-60cm	3L	Bushy	4/m²
15 No.	Osmanthus heterophyllus	30-40cm	3L	Bushy	4/m²
20 No.	Philadelphus 'Manteau d'Hermine'	40-60cm	3L	Bushy	4/m²
18 No.	Potentilla fruticosa 'Abbotswood'	30-40cm	3L	Bushy :C	4/m²
71 No.	Potentilla fruticosa 'Elizabeth'	30-40cm	3L	Bushy :C	4/m²
13 No.	Prunus laurocerasus 'Otto Luyken'	40-60cm	3L	Bushy	4/m²
2 No.	Rosa 'Kent'	30-40cm	3L	Bushy :C	4/m²
12 No.	Rosmarinus officinalis 'Miss Jessopp's Upright'	40-60cm	3L	Bushy	4/m²
17 No.	Sarcococca confusa	40-60cm	3L	Bushy	4/m²
1 No.	Syringa vulgaris 'Charles Joly'		5-7.5L		Counted

Total :475 No.

Climbers

No.	Species Name	Height	Pot Size	Specification	Density
2 No.	Parthenocissus henryana	100-150cm	10L	Several Shoots	Counted

Total :2 No.

Herbaceous


No.	Species Name	Height	Pot Size	Specification	Density
31 No.	Geranium macrorrhizum 'Mount Olympus White'		3L	Full Pot	1/m²

Total :31 No.

Refer to soft landscape drawings 14 - 16 for Open space

Sheet 12
Sheet 13
Sheet 12
Open space

Tree Planting Pit Detail within Soft Landscape

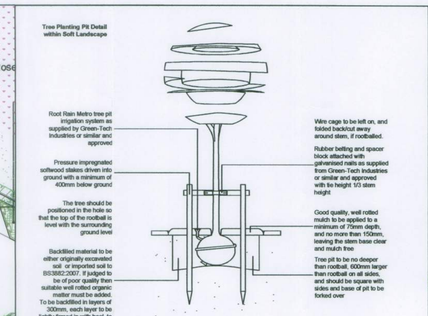

All components as supplied from Green Leaf or similar and approved

Legend

- Existing trees to be retained and protected during construction
- Trees to be removed
- Proposed tree. See detail on sheet
- Proposed conifer
- Proposed specimen shrub planting
- Approximate position for a climber. Climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed ornamental hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1m height
- Proposed ornamental hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. To be maintained at 1m height
- Proposed native hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row. After year five it should be maintained at 2m height (chamfered edge).
- Proposed shrub planting to receive 75mm bark mulch after planting operations
- Proposed native shrub planting to be planted in groups of 3 - 5 with an even distribution throughout the bed receive 75mm bark mulch after planting operations
- Proposed grass areas to receive good quality amenity grass turf laid in line with good horticultural practices
- Local grasslands retained with areas disturbed by construction to be re-seeded with good quality grass mix with 20% WF3 Wild Flower Meadow mix
- [B] Approximate position of Bat boxes by Schwegler or similar approved
- [Bi] Approximate position of Bird boxes by Schwegler or similar approved
- Proposed tarmac pathway
- Cut Lines

B	17.05.13	Layout change	JCL
A	21.11.12	Layout change	DKM

ACD
Ecology
Arboriculture
Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, Wilts, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Tanners, Lower Street,Haslemere, Surrey, GU27 2PE
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southgate Street, Winchester, Hampshire, SO23 9EF
Tel: 01962 855604

www.acdlandscape.co.uk

BARRATT HOMES

scheme: Brook Nursery, Barnham
client: Barratt Homes
drawing: Landscape proposals
date: 13/11/2012
scale: 1:200@A1
drawing no: BSH18222 13B
drawn: DKM checked: AW

Copyright of ACD Landscape Architects Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2012. Copyright of this plan remains with ACD until all fees have been paid in full.