


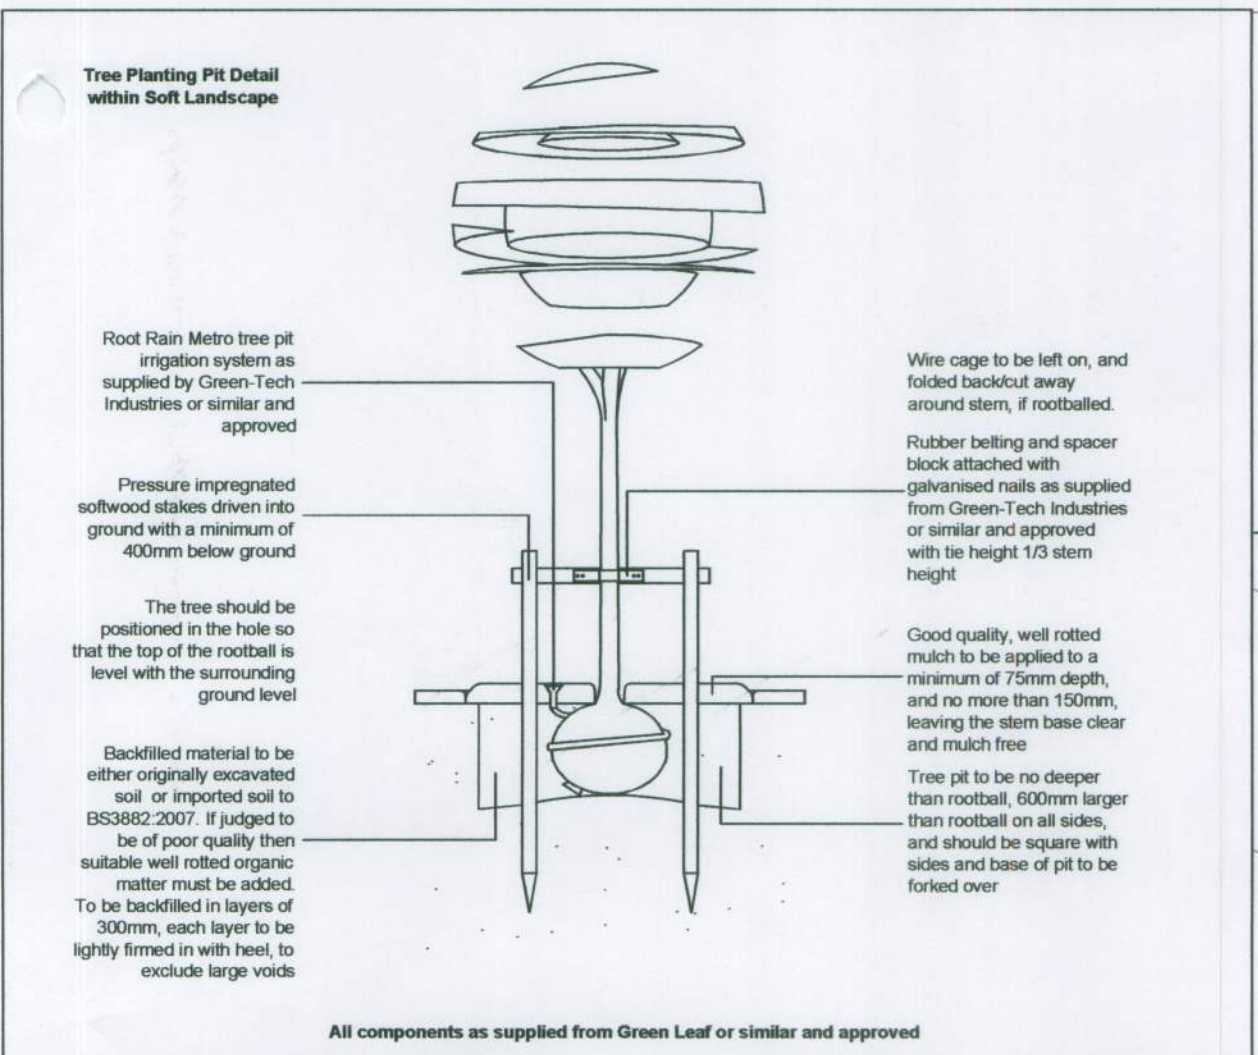

WF1 Wildflower species.

Corn poppy (*Papaver rhoeas*) 0.5%, Meadow buttercup (*ranunculus acris*) 2.0%, Musk Mallow (*Malva Moschata*) 1.5%, Ox eye daisy (*leucanthemum vulgare*) 2.0%, Red campion (*Silene Dioica*) 4.5%, Self heal (*Prunella vulgaris*) 4.5%, White campion (*Silene Alba*) 4.5%, Yarrow (*Achillea Millefolium*) 0.5%.

WF7 Wildflower mix for Marginal Edge

Agrimony (*agrimonia eupatoria*) 2.5%, Wild angelica (*Angelica sylvestris*) 2.5%, Gypsy wort (*lycopus europus*) 2.5%, Meadow buttercup (*ranunculus acris*) 17.0%, Meadowsweet (*Filipendula Ulmaria*) 11.5%, Purple Loosetrife (*Lythrum salicaria*) 2.5%, Ragged robin (*lychnis flos cuculi*) 2.50%, Red campion (*Silene Dioica*) 22.5%, Self heal (*Prunella vulgaris*) 22.5%, Teasel (*Dipsacus fulionum*) 7.5%, Water Avens (*Geum rivale*) 1.50%, Yellow Flag iris (*iris pseudocorus*) 5.0%.

Area 14 planting schedule

No.	Species Name	Girth	Height	Specification	Density
32No	Acer campestre	12-14cm	350-400cm	Clear Stem 175-200 RB Heavy Standard	4/m²
3No	Alnus cordata	12-14cm	350-400cm	Multi-Stemmed C	4/m²
8No	Betula pendula	12-14cm	350-400cm	Clear Stem 175-200 RB Heavy Standard	4/m²
3No	Prunus avium 'Plena'	12-14cm	350-400cm	Clear Stem 175-200 RB Heavy Standard	4/m²
4No	Quercus robur	12-14cm	350-400cm	Clear Stem 175-200 RB Heavy Standard	4/m²
1No	Robinia pseudoacacia 'Frisia'	12-14cm	350-400cm	Clear Stem 175-200 RB Heavy Standard	4/m²
1No	Sorbus aucuparia	12-14cm	350-400cm	Clear Stem 175-200 RB Heavy Standard	4/m²
Total :21No					

No.	Species Name	Height	Pot Size	Specification	Density
32No	Acer campestre	60-90cm	BR	0.5ctr Double Staggered at 0.5m offset	4/m²
96No	Crataegus monogyna	60-90cm	BR	0.5ctr Double Staggered at 0.5m offset	4/m²
7No	Ilex aquifolium 'Alaska'	60-90cm	BR	0.5ctr Double Staggered at 0.5m offset	4/m²
7No	Ligustrum vulgare	60-90cm	BR	0.5ctr Double Staggered at 0.5m offset	4/m²
7No	Rosa canina	60-90cm	BR	0.5ctr Double Staggered at 0.5m offset	4/m²
7No	Viburnum opulus	60-90cm	BR	0.5ctr Double Staggered at 0.5m offset	4/m²
Total :156No					

Shrubs

No.	Species Name	Height	Pot Size	Specification	Density
11No	Ceanothus thyrsiflorus repens	40-50cm	3L	Bushy	4/m²
11No	Choysa Aztec Pearl	30-40cm	3L	Bushy	4/m²
23No	Cornus sanguinea	60-90cm	3L	Branched B	4/m²
13No	Eunymus fortunei 'Emerald Gaiety'	40-50cm	3L	Bushy	4/m²
14No	Lonicera pileata	40-50cm	3L	Bushy	4/m²
6No	Potentilla fruticosa 'Abbotswood'	30-40cm	3L	Bushy C	4/m²
24No	Santolina chamaecyparissus 'Nana'	20-30cm	3L	Bushy C	4/m²
Total :119No					

Shrub/Understory

No.	Species	Height	Pot Size	Specification	Density
119No	Cornus alba	30-40cm	BR	Bushy	3/m²
22No	Cornus alba	30-40cm	BR	Bushy	4/m²
166No	Corylus avellana	60-90cm	BR	Bushy	3/m²
30No	Corylus avellana	60-90cm	BR	Bushy	3/m²
95No	Ribes sanguineum King Edward VII	60-90cm	BR	Bushy	3/m²
17No	Ribes sanguineum King Edward VII	60-90cm	BR	Bushy	4/m²
25No	Salix caprea 'Kilmarnock'	60-90cm	BR	Bushy	3/m²
17No	Salix caprea 'Kilmarnock'	60-90cm	BR	Bushy	4/m²
Total :561No					

Bulbs

No.	Species Name	Specification	Density
754No	Crocus speciosus 'Conqueror'	topsize+ 25/m²	25/m²
1006No	Fritillaria meleagris	topsize+ 25/m²	25/m²
1006No	Narcissus pseudonarcissus	topsize+ 25/m²	25/m²
Total :2514No			

130m of Green screen with a combination of Ivy and Clematis montana. Run around the perimeter of the security fencing.

