


DigiviewHD⁺

SHDV8KD4G	8 Channel Full HD 1TB CCTV System
SHDV8KD4G2TB	8 Channel Full HD 2TB CCTV System
SHDV8KD4G4TB	8 Channel Full HD 4TB CCTV System
SHDV8KD4G8TB	8 Channel Full HD 8TB CCTV System

SHDV8KD4W	8 Channel Full HD 1TB CCTV System
SHDV8KD4W2TB	8 Channel Full HD 2TB CCTV System
SHDV8KD4W4TB	8 Channel Full HD 4TB CCTV System
SHDV8KD4W8TB	8 Channel Full HD 8TB CCTV System

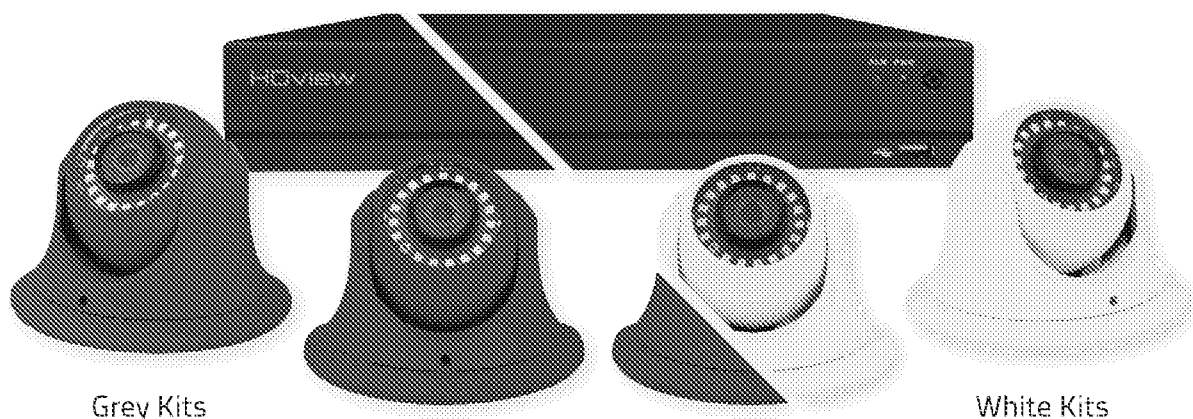

Grey Kits

White Kits

- ※ Complete with DVR, Cameras, Cable & System Power Supply
- ※ 4 x 4MP HD day/night dome Cameras - SHDVC36FDG / SHDVC36FDW
- ※ Hard drive options: SHDV4KD - 500GB, 1TB, 2TB, 4TB or 8TB
- ※ 8 Channel System (Supports up to 8 cameras)
- ※ 4 Megapixel live view and recording
- ※ Recording options – Continuous / Scheduled / Motion
- ※ Remote view via ESP HDview APP for smartphones
- ※ USB back up of recordings for easy evidence transfer

- ※ Video outputs HDMI / VGA for connection to a monitor
- ※ Premium Surveillance Hard Drive pre-installed
- ※ Programmable Spot Output
- ※ CMS software included for remote viewing via a pc
- ※ Remote monitoring via wired connection or Wi-Fi (requires DVRWLA)
- ※ Mouse driven comprehensive user interface RS485 control for PTZ cameras
- ※ Silent DVR operation

System

Main Processor	Embedded Processor
Operating System	Embedded LINUX

Video & Audio

Video Input	SHDV4KD - 4 channel BNC SHDV8KD - 8 channel BNC
Audio Input	SHDV4KD - 4 channel RCA SHDV8KD - 4 channel RCA
Audio Output	1 channel RCA

Display

Video Output	1 x HDMI, 1 x VGA, 1 x Auxiliary
Display Split	SHDV4KD - 1 and 4 SHDV8KD - 1, 4 and 10
Resolution	1024 x 768, 1280 x 720, 1280 x 1024, 1440 x 900, 1920 x 1080, 2560 x 1440

Recording

Video/Audio Compression	H.264 Mainprofile / G.711A
Resolution	4 Megapixel
Record Rate (Main Stream)	SHDV4KD - 4ch 4MP recording SHDV8KD - 8ch 4MP recording
Recording Mode	Manual/Motion Detection/Schedule

Playback & Backup

Sync Playback	SHDV4KD - 4ch 4MP recording SHDV8KD - 8ch 4MP recording
Backup Mode	Network/USB2.0 devices

Network

Ethernet	RI45 10M/100M
Network Functions	HTTP, IPv4/IPv6, TCP/IP, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP
Network Monitoring	Web browsers, CMS, Android & iPhone apps

Storage

Internal HDD	1 SATA HDD, up to 8TB per HDD
--------------	-------------------------------

Auxiliary Interface

PTZ Control	RS485 with multi-protocol
USB Interface	2

General

Power Supply	DC12V/2A
Power Consumption	<10W (without hard disk)
Operation Condition	0°C – +55°C / 10% – 90%
Dimensions	250(W)x230(D)x45(H)mm