




Ref: 058 Type 2 Under ground fire hydrant

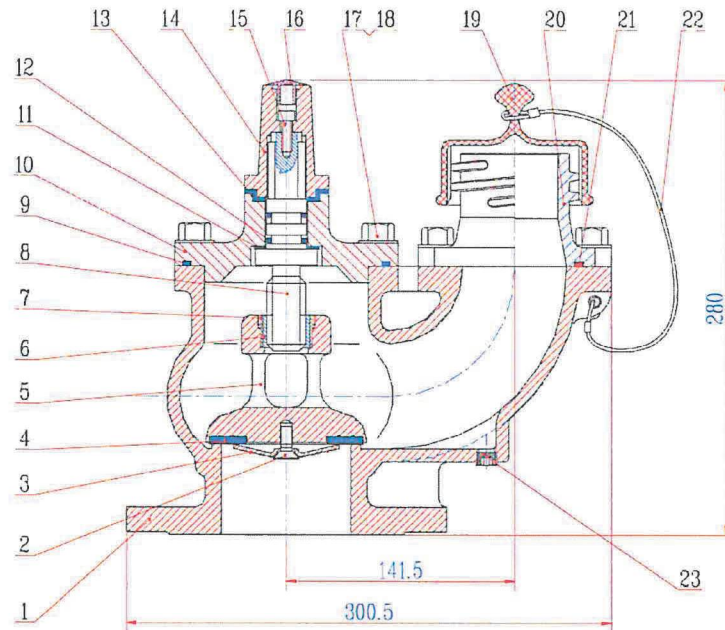


Materials List

No.	Part Name	ASTM Spec.	No.	Part Name	ASTM Spec.
1	Body	D.I. ASTM A536 65-45-12	13	Cap Gasket	Plastic
2	Bolt	Stainless Steel 304	14	Driver Cap	C.I. ASTM A126 class B
3	Holder	Stainless Steel 304	15	Bolt	Stainless Steel
4	Gasket	NBR	16	Indicator Cap	Plastic
5	Disc	D.I. ASTM A536 65-45-12	17	Bolt	Stainless Steel
6	Stem Nut	Bronze ASTM B16 C36000	18	Washer	Stainless Steel
7	Screw	Steel	19	Dust Cap	Plastic
8	Stem	Stainless Steel, AISI 416	20	Outlet	Bronze ASTM B62
9	O-Ring	NBR	21	O-Ring	NBR
10	Cover	D.I. ASTM A536 65-45-12	22	Rope	Stainless Steel
11	Washer	Brass	23	Plug	Plastic
12	O-Ring	NBR			

Notes:

1. Produced in accordance with the British National Water Council requirement.
2. The inlet flange is DN80 drilled to PN10, PN16 and ANSI B16.1 class 125.
3. The outlet is 2-1/2" London Round Thread, other outlet are available.
4. Hydrostatic Test: Body –24 Bar, Seat – 16 Bar.
5. External and internal parts: Epoxy coated.
6. Design & material are subject to change without notice.



**Specialist Manufacturers
of Fire Protection Products**

Wet / Dry Risers . Fire Hose Reel . Grooved Fittings

Elite™
A Name You Can Trust!

J.D. Fire Ltd
Jubilee Works, Russell Street,
Oldham, OL9 9LD
Tel: 0161 652 2655
Fax: 0161 624 8303
E-mail: sales@jdfire.co.uk
www.jdfire.co.uk

