





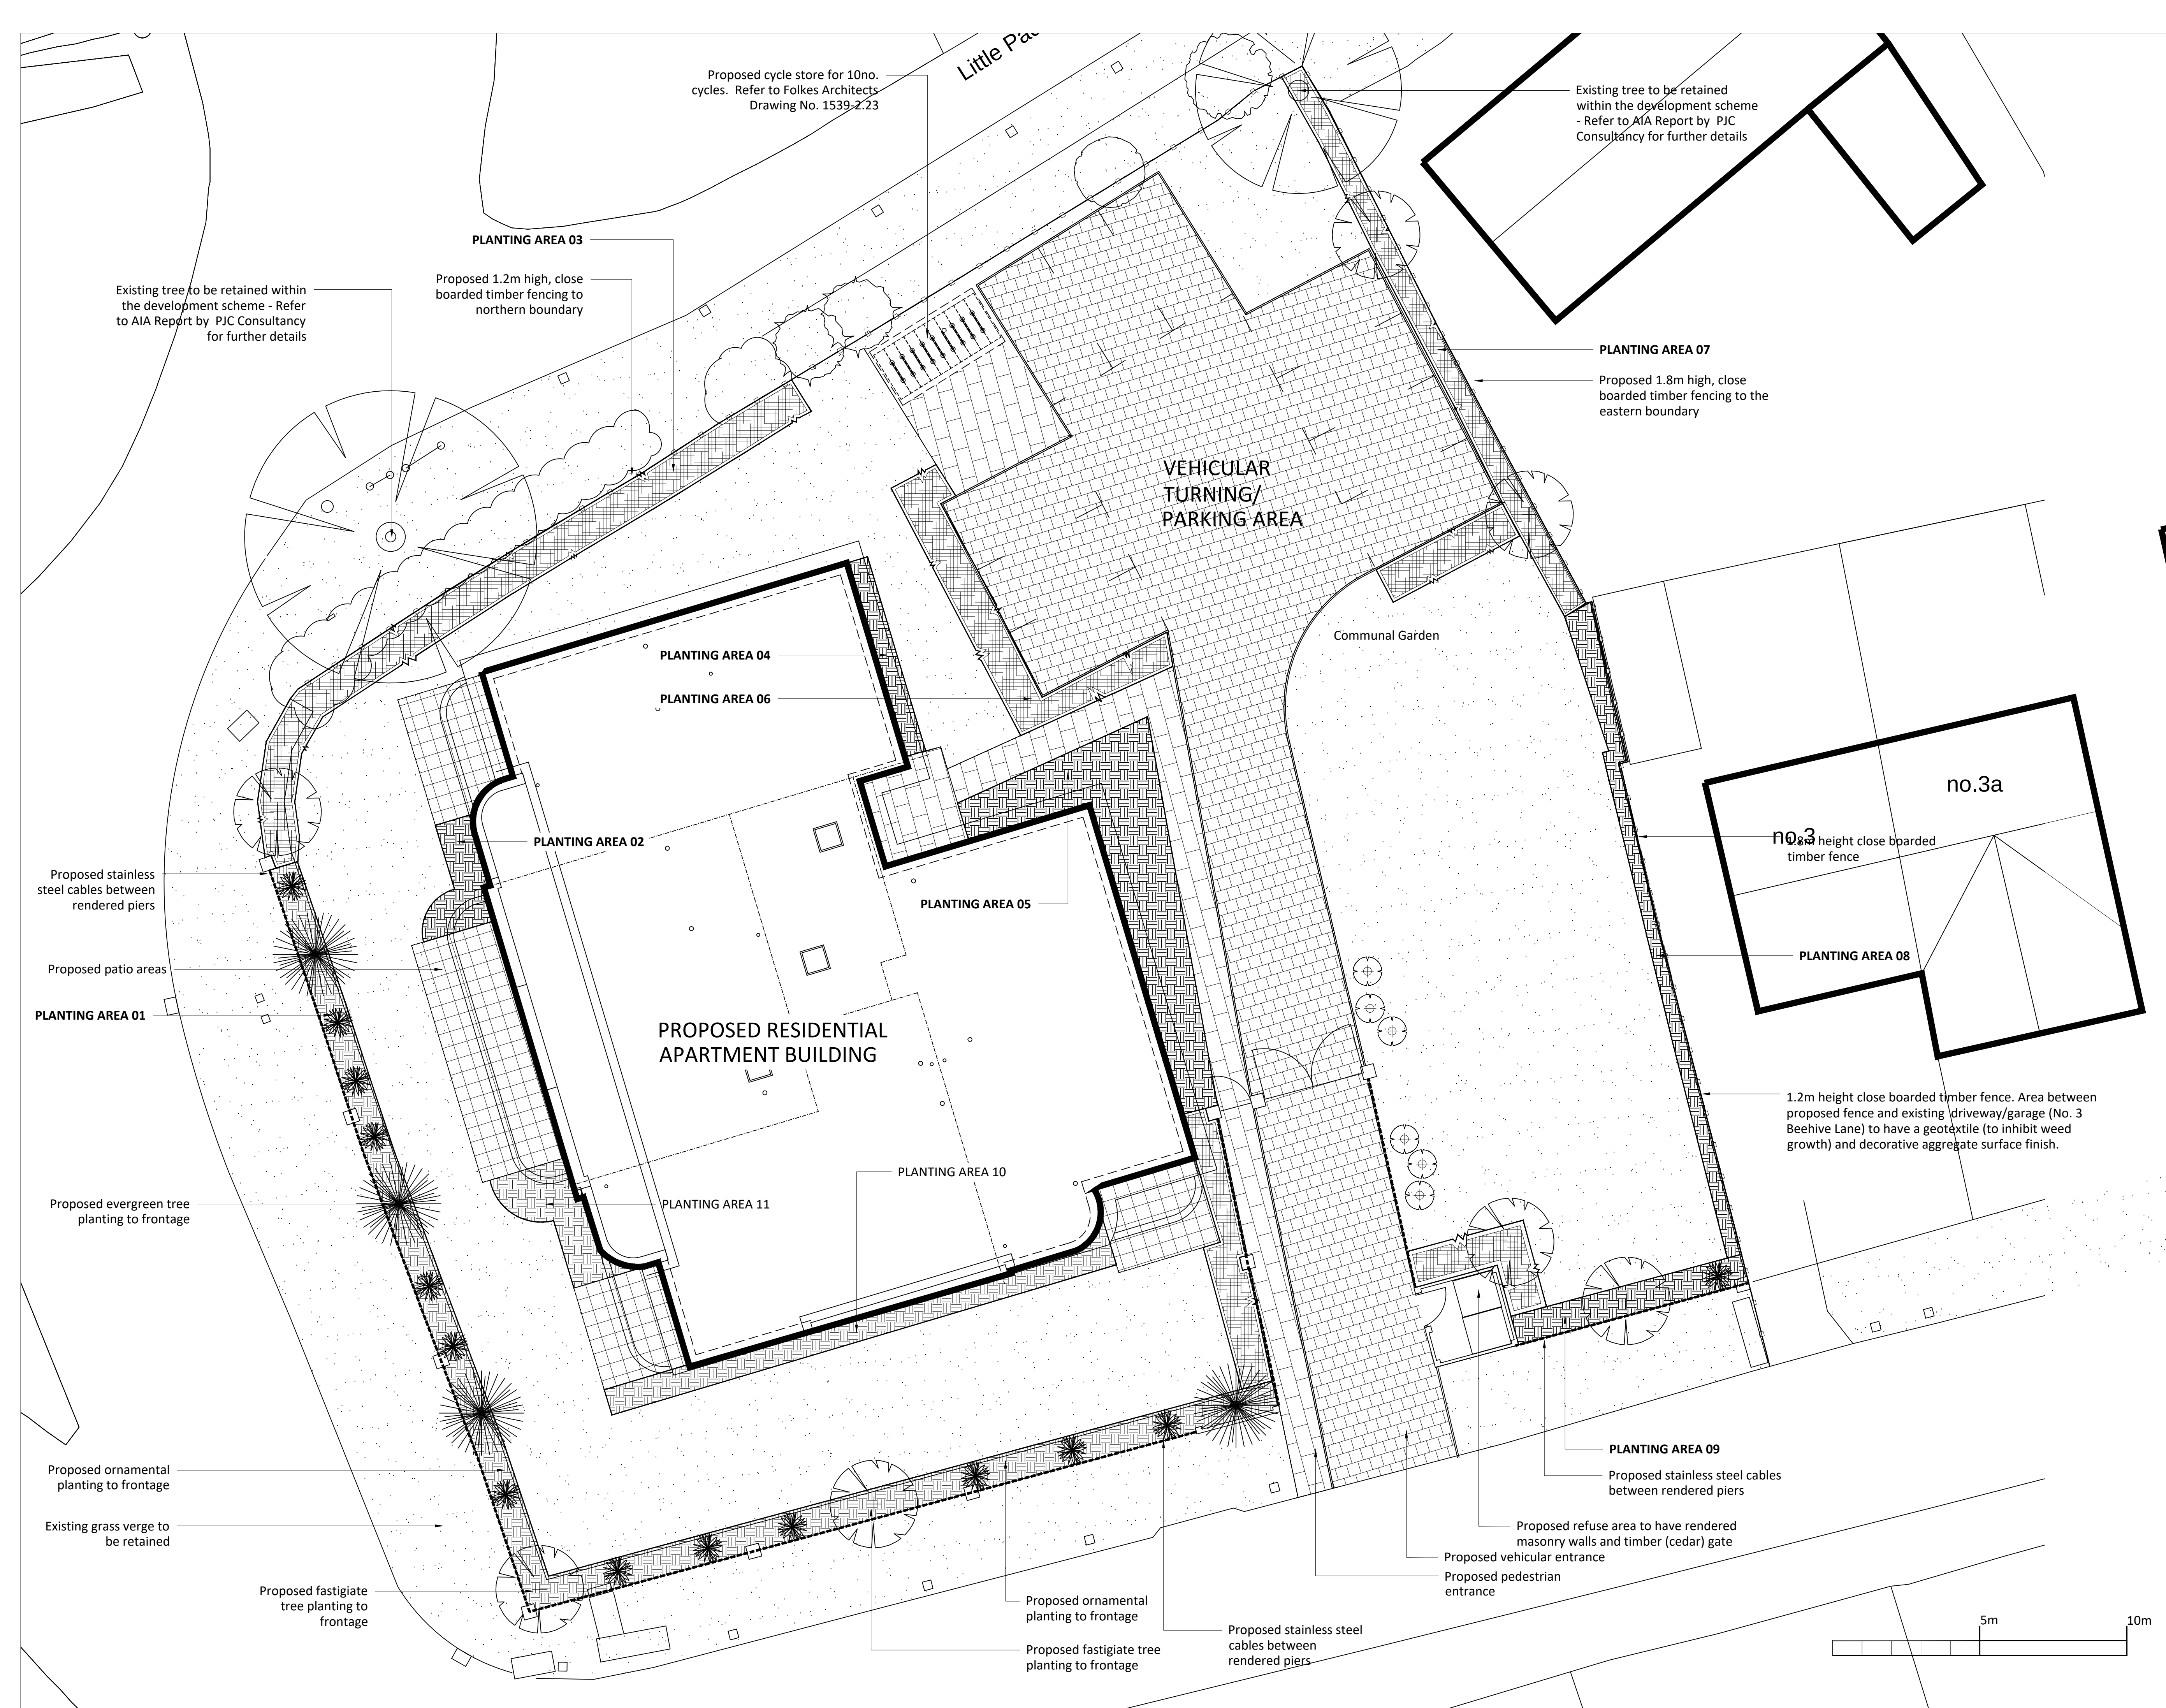

KEY




Existing Trees to be retained
 Existing trees to be retained and protected. Refer to PIC Consultancy AIA Report (PIC Ref No: PIC/3736/15) and accompanying figures for further details.



Proposed Ornamental, Evergreen Tree Planting
 Proposed ornamental, evergreen tree planting to frontage - refer to RCo 155 / 02 Detailed Planting Plan and accompanying Detailed Planting Schedule and Specification for further details.



Proposed Tree Planting
 Tree planting to be 12 – 14 cm Girth Size / 3.50 - 4.25 m height / 1.75 - 2.0m Clear Stem / Standard Heavy Stock. Trees to be supplied and planted in accordance with BS 8545: 2014 Trees: from nursery to independence in the landscape. Recommendations.



Proposed Hedgerow Planting
 Proposed ornamental / native species hedgerow planting. Planting areas to have 300mm depth (minimum) subsoil overlap with 450mm (minimum) multi-purpose topsoil to BS3882: 2015 Specification for Topsoil



Proposed Ornamental Planting Areas
 Proposed planting areas to feature a mix of flowering shrub, ornamental grass and herbaceous planting. Planting areas to have 300mm depth (minimum) subsoil overlap with 450mm (minimum) multi-purpose topsoil to BS3882: 2015 Specification for Topsoil



Proposed Specimen Evergreen Shrubs
 Proposed evergreen shrub specimens within ornamental planting areas. Planting areas to have 300mm depth (minimum) subsoil overlap with 450mm (minimum) multi-purpose topsoil to BS3882: 2015 Specification for Topsoil



Proposed Ornamental Shrub Specimens
 Proposed shrub specimens to have 300mm depth (minimum) subsoil overlap with 450mm (minimum) multi-purpose topsoil to BS3882: 2015 Specification for Topsoil



Proposed Grass Seeded / Turfed Areas
 Proposed grass seeded / turfed areas to have 300mm depth (minimum) subsoil overlap with 150mm depth (minimum) of multi-purpose topsoil to BS3882: 2015 Specification for Topsoil



Proposed Concrete Slab Paving
 Proposed patio areas to have Stonemarket Artic Granite Glacior pre-cast concrete slab paving



Proposed Concrete Slab Paving
 Proposed pedestrian paths and cycle storage area to have Stonemarket Artic Granite Glacior pre-cast concrete slab paving



Proposed Permeable Paving
 Proposed permeable paving to vehicular access drive and parking areas to be Tobermore Hydropave 240: Colour (including edging) to be Chocorot. Delineation of parking bays: Colour to be Natural.



Proposed Fencing
 Proposed fencing to be stainless steel cables between rendered pillars - refer to Folkes Architects elevations and detail.



Proposed Timber Fencing
 Proposed close boarded timber fencing to boundaries - refer to drawing annotation for heights.



Ramsay & Co
Landscape Architecture

The Studio, 68 Cuckfield Road, Hurstpierpoint, West Sussex, BN9 5NE
 T: 01273 834 198 M: 07973 770047 E: landscape@ramsayandco.co.uk

Project Title:
 South Point, Beehive Lane, Ferring, West Sussex

Globe Estates (Southern) Ltd
Drawing Title:
 Planting Layout

Scale:
 1:100@A1

Drawn:
 AR

Date:
 09-07-15

Drawing Number:
 RCo 155 / 01

Revision:
 10