




NF2471

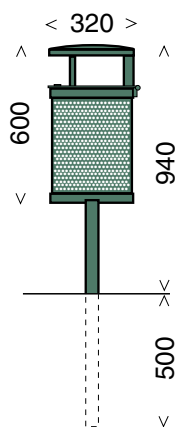

Guarantee

We issue a 5 year guarantee on bearing parts. Other parts carry a 2 year guarantee against manufacturing and materials faults. Contact Nifo-Lappset for further information.

The Jakob rubbish bin

Design: Architect Jan Rantfors

Rubbish bin in 3 mm steel which have been zinc-plated, chromitized and powder coated. The bin comes in three variations: with a 50 cm centre pole for concrete installation, for fixing to a wall and for fixing to e.g. a lamp post.

All three models have a lockable top and are fitted with practical rings for attaching bags.

Weight 17 kg. Volume 35 litres

- Custom-made hinge in stainless steel with built in stopper (100° opening)
- The robust construction minimises vandalism. The perforation makes it hard to stick posters on it.
- The convex lid stabilises the construction

Steel components

Our steel components are of high quality, zinc-plated and chromitized (12 mμ). These two methods provide double protection and high resistance to rusting.

After which the products are powder painted (80 mμ) to furnish added value in the environments in which they are installed.

Normally, no other maintenance besides cleaning is required.

Any damage incurred should be protectively treated and top-coated with two-component varnish immediately in order to retain corrosion protection and finish. Touch-up spray paints can be ordered from distributor of Nifo-Lappset AB.

The standard colours of our steel products are RAL 6012 dark green, RAL 9005 black and RAL 7042 grey.

Also available in the customer's colour of preference.

NF2471 Jakob, rubbish bin for concrete installation

NF2472 Jakob, rubbish bin for fastening to walls

NF2473 Jakob, rubbish bin for fastening to existing poles