REFER TO FABRIK DRAWING L.304

REFER TO FABRIK DRAWING L.304

REFER TO FABRIK DRAWING L.303

REFER TO FABRIK DRAWING L.303

BOUNDARY OF FUTURE DEVELOPMENT

NOTES
This drawing & the contents of it are the property of fabrik ltd. It must not be copied or reproduced without written consent. Only figured dimensions are to be taken from this drawing. All contractors must visit site and be responsible for taking and checking all dimensions related to the works shown on the drawing.

Plot 57 PG
Plot 80 PG
Plot 81 PG
Plot 82 PG
Plot 83 PG
Plot 84 PG
Plot 85 PG
Plot 86 PG
Plot 87 PG
Plot 88 PG
Plot 89 PG
Plot 90 PG
Plot 91 PG
Plot 92 PG
Plot 93 PG
Plot 112 PG
Plot 113 PG
Plot 114 PG
Plot 115 PG
Plot 116 PG
Plot 117 PG
Plot 118 PG
Plot 119 PG
Plot 126 PG
Plot 127 PG
Plot 128 PG
Plot 137 PG
Plot 138 PG
Plot 143 PG
Plot 144 PG
Plot 145 PG
Plot 146 PG
Plot 147 PG
Plot 148 PG
Plot 149 PG
Plot 150 PG
Plot 151 PG
Plot 152 PG
Plot 153 PG
Plot 154 PG
Plot 155
Plot 156 PG
Plot 157 PG
Plot 158 PG
Plot 159 PG
Plot 160 PG
Plot 161 PG
Plot 162
Plot 163 PG
Plot 164 PG
Plot 165 PG
Plot 166
Plot 167 PG
Plot 168 PG
Plot 169 PG
Plot 170 PG
Plot 171 PG
Plot 172 PG
Plot 173 PG
Plot 174 PG
Plot 175 PG
Plot 176 PG
Plot 177 PG
Plot 178 PG
Plot 179 PG
Plot 180 PG
Plot 181 PG
Plot 182 PG
Plot 183 PG
Plot 184 PG
Plot 185 PG
Plot 186 PG
Plot 187 PG
Plot 188-196
Plot 197 PG
Plot 199 PG
Plot 200 PG
Plot 201 PG
Plot 202 PG
Plot 203 PG
Plot 204 PG
Plot 205 PG
Plot 206 PG
Plot 207 PG
Plot 208 PG
Plot 209 PG

Native Mix Planting

Acer campestre	20%	29
Cornus sanguinea	15%	22
Crataegus monogyna	20%	29
Ilex aquifolium	2%	3
Prunus spinosa	15%	22
Rosa canina	8%	12
Sambucus nigra	10%	14
Ulex europaeus	10%	14

Planting Guidelines
All planting and landscape operations should comply with the requirements specified in BS 3936 (1992) Nursery Stock Part One and BS 4428 (1989) Code of Practice for General Landscape Operations (excluding hard surfaces)

Maintenance Notes
- All landscaped areas to be maintained for 12 months.
- All planted areas to be forked through regularly to keep soil loose and aerated.
- All litter and debris to be removed from landscaped areas and carted off site.
- Plants refirmed and straightened as required.
- Plants pruned as instructed by the Landscape Architect to promote healthy growth and to remove dead and diseased wood.
- Watering as required to maintain healthy growth (allow for 12 N° waterings minimum).
- Any species that dies or fails to establish in the first five years should be replaced by identical species.
- Allow for a minimum of 18 maintenance visits.

Additional Notes
- Existing levels to be preserved around existing trees and vegetation to be retained.
- Existing trees and vegetation to be retained are to be protected during construction to BS 5837,2005, (Refer to tree survey carried out by tree fabrik / July 2007)
- Any necessary tree works to be carried out by an approved tree surgeon to BS 3996.
- All planting in visibility splays should be below 600mm in height.

Proposed Tree Planting
To be planted as rootballed stock in the first available planting season after construction. Stock size proposed is as shown and tree support shall be two softwood stakes @ 7.5cm diameter @ 230cm length and should be driven into the ground to knee-height with ties and horizontal cross support.
Tree pit: 750x750x900mm depth

Proposed Shrub Planting
To be planted as container grown stock in the first available planting season after construction, Stock sizeto be 3-5litre, type and densities proposed are as shown, Shrubs are to be planted in a minimum depth of 450mm of approved topsoil overlying clean subsoil previously broken up by the Main Contractor to alleviate any compaction, Area planted to be spread with 75mm deep of approved bark mulch.

Proposed Hedge Planting
Hedgerow planting to be planted 300mm apart in double staggered rows at 450mm centres with plants of the same species in groups of 3 to 5 to be planted in the first available planting season after construction in a minimum 450mm depth of clean topsoil, with a minimum of 50mm approved bark mulch applied.

fabrik
38a High Street
Alton
Hampshire
GU34 1BD
T : 01420 593250
F : 01420 544243
E : studio@fabrikuk.com
W : www.fabrikuk.com

Soft Landscape

- Existing Trees to be retained and protected
- Proposed Trees
- Proposed Specimen Shrub
- Existing Vegetation to be retained
- Proposed Hedge Planting
- Proposed Native Hedge Planting
- Proposed Shrub Planting
- Proposed Grass
- Proposed Meadow Grass
- Proposed Bulb Planting
- Site Boundary

Rev.	Date	Reason	Name

External References:
- J:\Job Files\D1530 Felpham\Drawings\fabrik\Alton\Recvd 110630\D1530_working - back to manchester 30_06_11\BASE LAYOUT rev R\BASE LAYOUT rev R_copy.dwg

NOTES:
This drawing is the property of fabrik ltd. It must not be copied or reproduced without written consent. Only figured dimensions are to be taken from this drawing. All contractors must visit site and be responsible for taking and checking all dimensions related to the works shown on the drawing.

- for full details of tree survey and tree protection refer to tree:fabrik drawing no. TF607/Tpp/101-110 Rev F.
- Footpaths in POS areas to be finalised on site
- for plant schedule refer to fabrik drawing D1530.L.306

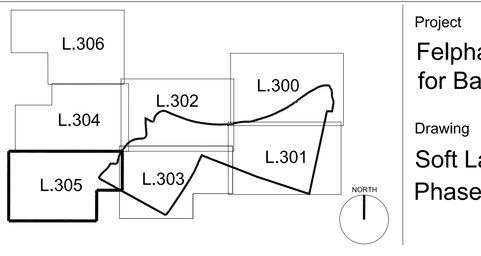

Project
Felpham, Bognor Regis
for Barratt & David Wilson Homes

Drawing
Soft Landscape Planting Plan
Phase C

Scale: 1 : 250@A0
Date: Jun '11
Drawn: ew
Drawing No.: D1530.L.305
Revision: -

- [ ] Preliminary
- [x] Issued for Planning Approval
- [ ] Issued for Construction
- [ ] Issued for Design/Information
- [ ] Issued for Tender
- [ ] As Built

Drawing sheet size - A0

Copyright Reserved ©