

*Classically styled with distinctive mouldings that create the appearance and feel of traditional entrance doors.*

### USES

Fitted with a mobility threshold as standard, these doorsets are suitable for most new buildings and renovation projects.

### CONSTRUCTION

Heavy 57mm thick door sections with wide rails and muntins in Conservation Ovolo or Limbs Tongue profiles. Panels are exterior grade 45mm thick composite insulated 'warm' construction with a 'U' value 1.2 w/m<sup>2</sup>k featuring raised and fielded profiles both sides.

### OPERATION

Factory hung doorset with key operated multi-point locking system.

### GLAZING

Factory fitted double glazing where appropriate. Alternatively these lights can be left unglazed for customers to fit their own decorative glass panels after installation.



## CONSERVATION ENTRANCE DOORSETS STANDARD FEATURES

### MATERIAL

Larch/Douglas Fir frame, doors constructed in laminated knot free (clear graded) Larch or solid Douglas Fir at our option. Panels are exterior grade composite type.

### PROFILE

Square frame and Ovolo door profiles.

### GILLS

Extruded aluminium mobility threshold strip mounted on a solid 142mm deep stained Hardwood sub sill.

### FRAME

68mm thick head and jamb.

### WEATHERSEAL

Fitted to frame.

### OPERATION

Factory hung to open inwards, right hand hinge viewed from outside. (Not available opening outwards).

### LOCKING SYSTEM

Multi-point, consisting of upper and lower claw bolts with a central mortice dead bolt and latch, all key operated from both sides via double cylinder. Bolt keepers are high security adjustable boxed version mounted into frame.

### IRONMONGERY

Door hung on brass hinges. Brass key escutcheons and internal lever handle to locking system. Large brass centre door knobs and traditional knocker (protecting frame are removed for delivery).

### PAINT

3 coats white paint.

### GLASS

Double glazed Low 'E' clear toughened safety glass where appropriate.

### SIZES

Standard sizes and patterns or made to measure as required (minimum overall frame width to comply with mobility access is 955mm).

### SECURITY

Pass 23/24 approval using anti-pull / anti-pick lock. Meets Secured by Design requirements.



## CONSERVATION ENTRANCE DOORSETS OPTIONS

### PROFILE

Limbs Tongue door profiles.

### OPERATION

Factory hung opposite hand left hand hinge viewed from outside.

### IRONMONGERY

- Thumb turn in lieu of internal key operated cylinder
- Letter plate and tidy including cut out
- Alternative finishes in polished and satin chrome
- Anti-bump cylinder

### COLOURS

Selected colour range. See website for RAL reference required.



### GLASS

Unglazed for customer to supply and fit own decorative glass on site.

Sheet glass incorporated into double glazed units.

### DECORATIVE PANIGLASS OPTIONS

A range of decorative fanlight grilles are available as shown applied either side of the glass panel. Integral glass spacer bars are not available with these designs.

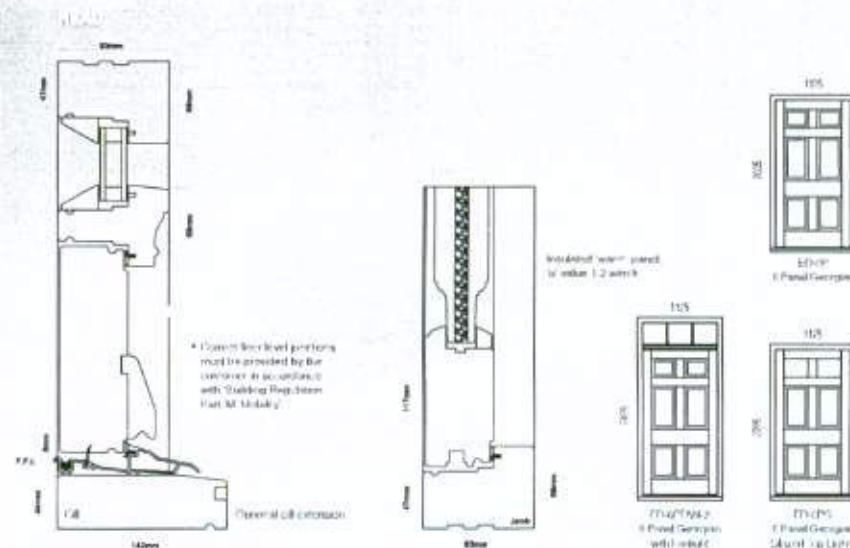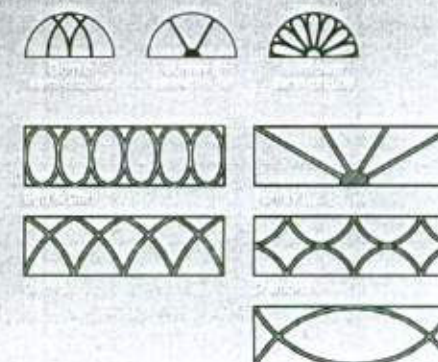

#### Ironmongery

Door hung on brass hinges. Brass key escutcheons and internal lever handle to locking system. Large brass centre door knobs and traditional knocker (projecting items are removed for delivery)

#### Weatherseal:

Fitted to frame

#### Paint:

3 coats white paint

#### Glass:

Double glazed Low 'E' clear toughened safety glass where appropriate

#### Sizes:

Standard sizes and patterns or made to measure as required (minimum overall frame width to comply with mobility access is 955mm)

#### Options Available

##### Profile:

Lambs tongue door profiles

##### Cills:

Loose mobility threshold for site fitting without Hardwood sub cill

##### Operation:

Factory hung opposite hand left hand hinge viewed from outside

##### Ironmongery:

- Thumb turn in lieu of internal key operated cylinder
- Letter plate and tidy including cut out
- Alternative finishes in Polished and Satin Chrome

##### Paint:



2 coats of white paint for on-site finishing (Translucent stains are not available)

##### Glass:


Unglazed for customer to supply and fit own decorative glass on site

##### Fanlight Designs

A range of decorative fanlight grilles are available as shown applied either side of the glass panel. Integral glass spacer bars are not available with these designs.




Egg & Dart




Gothic





Fish Tail



Sunray 5



Diamond

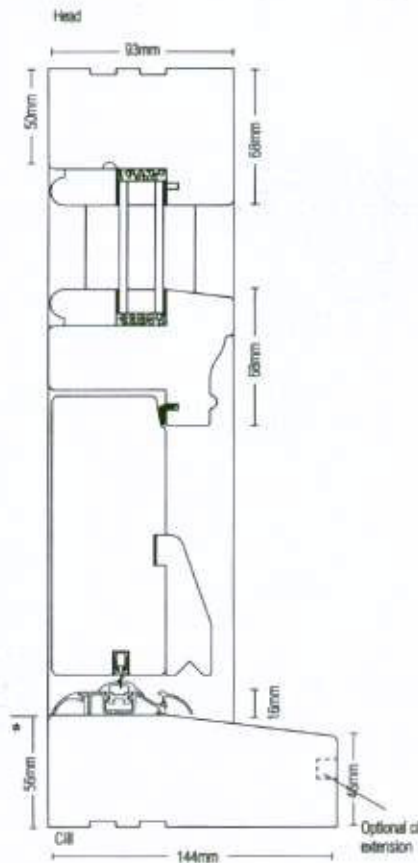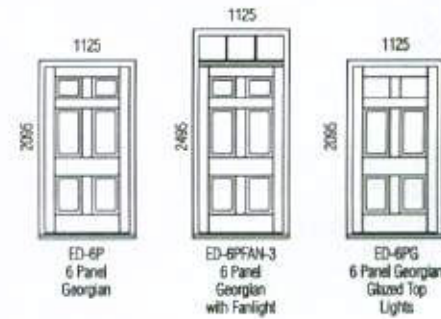

- Correct floor level junctions must be provided by the customer in accordance with Building Regulation Part 'M' Mobility.



Product drawing information is available from our website  
[www.mumfordwood.com](http://www.mumfordwood.com)  
or on disk in Autocad formats.

