

CONSERVATION SASH STANDARD FEATURES



MATERIAL

With the exception of cills and glazing bars, all framing, sash stiles and rails are in laminated knot free clear graded Larch or solid Douglas Fir at our option.

PROFILE

Ovolo moulded sash and slender 22mm wide Ovolo moulded glazing bars internally. External glazing bars with putty line profile.

EXTERNAL LINER

Plain square liners.

CILLS

Flush hardwood painted.

BALANCES

Heavy duty pre-tensioned spiral spring balances.

IRONMONGERY

Fitted brass traditional sash catch.
Sash lifts provided loose for site fitting.
(2 catches on windows over 1125mm wide)

WEATHERSEAL

Full standard sealing with Sashglide® insert weatherstrip.

PAINT


Three coats white paint.

GLASS

Mandatory factory double glazed units with Low 'E' toughened glass.

SIZES

Selected module sizes or made to measure available.

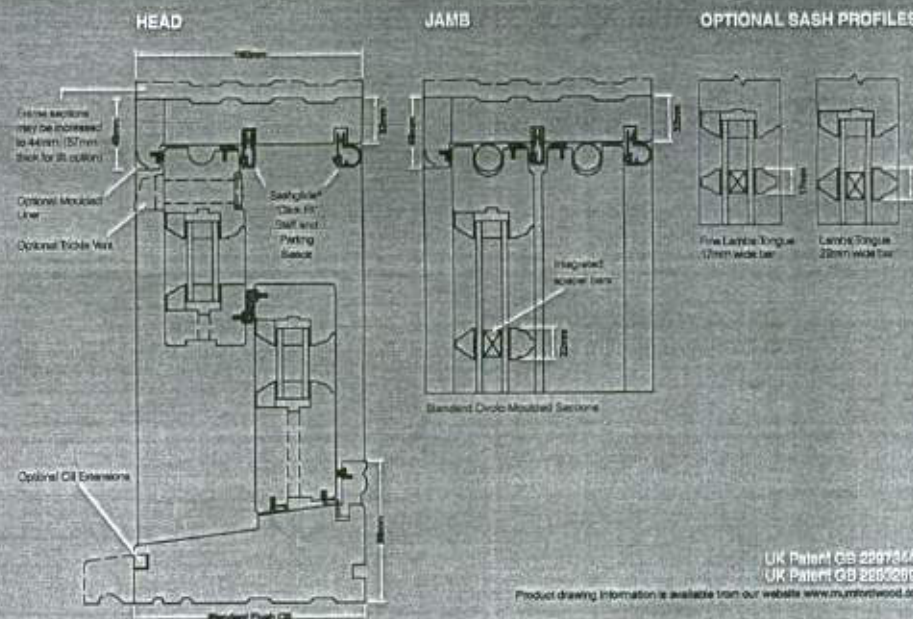

UK Patent GB 2897344B
UK Patent GB 2897297B

Product drawing information is available from our website www.mumfordwood.com

CONSERVATION SASH OPTIONS

PROFILE

Lamb's Tongue or Fine Lamb's Tongue glazing bar.

MOULDED EXTERNAL LINER

Moulded to match sash profile.

EXTENDED CILLS

Projections available:
35mm (195mm overall)
60mm (220mm overall)
85mm (245mm overall)

GLASS TYPE

Alternative types include obscure, toughened or laminated.

PERIOD GLASS

Sheet glass incorporated into double glazed units.

SLIDING SIDELIGHTS

On triple windows.

SASH HORNS

Shaped horns to top sash.

IRONMONGERY

Catch - polished or satin chrome.
Sash lifts - polished or satin chrome.
D pull handles for top sash.
Security lock stop.
Trickle vent.
Slide fit in bottom sash.

BAY WINDOWS

45 or 90 degree posts and prepared links.

PAINT

Selected colour range.
See website for RAL reference required.

ACOUSTIC SPECIFICATION

Improved acoustic performance to give 36db.

ECO SPECIFICATION

BFRC A-C rated frame.



CONSERVATION CASEMENTS

A high performance casement window in a choice of frame and sash profiles to match other conservation products whilst retaining the flush-line traditional appearance of casement to frame.

CONSTRUCTION

As the profile sections shown with optional choices shown on page 36. Non opening lights generally have a fixed sash to match sight lines.

OPERATION

Designed for maximum flexibility of opening types and casement sizes as shown. Hinge systems are of quality manufacture to exacting specifications with a high degree of quality control. Casement closure is by single locking handle operating a multi-point espagnolette with night vent keeper position. Please refer to section on escape for correct hinge specification.



SIZES

Made to measure, no standard sizes as virtually any pattern is possible within the parameter guide shown on page 35. Gothic patterns are available in standard module widths as shown on page 37.



SIDE HUNG 01
Friction hinge opens in 90 degrees



SIDE HUNG TRADITIONAL 02
Traditional lift off hinge with concealed adjustable friction stay to frame head



DIRECT GLAZE 05
Rebated outer frame beaded for direct glazing



TOP HUNG 03
Friction hinge opens to 90 degrees (45 degrees over 700mm high). Also available in top swing reversible (07)




FIXED SASH 04
Rebated frame with fixed sash maintains opening casement sight lines.



FRENCH WINDOW 06
No central frame mullion and utilises a side hung door hinge lift off system with hidden flush bolts within the slave leaf. Primary opening leaf fitted with espagnolette locking as standard, with dummy handle to slave leaf. Concealed friction stay to head.

STANDARD FEATURES

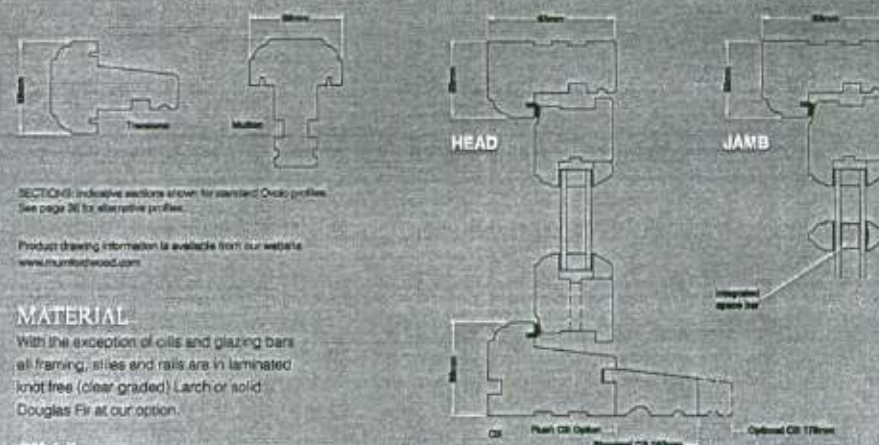

SECTION 05: Indicative sections shown for standard Ovolo profiles. See page 36 for alternative profiles.

Product drawing information is available from our website www.mumfordwood.com

MATERIAL

With the exception of oils and glazing bars all framing, sashes and rails are in laminated knot free (clear graded) Larch or solid Douglas Fir at our option.

GLASS

Hardwood painted with 60mm projection (153mm overall).

PROFILE

Ovolo moulded frame and casement.

FRAME

56mm thick head and jambs.

OPERATION CHOICE

As shown on opposite page.

IRONMONGERY

Multi-point espagnolette locking.

HANDLE

Brass plated locking.

WEATHERSEAL

Fully sealed.

PAINT

3 coats white paint.

GLASS FACTORY

Double glazed with Low 'E' toughened glass.

SIZES

Made to measure.

SIZE PARAMETER CHART - SINGLE OPENING

Window type	Overall frame maximum size		Overall frame minimum size	
	Width (mm)	Height (mm)	Width (mm)	Height (mm)
Side Swing 01	650 or 900	1500 or 1350	450	495
Top Swing 02	1400	1400	450	350
Side Hung 03	700 or 900	1600 or 1400	450	495
Fixed Sash 04	2400	2400	But Height + Width not to exceed 3600	
Direct Glaze 05	2400	2400		
French Window 06	1400	1600	840	875
SBD Casement 07	660 or 778	1540 or 1350	478	495 68mm head only