

Householder and other minor extensions in Flood Zones 2 and 3

Applications for planning permission should be accompanied by a completed form. An electronic version can be submitted by 'printing' it to a PDF writer.

This guidance is for domestic extensions and non-domestic extensions where the additional footprint created by the development does not exceed 250 sq. metres. It should NOT be applied if an additional dwelling is being created, e.g. a self contained annex.

We recommend that:

Planning Authorities:

- 1) Refer the applicant to the standing advice pages on the Environment Agency website or provide them with a copy of this page for them to include as part of the planning application submission.
- 2) Check the planning application to ensure that one or other of the mitigation measures from the table below has been incorporated.

Applicants:

Complete the table below and include it with the planning application submission. The table, together with the supporting evidence, will form the Flood Risk Assessment (FRA) and will act as an assurance to the Local Planning Authority (LPA) that flood risk issues have been adequately addressed.

Applicant to choose one or other of the flood mitigation measures below	Applicant to provide the LPA with the supporting information detailed below as part of their FRA	Applicant to indicate their choice in the box below. Enter 'yes' or 'no'
Either ; Floor levels within the proposed development will be set no lower than existing levels AND, flood proofing of the proposed development has been incorporated where appropriate.	Details of any flood proofing / resilience and resistance techniques, to be included in accordance with ' <i>Improving the flood performance of new buildings</i> ' CLG (2007)	yes
Or; Floor levels within the extension will be set 300mm above the known or modelled 1 in 100 annual probability river flood (1%) or 1 in 200 annual probability sea flood (0.5%) in any year. This flood level is the extent of the Flood Zones	This must be demonstrated by a plan that shows finished floor levels relative to the known or modelled flood level. All levels should be stated in relation to Ordnance Datum ¹	

Subterranean/basement extensions

Due to the risk of rapid inundation by floodwater basements should be avoided in areas at risk of flooding. The LPA may hold additional guidance for basement extensions.


Self-contained basement dwellings are 'highly vulnerable' development and should not be permitted in Flood Zone 3. We are opposed to these developments.

Continued...

¹ Ordnance Datum or the abbreviation 'OD' is the mean level of the sea at Newlyn in Cornwall from which heights above sea level are taken. The contour lines on Ordnance Survey maps measure heights above OD for example, though these are not accurate enough for a flood risk assessment..

Recommended ground-supported and acceptable suspended floor arrangements are presented in Figures 6.4 to 6.6. If suspended timber flooring is a favoured option, then a combination of construction elements that is likely to minimise problems associated with flooding is shown in Figure 6.6. This is referred to as a “Restricted option”

Figure 6.4 Ground-supported floor – Preferred option

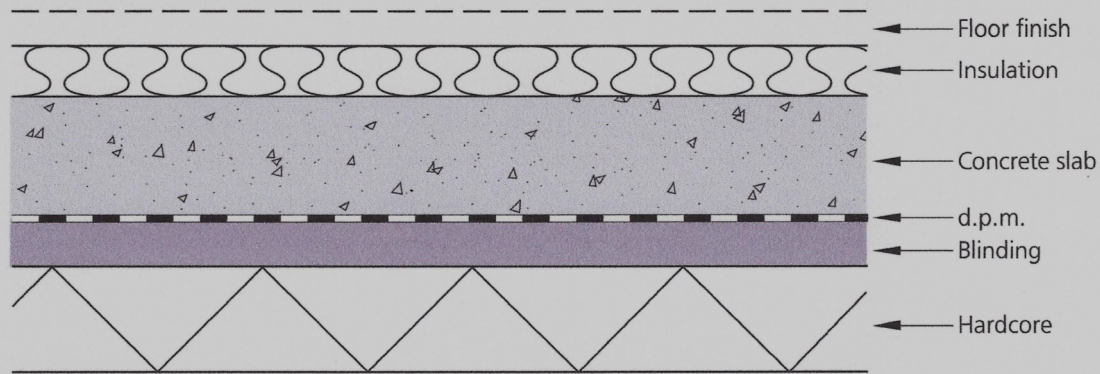

- Hardcore bed at least 100mm thick of well compacted inert material, blinded with fine inert material to provide a smooth base
- Damp proof membrane of polythene at least 1200 gauge
- Concrete slab at least 150mm thick
- Insulation as rigid closed-cell material
- Ceramic tiles or stone floor finishes and skirting boards.

As we are in a level 2 flood area we will be installing the ground floor as above.

We have not experience any flooding to date in or around the property