

BASICCHARGE:EV

EV OPENCHARGE

Type 2, Mode 3 Charging Socket(s)

(GPRS/Ethernet Communication)

3.6kW or 7.2kW

ROLEC

EV Charging

MANUFACTURED IN THE UK



COMPLIANT



The BASICCHARGE:EV OPENCHARGE pedestal replicates Rolec's world-leading Classic utility pedestal, which provides a simple and effortless EV charging experience for all users.

This affordable OCPP compliant pedestal can offer a simple pay-to-charge solution via the EV driver's smartphone and/or RFID card/fob authorisation through any chosen OCPP back office management system.

Available in either 1way or 2way versions, providing Mode 3 fast charging in 3.6kW or 7.2kW speeds, this unit features a built in GPRS antenna and Ethernet connection.


PRODUCT FEATURES

- Mode 3 (IEC 61851-1) fast charging
- Available in 1way / 2way & 3.6kW (16A) / 7.2kW (32A) versions
- Type 2 (IEC 62196) charging socket(s) c/w security hatchlock(s)
- OCPP 1.6 compliant (Can integrate with any back office)
- Remote firmware updates
- Built-in RFID reader
- Photocell controlled LED amenity lighting head
- Surface or roof mountable
- Built-in AC overload protection (MCB)
- Built-in AC & DC fault protection (RCD)
- Built-in LED charging status indicator socket halo(s)
- Built-in class 1 MID compliant kWh meter(s)
- EV driver Pay-to-Charge smartphone integration
- OLEV Grant Fundable under the Workplace Charging Scheme
- Easy to install & maintain
- IP rated, UV stabilised & corrosion resistant

Unit shown: BASICCHARGE:EV
EV OPENCHARGE
2way Socket (Type 2) Charging Pedestal

Chargepoint Management

Unless otherwise stated at time of order, EV OPENCHARGE units will be automatically programmed to operate via the Rolec VENDELECTRIC back office management system.

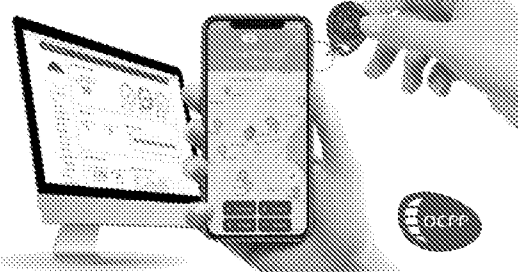


See the VENDELECTRIC sheet Overview for details




OCPP 1.6
Compliant



Grant
Fundable



GPRS / Ethernet
Connectivity



Branding & Colour
Options Available






LED Amenity
Lighting



IP Rated &
UV Stabilised

SPECIFICATIONS

Product Code	OCPP0210	OCPP0211	OCPP0220	OCPP0221
Charging Socket(s)	1x Type 2 (IEC 62196)	1x Type 2 (IEC 62196)	2x Type 2 (IEC 62196)	2x Type 2 (IEC 62196)
Rated Output	3.6kW	7.2kW	3.6kW	7.2kW
Rated Current	16A	32A	16A	32A
Charge Protocol	Mode 3			
Input Voltage	230V AC/50Hz (Single Phase)			
AC Overload Protection	1x C20A MCB	1x C40A MCB	2x C20A MCBs	2x C40A MCBs
AC & DC Fault Protection	1x Type B RCD		2x Type B RCDs	
Cable Terminals	3x 50mm			
Communications	GPRS (Recommended signal strength of 1+ CSQ or above) RJ45 ethernet connection			
Standby Consumption	Approx 0.3kW per day			
Certifications & Compliances	EV Charging Compliance – EN 61851-1:2011, BS EN 62196-1:2014, BS EN 62196-2:2017 Wiring Regulations – BS 7671 EMC Compliance – EN 301 489-01 V2.2.0, EN 301 489-03 V2.1.1, EN 301 489-52 V1.1.0, EN 50470-1:2006 (1x Skts) or EN 55032:2012 (2x Skts) Spectrum/Telecom – EN 301 511 V9.0.2, EN 300 330 V2.1.1 RED – 2014/53/EU – EN 62311:2006 Safety Compliance (LVD) – 2014/35/EU Environmental Protection – Enclosure IP65, Socket IP54 (BS EN 60529:1992+A2:2013)			
Dimensions	205mm x 1130mm x 205mm (W x H x D)			
Pedestal Material	High impact resistant aluminium composite outer shell			
Internal Chassis	Heavy duty, hot dipped galvanised steel			
Operating Temperature	-30°C to +50°C			
Standard Body Colour	Black (Other colours available upon request)			

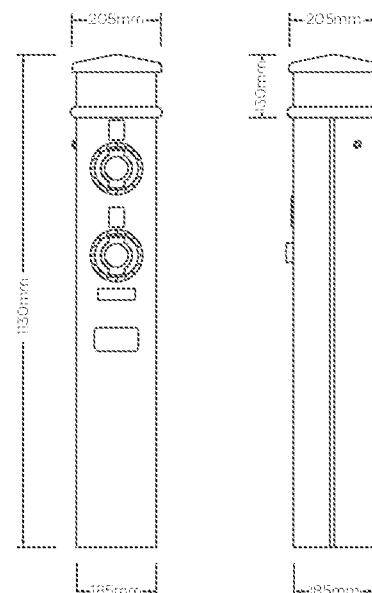

EV OPENCHARGE

- Smart charging control via mobile phone and/or RFID
- Can integrate with any chosen OCPP back office management system
- Open Charge Point Protocol 1.6 (OCPP 1.6)
- On board GPRS modem with antenna
- Ethernet connection

OPTIONS & ACCESSORIES

- RFID card/fobs
- Load Manager system (electrical distribution management)
- Available with powder coated aluminium or stainless steel outer shell
- Corporate branding (colours, logo badge, etc.)
- Galvanised steel ground mounting base
- Protection barriers & charge point signage
- EV charging cables (Type 1 to Type 2 or Type 2 to Type 2)



Images are for marketing purposes only and are not contractual © 2020



MEMBER OF THE COUNCIL OF EUROPE

@RopecEV
/Ropec-Services
www.ropecserv.com

Ropec Charge EV / OpenCharge Data Sheet