

MOW COTTAGE, WORMS LANE, FELPHAM

Replace burnt down cottage with a similar sized single storey property - FP/64/19/PL

SCHEDULE OF FINISHES

ELEVATIONS

- | | | |
|------------------|---|--|
| Brickwork | - | Forterra Farmstead Antique Red 65mm
https://www.forterra.co.uk/bricks/brick-detail/farmstead-antique-brick |
| Cladding (porch) | - | Softwood pre-treated timber featheredge boards, 2400 x 125 x ex22mm, with 38x38mm stop ends on corners. |

ROOF

- | | | |
|-----------|---|---|
| Tile | - | Redland concrete plain tile, Natural Red with granular finish, bonnets to the hips and half round to the ridge
https://redland.co.uk/products/plain-tile-range/plain-tile |
| Flat roof | - | composite GRP fibreglass finish |

WINDOWS/DOORS

- | | | |
|---------|---|--------------------------------------|
| Windows | - | white PVCu plastic and double glazed |
| Doors | - | PVCu composite door |

EAVES


- | | | |
|---------------|---|--|
| Soffit/fascia | - | no soffit/fascia, just exposed rafter feet with stained black finish |
|---------------|---|--|

R/W GOODS

- | | | |
|-----------|---|---|
| Guttering | - | black half round guttering with 63mm diameter downpipes |
|-----------|---|---|

EXTERNAL LIGHTING

- | | | |
|----------|---|---|
| Fittings | - | 8W LED external bulkhead security light (black) fitted with Dawn to Dusk PIR sensor.
https://www.screwfix.com/p/lap-ar0506-led-pir-bulkhead-black-670lm-8w/6470v |
|----------|---|---|

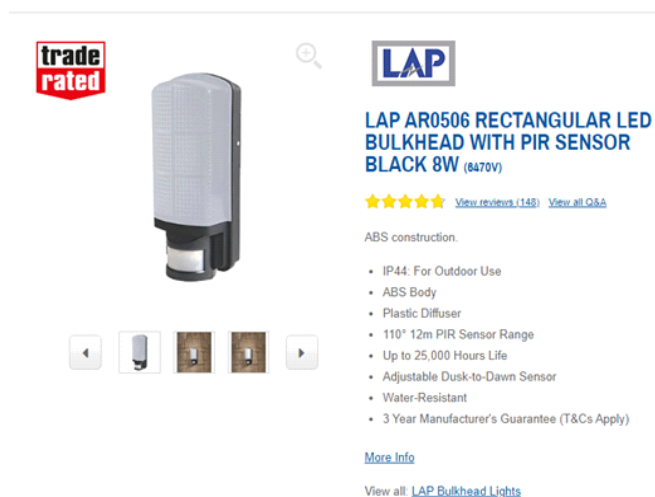

EXTERNAL WORKS

- Driveway MOT type 1 crushed stone with timber formwork edging.
- Path 600x600mm Marshall Saxon paving slabs (buff) butt edged together.

<https://www.jewson.co.uk/p/marshalls-saxon-paving-slab-buff-600-x-600-x-35mm-LSMSN312>



THE CONTRACTOR IS TO PROVIDE SAMPLES FOR APPROVAL BY THE CLIENT AND THE LOCAL PLANNING AUTHORITY WHERE REQUIRED.

Wayne Gander MCIAT
Chartered Architectural Technologist
98 Durrington Lane, Worthing,
West Sussex, BN13 2RQ
M 07808 887896
Email : waynegander08@gmail.com