

0800 389 9072

Email: sales@ablecanopies.co.uk
www.ablecanopies.co.uk



To: Paul Hull
Company: Bishop Tufnell CE Infant School
Pennyfields
Felpham
Bognor Regis
West Sussex
PO22 6BN

Quotation No: 12908
Job No: 56069JF

Contents:
Page 1: Product Image & Price
Page 2: Technical Specification
Page 3: Technical Drawings
Page 4: Choice of Colour
Page 5: Optional Extras

Date: 7th March 2013

1 of 5. Product Image and Price

Quote to supply and install the **Ulverston Waterproof Umbrella** as per specifications outlined on page 2.



Please note pictures are for illustrative purposes only and shows a 6metre Umbrella.

Total cost powder coated only:

Payment terms: 50% deposit upon order, remainder on completion.

If yellow roof required, this will be an additional cost of

Head Office | 8 - 10 Faraday Close, Gorse Lane Industrial Estate, Clacton-on-Sea, Essex CO15 4TR | Fax: 01255 425541



0800 389 9072

Email: sales@ablecanopies.co.uk
www.ablecanopies.co.uk



2 of 5. Technical Specification

Quotation No: 12908
Job No: 56069JF

Item	Technical Specification
Roofing	Technical properties of the Precontraint ® 502 waterproof fabric material Yarn 1100 dtex PES HT Weight 590 g/sqm Tensile strength (warp/weft) 250/250 daN/ 5 cm Tear strength 25/20 daN Adhesion 9/9 daN/ 5cm Finish vernis Biface Guarantee: 5 year guarantee on structural strength of fabric
Posts	139mm x 6mm tubular steel posts (219mm x 8mm) powder coated only. At an additional cost available galvanised or both galvanised and powder coated for ultimate corrosion protection. Posts can be powder coated to any standard RAL colour. Galvanised posts are finished to BS EN ISO 1461:1999.
Weather resistance	Waterproof tensile roof with high UV protection.
Installation	All installation teams have received extensive health and safety training and have been CRB checked. Whilst every care is taken when excavating post holes, Able Canopies will not accept responsibility for any damage to underground drains, water pipes, electrical cables or any other buried services unless their position is clearly indicated before excavation takes place Please note: If your building control or planning officer requires additional foundation mass or rainwater drainage over and above what has been quoted for this will be at an additional cost to you. If site specific structural calculations are required these will be at an additional cost.
Method of fixing	Posts are fastened to a bolt cage which is set into a minimum meter square concrete foundation (base size is post code specific). The bolt cage is made up from 4 no. M24 x 600 holding down bolts. Please see technical drawings.
Drainage	Drainage is not applicable as water is widely displaced
Guarantee	Up to a 10 year guarantee on the white fabric and a 5 year guarantee on all coloured fabrics. Galvanised posts have a full 10 year guarantee. Powder coated only posts have a 5 year guarantee.
Post Protection	FREE Able Post Pad – holds a 1-year guarantee. (colour subject to stock)
Excellent fire performance	BS 7837.
Life Expectancy	Powder coating: Life expectancy up to 5 years (anti-corrosion) * *Subject to maintenance schedule

Installation Information

- The height of the structure is to be confirmed.
- It is the customer's responsibility to arrange for the removal of lights and/or alarms that may obstruct the canopy unless prior arrangement has been made with us.
- Please check whether planning permission and building regulations are required. Please find a copy of our planning guide enclosed within your quote pack.
- Quote includes making good around works area after installation.

Head Office | 8 - 10 Faraday Close, Gorse Lane Industrial Estate, Clacton-on-Sea, Essex CO15 4TR | Fax: 01255 425541



0800 389 9072


Email: sales@ablecanopies.co.uk
www.ablecanopies.co.uk




3 of 5. Technical Drawings

Quotation No: 12908
Job No: 56069JF


Side elevation

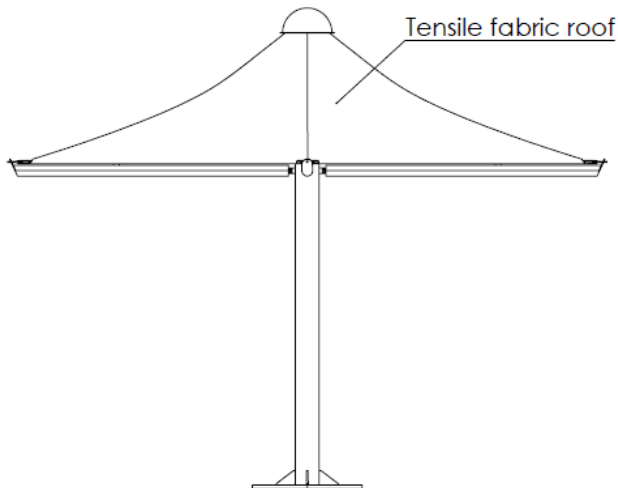

Plan View

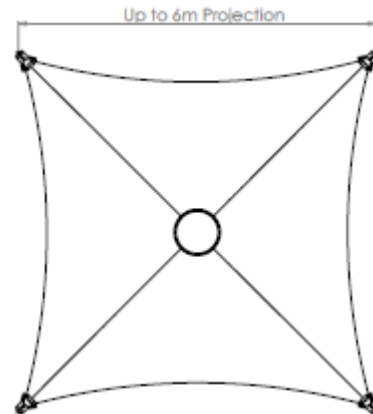

Fixing Detail

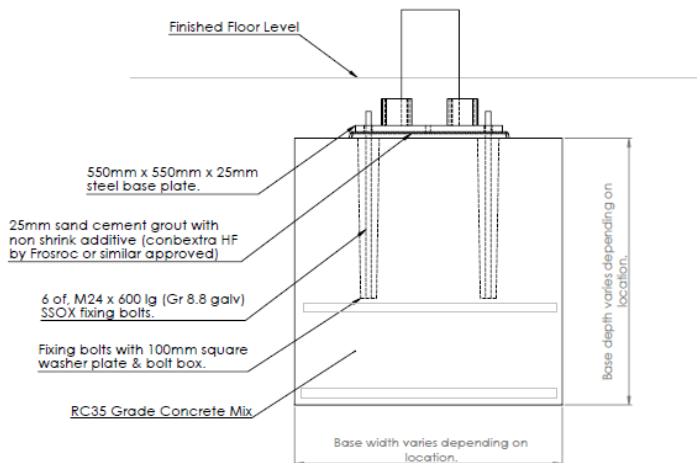

Please note drawings are for illustrative purposes only and are not to scale

Head Office | 8 - 10 Faraday Close, Gorse Lane Industrial Estate, Clacton-on-Sea, Essex CO15 4TR | Fax: 01255 425541



0800 389 9072

Email: sales@ablecanopies.co.uk

www.ablecanopies.co.uk



4 of 5. Choice of Colour

Quotation No:


12908

Job No:

56069JF

RAL colour options

The steel underside can be powder coated to any of our standard RAL colours shown below. At an additional cost, both the roof and/or the underside frame can be finished to any non-standard RAL colour. The full RAL colour chart can be found on our website: www.ablecanopies.co.uk/colours

							
RAL 8007 Fawn Brown	RAL 7016 Anthracite Grey	RAL 7001 Silver Grey	RAL 6018 Yellow Green	RAL 6005 Moss Green	RAL 5012 Light Blue	RAL 5010 Gentian Blue	RAL 5005 Signal Blue
							
RAL 3020 Traffic Red	RAL 3000 Flame Red	RAL 2004 Pure Orange	RAL 1028 Melon Yellow	RAL 1023 Traffic Yellow	RAL 9006 White Aluminium	RAL 9005 Jet Black	RAL 9003 Signal White


The colours on this chart are for reference only. Due to reproduction and printing methods used, actual colours may vary.

Head Office | 8 - 10 Faraday Close, Gorse Lane Industrial Estate, Clacton-on-Sea, Essex CO15 4TR | Fax: 01255 425541



0800 389 9072

Email: sales@ablecanopies.co.uk
www.ablecanopies.co.uk



5 of 5. Optional Extras

Quotation No: 12908
Job No: 56069JF

Customers who ordered a Ulverston also purchased these products:

Special Offer: Order your chosen optional extras with your canopy order and save up to 10%!

Product	Standard Price	Price when placed with this order	Product Image
<u>Picnic Tables & Benches</u> With a wide range of picnic tables and benches on offer in many designs and colours we are sure to have the seating solution for you. Our range starts from a standard A-frame picnic table to novelty flower and mushroom seats. For more information on all our seating options please visit www.ablecanopies.co.uk	Longside Picnic Table from £365.00 + VAT	Longside Picnic Table from £328.50 + VAT	
<u>Play Panels</u> We have a wide range of play panels and chalk boards to brighten up the playground and to encourage learning and interaction between children during break times. Our chalk boards can be post or wall mounted under the canopy to encourage more usage. For more information on all our play panel and chalk board options please visit www.ablecanopies.co.uk	Times Table Play Panel from £155.00 + VAT	Times Table Play Panel from £139.50 + VAT	
<u>Cycle Racks</u> We supply a full range of cycle racks for secure cycle parking. From standard cycle racks to modern styles, we are sure to have the cycle parking solution for you. All of our cycle racks are designed to withstand heavy use and are ideal for schools or commercial properties. For more information on all our cycle rack options please visit www.ablecanopies.co.uk	Sheffield Cycle Rack from £40.00 + VAT	Sheffield Cycle Rack from £36.00 + VAT	
<u>Scooter Racks</u> Our scooter racks are designed to be a durable, cost effective solution for scooter parking which is both easy to use and enduring to the challenges of a school environment, you can choose from either a single sided or double sided scooter rack. For more information on all of our scooter rack options please visit www.ablecanopies.co.uk	From £260 + VAT	From £234.00 + VAT	

Also available to purchase with this order are:

- Bins which are constructed from re-cycled HDPE plastic
- Bollards made from 90% recycled rubber that come with a choice of reflective signs
- Planter Boxes which are also constructed from recycled plastic.

For more information on all these products please visit our website www.ablecanopies.co.uk

Head Office | 8 - 10 Faraday Close, Gorse Lane Industrial Estate, Clacton-on-Sea, Essex CO15 4TR | Fax: 01255 425541



0800 389 9072

Email: sales@ablecanopies.co.uk

www.ablecanopies.co.uk



or contact us directly on 0800 389 9072

Head Office | 8 - 10 Faraday Close, Gorse Lane Industrial Estate, Clacton-on-Sea, Essex CO15 4TR | Fax: 01255 425541

