


TREE SCHEDULE (RM1S-XX-DR-L-P-012 - RM1S-XX-DR-L-P-021)					
Planted As Shown					
NO.	SPECIES	COMMON NAME	SIZE	POT SIZE	COMMENTS
11	ACER campestre	Field maple	20-25cm girth	Rootballed	3x/4x transplanted, 5-5.5m high, min. 2m clear stem
7	ACER campestre 'Streetwise'	Fm. Field maple	20-25cm girth	Rootballed	3x/4x, 5-5.5m high, min. 2m clear stem
12	ACER campestre 'William Caldwell'	Fm. Field maple	18-20cm girth	Rootballed	3x transplanted, 4.5-5m high, min. 2m clear stem, even canopy
15	ACER pseudoplatanus 'Erectum'	Fm. Sycamore	18-20cm girth	Rootballed	3x transplanted, 4.5-6m high, min. 2m clear stem, even canopy
11	AMEL ANCHIER lamarkii 'Robin Hill'	Juneberry	20-25cm girth	Rootballed	3x/4x, 5-5.5m high, min. 2m clear stem, even canopy
10	BETULA pendula	Silver birch	20-25cm girth	Rootballed	4x, 5-5.5m high, min. 2m clear stem, even canopy
42	BETULA utilis var. Jacquemontii	Himalayan birch	20-25cm girth	Rootballed	3x/4x, min 5-5.5m high, min 2m clear stem, even canopy
2	CARPINUS betulus	Hornbeam	18-20cm girth	Rootballed	3x transplanted, 4-4.5m high, even canopy
43	CARPINUS betulus 'Lucas'	Fm. Hornbeam	18-20cm girth	Rootballed	3x, 4.5-5m high, min. 2m clear stem
35	CRATAEGUS laevigata 'Paul's Scarlet'	Fm. Hawthorn	16-18cm girth	Rootballed	3x, 4-4.5m high, min. 2m clear stem, even canopy
33	CRATAEGUS monoxypha	Common hawthorn	18-20cm	Rootballed	3x transplanted, 4.5m high, 2m clear stem
38	CRATAEGUS monoxypha 'Strica'	Upright hawthorn	18-20cm girth	Rootballed	3x transplanted, 4.5m high, min. 2m clear stem
2	FAGUS sylvatica	Common beech	18-20cm girth	Rootballed	3x, min. 4.5m high, min. 2m clear stem
20	MAGNOLIA kobus	Magnolia Kobus	16-18cm	Rootballed	3x, 4.5m high, min. 2m clear stem, even canopy
14	MALUS sylvestris	Crab apple	18-20cm girth	Rootballed	3x transplanted, min. 4.25m high, 1.75-2m clear stem
5	PRUNUS 'Snow Goose'	Fm. Flowering cherry	20-25cm girth	Rootballed	3x/4x, min 5-5.5m high, min 2m clear stem, even canopy
28	PRUNUS 'Spire'	Fm. cherry	20-25cm girth	Rootballed	3x/4x 5-5.5m high, min. 2m clear stem, even canopy
17	PRUNUS avium	Wild cherry	18-20cm girth	Rootballed	3x transplanted, 4.5-6m high, min. 2m clear stem, even canopy
27	PRUNUS subhirtella 'Autumnalis Rosea'	Rosebud Cherry	16-18cm girth	Rootballed	3x, 4-4.5m high, min. 2m clear stem, even canopy
29	PYRUS calleryana 'Chanticleer'	Pear 'Chanticleer'	18-20cm girth	Rootballed	3x, 4-5.5m high, min. 2m clear stem
3	QUERCUS robur	Common oak	20-25cm girth	Rootballed	3x/4x, 5-5.5m high, min. 2m clear stem
6	SORBUS aria	Whitebeam	18-20cm girth	Rootballed	3x transplanted, 4.5-6m high, min. 2m clear stem
7	SORBUS aria 'Maestrosa'	Fm. Whitebeam	18-20cm girth	Rootballed	3x, 4-4.5m high, min. 2m clear stem
38	TILIA cordata 'Maestrosa'	Fm. Small leaved lime	20-25cm girth	Rootballed	3x/4x transplanted, 5-5.5m high, 2m clear stem

ON PLOT PLANTING SCHEDULE (a selection of plants to be used within individual plots)					
SPECIES	COMMON NAME	SIZE	POT SIZE	CENTRES	COMMENTS
HEDGE					
CARPINUS betulus	Hornbeam	Instant hedge	Trough	1.5-1.8m long x 1m high, min. 3 breaks/branches	
EUONYMUS japonicus 'Jean Hugues'	Fm. Euonymus	40-50cm	5L	200mm	Bushy, min. 5 breaks, double staggered row 200mm
LIGUSTRUM ovalifolium	Garden privet	60-80cm	3L	350mm	Branched, min. 5 breaks
LONICERA nitida 'May Green'	Box honeysuckle	40-60(D)	5-7.5L	300mm	Bushy, min. 8 breaks
SHRUBS AND GROUNDCOVER					
BERBERIS thunbergii 'Fireball'	Japanese Barberry 'Fireball'	30-40cm	3L	450mm	Branched with min. 5 breaks
CHOISYA ternata 'Sundance'	Fm. of Mexican Orange Blossom	30-40cm	3L	600mm	Bushy with min. 5 breaks/branches
CISTUS x skanbergii	Fm. Barberv	30-40cm	3L	500mm	Bushy, min. 4 breaks
CORNUS alba 'Elegantissima'	Fm. of Dogwood	40-60cm	3L	500mm	Branched with min. 4 breaks/branches
CORNUS sanguinea 'Mid-winter Fire'	Fm. of Dogwood	40-60cm	3L	500mm	Branched with min. 3 breaks/branches
ESCALLONIA laevis 'Pink Elle'	Escallonia 'Pink Elle'	40-60cm	3L	500mm	Bushy with min. 4 breaks/branches
EUONYMUS fortunei 'Emerald Gaiety'	Euonymus	20-30(D)	3L	400mm	Bushy, min. 7 breaks
HEBE rakaiensis	Form of Shrubby Veronica	40-60cm	5-7.5L	450mm	Bushy with min. 5 breaks/branches
HEBE 'Mrs Winder'	Form of Shrubby Veronica	30-40cm	3L	450mm	Bushy with min. 5 breaks/branches
HEBE 'Majorie'	Form of Shrubby Veronica	30-40cm	3L	500mm	Bushy with min. 5 breaks/branches
HYDRANGEA macrophylla 'Lanarth White'	Hydranger	40-60cm	5L	750mm	Branched with min. 5 breaks
HYDRANGEA macrophylla 'Blue Wave'	Hydranger	40-60cm	5L	600mm	Branched with min. 5 breaks
LAVANDULA angustifolia 'Hidcote'	English Lavender	30-40cm	5L	400mm	Bushy with min. 7 breaks/branches
LONICERA nitida 'May Green'	Box leaf honeysuckle	30-40(D)cm	3L	400mm	Bushy with min. 6 breaks/branches
PHLOMIS fruticosa	Jerusalem Sage	30-40cm	3L	500mm	Branched with min. 4 breaks
PITTOSPORUM tenuifolium 'Tom Thumb'	Pittosporum	30-40cm	3L	400mm	Branched with min. 4 breaks
PRUNUS laurocerasus 'Zabeliana'	Fm. of Laurel	30-40cm	3L	500mm	Branched with min. 5 breaks
MAHONIA aquifolium 'Apolo'	Preson Grape	40-60cm	3L	450mm	Branched even canopy
ROSMARINUS officinalis 'Miss Jessopp's Upright'	Fm. Rosemary	30-40cm	3L	800mm	Bushy, min. 4 breaks
ROSA 'Lichfield Angel'	Shrub rose 'Lichfield Angel'	60-80cm	6L	800mm	Quality A, strong growing
ROSA 'Princess Anne'	Shrub rose 'Princess Anne'	60-80cm	6L	800mm	Quality A, strong growing
SARCOCOCCCA humilis	Sweet Box	20-30cm	3L	400mm	Bushy with min. 6 breaks/branches
VIBURNUM opulus compactum	Compact Guelder Rose	40-60(D)cm	10L	750mm	Bushy with min. 5 breaks/branches
ACCENT SHRUBS					
AMALANCHIER lamarkii	June Berry	2-2.5m high	Rootballed	As shown	Specimen plant, multistem, branched min.5 breaks
MAGNOLIA stellata	Manrolia	1-1.5m high	15L/20L	As shown	Specimen plant, branched min.5 breaks
MAHONIA x media 'Winter Sun'	Fm. of Oregon Grape	80-100cm high	15L	As shown	Specimen plant, bushy min. 3 breaks
VIBURNUM x bodnantense 'Dawn'	Arrowwood 'Dawn'	100-125cm high	15L	As shown	Specimen plant, branched min. 6 breaks
PERENNIALS					
ALCHEMILLA mollis	Ladies Mantle	-----	3L	400mm	Seed or vegetative method, even bushy plant
ALLIUM sphaerocephalon	Round headed leek	-----	Bulbs 4/5	400mm	Bulbs
ANEMONE x hybrida 'Honarine Jobert'	Japanese Anemone	-----	1.5-2L	450mm	Propogated vegetative method, even bushy plant
BERGENIA 'Bressingham Ruby'	Elephant's Ears	-----	1.5-2L	400mm	Propogated vegetative method, even bushy plant
ECHINOPS 'Iro Velch's Blue'	Globe thistle	-----	3-4L pot	400mm	Propogated vegetative method, even bushy plant
GERANIUM x oxonianum 'Wargrave Pink'	Meadow Cranesbill	-----	1.5-2L	400mm	Propogated vegetative method, even bushy plant
GERANIUM pratense 'Mrs Kendall Clark'	Meadow Cranesbill	-----	1.5-2L	400mm	Propogated vegetative method, even bushy plant
HEUCHERA 'Marmalade'	Heuchera	-----	1.5-2L	400mm	Propogated vegetative method, even bushy plant
HEUCHERA 'Spotted Bount'	Heuchera	-----	1.5-2L	400mm	Propogated vegetative method, even bushy plant
IRIS siberica 'Silver Edge'	Siberian Iris 'SE'	-----	2L	450mm	Seed or vegetative method
LIRIOPE muscari 'Big blue'	Big Blue Lilly Turf	-----	1.5-2L	400mm	Propogated vegetative method, even bushy plant
NEPETA x faassenii 'Six Hills Giant'	Catmint	-----	1.5-2L	450mm	Propogated vegetative method, even bushy plant
PERSICARIA bistorta 'Superba'	Red bistort 'Superba'	-----	2L	500mm	Bushy clump, seed or vegetative method
POLYSTICHUM setiferum 'Herrnhausen'	Soft shield fern 'Herrnhausen'	-----	3L	450mm	Bushy, seed or vegetative method
SISYRINCHIUM striatum	Sisyrinchium	-----	1.5-2L	400mm	Bushy, seed or vegetative method
STACHYS byzantia	Lambs Ears	-----	1.5-2L	350mm	Propogated vegetative method, even bushy plant
VERBENA bonariensis	Argentinian vervain	-----	3L	450mm	Propogated vegetative method, even bushy plant
ORNAMENTAL GRASSES					
CALAMAGROSTIS 'Karl Foerster'	Feather reed grass	-----	3L	500mm	Seed or vegetative method
CAREX 'Ice Dance'	Sedae 'Ice Dance'	-----	3L	400mm	Propogated vegetative method, even bushy plant
DESCHAMPSIA cespitosa 'Goldtau'	Tufted Hair Grass Golden Dew	-----	3-4L	450mm	Propogated vegetative method, even bushy plant
PENNISETUM villosum	Feathergrass	-----	5-7.5L	450mm	Propogated vegetative method, even bushy plant
NASSELLA tenuissima	Mexican Feather Grass	-----	5-7.5L	500mm	Seed or vegetative propogation
STIPA tenuissima		-----			
CLIMBERS					
CLEMATIS arandiflora	Clematis	60-80cm	3L	As shown	Several shoots, min. 3 on frame
CLEMATIS 'Jackmonii' Multi Blue	Clematis	60-80cm	3L	As shown	Several shoots, min. 3 on frame
HYDRANGEA petiolaris	Hydrangea	100-150cm	5-7.5L	As shown	Several shoots, min. 3 on frame
LONICERA japonica	Japanese Honeysuckle	80-100cm	3L	As shown	Several shoots, min. 3 on frame
ROSA 'The Generous Gardener'	Climbing Rose	60-80cm	6L	As shown	Several shoots, min. 3 on frame
ROSA 'Teasing Georgia'	Climbing Rose	60-80cm	6L	As shown	Several shoots, min. 3 on frame

Indicative woodland planting matrix on a 1.5m grid

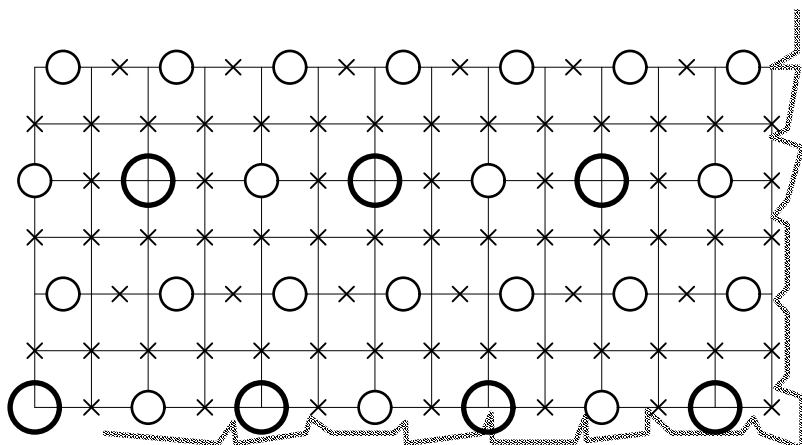

- Key to matrix symbols**
- Standard trees for 'instant' effect on a 6m staggered grid planted in groups of 1, 3, 5 and 7
 - Feathered trees on a 3m staggered grid planted in groups of 1, 3, 5 and 7
 - × Transplants on a 1.5m staggered grid planted in groups of 1, 3, 5 and 7

RUNWAY PARK & CLIMPING EDGE TREE SCHEDULE (RM1S-XX-DR-L-P-022 - RM1S-XX-DR-L-P-026)					
Planted As Shown					
NO.	SPECIES	COMMON NAME	SIZE	POT SIZE	COMMENTS
14	ACER campestre	Field maple	20-25cm girth	Rootballed	3x/4x transplanted, 5-5.5m high, min. 2m clear stem
6	AESCULUS hippocastanum	Horse chestnut	20-25cm girth	Rootballed	3x/4x, 5-5.5m high, min. 2m clear stem
13	BETULA pendula	Silver birch	20-25cm girth	Rootballed	4x, 5-5.5m high, min. 2m clear stem, even canopy
15	CARPINUS betulus	Hornbeam	18-20cm girth	Rootballed	3x transplanted, 4-4.5m high, even canopy
11	CARPINUS betulus 'Lucas'	Fm. Hornbeam	18-20cm girth	Rootballed	3x, 4.5-5m high, min. 2m clear stem
5	CASTANEA sativa	Sweet chestnut	18-20cm girth	Rootballed	3x, 4.5-6.5m high, min. 2m clear stem, even canopy
6	CORYLUS avellana	Common hazel	multi stem	Rootballed	Multi-stem (3 stems min), 2/3x, 2-2.5m high, umbrella stem
9	CRATAEGUS monoxypha	Common hawthorn	18-20cm	Rootballed	3x transplanted, 4.5m high, 2m clear stem
12	FAGUS sylvatica	Common beech	20-25cm girth	Rootballed	3x/4x, 5-5.5m high, min. 2m clear stem
8	LIRIODENDRON tulipera	Tulip tree	18-20cm girth	Rootballed	3x transplanted, 4.5-5m high, min. 2m clear stem, even canopy
11	MALUS 'Rudolf'	Flowering crab	18-20cm	Rootballed	3x, 4.5m high, min. 2m clear stem
3	MALUS domestica 'Brownless Russet'	Heritage apple cultivar	Min. 1.5m high	10/15L	2 year, half-standard, MM106 rootstock
5	MALUS domestica 'Discovery'	Heritage apple cultivar	Min. 1.6m high	10/15L	MM106 rootstock
12	MALUS sylvestris	Crab apple	18-20cm girth	Rootballed	3x transplanted, min. 4.25m high, 1.75-2m clear stem
7	MALUS hiobata	Flowering crab	18-20cm girth	Rootballed	3x, min. 4.5m high, 1.75-2m clear stem
3	PINUS sylvestris	Scots pine	14-16cm	Container	3x, leader/laterals
7	POPULUS alba	White Poplar	20-25cm girth	Rootballed	3x/4x, 5-5.5m high, min. 2m clear stem, even canopy
14	PRUNUS avium	Wild cherry	18-20cm girth	Rootballed	3x transplanted, 4.5-6m high, min. 2m clear stem, even canopy
6	PRUNUS domestica 'Sunburst'	Cherry 'Sunburst'	Min 1.5m high	10/15L	2x transplanted, half-standard
6	PRUNUS domestica 'Victoria'	Plum 'Victoria'	Min 1.5m high	10/15L	2 year, half-standard, St Julien Rootstock
7	PYRUS calleryana 'Chanticleer'	Pear 'Chanticleer'	18-20cm girth	Rootballed	3x, 4.5-5m high, min. 2m clear stem
6	PYRUS communis 'Conference'	Pear 'Conference'	Min 1.5m high	10/15L	2 year, half-standard, Quince A Rootstock
7	QUERCUS ilex	Holm Oak	20-25cm girth	Rootballed	3x/4x, 5-5.5m high, min. 2m clear stem, even canopy
7	QUERCUS robur	Common oak	20-25cm girth	Rootballed	3x/4x, 5-5.5m high, min. 2m clear stem
7	SALIX caprea	Goat willow	18-20cm girth	Rootballed	3x, 4.5-5m high, min. 2m clear stem
10	SORBUS torminalis	Wild Service tree	18-20cm girth	Rootballed	3x, 4.5-5m high, min. 2m clear stem
9	TILIA cordata	Small leaved lime	20-25cm girth	Rootballed	3x/4x, min. 5-5.5m high, min. 2m clear stem

PUBLIC OPEN SPACE PLANTING SCHEDULE (RM1S-XX-DR-L-P-022 - RM1S-XX-DR-L-P-026)						
%	LATIN NAME	COMMON NAME	SIZE	POT SIZE	CENTRES	COMMENTS
NATIVE WOODLAND STRUCTURE PLANTING						
To be planted on a staggered grid at 1.5m, 3m and 6m cts. Planted in species groups of 3, 5 and 7.						
Standard						
35	ACER campestre	Field maple	10-12cm girth	Bareroot	600mm	2x transplanted, 4 breaks, min. 3-3.5m high with min. 1.75-2m clear stem
30	PINUS sylvestris	Scots Pine	10-12cm girth	Bareroot	600mm	2x transplanted, min. 2.5-3m high
35	QUERCUS robur	Common oak	10-12cm girth	Bareroot	600mm	2x transplanted, 4 breaks, min. 3-3.5m high with min. 1.75-2m clear stem
Feathered						
30	ACER campestre	Field maple	175-200cm	Bareroot	3000mm	Feathered 2x transplanted, branched, min. 5 breaks
20	CRATAEGUS monoqayna	Hawthorn	175-200cm	Bareroot	3000mm	Feathered 2x transplanted, branched, min. 5 breaks
20	ILEX aquifolium	Holly	175-200cm	Rootball	3000mm	Leader/Laterals.
15	PINUS sylvestris	Scots Pine	175-200cm	Rootball	3000mm	Feathered 2x transplanted
15	PRUNUS avium	Wild cherry	175-200cm	Bareroot	3000mm	Feathered 2x transplanted, branched, min. 5 breaks
Transplant						
15	CARPINUS betulus	Hornbeam	60-80cm	Bareroot	1500mm	1+1 or 1/1
30	CRATAEGUS monoqayna	Hawthorn	60-80cm	Bareroot	1500mm	1+1 or 1/1
20	CORYLUS avellana	Hazel	60-80cm	Bareroot	1500mm	1+2 or 1/2, min.3 branched
10	CORNUS sanguinea	Dogwood	60-80cm	Bareroot	1500mm	1+1 or 1/1, branched, min. 2 breaks.
10	ILEX aquifolium	Common holly	60-80cm	2L	1500mm	Leader/Laterals.
10	PRUNUS spinosa	Blackthorn	60-80cm	Bareroot	1500mm	1+1 or 1/1
5	VIBURNUM opulus	Guelder rose	60-80cm	Bareroot	1500mm	1+2 or 1/2, min.3 branched
NATIVE HEDGE						
To be planted at minimum double staggered, 1m between rows at 1m cts. Planted in species groups of 3, 5 and 7.						
Feathered						
15	ACER campestre	Field maple	150-180cm	Bareroot	1000mm	2x feathered, min. 4 breaks
20	CRATAEGUS monoqayna	Hawthorn	150-180cm	Bareroot	1000mm	2x feathered, min. 4 breaks
15	FAGUS sylvatica	Beech	150-180cm	Bareroot	1000mm	2x feathered, min. 4 breaks
Transplant						
10	CORNUS sanguinea	Dogwood	80-100cm	Bareroot	1000mm	1+2, min. 3 breaks
20	CORYLUS avellana	Hazel	80-100cm	Bareroot	1000mm	1+2 or 1/2, min. 3 breaks
10	PRUNUS avium	Wild cherry	80-100cm	Bareroot	1000mm	1+2 or 1/2, branched, min. 3 breaks
5	PRUNUS spinosa	Blackthorn	80-100cm	Bareroot	1000mm	1+2 or 1/2, branched, min. 3 breaks
5	VIBURNUM opulus	Guelder rose	80-100cm	Bareroot	1000mm	1+2 or 1/2, branched, min. 3 breaks
NATIVE SCRUB PLANTING						
To be planted on a staggered grid at 1m cts. Planted in species groups of 3, 5 and 7.						
25	CORNUS sanguinea	Dogwood	80-100cm	Bareroot	1000mm	1+2, min. 3 breaks
15	CORYLUS avellana	Hazel	80-100cm	Bareroot	1000mm	1+2 or 1/2, min. 3 breaks
15	CRATAEGUS monoqayna	Hawthorn	80-100cm	Bareroot	1000mm	1+2 or 1/2, branched
5	EUONYMUS europaeus	Spindle	80-100cm	Bareroot	1000mm	1+2 or 1/2, branched
10	ILEX aquifolium	Common holly	80-100cm	Rootball	1000mm	Leader/Laterals.
10	PRUNUS spinosa	Blackthorn	80-100cm	Bareroot	1000mm	1+2 or 1/2, branched, min. 3 breaks
5	ROSA rugosa	Rugosa Rose	80-100cm	Bareroot	1000mm	1+1, branched, min. 3 breaks
10	SALIX caprea	Pussy Willow	80-100cm	Bareroot	1000mm	1+2 or 1/2, branched, min. 3 breaks
5	SALIX purpurea	Purple Willow	80-100cm	Bareroot	1000mm	1+2 or 1/2, branched, min. 3 breaks
SWALE SHRUBS						
5	EUONYMUS japonicus 'Aurea'	Spindle tree	30-40cm	3L	750mm	branched, min. 4 breaks.
5	CORYLUS avellana	Hazel	40-60cm	Bareroot	750mm	1+1 or 1/1, branched, min. 2 breaks.
5	CORNUS sanguinea	Fm. Dogwood	40-60cm	3L	600mm	Branched, min. 4 breaks.
5	CORNUS sanguinea 'Mid-Winter Fire'	Fm. Dogwood	40-60cm	3L	600mm	Branched, min. 3 breaks.
5	SALIX alba var. vitellina	Golden willow	80-100cm	Bareroot	750mm	0/2, Branched, min. 2 breaks
5	SALIX alba var. vitellina 'Britzensis'	Scarlet willow	80-100cm	Bareroot	750mm	0/2, Branched, min. 2 breaks
5	SAMBUCUS nigra 'Aurea'	Golden elder	80-100cm	Bareroot	800mm	0/2, Branched, min. 3 breaks
5	VIBURNUM opulus	Viburnum	40-60cm	3L	700mm	Branched, min. 4 breaks.
COMMUNAL ORNAMENTAL PLANTING						
Shrubs						
5	BERBERIS thunbergii f. atropurpurea	Fm. Japanese Barbervy	30-40cm	3L	500mm	Branched, min. 5 breaks/branches
5	CORNUS sanguinea	Common Dogwood	40-60cm	3L	750mm	Branched, min. 4 breaks
5	EUONYMUS fortunei 'Silver Queen'	Fm. Euonymus	30-40/D)cm	3L	400mm	Bushy, min. 7 breaks
5	HEBE 'Mrs Winder'	Fm. Hebe	30-40cm	3L	450mm	Bushy, min. 5 breaks
5	LAVANDULA angustifolia	English lavender	20-30cm	5L	400mm	Bushy, min. 5 breaks
5	ROSA anvensis	Field Rose	40-60cm	3L	500mm	Branched, min. 5 breaks
5	ROSMARINUS officinalis	Rosemary	40-60cm	3L	600mm	bushy, min. 3 breaks
Perennials						
5	AJUGA reptans	Bugle	1.5-2L	350mm		Vegetative method, even bushy plant
5	ANEMONE x hybrida 'Honorable Jobert'	Japanese anemone 'Honorable Jobert'	1.5-2L	450mm		Vegetative method, even bushy plant
5	DROXYPTERIS affinis	Scaly male fern	1.5-2L	750mm		Seed method
5	ECHEINACEA purpurea	Coneflower	3-4L	400mm		Seed method, even bushy plant
5	GERANIUM sanguineum	Bloody Cranesbill	1.5-2L	400mm		Vegetative method, even bushy plant
5	PERSICARIA affinis	Knotted	1.5-2L	500mm		Vegetative method, bushy clump
5	PHLOMIS russelliana	Turkish sage	1.5-2L	400mm		Seed or vegetative method
5	POLYSTICHUM setiferum	Soft shield fern	3-4L	500mm		Seed or vegetative
5	SALVIA nemorosa	Ballian clary	1.5-2L	400mm		Vegetative method, even bushy plant
5	SISYRINCHIUM striatum	Sisyrinchium	1.5-2L	450mm		Seed or vegetative method, even bushy plant