

Alex Nicholls

BoKlok Housing Ltd
Maple Cross House
Denham Way,
Maple Cross,
Rickmansworth,
WD3 9SW

5th July 2021

Our ref RB/21/LPQ8528

Dear Alex


Re: Elmgrove Road, Littlehampton Borehole and Shallow Soakage Testing and Installation

Further to our recent meeting, we are pleased to provide a costs estimate for the following:


- Preparation of subcontractor RAMS.
- Cone Penetration Testing at soakaway locations to confirm chalk integrity and provide UXO clearance at test locations.
- Drilling 12 x 6m deep 200mm diameter boreholes.
- Installing 12 x 6m deep 140mm diameter borehole soakaway liners.
- Constant head tests in completed borehole soakaways.
- 8 x 300mm square percolation tests for permeable paving (in natural soils) with allowance for heras fencing to allow overnight running.
- Saturated moisture content tests from each borehole to classify chalk density at soakage depth.
- Interpretative report with provision of permeability rates and interpretation of strength and density tests.

Leap Environmental Ltd
South Coast Regional office
Premier House, Victoria Road,
Burgess Hill, West Sussex
RH15 9LR

www.leapenvironmental.com

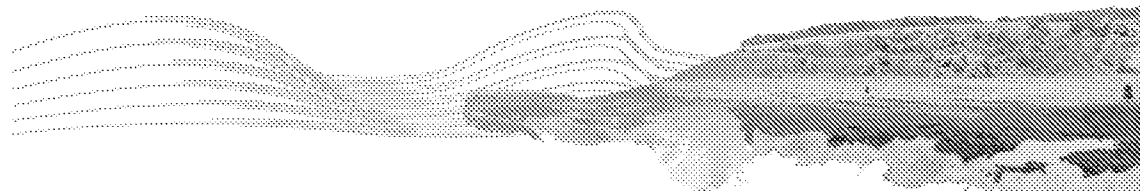

Head Office : Brook House, Vincent Lane, Dorking, Surrey, RH4 6HW



6m Borehole Soakaway Test Location



Percolation Test Location



Basemap: ECE Architecture Illustrative Site Plan

Client:

BoKlok Housing Ltd

Date:

5th July 2021

Project ID:

LPQ8528

Project:

Elmgrove Road,
Littlehampton

Title:

Borehole Soakaway and
Permeable Paving Tests

Fig. No.

I