



APPROX.

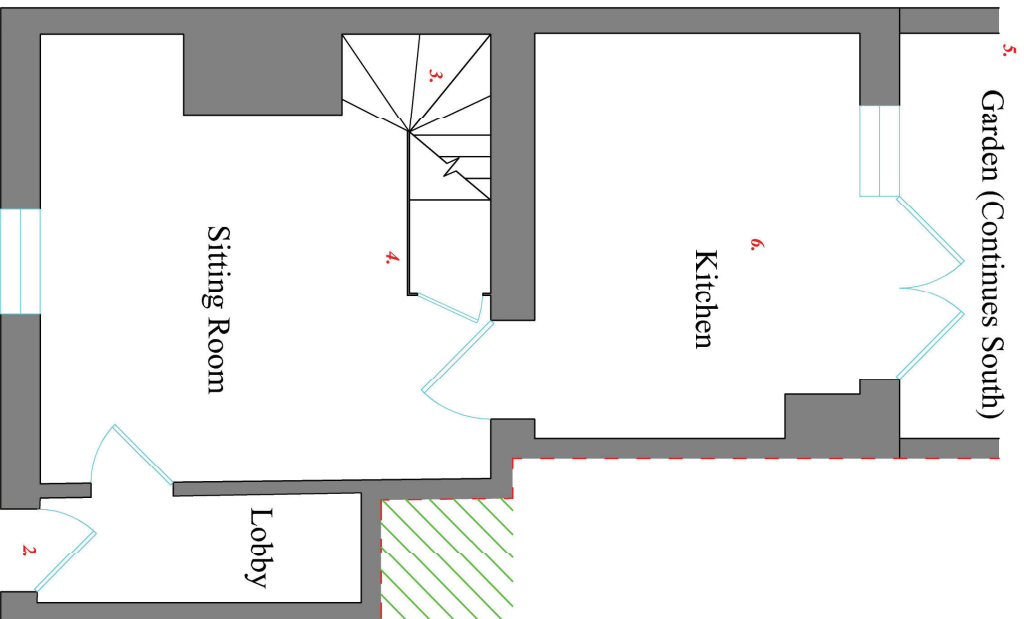

Ground Floor

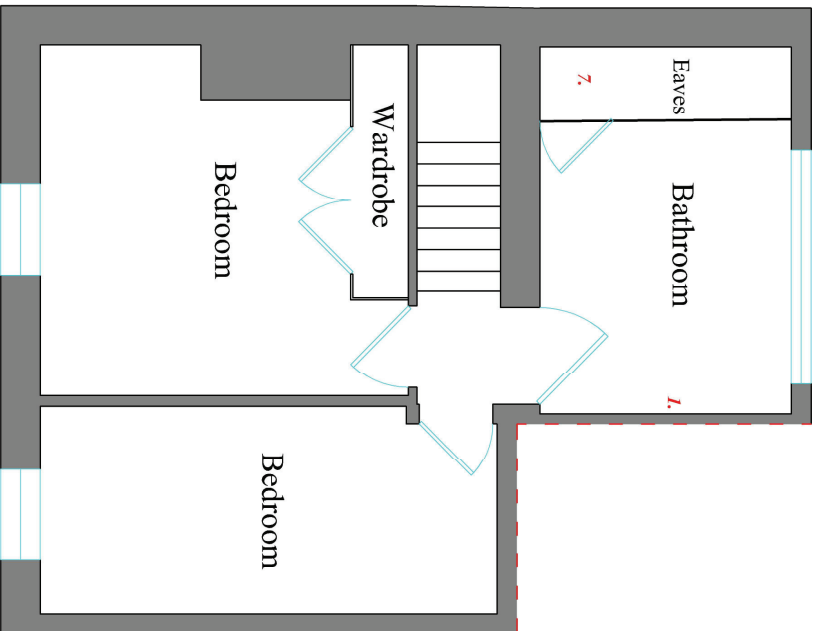

First Floor

Key

1. Internal timber to be replaced with wainscoted panels
2. Front door to be repaired where possible
3. Stairs to be replaced with like for like materials

4. Timber stud wall to be removed and reinstated
5. Garden and boundary wall to be repaired and stonework to be repaired

6. Kitchen floor to be tiled with natural slate

7. Boiler to be replaced and relocated to the roof void. Flue to exit through to roof at the rear

8. Brickwork to be stitched and cracked mortar joints to be repointed

9. Asbestos wall hung tiles to be removed and replaced with slate

10. Flat roof and dormer windows to be upgraded. Cill to internally be lifted 50mm

Note: 9 and 10 not shown on drawing.

DRAWING FOR PLANNING PURPOSES ONLY.

All dimensions are in mm unless specified otherwise

Client
Mr & Mrs Campbell

Location
20 Western Road
Littlehampton
West Sussex
BN17 5NP

Drawing title
Proposed Changes

Date
8th May 2019

Drawn	Checked	Scale
JS	JE	1:50 @ A3

Summs

Drawing No.	Revision
60002	-