



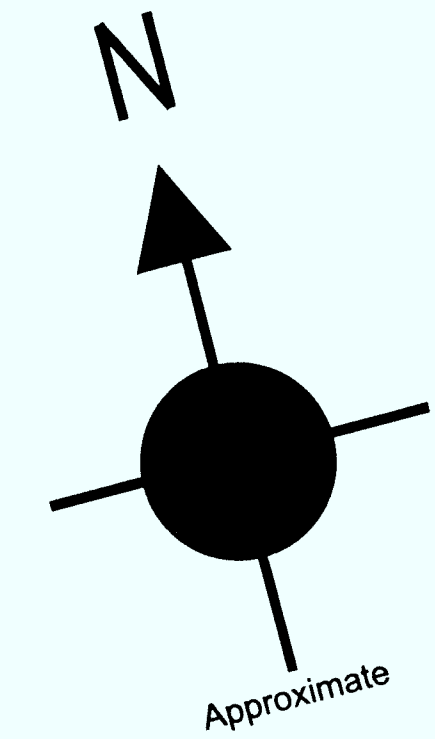

- SHRUB KEY :**
- PHYLLOSTACHYS NIGRA 10LT**
 - FARGESIA NITIDA 10LT**
 - TRACHYCARPUS FORTUNEI 25LT**
 - CORDYLINE TORBAY RED 10LT**
 - YUCCA GLORIOSA 10LT**
 - PHORMIUM TENAX 25LT**
 - PHORMIUM APRICOT QUEEN 10LT**
 - OPHIOPOGON PLANISCAPUS NIGRESCENS 2LT**
 - AGAPANTHUS AFRICANUS 2LT**
 - AMELANCHIER LARMAKII MULTISTEM1.50 - 2.00**
 - PHORMIUM TENAX VARIEGATUM 25LT**

Plant Schedule

Shrubs				
ISPN	Species	Qty	Size	
AMELAM	Amelanchier lamarckii	1	1.50 - 2.00	
CORTR	Cordyline australis 'Torbay Red'	9		10L
EEG	Euonymus fortunei 'Emerald 'n' Gold'	3	15-20cm	
ESQ	Euonymus fortunei 'Silver Queen'	1	20-30cm	
PHOAQ	Phormium 'Apricot Queen'	20		10L
PHOV	Phormium tenax 'Variegatum'	7		25L
TF	Trachycarpus fortunei	2		25L
YG	Yucca gloriosa	6		10L
Total - 49 plants				

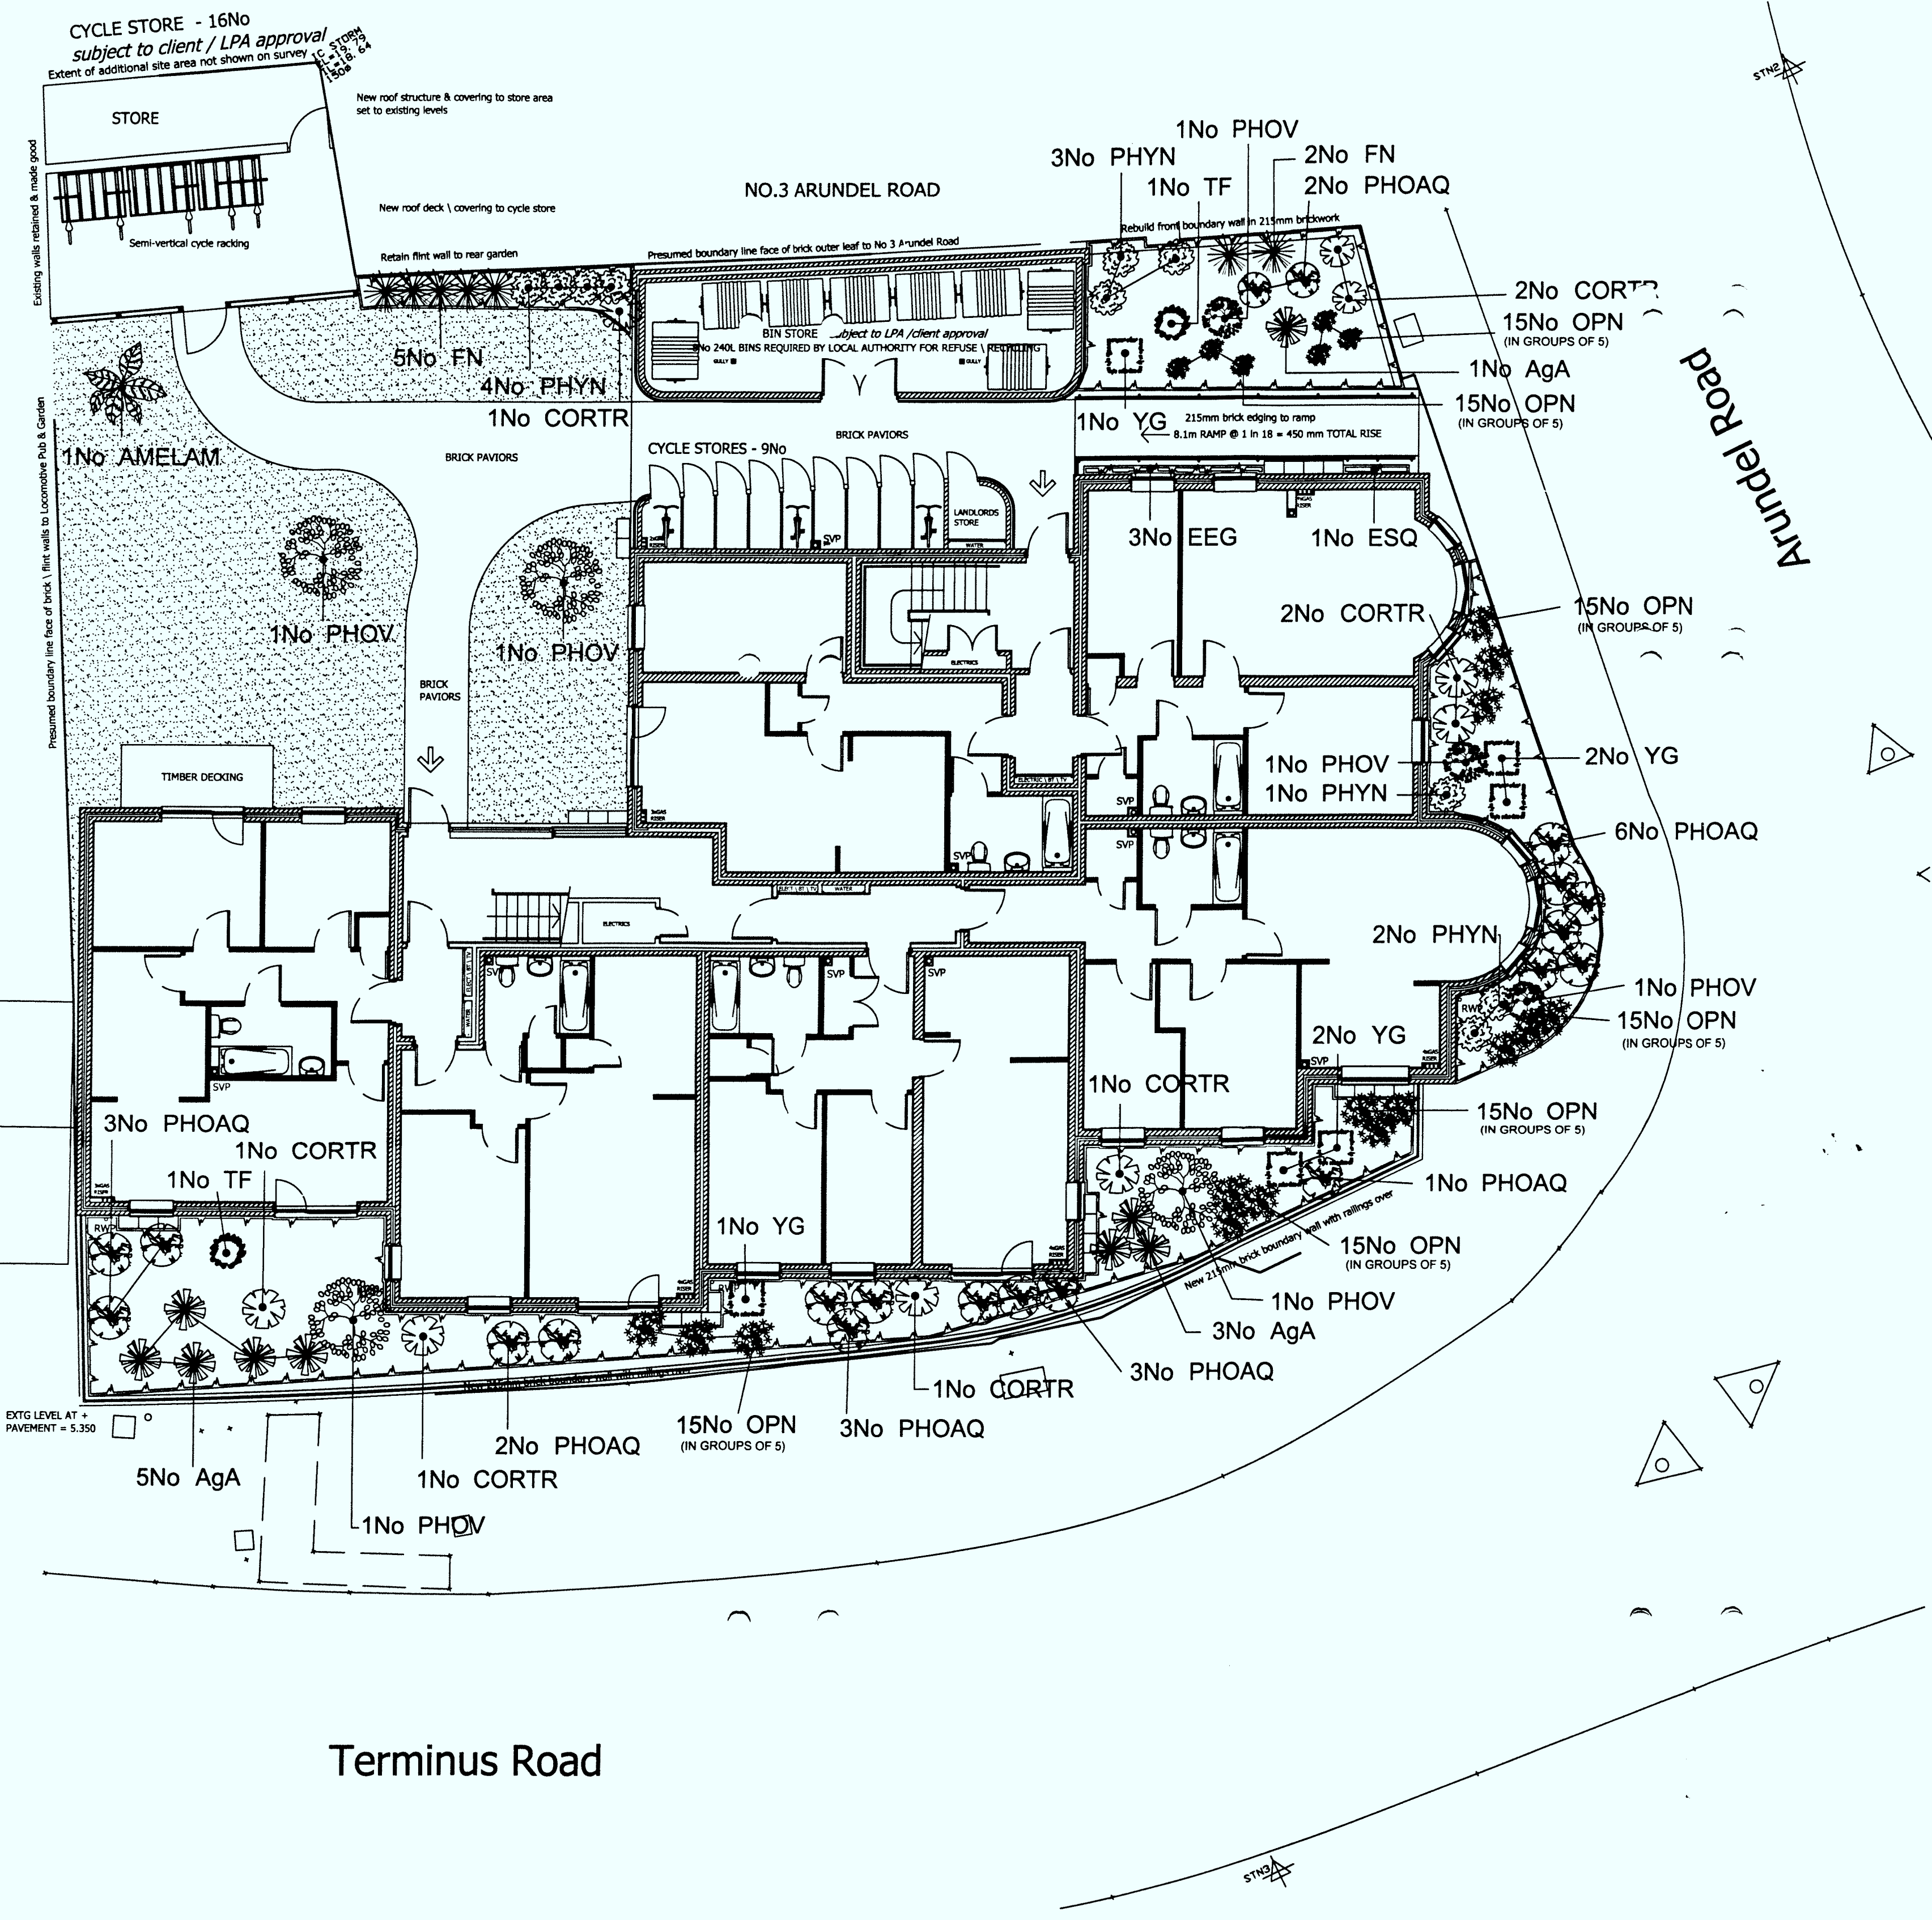

Herbaceous			
ISPN	Species	Qty	
AgA	Agapanthus Africanus	9	2L
OPN	Ophiopogon planiscapus 'Nigrescens'	105	2L
Total - 114 plants			

Bamboos			
ISPN	Species	Number	
FN	Fargesia nitida	7	10L
PHYN	Phyllostachys nigra	10	10L
Total - 17 plants			

KEY :

PLANTED AREAS - TO BE MULCHED WITH GEOTEXTILE & PLUM SLATE

GRASS (TURF)

- Notes**
- HARD LANDSCAPE FINISHES:**
- See separate architects drawings for hard landscape finishes, fencing and wall details. This drawing is only to be used for setting out tree, plant and turfing works only
- GROUND WORKS:**
- All ground works and top soil to be in accordance with section D20 of the project landscape specification
- EXISTING TREES:**
- Existing levels to be preserved around all existing trees. No permanent or temporary loading is to impose within three metres of each existing tree. All existing trees should be adequately protected prior to construction works commencing
- Any necessary tree works are to be carried out by an approved tree surgeon to BS 3998
- PLANTING ETC:**
- General plant stock to conform with BS 3936 and BS 5236 and planting to be undertaken in full accordance with the project landscape specification
- All planting areas and isolated tree beds to be mulched with plum slate gravel laid over geotextile membrane
- Foundations to dwellings to be designed to take account of mature height of existing and proposed trees
- MAINTENANCE:**
- Establishment maintenance for all planting for 1 year from planting date to include weed control and grass cutting

Revisions:

A - Additional 3 Specimen plants requested by Client

DESIGN CONSULTANCY & CONSTRUCTION

V.D.W.

LANDSCAPES LIMITED

Brick Kiln Nursery, Bignor Road, Merton, Chichester, West Sussex. PO20 1EJ

Telephone 01243 531700 Facsimile 01243 539933

Project:

ARUNDEL ROAD
LITTLEHAMPTON

Planting Layout:

Scale: 1:100 Date: FEBRUARY 2008

Dimensions to be verified on site prior to construction. Do not scale this drawing, use figured dimensions only. Copyright reserved. Under no circumstances must this drawing be used for landscaping purposes without the express prior permission of VDW Landscapes Limited.

Main Contractor:

CHEESMUR

Drawing Number: TND 23128-1A

© 2008 VDW Landscapes Limited