



**PERSIMMON HOMES THAMES VALLEY
LAND NORTH OF TODDINGTON LANE,
LITTLEHAMPTON**

**DRAINAGE STRATEGY, WEST OF
WETLANDS
(DISCHARGE OF CONDITION 10)**

JANUARY 2019

A light blue silhouette of a family riding a bicycle. The father is in the driver's seat, the mother is seated behind him, and a child is seated in front of her. The bicycle has a basket on the front. The text 'the journey is the reward' is written in a blue, sans-serif font at the bottom right of the image.

the journey is the reward

**PERSIMMON HOMES THAMES VALLEY
LAND NORTH OF TODDINGTON LANE,
LITTLEHAMPTON**

**DRAINAGE STRATEGY, WEST OF
WETLANDS
(DISCHARGE OF CONDITION 10)**

JANUARY 2019

Project Code:	A/PHDRAIN.10
Prepared by:	SF
Approved by:	AB
Issue Date:	24th January 2019
Status:	1st Issue

**Persimmon Homes Thames Valley
Land North of Toddington Lane, Littlehampton
Drainage Strategy, West of Wetlands
(Discharge of Condition 10)**

List of Contents

Sections

1	Introduction	1
2	Condition 10 - Surface Water Drainage	3

Appendices

APPENDIX A: Site Location & Pre-Demolition Layout	
APPENDIX B: Land Uses & Drainage Areas Covered	
APPENDIX C: Arun DC Surface Drainage Correspondence	
APPENDIX D: Exceedance Flows	
APPENDIX E: Windes – Network Details	
APPENDIX F: Windes – 1in100yr Simulation Results	
APPENDIX G: Windes – 1in30yr & 1in1yr Simulation Results	
APPENDIX H: Pre-Demolition Drainage	
APPENDIX I: Drainage Strategy, West of Wetlands	
APPENDIX J: Permeable Sub-base Road & Filter Trenches	
APPENDIX K: Free Discharge Rates from Phase 2 Sub-Catchment	
APPENDIX L: List of Drawings in West of Wetlands Catchment	

1 Introduction

- 1.1 Mayer Brown Ltd has been commissioned by Persimmon Homes Thames Valley (PHTV) to compile this report to assist with the discharge of planning condition 10 for their outlined approved development (**Arun DC reference LU/47/11/**) for up to 1,260 residential dwellings, B1 employment use, Class A facilities, a 100 bed hotel, 60 bed care home, primary school, plus many other facilities and improvements to the local infrastructure.

Outline Planning Consent

- 1.2 Outline Planning Consent was granted in 2011, under Arun District Council planning reference LU/47/11, which includes Condition 10 that relates to surface water drainage.

Purpose of this Drainage Report

- 1.3 This drainage report does not cover the entire area that received outline planning approval. It includes the development area of approximately 19.0 hectares to the west of the wetlands as identified Appendix B, titled “Land Uses and Drainage Areas Covered”.
- 1.4 There are a total of 18 land parcels and associated road infrastructure identified within this catchment at varying states of progress. The report describes the design philosophy behind the main surface sewers within the road network that will eventually drain the development parcels within this area. It also specifies the proposed connection points and peak allowable surface water discharge from each of the land parcels.
- 1.5 A parcel specific surface and foul water drainage strategy will still be required to accompany the reserved matters (RM) applications from the individual land parcels.
- 1.6 This report is to be used to accompany the RM planning applications for each of the individual parcels in order to demonstrate that the receiving drainage network has been adequately designed and considered.

Previous Consultancy Work

- 1.7 Greencore obtained outlined planning consent for the scheme in 2011, using White Young Green as their drainage consultants, and subsequently sold the site to PHTV.

- 1.8 Glanville Consulting Engineers were employed by PHTV to develop the surface and foul water strategy further. Glanville are no longer working on the project but produced useful information to depict the pre-development scenario, which is contained in a number of Appendices within this report.
- 1.9 Mayer Brown were employed by PHTV as their drainage consultants for the project in September 2017 and where possible will utilise the information produced by previous Consultants.
- 1.10 There are numerous projects, sub-parcels and associated civils and drainage drawings that inform the works within the west of wetlands catchment. It is not practical to include all the drawings for these projects within this report and, as such, they are listed in Appendix L. These drawings can be supplied on request to Mayer Brown Ltd.

2 Condition 10 - Surface Water Drainage

Condition 10: *No development shall begin until a fully detailed surface water drainage scheme for that phase of the development, based on sustainable drainage principles and designed in accordance with the SUDS strategy for the whole development, has been submitted to and approved in writing by the Local Planning Authority. It should be demonstrated how each detailed scheme will contribute to delivering, and link into, the surface water drainage strategy for the site as a whole.*

- *The SUDS shall be designed to attenuate the 1 in 100 year storm event (plus climate change allowance of 30% in accordance with DEFRA's National Standards for Sustainable Drainage Systems).*
- *No infiltration of surface water drainage shall occur within ground affected by contamination unless suitable remediation is undertaken.*
- *Each detailed scheme should include a timetable for its implementation; and provide a management and maintenance plan in the form of a site specific Maintenance Manual for the SUDS system for the lifetime of the development. This shall include the arrangements for adoption by any public authority or statutory undertaker or details of the financial management of the scheme throughout its lifetime.*

Elements of the scheme serving any particular phase shall subsequently be implemented in accordance with the approved details (unless otherwise agreed with the Local Planning Authority) prior to the occupation of any dwellings in that phase and no building in that phase of the development shall be occupied until the surface water drainage scheme has been fully implemented in accordance with the approved details.

Reason: To ensure that the proposed development is satisfactorily drained to prevent the increased risk of flooding, and improve and protect water quality, habitat and amenity, and ensure future maintenance of these in accordance with national guidance and policies GEN7, GEN9 of the Arun District Local Plan.

Pre-Demolition Site

- 2.1 The pre-demolition site was heavily developed comprising large glasshouses with associated outbuildings and areas of hardstanding. Refer to the site location plan in Appendix A that shows the extent of the glasshouses covering the site to the east and west of the wetlands.
- 2.2 A plan illustrating the existing surface water regime, produced by Glanville in 2014, is contained in Appendix H.
- The former Toddington Nurseries: The western part of the site comprising is understood to have discharged to a combination of soakaways and outfall to the existing ditch system north of the site.
 - Central West Former Holland Nursery: Discharged to an irrigation pond before discharging to Toddington ditch. It is understood that there was no restriction of flows from the system.

Infiltration

- 2.3 Intrusive ground investigations and soakage testing undertaken by Merebrook have confirmed that infiltration methods for the disposal of surface water runoff are unlikely to be practical across the majority of the site as the underlying material is generally found to comprise of Clay.
- 2.4 Review of these investigative reports appears to indicate only two areas where infiltration drainage were feasible (subject to further testing):
- Towards the western part of the site at depths of around 1.0m into the localised sand deposits; Parcels B3, B5, B1, Care Home, Enterprise Zone
 - Towards the western part of the site at depths of around 2.0m into localised Sand deposits; notably Parcels A1, A2, Youth Facility, B6, Waste Recycling Centre, and Commercial Areas.
- 2.5 Other than the locations noted above infiltration methods for the disposal of surface water runoff are unlikely to be feasible due to either the presence of Clay material or high groundwater levels.
- 2.6 Modelled Flood Levels in the Black Ditch are within a metre of ground level in many locations which could restrict depths available to effectively locate SuDS features.

Sustainable Drainage (SuDS) and Drainage Hierarchy

- 2.7 Sustainable Urban Drainage Systems (SuDS) are a range of techniques that aim to mimic the way rainfall drains in natural systems and so reduces the hydraulic and hydrological impact on the local area and downstream catchments. There are a number of options available to impose surface water restrictions on proposed development plots such as oversized sewers, below ground storage tanks, attenuation ponds and basins, swales, permeable paving, or infiltration systems.
- 2.8 To determine the most sustainable method of surface water disposal the hierarchy from approved document part H was used, see below:
- **An adequate soakaway or some other adequate infiltration system** apart from a few locations across the site infiltration methods for the disposal of surface water runoff are not feasible due to either the presence of Clay material or high groundwater.
 - **A Watercourse** – The Black Ditch is located to the north of the site within the boundary of the consented scheme. There are ordinary watercourse tributaries that run across the wetlands and connect to the Black Ditch
 - **A Sewer** – There are no public surface water sewers in the immediate vicinity. The only drains available were those that drained the pre-demolition glasshouses and discharged into the black ditch.

Proposed Surface Water Strategy

- 2.9 Based upon the above hierarchy a high level description of the surface water strategy is that the entire 19 hectare catchment as identified in Appendix B will drain at a restricted rate of run-off into the Black Ditch via a single outfall located at the northern boundary of development parcel C2.
- 2.10 As explained in the introduction this report describes the drainage strategy for the development parcels and associated road network for the consented scheme to the west of the wetlands. (The remaining area to the east of the wetlands is currently under development).

Proposed and Pre-Demolition Discharge Rates

Pre-Demolition Discharge

- 2.11 As described in paragraph 1.9 Glanville Consulting Engineers (GCE) produced useful information to depict the pre-demolition scenario. In order to understand and quantify the existing drainage and associated discharge rates

PHTV commissioned MK Surveys to carry out a drainage survey of the pre-demolition drainage network. The resulting survey is contained in Appendix H of this report (a total of 12 AO drawings covering the whole site).

2.12 GCE subsequently reviewed the drainage survey and ascertained there was a total of 10 outfalls, ranging in diameter from 150mm up to 375mm, with run-off eventually ending up in the Black Ditch via the series of smaller upstream ditches.

2.13 GCE produced basic micro drainage models in order to quantify the discharge rate from each outfall. They also produced a plan summarising the discharge rates from the individual parcels. Refer to Appendix H of this report.

2.14 The resulting total pre-demolition discharge rate from the West of Wetlands is as follows:

- Outfalls 01, 02, 03 (**Not** including outfalls 04 to 09 or the overland flow)
- Combined impermeable area = 8.33 hectares
- Peak Pre-demolition 1 in 1 year discharge = **390 Litres / second**

(The above figure does not account for the run-off from the demolished buildings and unrecorded drainage, as shown on the GCE plan. These areas are hatched on the GCE plan and are referred to as overland flow)

2.15 The overall development area of the west of wetlands catchment is 19.0 hectares, which equates to a pre-demolition peak **1 in 1 year** discharge rate of **20 litres / second / hectare**.

2.16 It is worth noting that the calculated pre-demolition discharge rate of 20 litres / second / hectare is for the 1 in 1 year return period and, although not calculated, would be significantly larger for the higher 1 in 30 year and 1 in 100 year return periods.

Proposed Discharge Rate

2.17 The Arun DC SFRA identifies the site as brownfield and states that development is unlikely to significantly increase run-off but should seek to reduce rates where possible. Therefore, the proposal is to specify a reduced rate of run-off when compared to the pre-demolition run-off described above.

2.18 A proposed peak discharge rate has been calculated using Greenfield runoff methods provided in IoH124 using a Soil Type of 5 to make allowance for the possible effect of the previous extensive impermeable area. The resulting 1 in 1 year brownfield rate has been calculated at approximately 15 litres

/second / hectare. A copy of the relevant calculation is contained in Appendix H.

- 2.19 The peak rate of surface water discharge for up to the **1 in 100 year return period + 30% climate change** will be restricted to **15 litres / second / hectare**. This proposed peak rate of surface water discharge will provide significant betterment when compared to the pre-demolition undeveloped scenario.

Calculations and Results

- 2.20 A Micro Drainage model has been created of the drainage network covering the overall catchment area of 19.0 hectares. The pipes have been sized to convey the surface water run-off from each area, and the proposed peak allowable discharge has been specified from each future development plot. The overall network schematic and details are contained in Appendix E.
- 2.21 Outfall B, the final outfall from the overall catchment, will discharge through a headwall into the existing ditch that is also located in a flood plain. There will be a flap valve on the final headwall to ensure floodwater within the floodplain will not back up into the drainage network. However, in this scenario the drainage network can't push open the flap valve until the water level within the site goes above the flood level in the wetlands.
- 2.22 There is a risk that a fully surcharged outfall could coincide with the on-site critical 1in100yr+CC storm so the Micro Drainage model has been simulated with a fully surcharged outfall.
- 2.23 The EA supplied 1in100yr+20%CC modelled flood level within the floodplain ranges from 1.72m AOD to 1.83m AOD. A flood level in the wetlands of 1.8m AOD by the outfall will result in the outfall (@ 1.0m AOD) being surcharged by approximately 0.8m.
- 2.24 There is also permeable sub-base designed beneath some of the Phase 2 roads, which has been incorporated into the Micro Drainage model.
- 2.25 The final peak allowable discharge of **285 litres / second** (19 hectares x 15 litres / second / hectares) has been modelled for the worst case 1 in 100 year storm event + 30% climate change. The simulation results are contained in Appendix F & G.

2.26 The discharge rates will be considerably lower for lower intensity storm events as shown below (discharge rates below are for a surcharged outfall. When the outfall is unsurcharged the full 285 litres / sec discharge is achieved):

- Critical 1 in 100 year storm (+30% CC): 265 litres / second
- Critical 1 in 30 year Storm: 207 litres / second
- Critical 1 in 1 year Storm: 167 litres / second

2.27 The proposed discharge rates represent a significant reduction when compared to the pre-demolition 1 in 1 year discharge rate of 390 litres / second, as follows:

- Critical 1 in 100 year storm (+30% CC): 32% Reduction
- Critical 1 in 30 year Storm: 47% Reduction
- Critical 1 in 1 year Storm: 58% Reduction

2.28 Most of the surface water attenuation will be located within the future car park area in a 1500 cubic metre proprietary storage tank and permeable paving sub-base. There will also be attenuation in the 900mm diameter pipe running from the car park to the outfall.

2.29 A maximum allowable discharge will be imposed on the majority of development parcels and, as such, each parcel will need to contain surface water storage within its respective reserved matters (RM) application boundary. These have been modelled indicatively within the micro drainage network but their design will need to be undertaken to accompany each RM Application.

[Existing & Future Development Parcels](#)

2.30 The discharge from each parcel into the main drainage network will be restricted to the following peak rate of run-off:

- Non-Resi Land (0.91Ha) 5 litres / second
- Non-Resi Land (0.81Ha) 5 litres / second
- Non-Resi Land (0.32Ha) 5 litres / second
- Non-Resi Land (Hotel) 5 litres / second
- Care Home: 5 litres / second
- Parking Square: 5 litres / second
- A1 Parcel (Existing): 34.5 litres / Second
- A2 Parcel: 5 litres / second
- B1 Parcel: 5 litres / second

- B2 Parcel: Free Discharge – See Appendix I & K
- B3 & B5 Parcel (Existing): 120 litres / second
- B6 Parcel: 5 litres / second
- Block B Parcel: 5 litres / second
- Block A Parcel: 5 litres / second

Free discharge areas below – See paragraph 2.27 to 2.29

- B4 Parcel (Phase2): Free Discharge – See Appendix I & K
- C1 Parcel: Free Discharge – See Appendix I & K
- C2 Parcel: Free Discharge – See Appendix I & K
- C4 Parcel: Free Discharge – See Appendix I & K
- Roads Serving Above Free Discharge into Network

Total Peak Discharge: **285 litres / Second**

(1in100yr return period, including climate change)

Free Discharge from Parcels

- 2.31 The surface water network serving the above parcels (C1, C2, C4, B4 Partial, Roads) are interconnected and overlap with each other, and the roads passing through these parcels also drain the upstream and surrounding parcels
- 2.32 There are also no flow controls (ie hydro-brakes) on the surface water sewers within Phase 2 parcels or roads. A total of 23 individual locations / sub-catchments have been identified within Phase 2. The free discharge varies for different return periods and their associated storm durations varying for short durations high intensity storms to longer durations low intensity rainfall events. The critical discharge rates have been identified in
- 2.33 Although there is a free discharge from these sub-catchments the downstream network has been designed to cater for this and the final outfall / discharge rate will not exceed 285 litres / second for the peak 1in100yr return period, including climate change. (The peak discharge rate will be considerably less for lower returns periods as set out above in paragraph 2.27.)
- 2.34 The type of attenuation tanks in the future development plots are to be determined at the time of the RM application. The volumes of tanks identified in Appendix I is approximate only and will need to be designed accurately by the Consultants undertaking the detailed design. Catch pit chambers are to

be specified immediately upstream to the tanks in order to limit the volume of debris / silt entering the tanks.

Modelled Overflow into Future Parcel B4

- 2.35 There is a requirement to add an overflow in the drainage network at the south west corner of the catchment (by SW01). The drainage is exceptionally shallow in this location so there is no scope to add surface water attenuation under the road or adjacent parking areas.
- 2.36 Approximately 226m³ of surface water run-off will overflow into the proposed surface water drainage network that will eventually serve the future development parcel B4. This will only occur for the critical duration storm (120mins) for the 1in100yr return period + climate change.
- 2.37 Therefore, the plan is to increase the size of the future attenuation tank in the adjacent B4 parcel so it will store the 226m³ and release it into the wetlands via a future outfall at the agreed rate of 15 liters / second / hectare.

Surface Water Treatment

- 2.38 Table 26.2 of the SuDS Manual identifies the pollution hazard level associated with the land uses within the Proposed Development as being 'Low'. On a scale from 0-1 a 'Low' pollution hazard level relates to the following pollution hazard indices (See table 26.2 of the SuDS Manual) This is applicable to runoff from residential roofs, driveways, paths, residential parking areas and low traffic roads:
- Total Suspended Solids = 0.5
 - Metals = 0.4
 - Hydrocarbons = 0.4
- 2.39 Table 26.3 of the SuDS Manual sets out the indicative mitigation indices provided by different SuDS features for discharges to surface water.

Permeable Paving

- 2.40 Communal parking and private driveways will be constructed using permeable paving allowing the rainwater falling onto permeable paved areas to be treated by the microorganisms as it passes through drainage medium, see Figure 4.1 below.

- 2.41 Permeable paving provides sufficient pollution mitigation for runoff from low hazard land uses and provides mitigation indices of 0.7, 0.6 and 0.7, which are in excess of the requirement set out in paragraph 2.25.

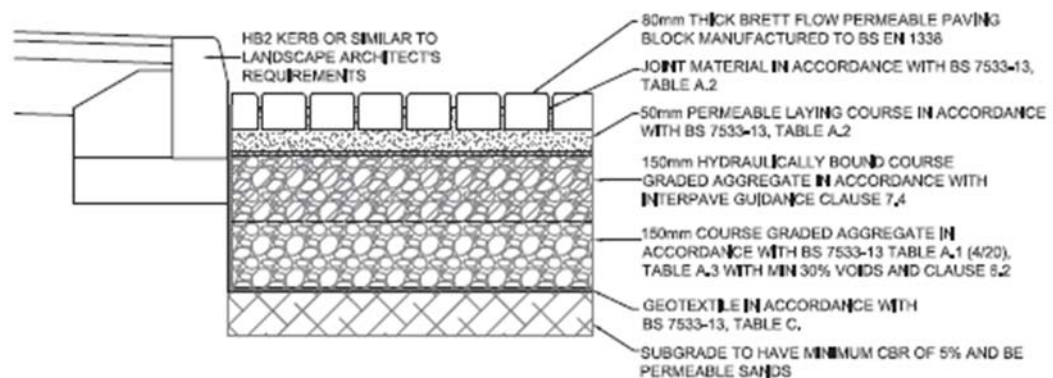


Figure 2.1: Typical Permeable Block Paving Construction

Permeable Sub-base Road

- 2.42 A number of the private roads within C2 Parcel, B2 Parcel and B4 Parcel draining into the drainage network will drain via permeable sub-base located under the road surface. The specific construction is contained in Appendix J.
- 2.43 It is considered that the permeable sub-base provides sufficient pollution mitigation for runoff from low hazard land uses and provides mitigation indices of 0.7, 0.6 and 0.7, which are in excess of the requirement set out in paragraph 2.25

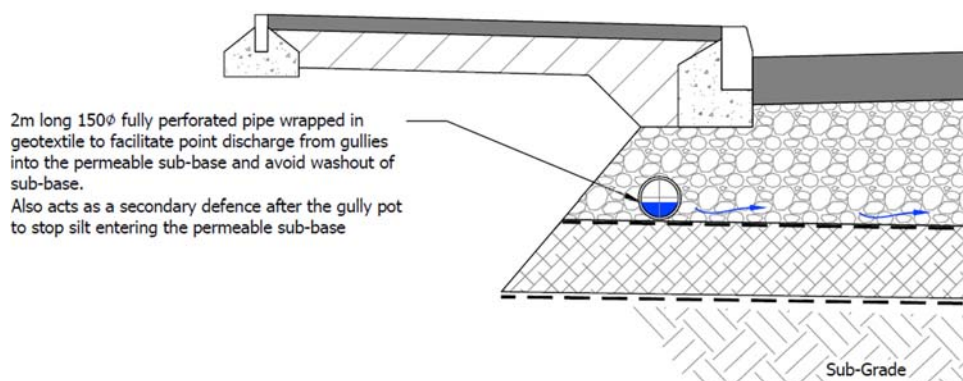


Figure 2.2: Permeable Sub-base Road (refer to Appendix J)

- 2.44 The private roads within C1 Parcel will drain via a filter trench running adjacent the carriageways. The specific construction is contained in Appendix J.
- 2.45 It is considered that the granular material sub-base will provides sufficient pollution mitigation for runoff from low hazard land uses and provides

mitigation indices of 0.7, 0.6 and 0.7, which are in excess of the requirement set out in paragraph 2.25

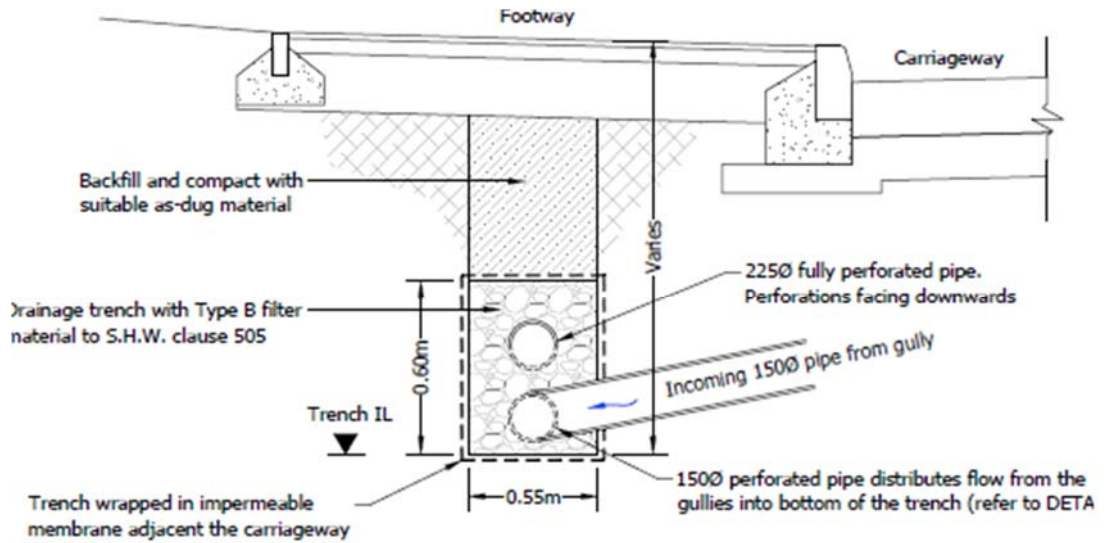


Figure 2.3: Permeable Sub-base Road (refer to Appendix J)

Traditional Gullies

- 2.46 Full size precast concrete gully pots draining the asphalt roads that will act as the first line of defence to trap silt and sediments in the drainage network.

Exceedance Flows & Surcharged Outfall

- 2.47 The drainage network is designed to cope with flooding up to the **1in100yr+30%CC** flood event and this water will be contained on site within the developed areas (not the wetlands)
- 2.48 Appendix D contains drawings that show the route of overland flow in the event of system failure, blockage or overload. This demonstrates that dwellings will be suitably protected in the event of a drainage system failure and resulting overland flow can find its way safely through the road network and into the wetlands.
- 2.49 Discussions have been had with Arun DC to ascertain what would happen if the wetland are flooded and the outfall becomes surcharged. The EA supplied 1in100yr+20%CC modelled flood level within the floodplain ranges from 1.72m AOD to 1.83m AOD. A flood level in the wetlands of 1.8m AOD by the outfall will result in the outfall (@ 1.0m AOD) being surcharged by approximately 0.8m.

- 2.50 The chances of the critical 1in100yr+CC flood level in the wetlands (which is tidal) coinciding with the peak 1in100yr+CC storm event on the site are very small. However, a fully surcharged outfall was simulated and results in a small flood volume escaping from the drainage network that can be safely be contained within the road network (refer to the simulated results for the critical 240 minute storm in Appendix F).

Adoption and Maintenance

- 2.51 The proposed surface water drainage system will be constructed in accordance with Sewers for Adoption 7th edition (SFA7); however it will remain in private ownership and will be maintained by a Management Company organised by the Developer.
- 2.52 Some of the main roads, footpaths and shared areas will be adopted by Mid Sussex District Council under a Section 38 agreement. The remaining private roads and communal parking areas will be maintained by a Management Company, organised by the Developer.
- 2.53 Taking this approach will ensure shared drainage and infrastructure items are properly maintained. This should enable tight control over the operation and maintenance of the drainage / SuDS systems on site.

Attenuation Tank Maintenance

- 2.54 The primary purpose of the attenuation tanks is to attenuate surface water run-off during extreme rainfall events.
- 2.55 Regular inspection and maintenance is required to ensure the effective long-term operation of the below ground storage tanks, see table 2.1 below for details:

Maintenance Schedule	Required Action	Recommended Frequency
Regular Maintenance	Inspect and identify any areas that are not operating correctly. If required, take remedial action.	Monthly for 3 months, then annually
	Debris removal from catchment surface (where may cause risk to performance).	Monthly.
	Remove sediment from pre-treatment structures.	Annually, or as required.
Remedial Actions	Repair/rehabilitation of inlets, outlets, overflows and vents.	As required.
Monitoring	Inspect/check all inlets, outlets, vents and overflows to ensure that they are in good condition and operating as designed.	Annually and after large storms.

	Survey inside of tank for sediment build-up and remove if necessary.	Annually until evidence this is too regular, every 5 years thereafter.
--	--	--

Table 2.1: Attenuation Tank Maintenance Requirements

Pervious Pavement Maintenance

- 2.56 Pervious pavements are pavements that allow for pedestrian and/or vehicular traffic while allowing rainwater to infiltrate through the surface and into underlying structural foundation layers.
- 2.57 Regular inspection and maintenance is important for the effective operation of pervious pavements as designed, these are described below in table 2.2:

Maintenance Schedule	Required Action	Recommended Frequency
Regular Maintenance	Brushing and vacuuming (standard cosmetic sweep over whole surface).	Once a year, after autumn leaf fall, or reduced frequency as required, based on site-specific observations of clogging or manufacturer's recommendations – pay particular attention to areas where water runs onto pervious surface from adjacent impermeable areas as this area is most likely to collect the most sediment.
Occasional Maintenance	Stabilise and mow contributing and adjacent areas.	As required.
	Removal of weeds or management using glyphosphate applied directly into weeds by an applicator rather than spraying.	As required – once per year on less frequently used pavements.
Remedial Actions	Remediate any landscaping which, through vegetation maintenance or soil slip, has been raised to within 50mm of the level of the paving.	As required.
	Remedial work to any depressions, rutting and cracked or broken blocks considered detrimental to the structural performance or a hazard to users, and replace lost joining material.	As required.
	Rehabilitation of surface and upper substructure by remedial sweeping.	Every 10 to 15 years or as required (if infiltration performance is reduced due to significant clogging).
Monitoring	Initial inspection.	Monthly for three months after installation.
	Inspect for evidence of poor operation and/or weed growth – if required, take remedial action.	Three-monthly, 48h after large storms in first six months.
	Inspect silt accumulation rates and establish appropriate brushing frequencies.	Annually.
	Monitor inspections chambers.	Annually.

Table 2.2: Pervious Pavement Maintenance Requirements

Drainage Network Design Criteria

- 2.58 The positive drainage will be designed in accordance with Sewers for Adoption, and BS EN 752 – Drain and sewer systems outside buildings and the Building Regulations - part H (2002).
- 2.59 The surface water network design and rate of surface water runoff would be based on the Modified Rational method and designed in accordance with the Wallingford Procedure. In order to carry out the design of the networks, a number of Global Variables are used. These Global Variables / parameters are related to the location of the site in the UK and have been obtained from the Flood Estimation Handbook (FEH).
- 2.60 The positive surface water system would be designed such that:
- The pipes remain unsurcharged during the 1 in 2 year design storm;
 - The system should not flood during the worst case 1 in 30 year storm with a free outfall;
 - The surface water run-off from the proposed development would be safely contained on site for up to and including the worst case 1 in 100 year storm event, plus an additional 30% for climate change;
 - The pipe velocities are such that self-cleansing is achieved at lesser more moderate storm intensities :
 - o Pipe roughness (ks) = 0.6
 - o Minimum pipe velocity at full flow = 1.0 m/s
 - o Cv Value of 0.84 (as agreed with WCSS)
 - o Percentage Impermeable areas
 - Buildings = 100%
 - Carriageways and footpaths = 100%
 - Private and Communal Parking = 100%

Micro Drainage Software

- 2.61 The proposed and existing networks have been designed and analysed using the Micro drainage software package that is recognised as one of the industry standard design suites. There are two separate programmes used within the package to firstly generate and then analyse the completed model. These are 'System 1' and 'Simulation'.

- System 1: The surface water computer model has been generated in “System 1” in using proposed data, such as the cover levels, invert levels and catchment areas. This is used to size the pipes in the proposed network based on the global variable outlined above
- Simulation: Once the proposed drainage system has been generated it was analysed using ‘Simulation’. This is a full hydrograph method for the determination of flood risk and system failure under extreme conditions. It can be used to analyse system overloads, storage, reverse flow characteristics, surcharging and backwater effects. It can also analyse against a wide variety of critical variables.

Return Periods & Critical Duration Storms

- 2.62 To determine the hydraulic requirements for an element of a drainage system, one must first consider the consequences of that capacity being exceeded and then identify an acceptable frequency for this to occur. This acceptable frequency is termed the return period, the period of time during which the stated rainfall can be expected to be exceeded on average only once, that particular element is then designed to accommodate a storm / flood with this return period.
- 2.63 Once the design return period is established the most critical storm duration for each of the elements is determined. These range in duration from 15 to 1440 minutes. For example;
- A 1 in 30 year, 30 minute duration storm for the northern catchment has an average intensity of 56.762mm/hr. This intensity of storm would be used to size the pipes and other drainage elements for conveyance purposes.
 - A 480 minute duration storm has an average intensity of only 8mm/hr (figures obtained from simulated results). However, the 480 minute storm lasts 16 times longer, therefore generating a much greater volume of water and would be used to size the attenuation tanks.


Condition 10 Conclusion

- 2.64 This surface water drainage strategy demonstrates that the west of wetlands catchment site can be drained satisfactorily without increasing flood risk elsewhere.

- 2.65 Intrusive ground investigations and ground water monitoring have determined that infiltration drainage is unlikely to be practical across **much** of the site. Discharge of surface water runoff directly into the chalk, which is designated a principal aquifer, has been discounted due to high recorded groundwater levels within this material and the inability to provide a minimum standoff distance from the saturated zone.
- 2.66 There are, however parcels to the **west** of the site, (as described in paragraph 2.4) that are yet to be developed and where bespoke infiltration drainage might be feasible. Parcel specific infiltration tests will be undertaken to determine the feasibility for each future land parcel where the standing ground water level is found to be in excess of 2.0m below the surface.
- 2.67 Surface water runoff will be discharged to the Black Ditch at a peak allowable discharge of 15 litres / second / hectares for up to the 1 in 100 year return period, plus 30% allowance.
- 2.68 This proposed rate of discharge will provide considerable betterment when compared to the pre-demolition brownfield arrangement. The provision of SuDS and attenuation features will store the balance of surface water runoff.
- 2.69 The proposed discharge rates represent a significant reduction when compared to the pre-demolition 1 in 1 year discharge rate of 390 litres / second, as follows:
- Critical 1 in 100 year storm (+30% CC): 32% Reduction
 - Critical 1 in 30 year Storm: 47% Reduction
 - Critical 1 in 1 year Storm: 58% Reduction
- 2.70 The information contained within this report demonstrates that adequate surface water infrastructure will be provided to enable the consented scheme to be satisfactorily drained, and will enable the future Parcels within the west of the wetlands catchment to make a positive connection into the proposed surface water network.
- 2.71 The reserved matters planning applications for the future parcels will need to be accompanied by an individual surface water drainage strategy and technical note. Each technical note will also include this overall strategy that demonstrates the downstream receiving network has been satisfactory designed in accordance with the relevant standards.

- 2.72 Parcel specific soakaway tests will be undertaken to confirm the feasibility of using infiltration drainage on the future RM planning applications for the remaining land parcels. If feasible the infiltration drainage will be used in conjunction with the positive discharge rates described within this report.
- 2.73 Therefore, it is considered that this evidence base, when read in conjunction with the RM application for the individual parcels, will provide sufficient information to discharge the outline planning Condition 10.

APPENDIX A: Site Location & Pre-Demolition Layout

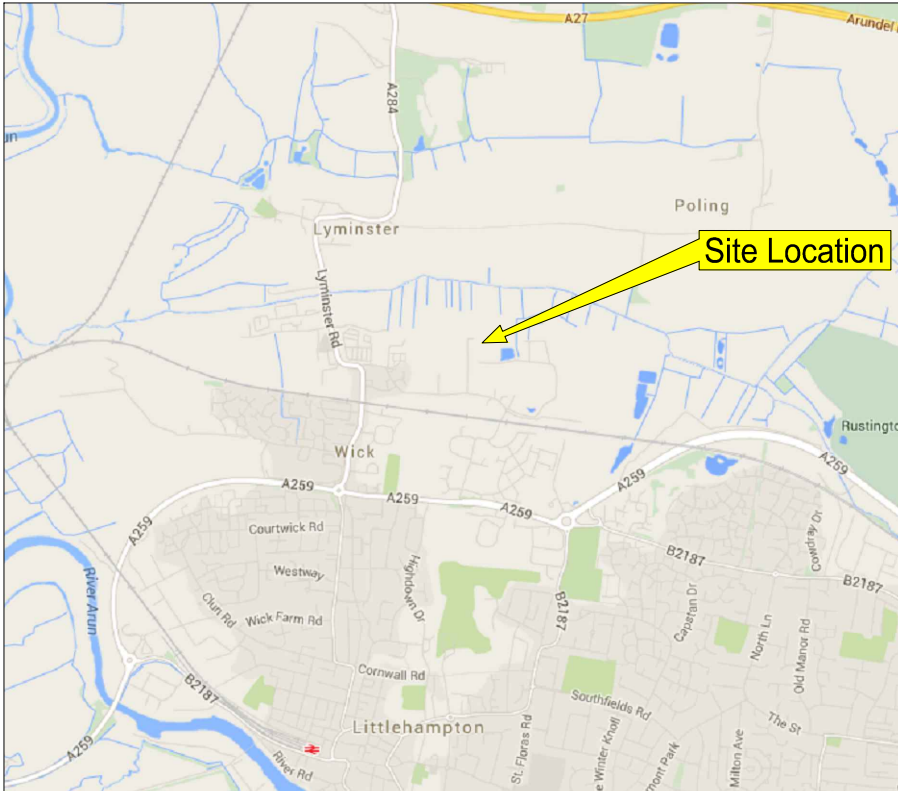

NOTES

1. This drawing is to be read in conjunction with all relevant documents and specifications.
2. Dimensions not to be scaled.

LOCATION


Address: Toddington Lane
Wick
Littlehampton
West Sussex
BN17 7PP

National Grid reference: TQ 03414 03979



Plan NTS

Plan 1:10000

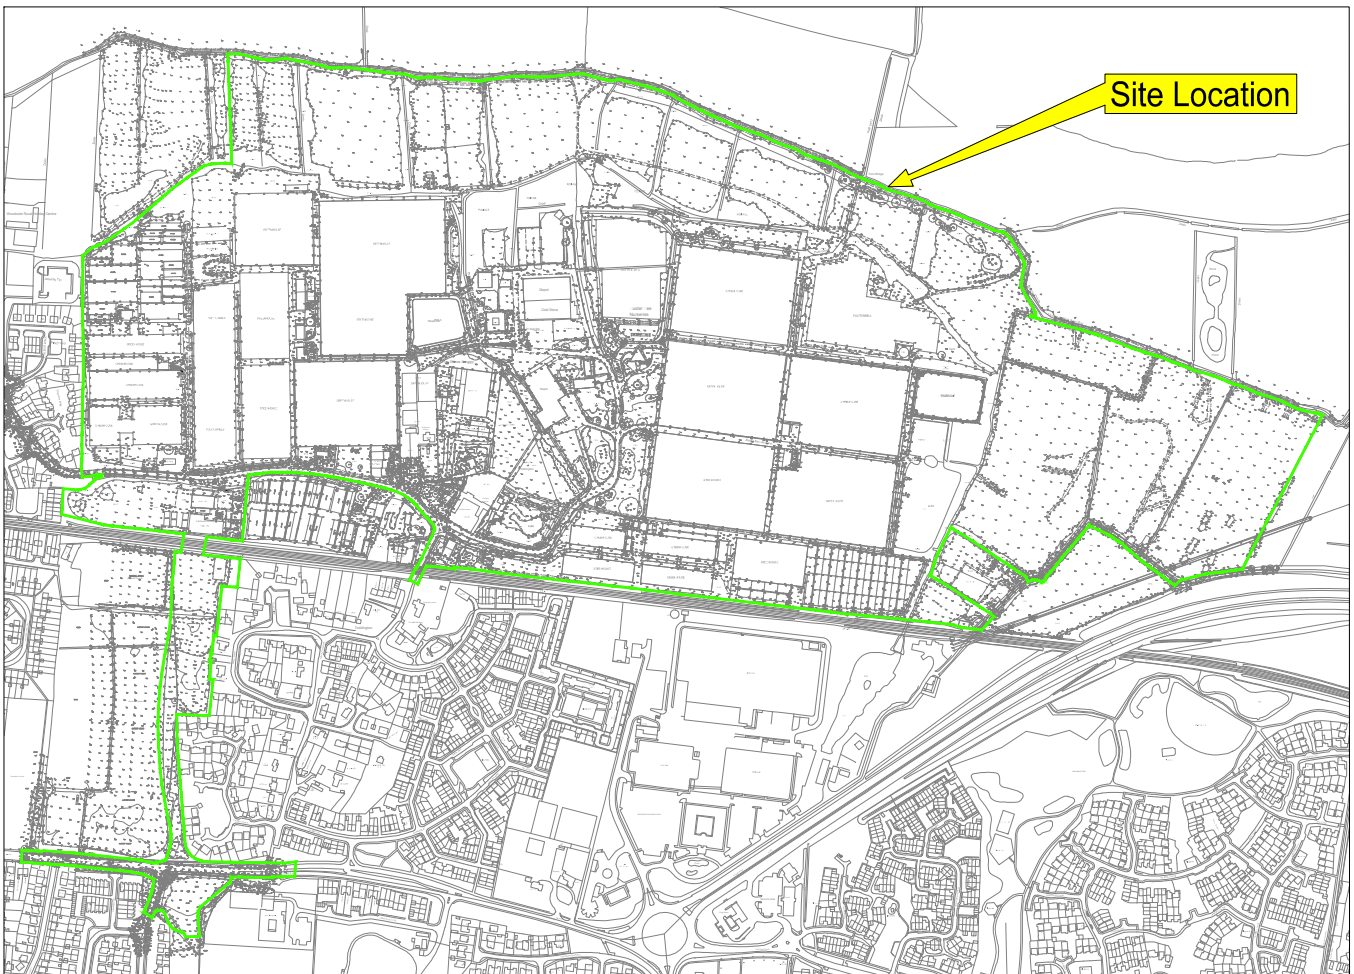

Project :

Land North of Toddington Lane, Littlehampton

Title :

Site Location Plan

Project Engineer : J O'Kelly

Scale : As Shown@A4

Project Director : k Rayner

Date : December 14

Drawing No.

N/A

Rev

-


APPENDIX B: Land Uses & Drainage Areas Covered



RESERVED MATTERS
APPLICATION AREA

OUTFALL

Open Space - Black Ditch

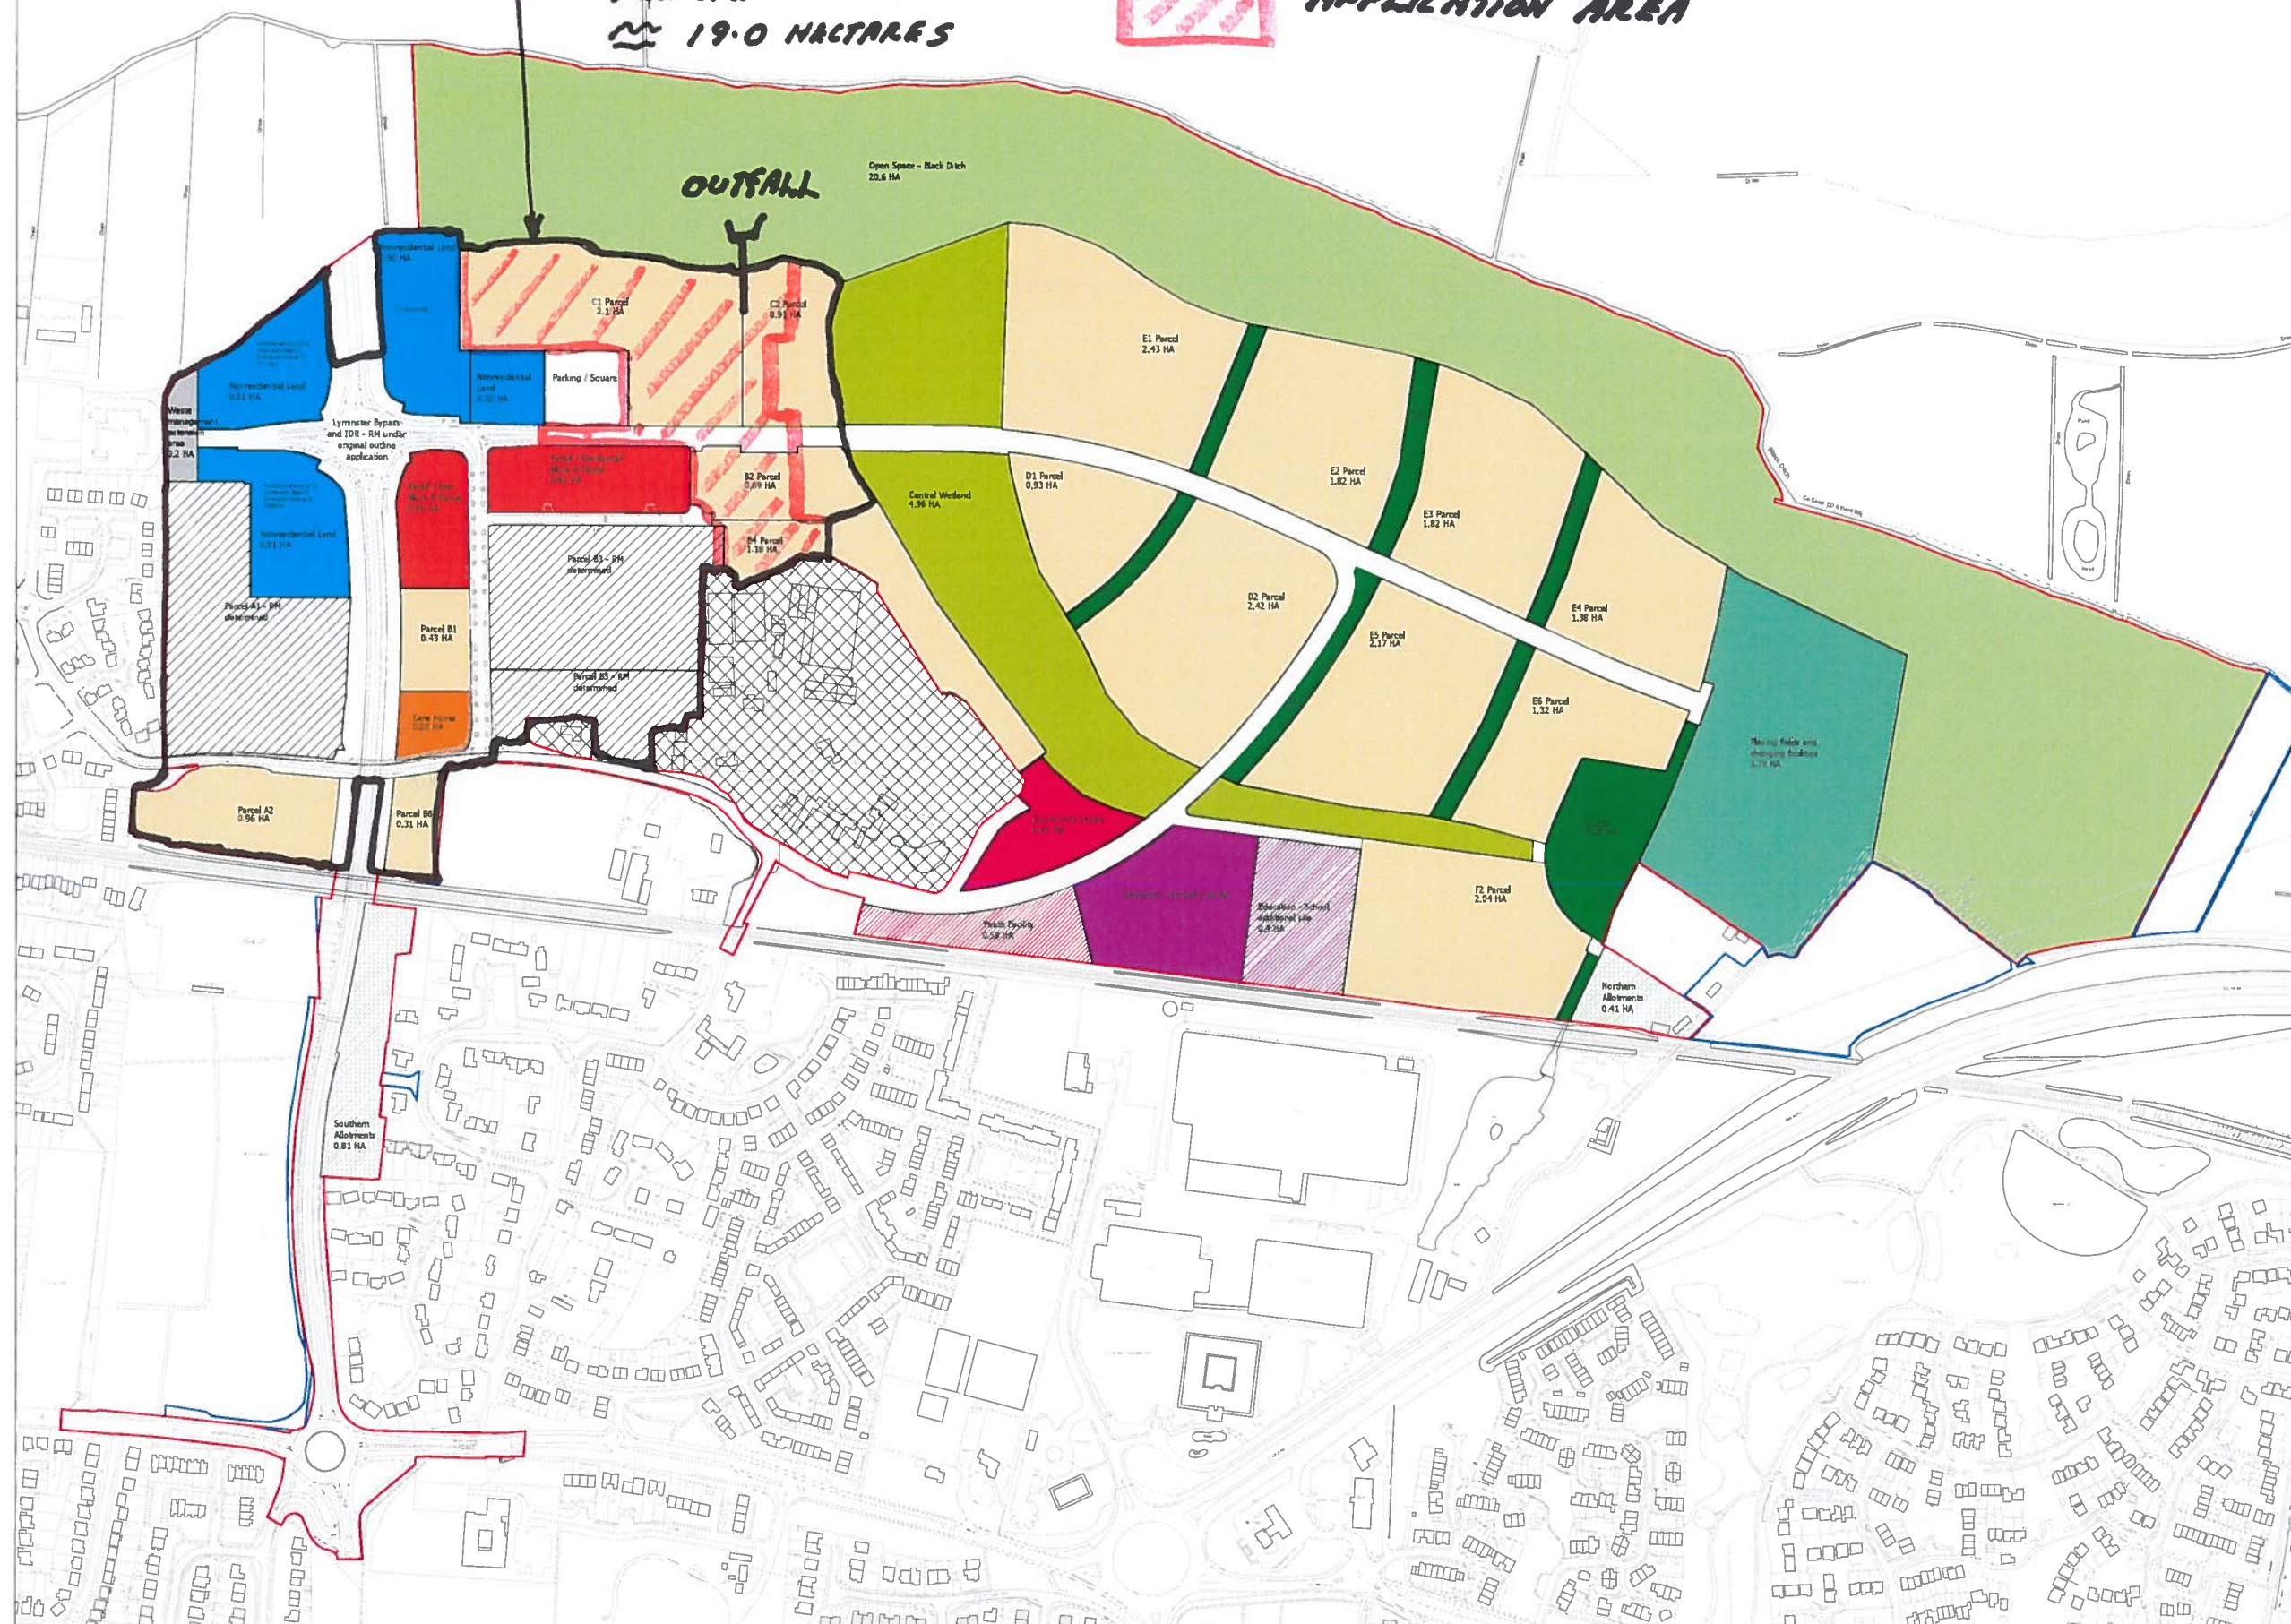

Key

- Public Open Space - Black Ditch
- Public Open Space - Central Wetland
- Playing Fields and Changing Facilities (S106 - 3.79HA)
- Allocations (S106 - 0.41HA & 0.81HA)
- SUD's
- Residential
- Education - School Site (S106 - 2.21HA)
- Community Centre and Youth Facility (S106 - 0.62HA & 0.58HA)
- Nonresidential Land (S106 - 2.62HA, Contract - 2.94HA)
- Recycling Centre (S106 - 0.21HA)
- Retail / residential (up to 3500SQM of Class A)
- Infrastructure
- S7J extension - Parade approved under previous RM
- Care Home

B	Land purchase amounted to be in with \$400	19.04.17
A	Transfer of land to be in with \$400	12.09.16
Per		Ende



Persimmon Homes Thames Valley
Persimmon House, Knoll Road,
Camberley, Surrey GU15 3TQ
Tel 01276 808080

**Toddington Lane
Littlehampton**

Date:

Scale:
1:2500 @ A1

Drop No: 519-GR.L 006


Drawing Title:
Parameter Plan - Land use

Drawing Status:

SUBMITTED

Drawn:

Rev:

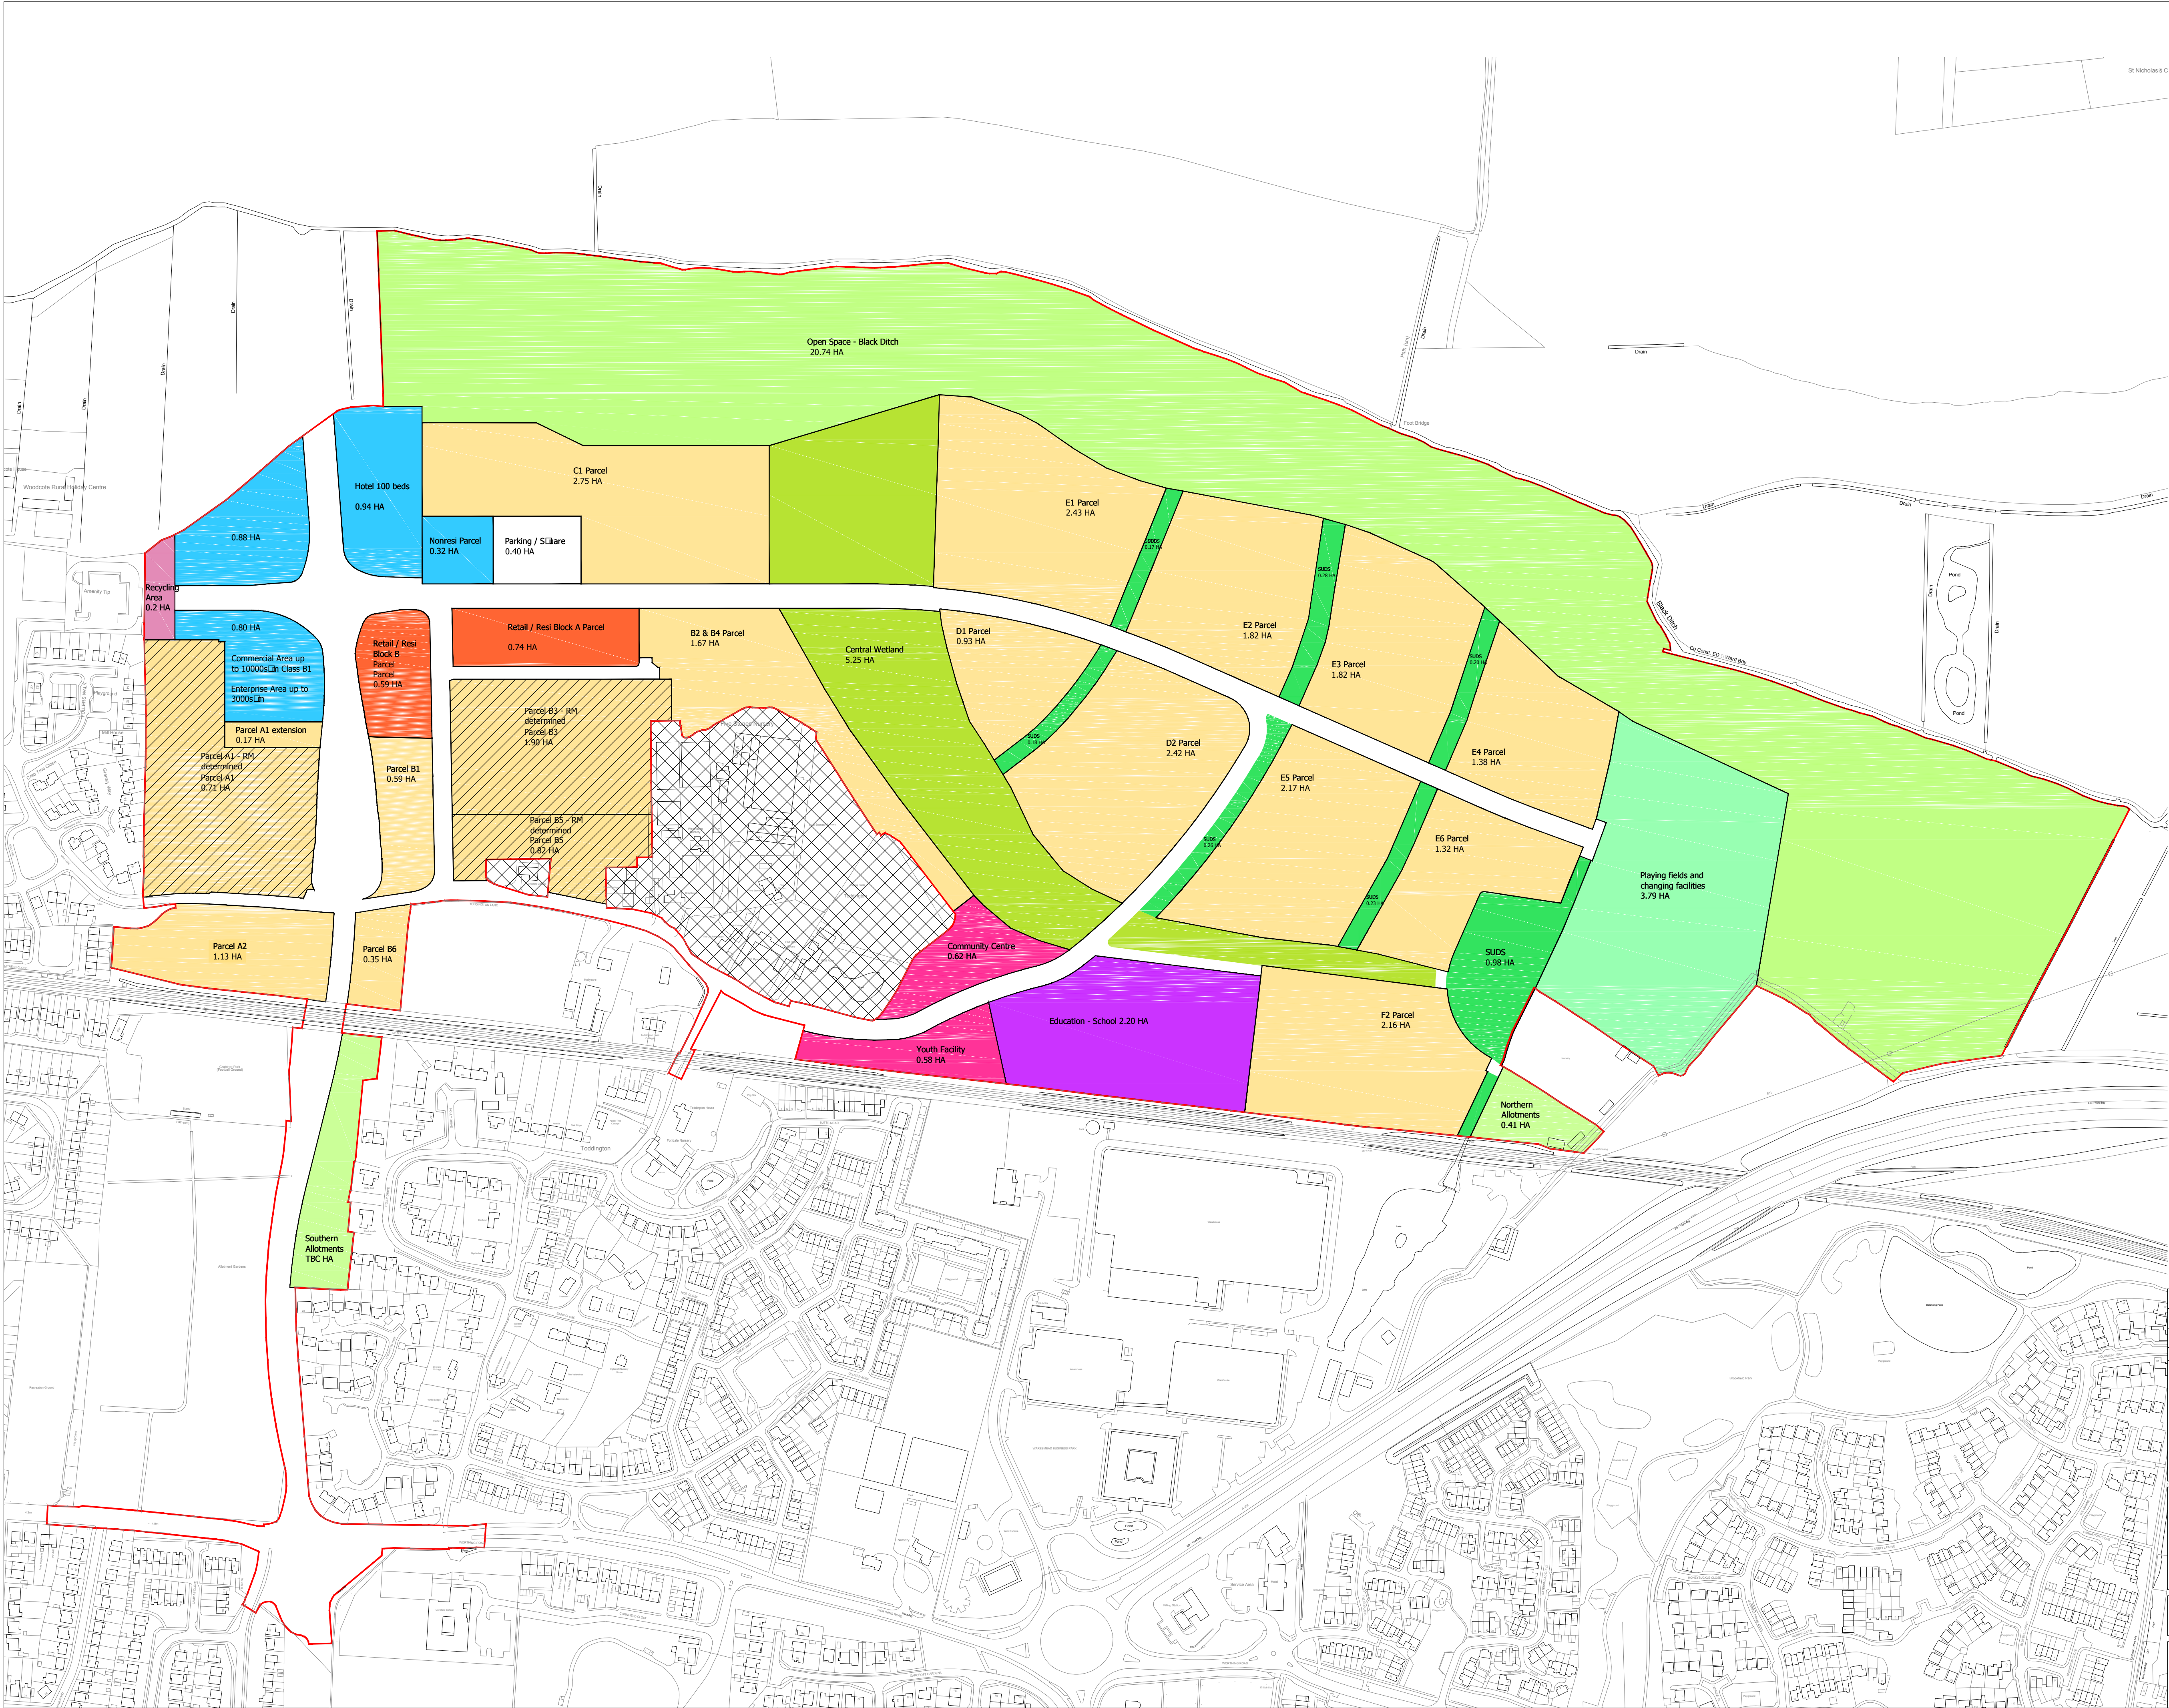

- Key:
- Public Open Space - Black Ditch
 - Public Open Space - Central Wetland
 - Playing fields and Changing Facilities (S106 - 3.79HA)
 - Allotments (S106 - 0.41HA & 0.81HA)
 - SUDS
 - Residential
 - Education - School Site (S106 - 2.2HA)
 - Community Center and Youth Facility (S106 - 0.62HA & 0.58HA)
 - Non-residential Land (S106 - 2.62HA, Contract - 2.94HA)
 - Recycling Center (S106 - 0.2HA)
 - Retail / residential (up to 3500sqm of Class A)
 - Infrastructure
 - S73 exclusion - Parcels approved under previous RM

Site:	-	-
Rev	-	-
A	Non-Residential land area (blue hatch) amended.	12.09.16



PERSIMMON
Together, we make a home

Persimmon Home Limited
Persimmon House, Knoll Road,
Camberley, Surrey GU15 3TQ
Tel: 01276 808080

Site: Toddington Lane Littlehampton

Date: 27.06.16

Scale: 1:2500 @ A1

Orig No: 519-GR.L_006

Drawing Title: Parameter Plan - Land use

Drawing Status: SUBMITTED

Drawn: KJ

Rev: A

APPENDIX C: Arun DC Surface Drainage Correspondence

Sean Foley

From: Laura Gibbons <Laura.Gibbons@arun.gov.uk>
Sent: 16 January 2019 11:05
To: Sean Foley
Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq; Fatima Evernden; Tracey Headley-Smith; Alex Wray; Adam Winstone
Subject: RE: Planning Consultation on LU/345/18/DOC

Hi Sean,

Condition 10

I am now happy for you to submit the details formally to planning to discharge condition 10.

Condition 11

I think it would be most practical whilst awaiting consent from the EA to provide us with two potential schemes, i.e. one presuming consent is achievable. And one presuming that consent will not be granted which demonstrates sufficient easement to the watercourse.

Please also speak with Tracey Headley-Smith (copied in) regarding this condition.

Condition 12

Please provide evidence that application for consent has been applied for by the end of tomorrow.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[Laura Gibbons](#) | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF

Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk

Arun is Working in Partnership with Chichester District Council

Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk



Save the environment - think before you print.

From: Sean Foley [mailto:sfoley@mayerbrown.co.uk]

Sent: 11 January 2019 16:42

To: Laura Gibbons

Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq; Fatima Evernden; Tracey Headley-Smith; Alex Wray; Adam Winstone

Subject: RE: Planning Consultation on LU/345/18/DOC

Laura,

Please see below in red and attached is a link to the updated DOC report that takes these comments into account: The wetransfer link is here: <https://we.tl/t-eCQNn8oBpT>

With this in mind I believe we are now agreed on surface water condition 10, which will hopefully prevent a temporary stop notice being served.

We will endeavour resolve conditions 11 & 12 asap.

Many thanks

Sean Foley
01483 750 508

From: Laura Gibbons [mailto:Laura.Gibbons@arun.gov.uk]
Sent: 11 January 2019 13:19
To: Sean Foley <sfoley@mayerbrown.co.uk>
Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>; Alex Wray <awray@peterbrett.com>; Adam Winstone <AdamW@mjaconsulting.co.uk>
Subject: RE: Planning Consultation on LU/345/18/DOC

Hi Sean,

Thanks for the prompt response.

Comments Regarding Condition 10

- The area at point 11 (PN 31.000) in the model and plan are inconsistent. Within the model you have 0.215 ha Impermeable area at PN31.000 and 0.043 ha at PN31.001. This is less than the 0.358 ha on plan. The other areas are okay as you have clarified that they are totals.

MBL Response: You are correct. The modelled figure at PN31.000 did not match the plan. The model was okay but the plan was not. This is now updated on the plan as a 60:40 split between PN31.000 & PN18.000. Has been updated on appendix H

- The attenuation volume on plan at 3.000 is inconsistent to that in the model, 80m³ and 92m³ respectively.

MBL Response: Noted. This has been changed. And is on the drainage plan in Appendix L

- Please can you confirm if all manholes/ gullies upstream of connections into attenuation tanks and permeable sub bases are catchpits/sumps.

MBL Response:

- We will specify the chambers immediately upstream of the main 1,500m³ attenuation tank under the car park as catch pits, which is good practice
- We expect the attenuation tanks in the future plots will also specify catch pits. We have added a section to the updated DOC report. refer to paragraph 2.34
- Run-off enters the permeable sub-base via large precast concrete catch pit gullies. In order to ensure the sub-base does not become blocked / blinded we have also specified a geotextile wrapped around the perforated pipe feeding into the sub-base. See attached detail that was also in the DOC report.

Comments Regarding Conditions 11 and 12

I still do not believe evidence has been submitted regarding consents from the EA to infill the reservoir and its associated IDB ditch.. Please provide this so that condition 11 and 12 can be discharged? N.B. This needs to be submitted now as it is within the phase 2 development area.

MBL Response: Noted. We will resolve this asap.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

From: Sean Foley [<mailto:sfoley@mayerbrown.co.uk>]

Sent: 11 January 2019 07:56

To: Laura Gibbons

Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq; Fatima Evernden; Tracey Headley-Smith; Alex Wray; Adam Winstone

Subject: RE: Planning Consultation on LU/345/18/DOC

Laura,

Excellent news. Please see below.

Attached is an wetransfer link to the updated drainage report which is circa 70MB with appendices. Therefore I have also attached the text only part of the report.

<https://we.tl/t-4uDxtCmjug>

Regards,

Sean Foley
01483 750 508

From: Laura Gibbons [<mailto:Laura.Gibbons@arun.gov.uk>]

Sent: 10 January 2019 16:29

To: Sean Foley <sfoley@mayerbrown.co.uk>

Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>; Alex Wray <awray@peterbrett.com>; Adam Winstone <AdamW@mjaconsulting.co.uk>

Subject: RE: Planning Consultation on LU/345/18/DOC

Hi Sean,

I have reviewed the information you have provided. To summarise what needs to be resolved:

1. There are numerous inconsistencies between plans and calculations regarding cover levels and invert levels of MHs. Please complete a full review and ensure all inconsistencies are removed.

MBL Response: Noted. We have reviewed the model and removed the inconsistencies in Phase 1. We have re-run the simulations and it make negligible difference to the modelled output. The output network details and simulation results take these changes into account

2. There are inconsistencies between impermeable areas on plan and those modelled at points 11, 18 and 22. Please increase the areas in calculations so that they are consistent with those on plan.

MBL Response: Noted.

- Point 11 coincides with PN 31.000: The modelled at this location is 0.358 hectares, which matches the plan. Therefore no discrepancy. No amendment necessary to model
- Point 18 coincides with PN 40.001: The modelled total area at this location is 0.11 hectares, which matches the plan. Therefore no discrepancy. No amendment necessary to model
- Point 22 coincides with PN 37.002: The modelled total at this location is 0.213 hectares, which matches the plan. Therefore no discrepancy. No amendment necessary to model

3. Your summary of the pipe network doesn't show the very top extent of Phase 2. The A0 drawings do not detail pipe diameters in this area

MBL Response: Noted and amended accordingly in Appendices of the updated DOC report. (Appendix H)

4. Updated drainage strategy report to include flows from unrestricted discharge points.

MBL Response: Noted and amended accordingly in Appendices of the updated DOC report. (Appendices L & S)

5. Updated plans with revised storage volumes.

MBL Response: Noted and amended accordingly in Appendices of the updated DOC report. (Appendix L)

Once you have supplied these details and I have reviewed they are correct we will be at a point where all relevant details can be submitted through planning to discharge the condition.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[Laura Gibbons](#) | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF
Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk
Arun is Working in Partnership with Chichester District Council
Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk



Save the environment - think before you print.

From: Sean Foley [<mailto:sfoley@mayerbrown.co.uk>]

Sent: 10 January 2019 12:26

To: Laura Gibbons

Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq; Fatima Evernden; Tracey Headley-Smith; Alex Wray; Adam Winstone

Subject: RE: Planning Consultation on LU/345/18/DOC

Importance: High

Laura,

I call earlier but went to voicemail.

The area currently being developed is Phase 2 and the extent of this RM application within the west of wetlands drainage catchment is on the attached PDF, titled "Phase 2 – Proposed Layout"

- Phase 2 (Parcel C1, Partial C2, Partial B2, Partial B4) – Full Drainage details have been supplied in Appendix N (MBL Estate Road layout and details) and Appendix O (MJA Plots or sub-catchment layout and details). MJA have not undertaken detailed drainage modelling (microdrainage) of their sub-catchments because it is unnecessary to do this. MJA have however undertaken the detailed design of the plot drainage within these sub-catchments in accordance with Building Regulations Part H & BS EN 752.
- Bovis site (Parcels B3 & B5) – RM determined. Constructed. I believe the last correspondence on this is attached and I have extracted the condition 10 information below. The Glanville Appendix I is also attached. The Bovis site is within the purple "Sub-Catchment Outfall B", which has a proposed discharge of 221.7 litres / second. By our estimation Parcels B3/B5 takes up approximately 50% of this sub-catchment areas, which explains the peak allowable discharge of 120 litres / second for the Bovis Site. However, the Glanville drainage strategy has now been superseded by MBL's drainage strategy, which is subject to our ongoing discussions

Condition 10: ADC Engineers have asked for confirmation that the total flow from the site is consistent with the proposed flows calculated in the Glanville Site-wide Surface Water Drainage Outfall Strategy of 19 May 2015, specifically appendix 1. They have suggested an overlay of each phase to be shown on the proposed discharge rate catchment layout, showing it as a proportion of the catchment. The same comment was made in relation to application LU/79/16/DOC and additional information was provided. **Please could the same information be submitted in relation to this DOC application.**

- Parcel A1 – RM determined. Constructed. The RM application was accompanied by the attached surface water drainage strategy report and associated calculations produced by Glanville. The final outfall location has now been superseded by MBL's drainage strategy, which is subject to our ongoing discussions

Hopefully this help is what you are looking for in relation to the catchments. If this is correct I believe you now have all the information you require. Please advise if otherwise.

We will now update the DOC Report to take account of what we've discussed / agreed.

Regards,

Sean Foley
01483 750 508

From: Sean Foley
Sent: 09 January 2019 18:20
To: 'Laura Gibbons' <Laura.Gibbons@arun.gov.uk>
Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>; Alex Wray <awray@peterbrett.com>; 'Adam Winstone' <AdamW@mjaconsulting.co.uk>
Subject: RE: Planning Consultation on LU/345/18/DOC

Laura,

We have already supplied the details for the areas that are currently being developed. Refer to Appendices N to R of the DOC report dated 07/11/2018.

I have also addressed your comments in green below. If possible I'd like to discuss point b below about the "catchment plan". Before we embark on providing this I'd like to understand exactly what you require

Regards,

Sean

From: Laura Gibbons [<mailto:Laura.Gibbons@arun.gov.uk>]
Sent: 09 January 2019 16:14
To: Sean Foley <sfoley@mayerbrown.co.uk>
Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>; Alex Wray <awray@peterbrett.com>
Subject: RE: Planning Consultation on LU/345/18/DOC

Sean,

I think there is some confusion regarding the level of detail I require. I require full drainage details of the areas which are currently being developed without pre-commencement conditions having been discharged. Without this there is

a continued breach of the planning permission and a Temporary Stop Notice will be served. I will require this level of detail for each future parcel and their respective DOC application prior to commencement.

I have provided some comments below in blue. I would like to complete my next review when all details are provided, rather than taking a piecemeal approach which is not time effective.

Look forward to receiving the necessary details.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[Laura Gibbons](#) | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF
Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk
Arun is Working in Partnership with Chichester District Council
Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk



Save the environment - think before you print.

From: Sean Foley [<mailto:sfoley@mayerbrown.co.uk>]

Sent: 09 January 2019 15:01

To: Laura Gibbons

Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq; Fatima Evernden; Tracey Headley-Smith; Alex Wray

Subject: RE: Planning Consultation on LU/345/18/DOC

Importance: High

Laura,

Thanks. Please see below in red.

With the recent correspondence and attached in mind we have absolute confidence that the proposed surface water network is fit for purpose:

- Peak rate of discharge is a significant improvement when compared to the pre-demolition figure
- There is sufficient storage volume on site to cater for the critical 1in00yr+CC storm event, even with a fully surcharged outfall
- There is no flooding for the 1in30yr event with a fully surcharge outfall
- In the unlikely event the surface water is overwhelmed by a storm event in excess 1in100yr, or the outfall/pipe experience a blockage the resulting floodwater can flow safely within the road network into the wetlands leaving the new properties unaffected

Regards,

Sean Foley
Principal Engineer
Mayer Brown Ltd
01483 755 508

From: Laura Gibbons [<mailto:Laura.Gibbons@arun.gov.uk>]

Sent: 09 January 2019 11:23

To: Sean Foley <sfoley@mayerbrown.co.uk>

Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith

Subject: RE: Planning Consultation on LU/345/18/DOC

Hi Sean,

I have now managed to complete a more detailed review of the proposals. As we are now a few comments and responses in, I have just started a new comments list (alphabetically referenced), any points which cross over to old points are cross referenced.

- a) (3+6) The storage structures (which are not porous paving) are inconsistent between calculations and plans. With the storage volumes provided in calculations all being greater than those on plan. Please update calculations or drawings so that they match up. Compliance with this on site will need to be checked.

MBL Response:

- The only storage structure that needs to be accurate is the large one underneath the car park because this is subject to the RM application for Phase 2 and provides most of the storage for the drainage network. This has been modelled accurately. This has not been modelled accurately, volumes are incorrect as are invert levels. MBL: The large tank you are referring to is located at PN 24.010. The invert level of the tank in the drawing is 1.70m, and is 1.71m in the model. Apart from this 10mm difference the large tank has been modelled correctly. The tank dimensions of 50m x 21m x 1.5m are the same in the drawing and in the model. We will not change the model and will change the number on the drawing. I'd be grateful
- The other modelled storage structures in the future development plots are indicative and have not been subject to a detailed design. The layout of these sites are not even agreed yet, never mind a detailed drainage design and associated tank dimensions and, as such, the volumes of the tanks are indicative only. The most important piece of information is the peak allowable discharge rate from each of the plots. The follow on RM applications for each of the plots will then provide accurate drainage designs and you will have an opportunity to scrutinise these as they accompany the future applications. I need to see that the modelled details match up with those on plan. When detailed design of the future stages occurs logically they would start by looking at the storage volumes outlined on the plans you are creating. Please update the plans. MBL: Noted and we will do this so the modelled tank dimensions match the plan.

- b) (5) Please provide a catchment area plan for the detailed persimmons parcels, and the time area details for these in a MicroDrainage printout.

MBL Response:

- We don't have a catchment area plan for the detailed persimmon parcels. We have however added the modelled areas to the plan (see point C below), which also shows how far back the model extends into each sub-catchment. You need to fully detail the catchments for the persimmons land where development has already started. MBL: Can we discuss on the phone please in the morning
- On 20th December we explained that we enhanced our micro drainage model so it picks up the individual pots areas / sub catchments identified as Points 1 to 23. We have not extended the model to include the surface water pipes within each sub-catchment. The drainage networks within the 23 sub-catchments are made up with a combination of 100dia, 150dia and 225dia pipes, which are expected for small catchments. Each of these mini catchments have already been designed MJA Consulting and we have 100% confidence that the pipes within these catchments are sized correctly / adequately. I need evidence that the design of the networks is sufficient within the parcels where development is occurring. This level of detail will be required for each subsequent DOC application. MBL: Can we discuss on the phone please in the morning
- We did not feed the areas onto the sub catchment nodes using a time area hydrograph. For example on PN22.000 we added the 710m2 impermeable area as one hit and the time of entry is 2 minutes. I will review this information against the plan provided.

- c) Please provide pipe details on a MicroDrainage printout (list) so that I can review the MicroDrainage model.

MBL Response:

- Please find attached the network details the pipeline schedules for the drainage network. Thank you, I will review this in due course.
- The plan showing pipe numbers is attached again and we have added the hardstanding areas from each of the sub-catchments and the MJA drainage plot networks (as a reminder MJA completed the sub-catchment drainage designs)

- d) (9) Without a flat sub base to permeable areas the water will pool at the lower points, and breach the surface at these points. I would like to either see: slopes modelled in the MicroDrainage inputs (i.e. take account of the 300mm difference in elevation over the relevant distances); or cover levels reduced to the lowest cover elevation within each permeable area. I believe this will result in considerably more flooding,

and therefore evidence the requirement for either a flat sub base to provide greater depths of stone in some areas, or check dams being provided.

MBL Response:

- The permeable sub-base does not need to be laid to be effective. The water will inevitably pool at the low points within the road network and come out of the gullies at these locations. There is 260mm of tarmac above the sub-base stone so when the water comes out of the gullies at the low point almost all the storage volume in the open graded stone will be utilised.
- We have updated the model and added a sloped invert to the sub-base. We have also changed the cover levels at the sub-base nodes (permeable subbase nodes 04 & 05) because these coincide with the gully locations
- Modelling the slope sub-base has a negligible difference when compared to the previous results. The 240minute duration event is still the critical storm:
 - o PN8.001/8.002 decreases from 7.6m3 to 3.9m3
 - o PN14.002 increases from 22.4m3 to 23.50m3
 - o PN1.014/PN1.015 increases from 4.7m3 to 9.5m3 I will review this in due course.

- e) (12) I am happy for all free discharge rates to be provided on plan and within the report for the 1 in 1 year event, 1 in 30 year and 1 in 100 year plus cc.

MBL Response:

- Thanks, we will add these figures to the report and the drawing.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[Laura Gibbons](#) | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF
Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk
Arun is Working in Partnership with Chichester District Council
Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk
 Save the environment - think before you print.

From: Sean Foley [<mailto:sfoley@mayerbrown.co.uk>]

Sent: 08 January 2019 13:13

To: Laura Gibbons

Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq; Fatima Evernden; Tracey Headley-Smith; Alex Wray

Subject: RE: Planning Consultation on LU/345/18/DOC

Importance: High

Laura,

Regarding point 3 below:

Please find attached the phase 2 drainage composite plan. I've sent you the phase 2 information because this is the area that has been designed to a construction standard level of detail.

(The layouts are still being developed for extension of parcels C2 and B2, denotes as unrestricted discharge points 6, 7, 12 & 13)

These A0 plans at 1:250 scale include:

- Finished Road Levels
- House finished floor level
- Proposed levels in parking courts and driveways
- Location of permeable sub-base
- Surface Water sewer and associated invert and cover levels
- Windes Pipe numbers that can be read in conjunction with the supplied Windes simulation results

The only information missing is the formation level of the permeable sub-base. See point 9 below

Regarding point 9 below:

The finished road surface down around this low area of the site ranges generally from 3.8m to 4.1m (apart from in front of plots 64 & 65 where it drops to 3.6m). This is because these properties 61 to 100 are on a relatively flat earthworks platform. The roads cannot be laid flat so we designed crests and sags in order to introduce falls to gullies. The low points are generally 3.8m and the high points are generally 4.1m.

The formation level of the sub base is not constant flat level, and it mirrors the finished surface. The formation level is approximately 720mm below the surface (260mm tarmac over 460mm open graded stone). We have modelled the formation level of the sub-base at 3.08m AOD and allowed for 460mm depth of storage. For your peace of mind we have also just run some figures with the formation level modelled 170mm higher at 3.25 (conservative approach), so in theory the storage becomes effective later in the storm. The volume of flooding increase slightly but not by a significant amount (Attached are the results)

- PN14.002 increases from 22.4m³ to 27.50
- PN1.014 increases from 4.7m³ to 9.9m³

I hope this is acceptable

Regards,

Sean Foley
Principal Engineer
Mayer Brown Ltd
01483 755 508

From: Sean Foley

Sent: 07 January 2019 17:30

To: 'Laura Gibbons' <Laura.Gibbons@arun.gov.uk>

Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>; Alex Wray <awray@peterbrett.com>

Subject: RE: Planning Consultation on LU/345/18/DOC

Laura,

Thanks,

Regarding point 10 below, please find attached the free discharge rates from the plots areas. Apologies for not attaching this to my previous e-mail.

Regarding point 12, are we supposed to add the critical 1in1, 1in30 & 1in100yr discharges rate at each of the 23 nodes. Both on the drawing and within the report?

I'll get back to you asap on point 3. We did not have the latest dwg files from MJA previously that contained plot levels and FFLs. We have these now so will be able to produce a composite plan

Regards,

Sean

From: Laura Gibbons [<mailto:Laura.Gibbons@arun.gov.uk>]

Sent: 07 January 2019 16:31

To: Sean Foley <sfoley@mayerbrown.co.uk>
Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>; Alex Wray <awray@peterbrett.com>
Subject: RE: Planning Consultation on LU/345/18/DOC

Hi Sean,

Thanks for your email. Just to clarify after we have agreed the drainage details between us they will need to be submitted formally to the planners.

I have provided comments below in purple. Please give me a call if you have any queries.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[Laura Gibbons](#) | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF
Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk
Arun is Working in Partnership with Chichester District Council
Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk



Save the environment - think before you print.

From: Sean Foley [<mailto:sfoley@mayerbrown.co.uk>]
Sent: 04 January 2019 15:38
To: Laura Gibbons
Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq; Fatima Evernden; Tracey Headley-Smith; Alex Wray
Subject: RE: Planning Consultation on LU/345/18/DOC
Importance: High

Hi Laura,

Happy new year and I hope you had a good break,

I also hope you agree we're in a pretty good position in relation to the surface water drainage design and the responses below in red, with associated attachments, will enable Condition 10 to be discharged.

Whilst reading the response below please note we have updated our Windes model so it now includes the permeable sub-base. See image below where we've added new nodes and modelled is as a "porous car park" (function within the programme) where the storage within 30% voids of the granular sub-base is recognised. We have distributed it as evenly as possible across the areas where the granular sub-base is located. The addition improves the results significantly and the total flooding volume for the fully surcharged critical 1in100yr+CC storm is now only 35m3 (spread across 4 different locations) that can safely be contained within the site.


We're confident this will answer your questions, but if not we would be happy to meet you early next week if you feel this would be beneficial. Or alternatively, we're happy to discuss over the phone

I look forward to your response.

Regards,

Sean Foley

Image below: Shows the locations of the permeable sub-base within the Windes model..

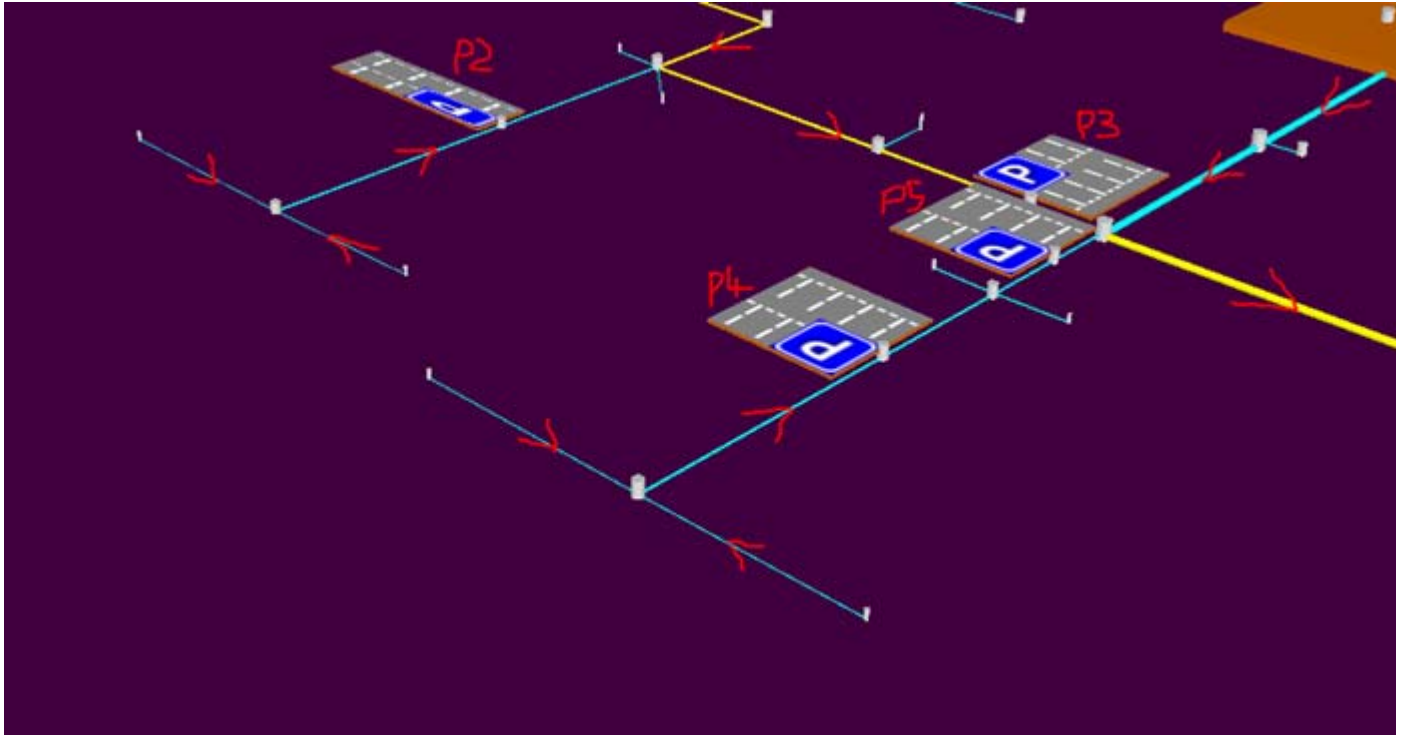

From: Laura Gibbons [<mailto:Laura.Gibbons@arun.gov.uk>]

Sent: 21 December 2018 15:21

To: Sean Foley <sfoley@mayerbrown.co.uk>

Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>; Alex Wray <awray@peterbrett.com>

Subject: RE: Planning Consultation on LU/345/18/DOC

Hi Sean,

Thanks for sending me that information. I have the following comments/ queries:

Surcharged outfall simulations

1. Can you please send me the FRA/ modelling report from PBA? I can access an FRA from PBA but it does not detail revised flood levels. Asking for this information from the EA will take quite some time (21 days even for us).

MBL Response:

- We have obtained the EA Product 4 form PBA. It is quite large to the following is a wetransfer link to the zip file: <https://we.tl/t-LIBEpKEWou> okay.
- 2. If you could also send me the critical storm summary for the 1 in 100year plus climate change allowance surcharged outfall event.

MBL Response:

- Attached is the critical storm summary for the 1in100yr+CC event. The critical storm down at the low end of the catchment where the surface flooding occurs is the 240 minute storm. I will review this once point 3 is resolved.
- 3. Can I please see a plan showing FFLs (including garages) and the drainage layout on the same drawings, with references to MicroDrainage PN included. Please also indicate kerb levels in the areas of flooding on this drawing.

MBL Response:

- Please find attached the MJA drawings that show the proposed road contours and the building floor levels. We have also identified where the critical 1in100yr flooding occurs on the levels plan. I need to see FFLs, finish, and formation levels of permeable paving, kerb levels, drainage network details including PN on the same plan. I do not believe this to be too onerous an ask. Without this my review is very slow and errors can easily be missed. Drawings need to be of a standard that can easily be interpreted, i.e. construction issue quality.
4. Can you please explain the water levels shown on the road cross section, is this just the MicroDrainage level from a specific location (not taking account of the sub base)?

MBL Response:

- Please ignore this. We added this to the drawing last year in order to get an approximation of flood levels within the system, which did not take into account the storage volume of the sub-base. I have removed the information from the drawing and re-issued. See point 7 below. Okay.
5. There is currently a small volume of flooding in the 30 year event simulation, please provide storage/ change pipe sizes to remove this.

MBL Response:

- The simulated flood volume was 0.2m³ for the high intensity 15 minute storm. The addition of the permeable sub-base and adjustment of the hardstanding area has removed this flooding and attached are the revised 1in30yr simulation results please can you provide me with an updated catchment area plan.
6. 250mm depth of water is not insubstantial and vehicular movements could result in bow waves and flooding to properties. Therefore, we want to see evidence the vast majority of water is actually stored within the sub base.

MBL Response:

- The addition of the permeable sub-base to the micro drainage model has decreased the flood volume significantly. The simulated volume in front of plots 83/84 & 90/91 has now been reduced from 58m³ to 22.4m³. This is a large open area if approximately 1200m² and 22.4m³ could easily be accommodated within this space (20mm depth of water over a space of 1,200m² works out at approximately to 24m³). I will review this upon completion of point 3.
 - The 250mm depth of water would only occur if a complete blockage / failure of the drainage network occurred in this specific area in front of plots 83/84 & 90/91. Okay.
7. Please can you provide detail on finish and formation level of roads on the same plans as requested in point 3 above.

MBL Response:

- The type of road make-up and finishes are on the attached drawings, which also show the location of the permeable sub-base.
 - The formation level of the roads is based upon the attached drawing that show the road make-up. The depth of the open graded stone is generally 460mm and is located just below the tarmac layers. See point 3.
8. Please also clearly indicate on a plan which roads will have a permeable subbase.

MBL Response:

- The location of the permeable sub-base is also on the road build-up and finishes drawing. (See point 7 above) See point 3
9. Please can you model the permeable sub base roads to demonstrate if the flooded volume can be stored. Check dams etc. may need to be provided.

MBL Response:

- We have added the permeable sub-base to the micro drainage model so the storage within the open graded sub-base is now included. There is no need to include check dams because the volume of the sub-base is utilised / required for the long duration. The site does slope, is subbase of all permeable subbases to be laid flat? Clarification and details of this under point 3 will be required. I will complete a full review of the calculations once point 3 is provided.

Free Discharge Rates

10. For information can you please supply the critical flow rates (critical storm may vary per catchment).

MBL Response:

- Critical Flow rates for the sub-catchment are now attached I cannot see these, can you resend and tell me the file name.

11. On the summary of discharges for plot areas you have got different (greater in some locations) flooded volumes to those provided in the surcharged outfall simulations. Please can you explain this discrepancy.

MBL Response:

- This is because we provided the summary for discharges for plot areas before we added a surcharged outfall. The latest attached figures now include for a surcharged outfall.
- All results provided are now based upon a surcharged outfall, apart from one which is the 1in100+CC 240min and is titled accordingly as “unsurcharged”.

12. Please confirm parcel ownerships for the areas with free discharges.

MBL Response:

- Persimmon Homes Thames Valley own all of the parcels where free discharges into the main network are proposed. Okay, I would like to see the surface water drainage strategy updated to reference (maybe in an appendix) the critical flows from each of the free discharge parcels. The main document itself must also reference the criticality of the network design within these regions.

Please note I am on leave from 4pm this afternoon until 2nd January.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[Laura Gibbons](#) | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF

Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk

Arun is Working in Partnership with Chichester District Council

Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk



Save the environment - think before you print.

From: Sean Foley [<mailto:sfoley@mayerbrown.co.uk>]

Sent: 21 December 2018 11:37

To: Laura Gibbons

Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq; Fatima Evernden; Tracey Headley-Smith; Alex Wray

Subject: RE: Planning Consultation on LU/345/18/DOC

Laura,

Good news. I had a very useful conversation with PBA yesterday afternoon, the flood risk consultants on the project, who have undertaken the flood compensation analysis for the new residential platforms that extend into the wetland. It turns out the flood level in the wetlands is much lower than we thought so the simulated flood volume resulting from a surcharged outfall reduces significantly.

Revised Flood Level in Wetlands

PBA confirmed we were using an out of date flood levels in the wetland, which accompanied the outline application. The EA have updated their flood model (post outline submission) and the modelled flood levels in the wetlands are as follows:

- 1in1000yr Flood Level: 2.38m AOD
- 1in100yr+20%CC Flood level: Ranges 1.72m to 1.83m AOD
- 1in75yr Flood Level: Ranges 1.56m to 1.72m AOD
- 1in20yr flood level: Ranges 1.49m to 1.59m AOD

This represents a significant reduction when compared old flood levels:

- Superseded 1in100yr flood level: 3.23m AOD
- Current 1in100yr flood level: 1.80m AOD
- **1.43m lower**

Revised Surcharged Outfall Simulation

With the above in mind we have applied a surcharged outfall to our micro-drainage model. A 1in100yr flood level in the wetlands of 1.8m AOD by the outfall will result in the outfall (@ 1.0m AOD) being surcharged by approximately 0.8m. There will be a flap valve on the final headwall to ensure this floodwater will not back up into the drainage network but in this scenario the drainage network can't push open the flap valve until the water level within the site goes above the flood level in the wetlands. Below is an image we have taken from our micro-drainage model where a constant surcharge of 0.8m has been applied.

Critical Storm

Windes allows us to simulate a range of storm events from short duration very intensity events (15min or 30min storms) and much longer low intensity rainfall events (24hrs). A 30 minute duration storm for this site has an average intensity of 57mm/hr. This intensity of storm would be used to size the pipes and other drainage elements for conveyance purposes. A longer 480 minute duration storm has an average intensity of only 8mm/hr (figures obtained from simulated results). However, the 480 minute storm lasts 16 times longer, therefore generating a much greater volume of water and would be used to size the attenuation. The critical storm for this scenario of a surcharge outfall is the 240 minute storm (4 hour storm).

It is worth noting that flooding in the wetlands is effected by the tide so it is unlikely this flood depth of 1.8m AOD will remain constant, and is the peak flood level. It takes approximately 6 hours for the high tide level to go to low tide level so in theory the flood level is likely to subside when this is read in conjunction with the 4 hour critical storm. However, we have taken a conservative approach and simulated a constant surcharged depth of 0.8m for the entire duration of the 4 hour critical storm

Flood Mechanism for surcharged outfall

The 1in100yr+cc 240min storm will generate a low intensity but large volume of water that will drain to the bottom of the network by the outfall. It cannot escape immediately because the flap valve on the outfall would be kept shut by the 1in100yr flood water in the wetlands. The drainage network will start to fill up and on-site water will eventually push open the flap valve. However, on-site storage has been used within this filling up period and, as such, flooding is simulated on site for this critical 4 hour storm. The drainage network at the low end of the site will eventually fill up entirely and flood water would start to escape out of the gullies located at the low points of the roads.

The low points where the flood water will escape from the network, for the 240minute storm, has been highlighted on the attached. The total combined volume across these points for the surcharged outfall is 182m³. This floodwater would follow the exceedance flow route in the channels of the road as shown on the attached appendix N. It would flow in the channel of the roads and would not affect the properties.

The flood depth and velocity in the channel will be low and it is expected that most of the footpaths would still be usable. The maximum depth of flood would occur in front of plots 83/84 & 90/91. The flood water would rise to a maximum level depth of 250mm (low point gullies @ 3.8, spill level of adjacent road table 4.05m) before it flow north along the road and into the wetlands. The flood water in this areas would also be stationary (zero velocity)

Permeable Sub-base Road

There are also permeable sub-base roads located in these low / gully areas. Also identified on the attached pan. This open graded sub-base in the roads has the ability to store water within the voids

The total area of carriageway with permeable sub-base is 1,300m². Based upon the design depth of 460mm open graded sub-base with a void ratio of 30% the volume of storage within these carriageways is approximately 180m³. (Note: it is a coincidence that it matches the surcharged flood volume above)

The permeable sub-base has not been modelled in the drainage network because we've designed it primarily for treatment purposes, but in reality it will have the ability to store water. So in theory it removes the surcharged 1in100yrCC flooding

1in30yr Storm with Surcharged Outfall

The reduced flood level in the wetlands also has the added benefit of removing the flooding for the 1in30yr storm event. Attached are the results.

Flood Compensation – Wetlands

While speaking with PBA yesterday afternoon they informed us that their flood compensation analysis for the wetlands is currently resulting in 500m³ surplus volume for the 1in1000yr analysis. Therefore, spilling floodwater into the wetlands for the extremely rare event of a fully surcharged outfall coinciding with the critical 1in100yr storm event will not have negative impact on downstream or surrounding properties.

Conclusion

With the above and attached in mind we have absolute confidence that the proposed surface water network is fit for purpose:


- Peak rate of discharge is a significant improvement when compared to the pre-demolition figure
- There is sufficient storage volume on site to cater for the 1in00yr+CC storm event, even with a fully surcharged outfall
- There is no flooding for the 1in30yr event with a fully surcharge outfall
- In the unlikely event the surface water is overwhelmed by a storm event in excess 1in100yr, or the outfall/pipe experience a blockage the resulting floodwater can flow safely within the road network into the wetlands leaving the new properties unaffected

I hope the above and attached provide sufficient information to facilitate the discharge Condition 10. We would be happy to meet you in the first week to January if you feel this would be beneficial. Or alternatively, we're happy to discuss over the phone

I look forward to your response

Regards,

Sean Foley
Principal Engineer
Mayer Brown Ltd
01483 755 508

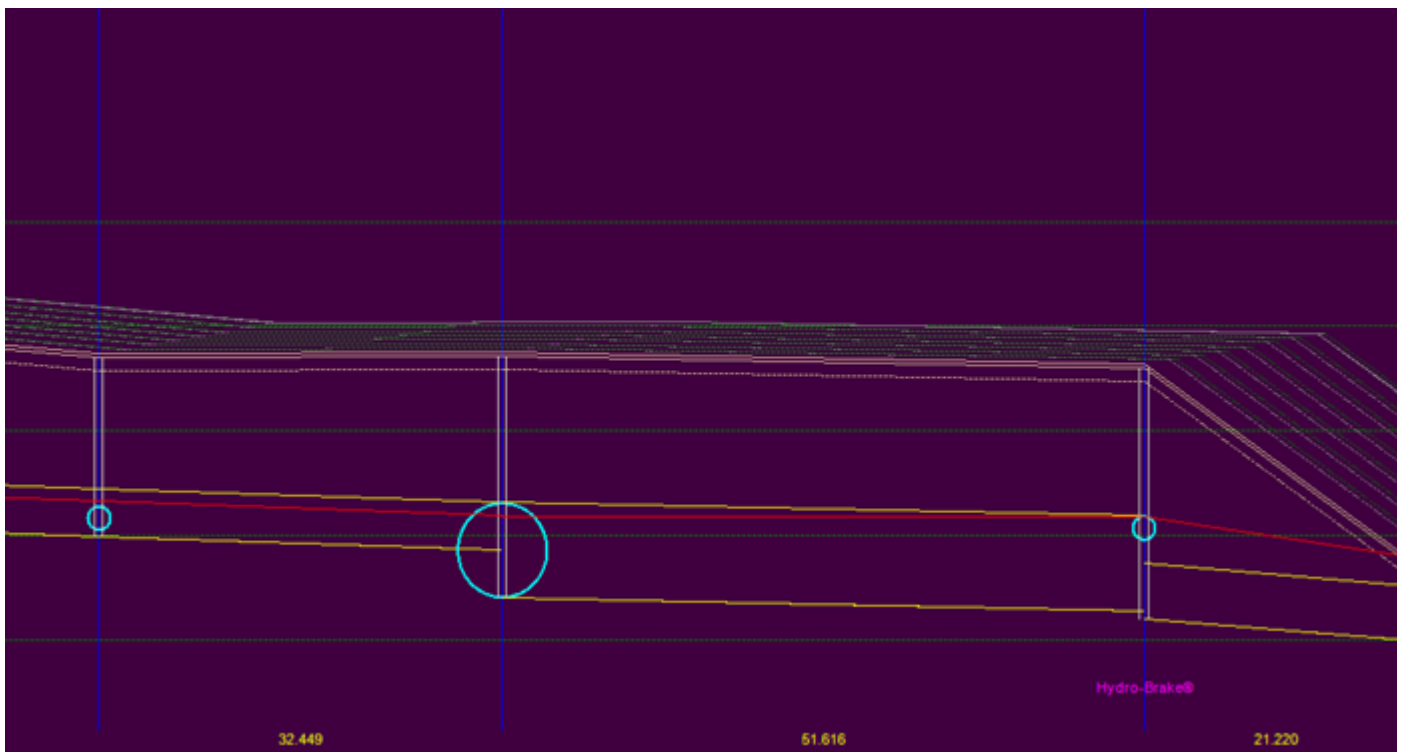

From: Sean Foley

Sent: 20 December 2018 16:18

To: 'Laura Gibbons' <Laura.Gibbons@arun.gov.uk>

Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>

Subject: RE: Planning Consultation on LU/345/18/DOC

Laura,

As requested, we have enhanced / increased the microdrainage model so it picks up the individual pots areas / sub catchments. The most notable changes are new branches at points 2, 6, 7, 12, 13, 20 & 21. We have then re-distributed the impermeable areas.

With the above in mind, attached is the following:

- Plans showing 23 different locations / sub-catchments within Parcels B2, Partial B4, C1, C2 & S4. The sub catchment are all feeding into the main carrier sewer as it passes through the site
- Flow rates for the 23 location for the 1in1, 1in30 & 1in100yr return period. We chose the relatively high intensity storm duration of 30 minutes.

Hopefully this information is what you are expecting to receive.

We wish to avoid installing hydro-brakes within each of these sub-catchments because the downstream receiving sewers have already been designed to receive the run-off from each of the sub-catchments. The downstream attenuation volume and final restricted flow into the black ditch have been designed with a free discharge from the sub-catchments. Therefore, free discharges from the sub-catchments into the downstream sewer will not increase the flood risk downstream

Apologies for my piecemeal response, but we're feed the modelling information through to you as I complete it.

Regards,

Sean Foley
Principal Engineer
Mayer Brown Ltd
01483 750 508

From: Laura Gibbons [<mailto:Laura.Gibbons@arun.gov.uk>]

Sent: 19 December 2018 12:30

To: Sean Foley <sfoley@mayerbrown.co.uk>

Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>; Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven Lecocq <slecocq@mayerbrown.co.uk>; Fatima Evernden <Fatima.Evernden@arun.gov.uk>; Tracey Headley-Smith <Tracey.Headley-Smith@arun.gov.uk>

Subject: RE: Planning Consultation on LU/345/18/DOC

Hi Sean,

Thanks for the prompt response.

I am very concerned by the fact that the surcharged outfall scenario results indicate that significant flooding would occur and furthermore I do not believe the joint probability of a rainfall event and tidal event occurring are infinitesimally small. DEFRA research indicates that typically the south coast has a modest correlation between the two. Obviously catchment factors vary this, with some catchments on the south coast having a far greater correlation. I could go into more detail on this, but it really is opening a big can of worms and having done some joint probability analysis in the past I know it isn't a small task. I also believe that flooding will occur for lower probability events.

The important thing is that WSCC policy states that the 1 in 100 year plus climate change event must be contained on site/ not increase flood risk elsewhere. You need to demonstrate that allowing 1750m3 to overflow through the development wouldn't increase flood risk elsewhere. You will also need to demonstrate to me that flood depths and velocities on site are safe.

Furthermore, WSCC policy requires no flooding for the 1 in 30 year plus climate change event, please model this event with a surcharged outfall and ensure that surface water drainage design is modified to provide the required storage to ensure no flooding.

Regarding condition 11, until I have seen consent for the infilling I am not willing to recommend the discharge of this condition.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[Laura Gibbons](#) | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF
Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk
Arun is Working in Partnership with Chichester District Council
Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk



Save the environment - think before you print.

From: Sean Foley [<mailto:sfoley@mayerbrown.co.uk>]
Sent: 18 December 2018 16:09
To: Laura Gibbons
Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq
Subject: RE: Planning Consultation on LU/345/18/DOC

Laura,

Thanks for your response. I'll come back to you asap on the hydro-brake / modelling issue.

I can however provide a response on the surcharged outfall scenario, which is covered in paragraphs 2.42 to 2.46 of the submitted DOC report (text attached), under the section titled "*Exceedence Flows and Surcharged Outfall*"

We had lengthy discussions earlier this year with Mark Akmenkalns (MA), the Drainage Engineer at West Sussex County Council. The correspondence is contained in Appendix F of the DOC drainage report (attached). A number of issues were addressed including a situation whereby the outfall could potentially be surcharged by the flood water in the Black Ditch. We simulated the surcharged scenario and it ended up with a large volume of flood water escaping from the drainage network. Therefore, It was agreed with WSCC that it is not reasonable keep this flood water on site and the resulting flood water will flow safely through the road network and eventually into the wetlands, as shown in Appendix H.

Condition 11 & 12

We have analysed the wording of these conditions again and perhaps there is some misunderstanding about the specific requirements contained therein.

- Condition 11 – Refers to arrangements for future access to and maintenance of any watercourse or culvert. Section 3 of the DOC report provides clarification that there will no longer be any existing watercourses or ditches within this section of the development, West of Wetlands, that will require future access for maintenance. Therefore, arrangements for future access are not required for the areas to the West of the Westlands. The final headwall at Outfall location B that discharges into existing ditch will be maintained by a Management Company organised by Persimmon Homes. The headwall is located adjacent an estate road turning head so will be easily accessible.
- Condition 12 – Refers to consents for any works effecting watercourses.
 - o Outfall B: A nominal length of existing ditch is to be filled in to facilitate the construction of the new 525mm diameter outfall pipe and the new headwall. The 525mm diameter outfall pipe and associated headwall are described / included in the Flood Defence Consent for Outfall B. Therefore, we believe existing flood defence consent for Outfall B should be sufficient for works affecting this particular ditch
 - o Lagoon and Overflow ditch: Regarding the irrigation lagoon and overflow ditch, we will find out if a specific application has been submitted to fill this ditch in. If not we will organise for one to be submitted asap.

We will get back to you asap about the hydro-brake / modelling issue

Regards,

Sean Foley
01483 750 508

From: Laura Gibbons [<mailto:Laura.Gibbons@arun.gov.uk>]
Sent: 18 December 2018 13:29
To: Sean Foley <sfoley@mayerbrown.co.uk>
Cc: Clark, Robert <robert.clark@persimmonhomes.com>; Michael Eastham <Michael.Eastham@arun.gov.uk>;
Edgley, Martin <martin.edgley@persimmonhomes.com>; Adrian Barnley <abarnley@mayerbrown.co.uk>; Steven
Lecocq <slecocq@mayerbrown.co.uk>
Subject: RE: Planning Consultation on LU/345/18/DOC

Sean,

Thanks for the email.

Condition 10

I have attached a plan, with alterations to the required hydrobrake locations crossed out. This reduces the number to 17 by utilising hydrobrakes within slightly more main sewers, this is just an option. However, I do feel that if we were looking at this from scratch we could have reduced this number down further. In my opinion there is insufficient argument to not reduce the number of hydrobrakes/ construct them.

Within the model you have what are the flow rates you have coming from each of the 26 locations?

I am unwilling to accept the surface water drainage proposals without further information regarding detailed network modelling or installing the required hydrobrakes.

Furthermore, you need to be submitting MicroDrainage results from models with the outfall to the black ditch surcharged to the 1 in 100 year plus climate change flood levels. Ensuring that the surface water drainage network can cope with this event. N.B. This was one of the reasons for refusal given on the decision notice.

Condition 11

I look forward to receiving further information on this.

Condition 12

As you stated in your response below regarding condition 11 you are infilling a ditch. I therefore, I await confirmation from you as to whether consent has been obtained for this.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[Laura Gibbons](#) | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre,
Maltravers Road, Littlehampton, BN17 5LF

Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk
Arun is Working in Partnership with Chichester District Council

Visit Arun's web site at <http://www.arun.gov.uk/> and www.chichester.gov.uk



Save the environment - think before you print.

From: Sean Foley [<mailto:sfoley@mayerbrown.co.uk>]
Sent: 13 December 2018 13:06

To: Laura Gibbons
Cc: Clark, Robert; Michael Eastham; Edgley, Martin; Adrian Barnley; Steven Lecocq
Subject: RE: Planning Consultation on LU/345/18/DOC

Dear Laura,

Thank you for your comments below. Following your initial response our subsequent / updated report (dated 7th November) we did take your comments into account where we believed they were appropriate. (We certainly do not wish to give the impression we've ignored these and apologies if this is how it seems)

The paragraphs where amendments were made are highlighted in yellow on the attached DOC report_07.11.2018_Text only

Condition 10 – Surface Water Drainage

Discharge Rates (pre-demolition & proposed)

In the surface water Condition 10 Section:

- We have amended paragraphs 2.14 to 2.16 and 2.23 that cover the pre-development and post development discharge rates.
- We have 2.62 & 2.68 that deals with infiltration within the individual parcels

Restricted Discharges from Parcels

When we met a few months ago you requested that individual parcels are assigned a specific discharge rates. However there are a number of parcels where it is not practicable to achieve this.

Following our meeting we endeavoured to figure out a solution by analysing the micro drainage model but it is almost impossible to assign a specific rate unless individual controls are applied. We have highlighted on the attached pdf where these individual controls would be required before it discharges into the main carrier sewers. A total of 26 controls would be needed, and where controls are applied we then need to potentially add some upstream attenuation.

I believe you accept it is not practicable to apply 26 individual controls, but you requested us to justify the approach by creating individual micro drainage models for each location. We believe creating 26 individual micro drainage models would prove to be a superfluous exercise. The drainage networks within the 26 mini catchments are made up with a combination of 100dia, 150dia and 225dia pipes, which are expected for small catchments of no more than 1,000m2. Each of these mini catchments have already been designed MJA Consulting (contained in Appendix O) and we 100% confidence that the pipes within these catchments are sized correctly / adequately and creating an individual model for each one is not a task we would normally undertake.

Modelling the main drainage runs and laterals is absolutely required and we have already created a large and pretty comprehensive microdrainage model of the drainage network that takes into account the drainage areas from each of these 26 locations.

With the above in mind we hope you agree that we do not need to assign specific discharge rates to the parcels in phase 2, which are listed in paragraph 2.26 of the updated report (including B2). Plus, there is no need to undertake additional modelling for the 26 individual catchments.

Condition 11 – Existing Watercourses & Culverts

The only watercourse and ditch affected by the proposed development will be the irrigation lagoon and its overflow, which are no longer required to serve the consented scheme. We understand that the ditch is not yet filled in and the works will form part of the future planning submission for the remaining section of phase 2 that extends into the wetlands.

We will liaise with our Client to find out if a specific application has been submitted to fill this ditch in. If not we will organise for one to be submitted asap.

Condition 12 – Consents

We surprised by this response because we believe the Flood Defence Consent for the new outfall (granted by the Environment Agency) into the ditch would be adequate because it includes a description of the works and information on the new headwall.

Below is an extract from the flood defence consent describing what is allowed and we are at a loss as to why this is not considered adequate?

We'd be very grateful for some advice on how we can overcome this please.

Watercourse: Ordinary Watercourse within the River Arun Internal Drainage District

Location: Land south of Black Ditch, North Littlehampton, West Sussex

NGR: 503413, 104302

Description of works: Construction of 1 no. precast concrete surface water outfall (with railings and flapvalve) to take discharge from new development through 525mm diameter pipe.

For the following activities:

Construction of 1 no. surface water outfall

(1) Construction of 1 no. permanent precast concrete surface water outfall (with railings and flapvalve) to take discharge from new development through 525mm diameter pipe

As detailed on Drawings: 8140927/SK12, CV8140927/SK09 and SFA 10C

Headwall Plan

I trust the above is acceptable and will hopefully be sufficient to contribute towards the discharge to these planning conditions, specifically Condition 10 & 12

Please contact me if you wish to discuss this further or require additional information.

Regards,

Sean Foley
Principal Engineer
Mayer Brown Ltd
01483 750 508

Sean Foley,
Principal Engineer
Mayer Brown Limited
Lion House
Oriental Road
Woking
Surrey
GU22 8AR

T: 01483 750 508
M: 07774 221 044
E: sfoley@mayerbrown.co.uk

www.mayerbrown.co.uk



Please consider the environment before printing this email. Thank you.

IMPORTANT: This message is private and confidential. If you received this message in error, please notify us and remove it from your system.

Mayer Brown is a limited company registered in England.
Registered number: 3531997. Registered office: Lion House, Oriental Road, Woking Surrey, GU22 8AR

This message (and any associated files) is intended only for the use of the intended recipients and may contain information that is confidential, subject to copyright or constitutes a trade secret. If you are not the intended recipient you are hereby notified that any dissemination, copying or distribution of this message, or files associated with this message, is strictly prohibited. If you have received this message in error, please notify us immediately by replying to the message and deleting it from your computer. Any views or opinions presented are solely those of the author (sfoley@mayerbrown.co.uk) and do not necessarily represent those of the company.

From: Clark, Robert [<mailto:robert.clark@persimmonhomes.com>]
Sent: 12 December 2018 15:55
To: Sean Foley <sfoley@mayerbrown.co.uk>
Subject: FW: Planning Consultation on LU/345/18/DOC

Hi Sean

Please see email below. This is getting urgent as the Council have now threatened a Stop Notice. Can you review ASAP and get in touch with Laura Gibbon today. Thanks

Kind Regards

Rob

Robert Clark
Head of Planning
Persimmon Homes Thames Valley
Persimmon House
Knoll Road
Camberley
GU15 3TQ
Tel 01276 808080

From: Michael Eastham [<mailto:Michael.Eastham@arun.gov.uk>]
Sent: 06 December 2018 15:33
To: Clark, Robert
Subject: FW: Planning Consultation on LU/345/18/DOC

Hi Rob,

Please see the email below from ADC Drainage Engineers to LU/345/18/DOC.

I look forward to receiving the requisite information.

Kind regards,

Michael

From: Laura Gibbons
Sent: 06 December 2018 14:58
To: Planning.Responses
Cc: Michael Eastham
Subject: Planning Consultation on LU/345/18/DOC

Engineers Comments Regarding Condition 10

I cannot see that anything has changed from the Surface Water Drainage Strategy that Mayer Brown provided on the 9th October, in fact the version number is the same. I had the following comments in October:

“Thank you for sending through that information. I have the following comments regarding the pre-demolition rates:

1. No connection between Outfall 5, 6 and 7 the lakes and reservoirs to the Norway ditch was proven in the drainage survey. I would therefore like to see these removed from the 1 in 1 year calculations for the site (we don't know what the capacity of the lakes would have been but I would imagine they'd take a decent volume of water). This equates to 163.5 l/s
2. The pond between catchment 3 and the Toddington ditch was not included in the calculations, therefore the rate of 301.4 l/s is far too great in my opinion.

If we discount the runoff in points 1 and 2 above we get a 1 in 1 year discharge of 340.47l/s. This is greater than what you are proposing. And some discharge from catchment 3 would have occurred, so the figure would be something greater than 340.47l/s.

To summarise, as the pre-development rates are greater than the rates you propose I am happy.

Regarding the discharge rates from individual parcels:

I note that you state that there are no controls in the interlinked parcels B4, C1, C2, C4 and roads and you are using this as justification for allowing an uncontrolled discharge from these parcels. I am not happy with this, it is possible that you are causing a greater flood risk downstream as a result. As discussed in the meeting I am keen to see you stating maximum values from each. If physical controls aren't currently used then I am keen to push for them to be constructed. The only other way I will accept no physical control devices being installed is by you demonstrating that the maximum flow from the networks doesn't exceed the maximum value for that parcel as a result of pipe diameters constricting flow. This will require you modelling the networks in microdrainage and running various return periods and storm durations.

What about parcel B2 where discharge is proposed to be free? What is the justification for this?

Please feel free to give me a call should you have any questions.”

These comments have not been resolved. There are still un restricted flows from B4, C1, C2, C4 and B2 despite my previous comments that this was inappropriate. I will re-iterate that either controls should now be installed or models run to show what the maximum flow from each parcel is based upon pipe diameters that have been constructed. And evidence submitted based on this that the total flow from the complete development does not exceed 285l/s.

Until such a time as this evidence is clearly supplied and the drainage strategy updated to follow this I am unwilling to recommend the discharge of this condition.

Engineers Comments Regarding Condition 11

No evidence has been submitted of formal written acceptance of the proposals to infill the watercourses shown in Figure 3.1 of the drainage strategy. Therefore, I do not recommend the discharge of this condition.

Engineers Comments Regarding Condition 12

A FRAP has been obtained from the Environment Agency to construct a headwall in the Black ditch. However, no evidence of the acceptance of infilling has been provided, nor for any over proposed structures. Therefore, I do not recommend the discharge of this condition.

Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

Laura Gibbons | Engineer (Drainage & Coastal), Engineering Services, [Arun District Council](#) | Location: First Floor, Arun Civic Centre, Maltravers Road, Littlehampton, BN17 5LF
Internal: 37818 | External: +44 (0) 1903 737818 | Fax: +44 (0) 1903 716018 | E-mail: laura.gibbons@arun.gov.uk



From:

planning.responses@arun.gov.uk [<mailto:planning.responses@arun.gov.uk>]

Sent: 30 November 2018 11:04

To: Land Drainage

Subject: Planning Consultation on LU/345/18/DOC

To: **Engineers (Drainage)**

NOTIFICATION FROM ARUN DISTRICT COUNCIL

TOWN AND COUNTRY PLANNING ACT 1990

APPLICATION NO: LU/345/18/DOC

Registered: 28-NOV-18

Site Address: Land North of Toddington Lane Littlehampton BN17 7PP

Description of Works: Approval of details reserved by condition imposed under ref LU/47/11/ relating to Condition Nos 10 surface water drainage scheme, 11 future access to & maintenance of any watercourse or culvert, 12 discharge of any flows to watercourse, 13 foul water drainage system.

The Council have received the above application to discharge conditions. I shall be pleased to receive any observations you may wish to make in respect of those conditions relating to your field of expertise.

[Click here to view the Discharge of Condition application](#)

[Click here to view conditions on original application - click on decision tab](#)

Should you have any comments to make, these should be sent **by replying to this email** by 14th December 2018.

www.arun.gov.uk/planning

Please be aware that any comments you may make will be available on our website so please do not insert personal details or signatures on your reply.

In the absence of a reply within the period stated, I shall assume that you have no observations to make.

The officer dealing with this application is Michael Eastham who can be contacted on telephone number 01903 737772.

Thanking you in anticipation

Planning Case Officer
Arun District Council

post_con_email

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

This email has been scanned by the Symantec Email Security.cloud service.

For more information please visit <http://www.symanteccloud.com>

The information in this email is confidential and may be legally privileged. It is intended solely for the addressee. Access to this email by anyone else is unauthorised. If you are not the intended recipient, any disclosure, copying, distribution or any action taken or omitted to be taken in reliance on it, is prohibited and may be unlawful. If you are not the intended recipient please contact the sender and delete the message.

Our privacy policies for our customers, employees and job applicants are available at

<http://www.persimmonhomes.com/corporate/corporate-responsibility/policies>

Persimmon Homes Limited is registered in England number 4108747, Charles Church Developments Limited is registered in England number 1182689 and Space4 Limited is registered in England number 3702606. These companies are wholly owned subsidiaries of Persimmon Plc registered in England number 1818486, the Registered Office of these four companies is Persimmon House, Fulford, York YO19 4FE.

This email has been scanned by the Symantec Email Security.cloud service.

For more information please visit <http://www.symanteccloud.com>

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly

prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

APPENDIX D: Exceedance Flows


Pool Allowable Discharge: 286 litres / second

PHASE 2: Application

FOR INFORMATION

1971 FEB 27/65

ARUN DISTRICT COUNCIL LU/17/19/DOC

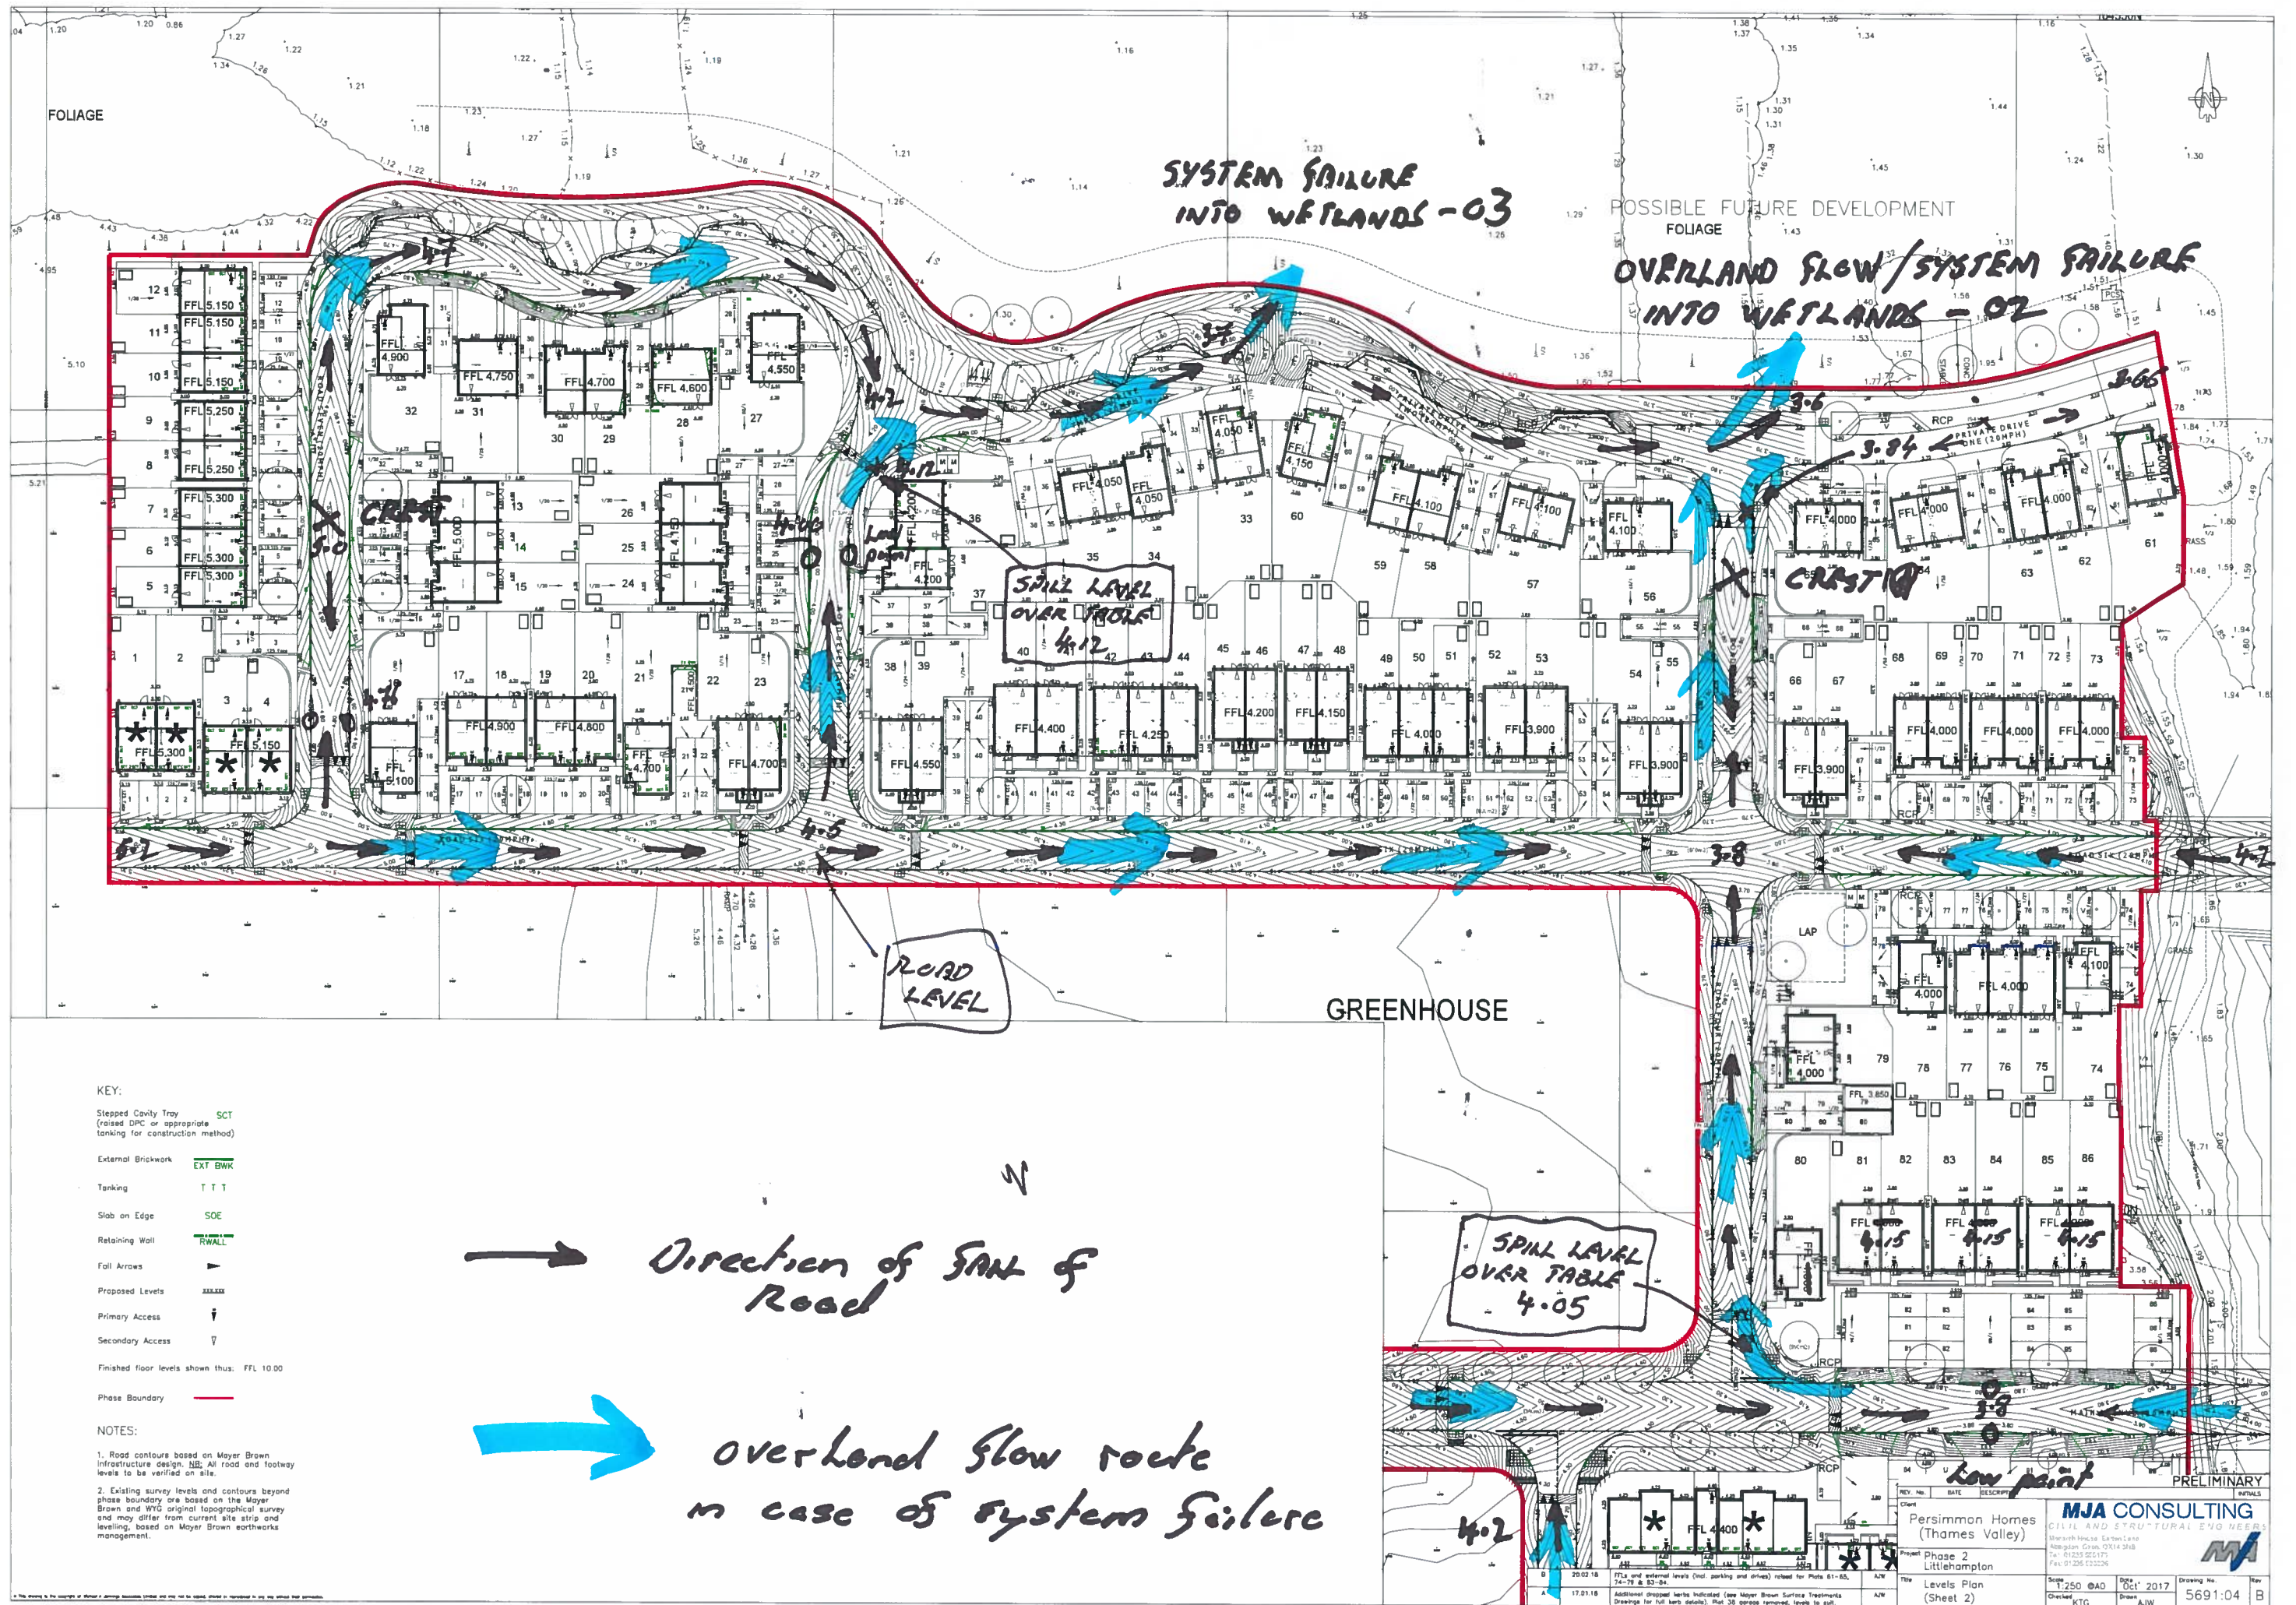

KEY:

Stepped Cavity Tray (raised DPC or appropriate tanking for construction method) SCT

External Brickwork EXT BWK

Tanking T T T

Slab on Edge SOE

Retaining Wall RWALL

Fall Arrows

Proposed Levels

Primary Access

Secondary Access

Finished floor levels shown thus: FFL 10.00

Phase Boundary


NOTES:

1. Road contours based on Mayer Brown Infrastructure design. NB: All road and footway levels to be verified on site.

2. Existing survey levels and contours beyond phase boundary are based on the Mayer Brown and WYG original topographical survey and may differ from current site strip and levelling, based on Mayer Brown earthworks management.

Persimmon Homes (Thames Valley)
Phase 2 Littlehampton
Levels Plan (Sheet 2)

MJA CONSULTING
CIVIL AND STRUCTURAL ENGINEERS
17.01.18
5691:04

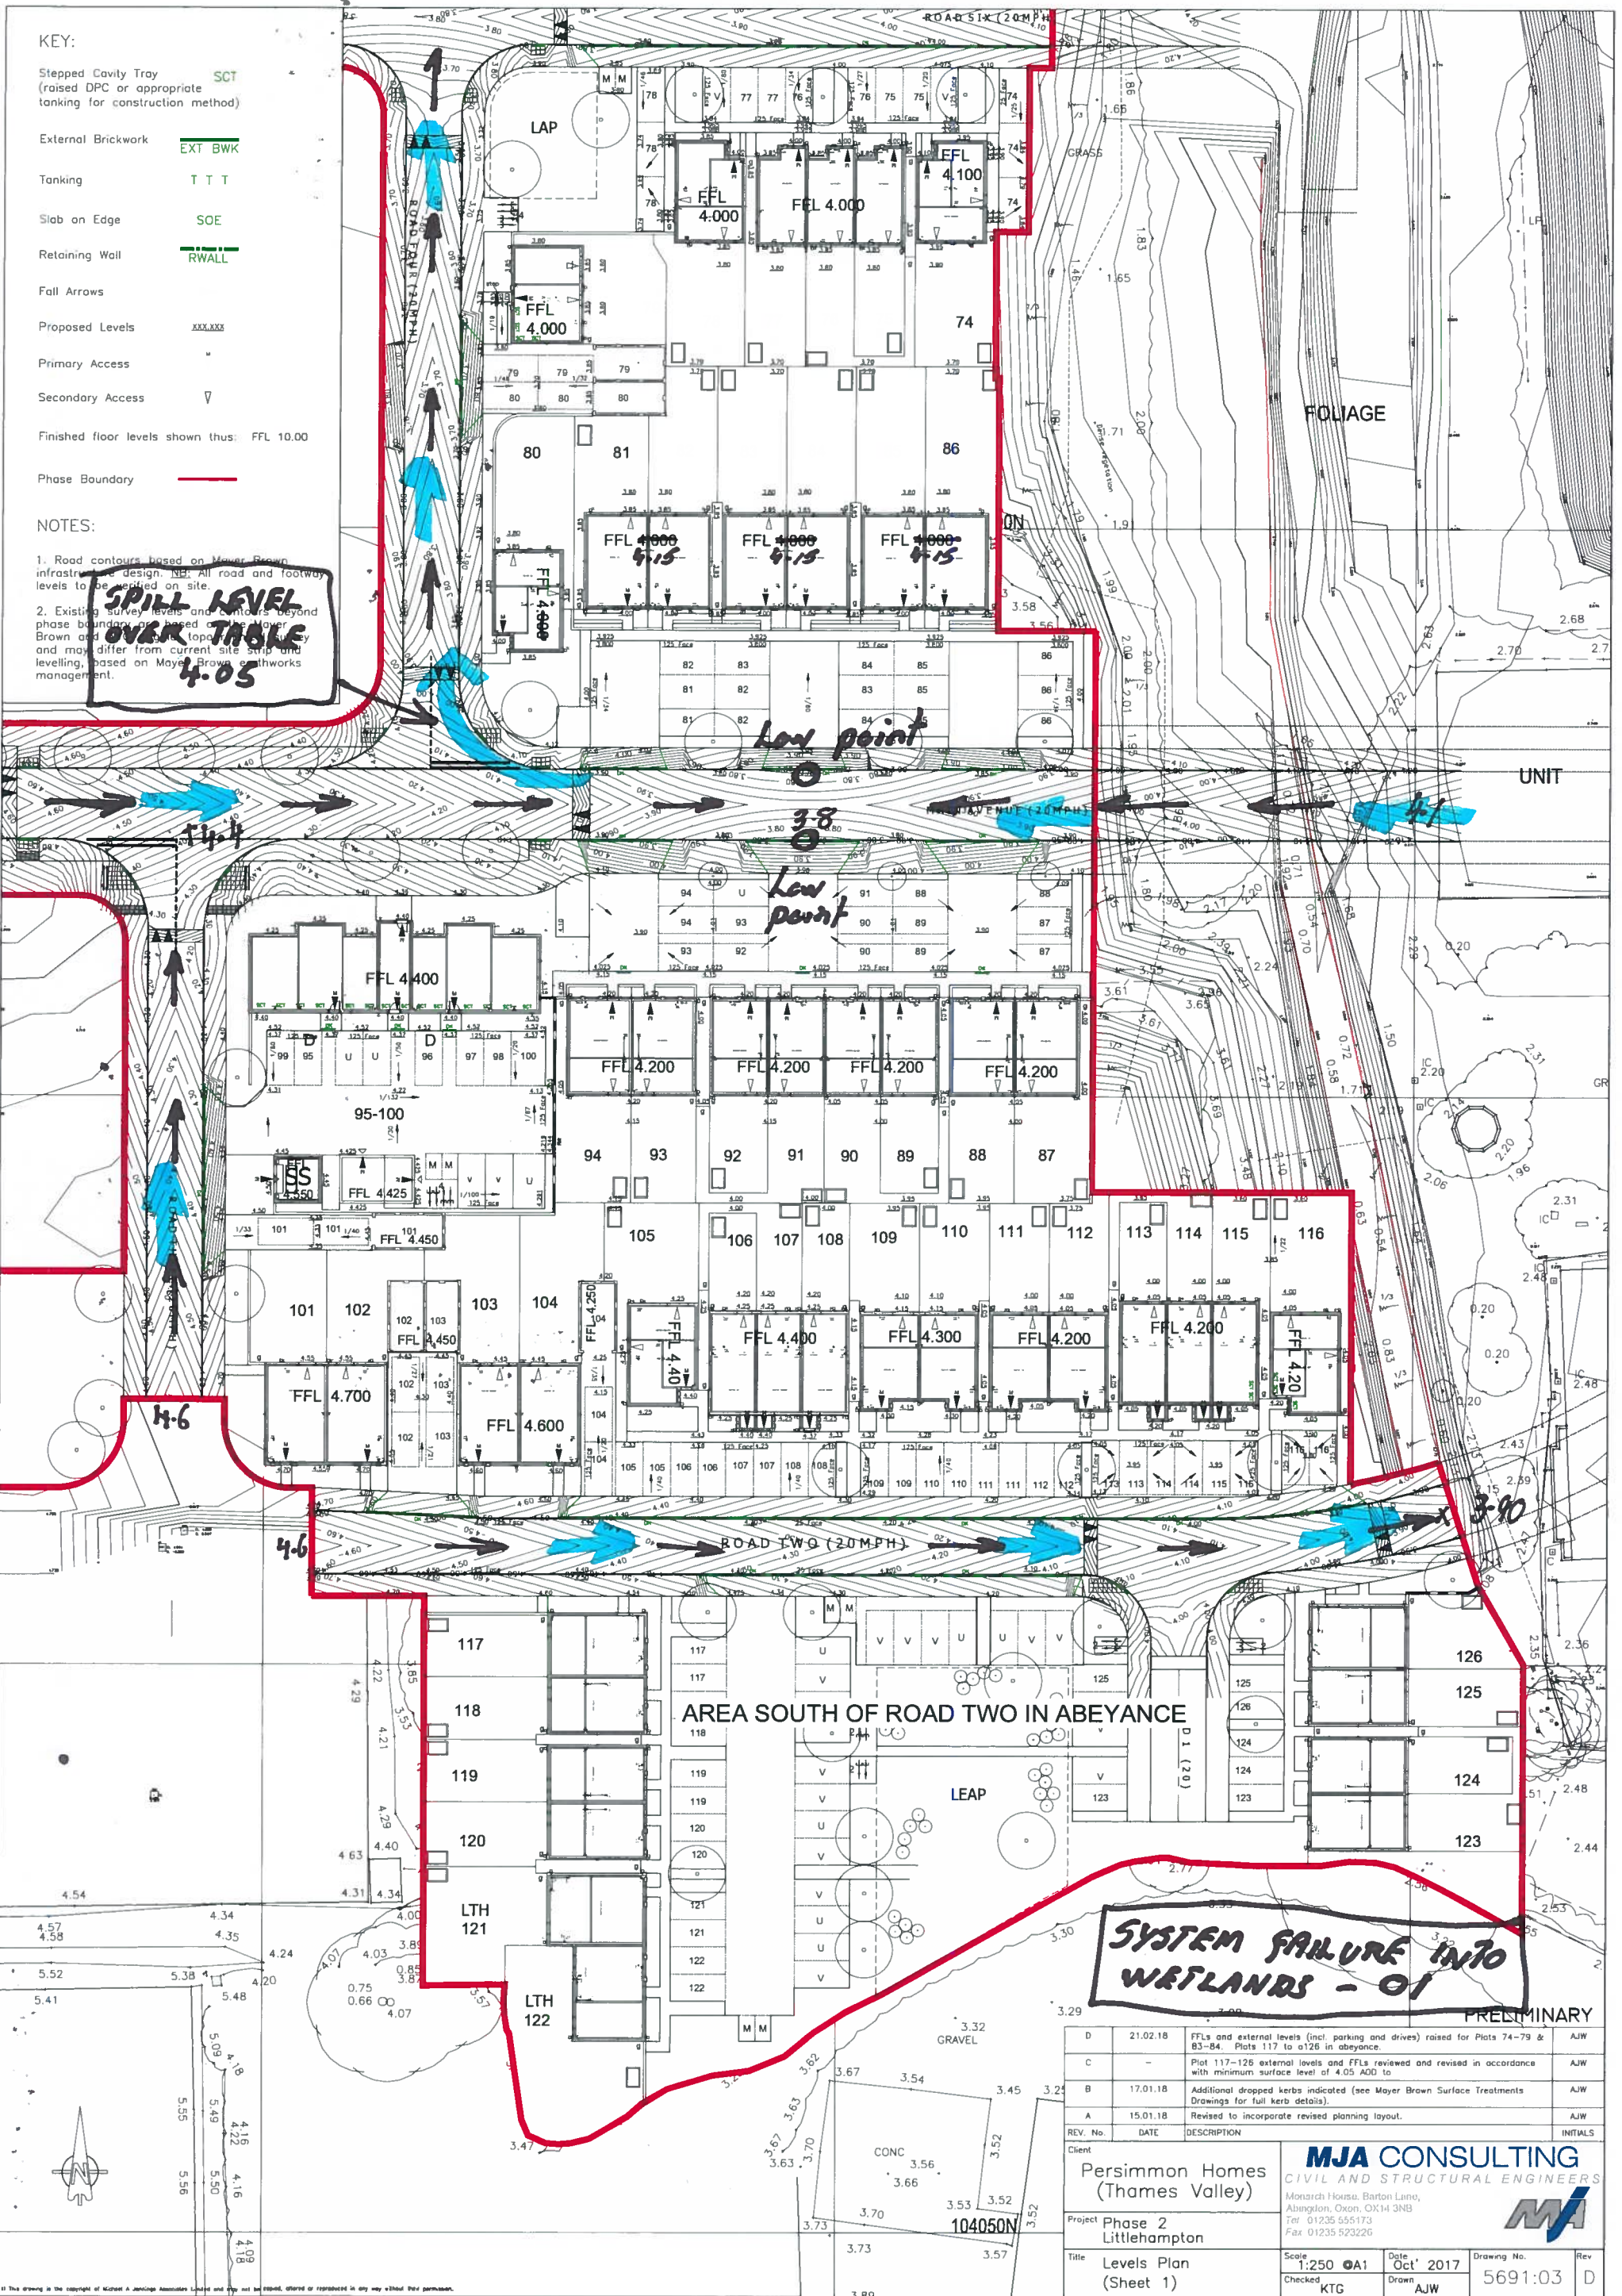

- KEY:
- Stepped Cavity Tray (raised DPC or appropriate tanking for construction method) **SCT**
 - External Brickwork **EXT BWK**
 - Tanking **T T T**
 - Slab on Edge **SOE**
 - Retaining Wall **RWALL**
 - Fall Arrows
 - Proposed Levels **XXX.XXX**
 - Primary Access
 - Secondary Access
 - Finished floor levels shown thus: FFL 10.00
 - Phase Boundary

NOTES:

1. Road contours based on Mayer Brown infrastructure design. NB: All road and footway levels to be verified on site.

2. Existing survey levels and contours beyond phase boundary are based on the Mayer Brown and existing topography and may differ from current site strip and levelling, based on Mayer Brown earthworks management.


SPILL LEVEL OVER TABLE 4.05


D	21.02.18	FFLs and external levels (incl. parking and drives) raised for Plots 74-79 & 83-84. Plots 117 to 126 in abeyance.	AJW
C	-	Plot 117-126 external levels and FFLs reviewed and revised in accordance with minimum surface level of 4.05 AOD to	AJW
B	17.01.18	Additional dropped kerbs indicated (see Mayer Brown Surface Treatments Drawings for full kerb details).	AJW
A	15.01.18	Revised to incorporate revised planning layout.	AJW
REV. No.	DATE	DESCRIPTION	INITIALS
Client: Persimmon Homes (Thames Valley)			
Project: Phase 2 Littlehampton			
Title: Levels Plan (Sheet 1)			
Scale	1:250	Drawn	Oct' 2017
Checked	KTG	Drawn	AJW
Drawing No.	5691:03	Rev	D

MJA CONSULTING
CIVIL AND STRUCTURAL ENGINEERS
Monarch House, Barton Lane,
Abingdon, Oxon, OX14 3NB
Tel: 01235 555173
Fax: 01235 523226

→ Direction of fall of road → overland flow route in case of system failure

APPENDIX E: Windes – Network Details

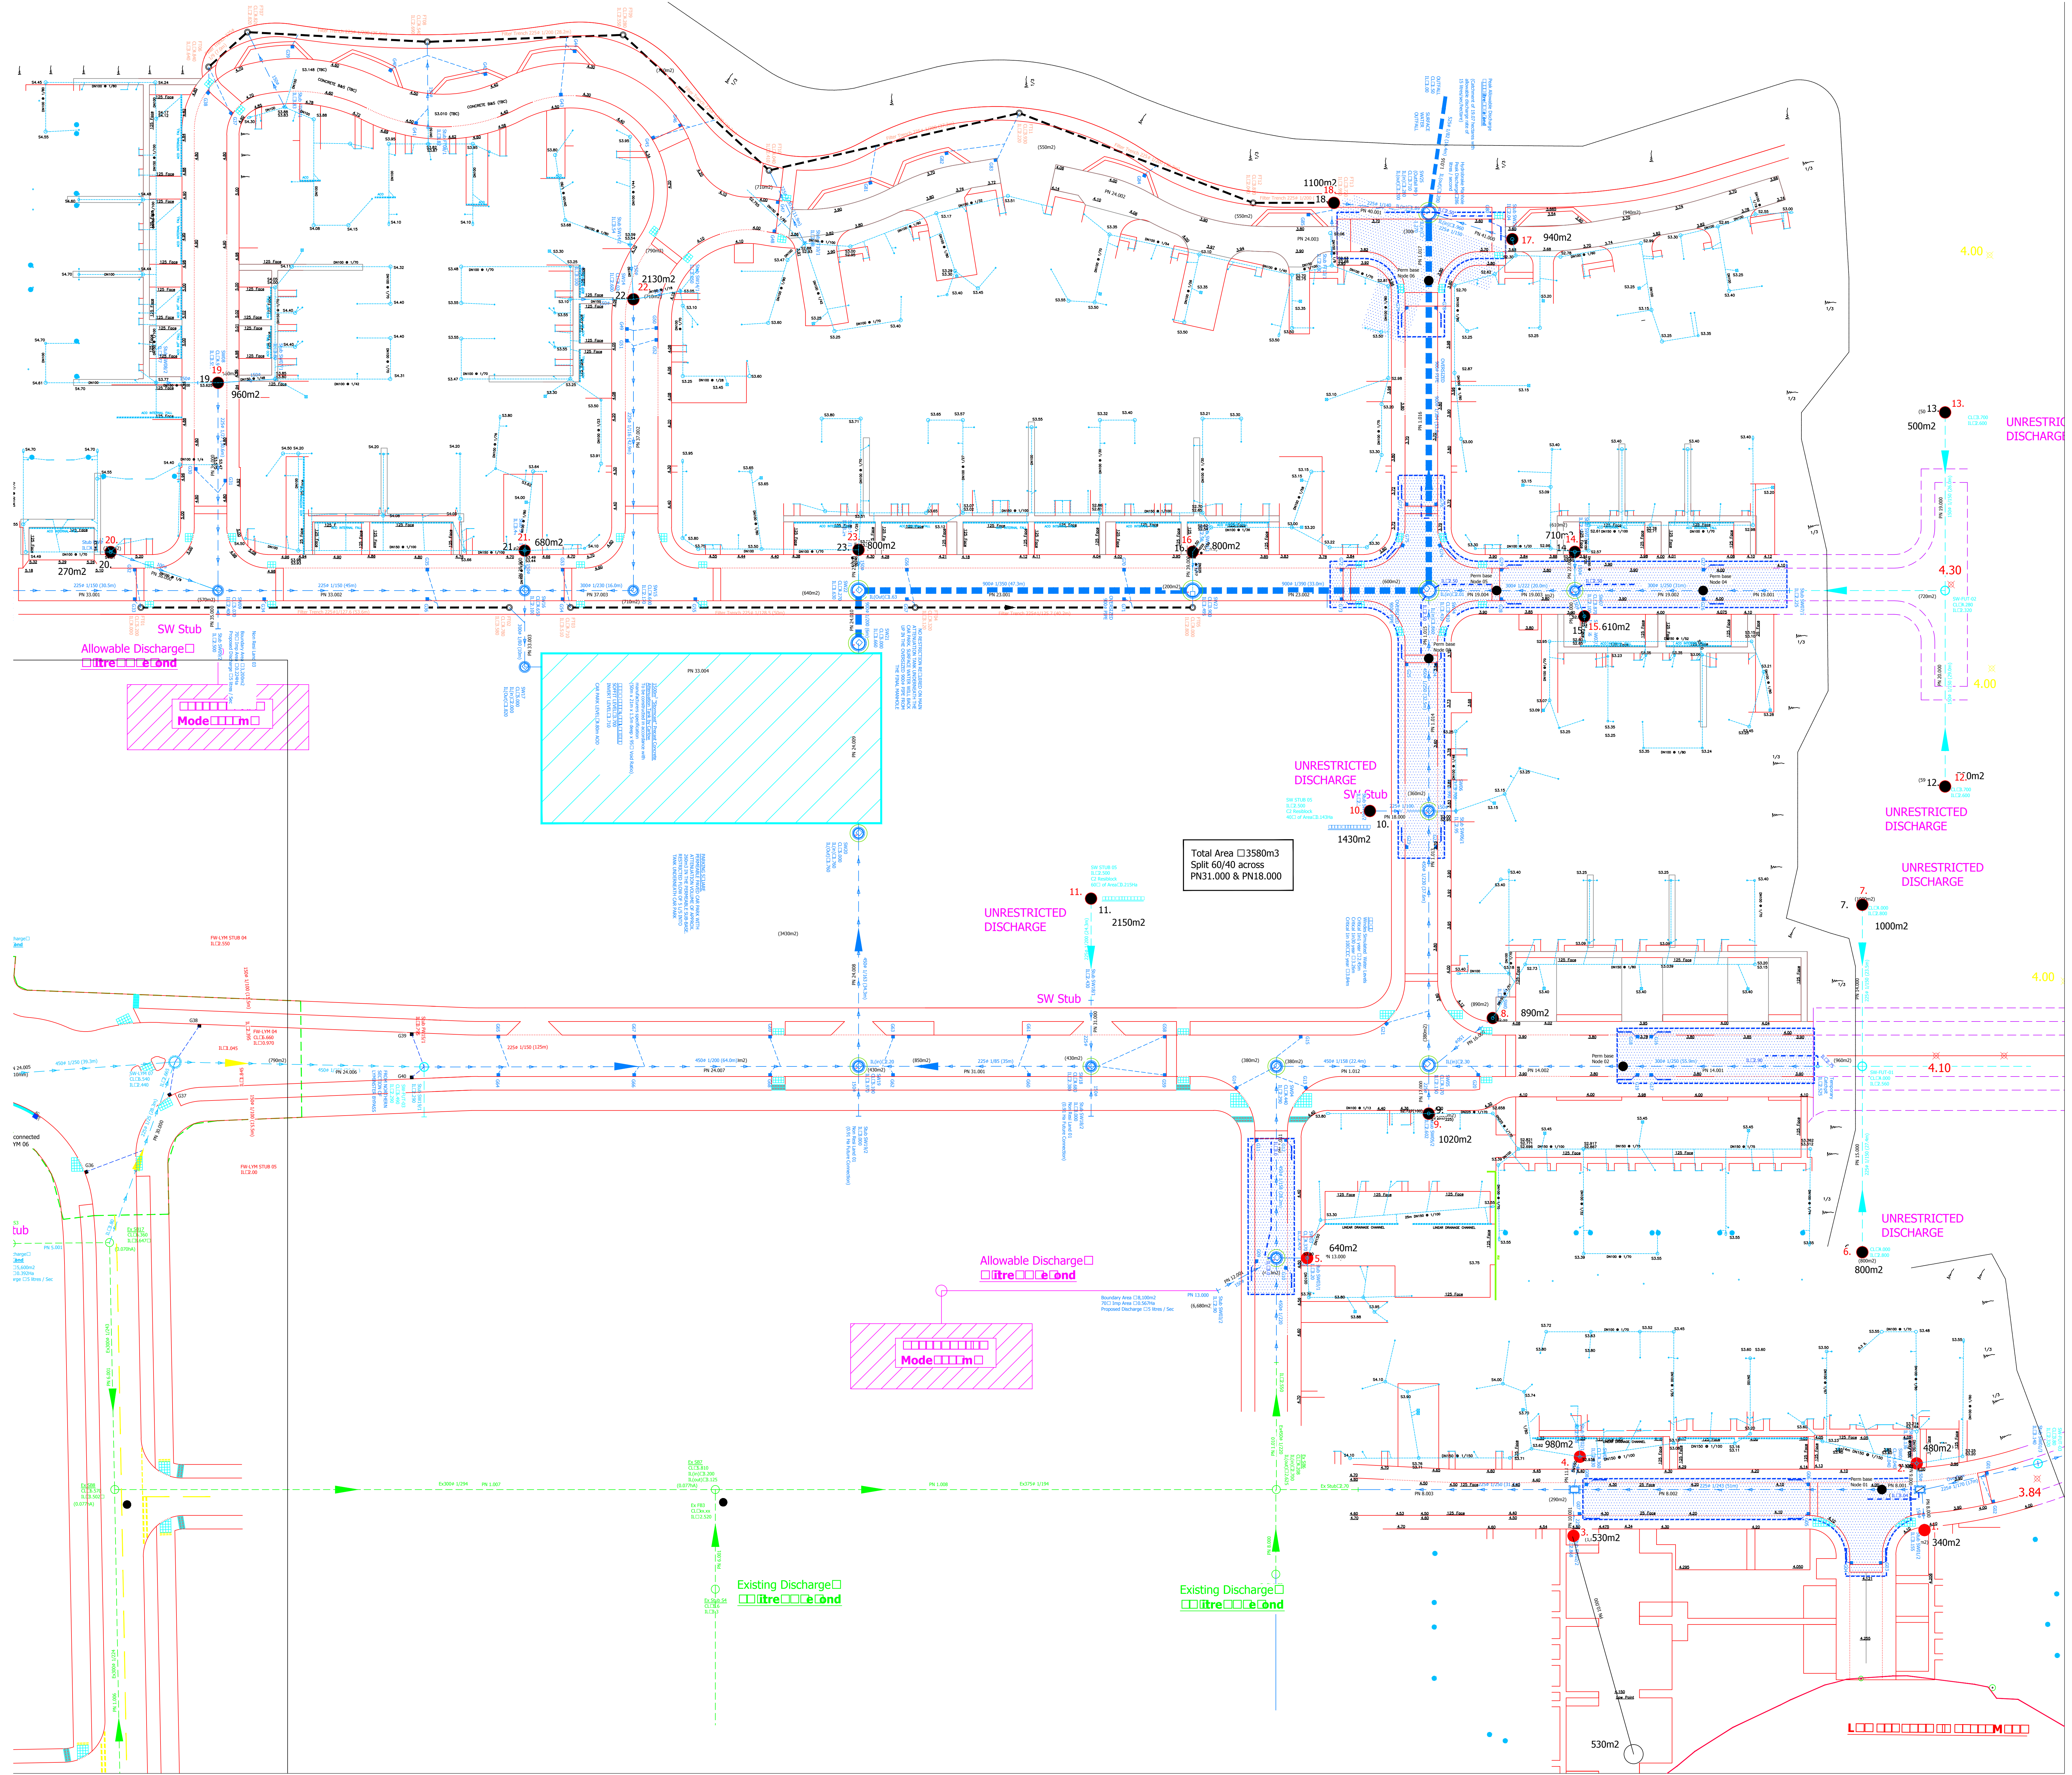

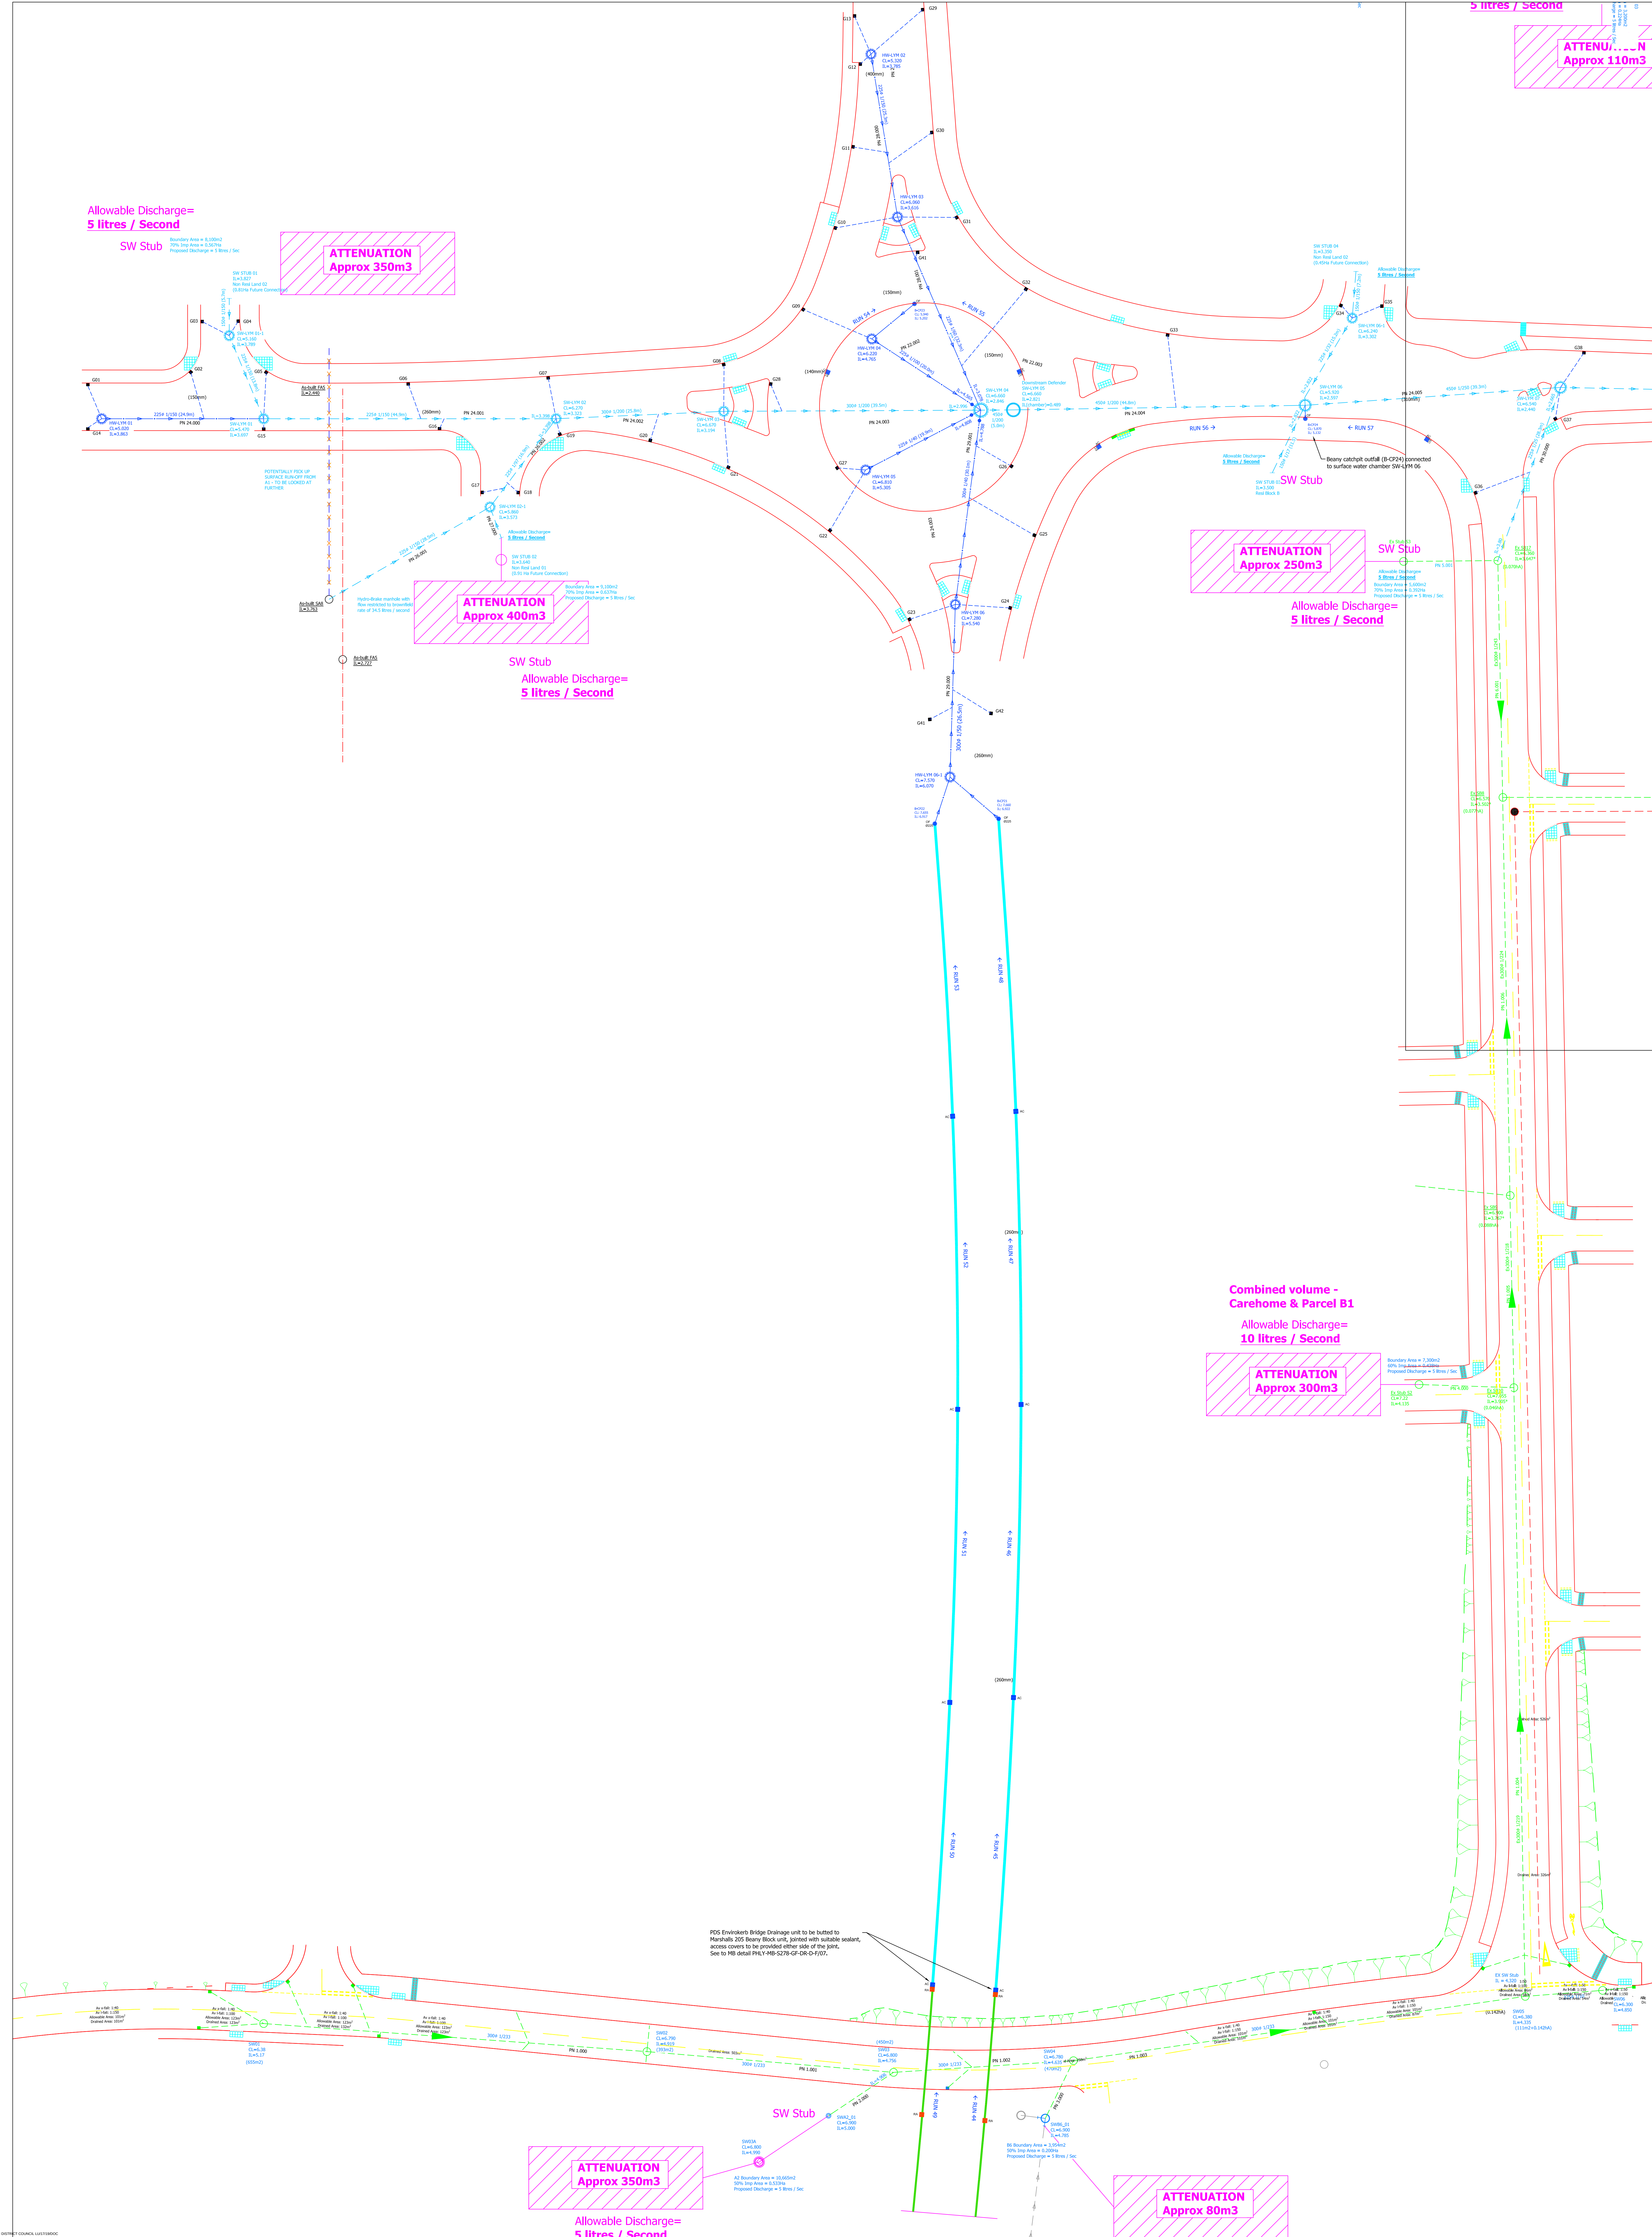

Mayer Brown Ltd		Page 1							
Lion House Oriental Road Woking GU22 8AR	Littlehampton Overall Surface Network West of Wetlands								
Date January 2018	Designed by S Foley								
File WEST CATCHMENT MODEL_...	Checked by								
XP Solutions	Network 2013.1								
Existing Network Details for Storm									
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)
1.000	59.000	0.251	235.1	0.066	2.00	0.0	0.600	o	300
1.001	38.000	0.163	233.1	0.040	0.00	0.0	0.600	o	300
2.000	12.808	0.200	64.0	0.534	5.00	0.0	0.600	o	300
2.001	12.001	0.080	150.0	0.000	2.00	0.0	0.600	o	150
1.002	27.675	0.121	228.7	0.045	0.00	0.0	0.600	o	300
3.000	19.930	0.200	99.7	0.198	5.00	0.0	0.600	o	300
3.001	10.000	0.067	149.3	0.000	2.00	0.0	0.600	o	150
1.003	70.062	0.300	233.5	0.047	0.00	0.0	0.600	o	300
1.004	94.210	0.425	221.7	0.153	0.00	0.0	0.600	o	300
4.000	20.000	0.065	307.7	0.438	5.00	0.0	0.600	o	300
4.001	14.532	0.097	149.8	0.000	2.00	0.0	0.600	o	150
1.005	30.500	0.140	217.9	0.046	0.00	0.0	0.600	o	300
1.006	59.368	0.270	219.9	0.088	0.00	0.0	0.600	o	300
5.000	19.999	0.595	33.6	0.392	5.00	0.0	0.600	o	300
5.001	14.532	0.105	138.4	0.000	2.00	0.0	0.600	o	150
5.002	36.500	0.150	243.3	0.070	0.00	0.0	0.600	o	300
1.007	88.421	0.300	294.7	0.077	0.00	0.0	0.600	o	300
6.000	20.006	0.100	200.1	0.700	5.00	0.0	0.600	o	375
6.001	14.650	0.875	16.7	0.000	5.00	0.0	0.600	o	375
Network Results Table									
PN	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Vel (m/s)	Cap (l/s)				
1.000	5.170	0.066	0.0	1.02	72.2				
1.001	4.919	0.106	0.0	1.03	72.5				
2.000	5.200	1.067	0.0	1.97	139.1				
2.001	5.000	1.067	0.0	0.82	14.5				
1.002	4.756	1.218	0.0	1.04	73.2				
3.000	5.000	0.395	0.0	1.58	111.3				
3.001	4.800	0.395	0.0	0.82	14.5				
1.003	4.635	1.660	0.0	1.02	72.4				
1.004	4.335	1.813	0.0	1.05	74.4				
4.000	4.200	0.730	0.0	0.89	63.0				
4.001	4.135	0.730	0.0	0.82	14.5				
1.005	3.910	2.589	0.0	1.06	75.0				
1.006	3.770	2.677	0.0	1.06	74.7				
5.000	4.500	0.560	0.0	2.72	192.4				
5.001	3.905	0.560	0.0	0.85	15.1				
5.002	3.650	0.630	0.0	1.00	70.9				
1.007	3.500	3.384	0.0	0.91	64.4				
6.000	4.100	1.400	0.0	1.28	141.1				
6.001	4.000	1.400	0.0	4.45	491.1				
©1982-2012 Micro Drainage Ltd									

Mayer Brown Ltd						Page 2			
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands						
Date January 2018 File WEST CATCHMENT MODEL_...			Designed by S Foley Checked by						
XP Solutions			Network 2013.1						
Existing Network Details for Storm									
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)
1.008	77.584	0.400	194.0	0.077	0.00	0.0	0.600	o	375
7.000	20.000	0.175	114.3	0.700	5.00	0.0	0.600	o	375
7.001	13.401	0.425	31.5	0.000	5.00	0.0	0.600	o	375
1.009	4.916	0.025	196.6	0.000	0.00	0.0	0.600	o	450
8.000	23.339	0.065	359.1	0.034	5.00	0.0	0.600	o	150
9.000	3.876	0.046	84.3	0.048	5.00	0.0	0.600	o	150
8.001	5.600	0.020	280.0	0.060	2.00	0.0	0.600	o	225
8.002	45.386	0.190	238.9	0.000	0.00	0.0	0.600	o	225
10.000	33.343	0.297	112.3	0.053	5.00	0.0	0.600	o	150
10.001	6.800	0.038	178.9	0.053	2.00	0.0	0.600	o	225
11.000	6.800	0.062	109.7	0.098	2.00	0.0	0.600	o	225
8.003	43.824	0.130	337.1	0.029	0.00	0.0	0.600	o	225
1.010	34.073	0.155	219.8	0.000	0.00	0.0	0.600	o	450
12.000	40.643	0.100	406.4	0.567	5.00	0.0	0.600	o	300
12.001	9.903	0.130	76.2	0.000	2.00	0.0	0.600	o	150
13.000	6.000	0.103	58.3	0.064	2.00	0.0	0.600	o	225
1.011	28.223	0.180	156.8	0.042	0.00	0.0	0.600	o	450
Network Results Table									
PN	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Vel (m/s)	Cap (l/s)				
1.008	3.125	4.861	0.0	1.30	143.3				
7.000	3.400	1.400	0.0	1.69	187.1				
7.001	3.225	1.400	0.0	3.24	357.5				
1.009	2.725	6.261	0.0	1.45	230.0				
8.000	3.155	0.034	0.0	0.52	9.3				
9.000	3.136	0.048	0.0	1.10	19.4				
8.001	3.040	0.142	0.0	0.78	30.9				
8.002	3.020	0.142	0.0	0.84	33.5				
10.000	3.165	0.053	0.0	0.95	16.7				
10.001	2.868	0.106	0.0	0.97	38.7				
11.000	3.000	0.098	0.0	1.25	49.6				
8.003	2.830	0.375	0.0	0.71	28.1				
1.010	2.625	6.636	0.0	1.37	217.4				
12.000	3.000	0.810	0.0	0.77	54.7				
12.001	2.900	0.810	0.0	1.15	20.4				
13.000	3.000	0.064	0.0	1.72	68.3				
1.011	2.470	7.552	0.0	1.62	257.8				
©1982-2012 Micro Drainage Ltd									

Mayer Brown Ltd		Page 3
Lion House Oriental Road Woking GU22 8AR	Littlehampton Overall Surface Network West of Wetlands	
Date January 2018 File WEST CATCHMENT MODEL_...	Designed by S Foley Checked by	
XP Solutions	Network 2013.1	

Existing Network Details for Storm

PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)
1.012	22.432	0.140	160.2	0.038	0.00	0.0	0.600	o	450
14.000	22.905	0.150	152.7	0.100	5.00	0.0	0.600	o	150
15.000	28.097	0.150	187.3	0.080	5.00	0.0	0.600	o	150
14.001	35.213	0.140	251.5	0.100	2.00	0.0	0.600	o	300
14.002	28.603	0.120	238.4	0.000	0.00	0.0	0.600	o	300
16.000	12.624	0.250	50.5	0.089	2.00	0.0	0.600	o	150
17.000	7.200	0.302	23.8	0.102	2.00	0.0	0.600	o	225
1.013	37.575	0.160	234.8	0.038	0.00	0.0	0.600	o	450
18.000	8.659	0.266	32.6	0.143	2.00	0.0	0.600	o	225
1.014	22.449	0.090	249.4	0.036	0.00	0.0	0.600	o	450
1.015	10.000	0.040	250.0	0.000	0.00	0.0	0.600	o	450
19.000	26.210	0.130	201.6	0.050	5.00	0.0	0.600	o	150
20.000	28.840	0.130	221.8	0.059	5.00	0.0	0.600	o	150
19.001	35.611	0.145	245.6	0.072	2.00	0.0	0.600	o	300
19.002	18.889	0.075	251.9	0.000	0.00	0.0	0.600	o	300
21.000	7.800	0.040	195.0	0.061	2.00	0.0	0.600	o	150

Network Results Table

PN	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Vel (m/s)	Cap (l/s)
1.012	2.290	7.590	0.0	1.60	255.0
14.000	2.800	0.100	0.0	0.81	14.3
15.000	2.800	0.080	0.0	0.73	12.9
14.001	2.560	0.280	0.0	0.99	69.8
14.002	2.420	0.280	0.0	1.01	71.7
16.000	2.550	0.089	0.0	1.42	25.1
17.000	2.602	0.102	0.0	2.69	107.0
1.013	2.150	8.099	0.0	1.32	210.3
18.000	2.320	0.358	0.0	2.30	91.5
1.014	1.990	8.493	0.0	1.28	204.0
1.015	1.900	8.493	0.0	1.28	203.8
19.000	2.600	0.050	0.0	0.70	12.4
20.000	2.600	0.059	0.0	0.67	11.9
19.001	2.320	0.181	0.0	1.00	70.6
19.002	2.175	0.181	0.0	0.99	69.7
21.000	2.600	0.061	0.0	0.72	12.7

Mayer Brown Ltd						Page 4			
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands						
Date January 2018			Designed by S Foley						
File WEST CATCHMENT MODEL_...			Checked by						
XP Solutions			Network 2013.1						
Existing Network Details for Storm									
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)
22.000	9.600	0.100	96.0	0.071	2.00	0.0	0.600	o	150
19.003	11.498	0.045	255.5	0.011	0.00	0.0	0.600	o	300
19.004	10.000	0.045	222.2	0.000	0.00	0.0	0.600	o	300
23.000	6.005	0.935	6.4	0.080	5.00	0.0	0.600	o	150
24.000	24.867	0.100	248.7	0.056	2.00	0.0	0.600	o	225
25.000	39.317	0.280	140.4	0.567	5.00	0.0	0.600	o	450
25.001	13.808	0.080	172.6	0.000	5.00	0.0	0.600	o	225
24.001	44.896	0.215	208.8	0.045	0.00	0.0	0.600	o	225
26.000	39.613	0.237	167.1	0.600	5.00	0.0	0.600	o	450
26.001	28.513	0.193	147.7	0.000	5.00	0.0	0.600	o	225
27.000	34.498	0.360	95.8	0.637	5.00	0.0	0.600	o	450
27.001	5.111	0.070	73.0	0.000	5.00	0.0	0.600	o	225
26.002	16.877	0.145	116.4	0.000	5.00	0.0	0.600	o	225
24.002	25.768	0.125	206.1	0.045	0.00	0.0	0.600	o	225
24.003	43.680	0.160	273.0	0.033	0.00	0.0	0.600	o	300
28.000	25.335	0.200	126.7	0.057	2.00	0.0	0.600	o	225
28.001	34.164	0.530	64.5	0.102	0.00	0.0	0.600	o	225
29.000	64.700	1.130	57.3	0.314	5.00	0.0	0.600	o	300
Network Results Table									
PN	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Vel (m/s)	Cap (l/s)				
22.000	2.600	0.071	0.0	1.03	18.1				
19.003	2.100	0.324	0.0	0.98	69.2				
19.004	2.055	0.324	0.0	1.05	74.3				
23.000	3.240	0.080	0.0	4.00	70.7				
24.000	3.740	0.056	0.0	0.82	32.8				
25.000	4.000	0.810	0.0	1.71	272.6				
25.001	3.720	0.810	0.0	0.99	39.5				
24.001	3.640	0.911	0.0	0.90	35.8				
26.000	4.000	1.000	0.0	1.57	249.7				
26.001	3.763	1.000	0.0	1.07	42.7				
27.000	4.000	0.910	0.0	2.08	330.4				
27.001	3.640	0.910	0.0	1.53	60.9				
26.002	3.570	1.910	0.0	1.21	48.1				
24.002	3.350	2.866	0.0	0.91	36.1				
24.003	3.225	2.899	0.0	0.95	66.9				
28.000	3.870	0.057	0.0	1.16	46.1				
28.001	3.670	0.159	0.0	1.63	64.9				
29.000	7.200	0.314	0.0	2.08	147.2				
©1982-2012 Micro Drainage Ltd									

Mayer Brown Ltd		Page 5
Lion House Oriental Road Woking GU22 8AR	Littlehampton Overall Surface Network West of Wetlands	
Date January 2018 File WEST CATCHMENT MODEL_...	Designed by S Foley Checked by	
XP Solutions	Network 2013.1	

Existing Network Details for Storm

PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)
29.001	30.927	0.000	0.0	0.070	0.00	0.0	0.600	o	300
24.004	45.590	0.230	198.2	0.038	0.00	0.0	0.600	o	375
24.005	38.840	0.160	242.7	0.231	0.00	0.0	0.600	o	450
30.000	26.634	0.540	49.3	0.000	5.00	0.0	0.600	o	225
24.006	37.201	0.280	132.9	0.040	0.00	0.0	0.600	o	450
24.007	63.944	0.270	236.8	0.040	0.00	0.0	0.600	o	450
31.000	24.684	0.120	205.7	0.215	5.00	0.0	0.600	o	225
31.001	35.227	0.180	195.7	0.043	5.00	0.0	0.600	o	225
24.008	19.302	0.170	113.5	0.043	0.00	0.0	0.600	o	450
24.009	42.970	0.100	429.7	0.000	0.00	0.0	0.600	o	525
32.000	7.262	0.100	72.6	0.343	5.00	0.0	0.600	o	450
32.001	27.748	1.690	16.4	0.000	5.00	0.0	0.600	o	150
33.000	20.005	0.100	200.1	0.630	5.00	0.0	0.600	o	450
33.001	30.526	0.200	152.6	0.000	0.00	0.0	0.600	o	225
34.000	30.576	1.150	26.6	0.096	5.00	0.0	0.600	o	225
35.000	22.482	0.200	112.4	0.224	5.00	0.0	0.600	o	450
35.001	5.638	0.100	56.4	0.000	5.00	0.0	0.600	o	225
36.000	16.786	1.710	9.8	0.027	5.00	0.0	0.600	o	150

Network Results Table

PN	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Vel (m/s)	Cap (l/s)
29.001	5.540	0.384	0.0	0.00	0.0
24.004	2.990	3.480	0.0	1.28	141.7
24.005	2.680	3.711	0.0	1.30	206.8
30.000	3.700	0.000	0.0	1.87	74.2
24.006	2.520	3.751	0.0	1.76	280.3
24.007	2.240	3.791	0.0	1.32	209.4
31.000	2.500	0.358	0.0	0.91	36.1
31.001	2.380	0.401	0.0	0.93	37.0
24.008	1.970	4.235	0.0	1.91	303.3
24.009	1.760	4.235	0.0	1.07	232.5
32.000	3.500	0.343	0.0	2.39	379.8
32.001	3.400	0.343	0.0	2.50	44.1
33.000	2.700	0.900	0.0	1.43	228.0
33.001	2.600	0.900	0.0	1.06	42.0
34.000	3.550	0.096	0.0	2.55	101.3
35.000	2.700	0.320	0.0	1.92	304.9
35.001	2.500	0.320	0.0	1.75	69.4
36.000	4.310	0.027	0.0	3.23	57.2

Mayer Brown Ltd						Page 6			
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands						
Date January 2018 File WEST CATCHMENT MODEL_...			Designed by S Foley Checked by						
XP Solutions			Network 2013.1						
Existing Network Details for Storm									
PN	Length (m)	Fall (m)	Slope (1:X)	I.Area (ha)	T.E. (mins)	Base Flow (l/s)	k (mm)	HYD SECT	DIA (mm)
33.002	45.139	0.300	150.5	0.057	0.00	0.0	0.600	o	225
37.000	21.924	0.110	199.3	0.071	5.00	0.0	0.600	o	225
37.001	23.225	0.160	145.2	0.071	5.00	0.0	0.600	o	225
37.002	42.860	0.370	115.8	0.071	5.00	0.0	0.600	o	225
37.003	16.004	0.070	228.6	0.071	5.00	0.0	0.600	o	300
38.000	5.880	1.040	5.7	0.068	5.00	0.0	0.600	o	150
33.003	7.752	0.280	27.7	0.000	0.00	0.0	0.600	o	300
33.004	49.146	0.160	307.2	0.000	0.00	0.0	0.600	o	450
24.010	7.734	0.030	257.8	0.000	0.00	0.0	0.600	o	900
23.001	49.171	0.135	364.2	0.064	0.00	0.0	0.600	o	900
39.000	5.695	0.000	0.0	0.080	5.00	0.0	0.600	o	225
23.002	34.760	0.085	408.9	0.020	0.00	0.0	0.600	o	900
1.016	45.616	0.110	414.7	0.064	0.00	0.0	0.600	o	900
1.017	6.000	0.020	300.0	0.000	0.00	0.0	0.600	o	900
40.000	34.385	0.230	149.5	0.055	5.00	0.0	0.600	o	225
40.001	26.630	0.030	887.7	0.055	0.00	0.0	0.600	o	225
41.000	30.249	0.080	378.1	0.094	2.00	0.0	0.600	o	225
1.018	21.220	0.200	106.1	0.030	0.00	0.0	0.600	o	525
Network Results Table									
PN	US/IL (m)	Σ I.Area (ha)	Σ Base Flow (l/s)	Vel (m/s)	Cap (l/s)				
33.002	2.400	1.400	0.0	1.06	42.3				
37.000	2.790	0.071	0.0	0.92	36.7				
37.001	2.680	0.142	0.0	1.08	43.1				
37.002	2.600	0.213	0.0	1.21	48.3				
37.003	2.170	0.284	0.0	1.04	73.2				
38.000	3.440	0.068	0.0	4.27	75.4				
33.003	2.100	1.752	0.0	3.00	212.0				
33.004	1.820	1.752	0.0	1.15	183.6				
24.010	1.660	6.330	0.0	1.95	1238.5				
23.001	1.630	6.474	0.0	1.64	1040.7				
39.000	2.500	0.080	0.0	0.00	0.0				
23.002	1.495	6.574	0.0	1.54	981.7				
1.016	1.410	15.455	0.0	1.53	974.8				
1.017	1.300	15.455	0.0	1.80	1147.5				
40.000	2.370	0.055	0.0	1.07	42.4				
40.001	1.990	0.110	0.0	0.43	17.1				
41.000	2.040	0.094	0.0	0.67	26.5				
1.018	1.200	15.689	0.0	2.17	470.7				
©1982-2012 Micro Drainage Ltd									

Mayer Brown Ltd					Page 7						
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands								
Date January 2018			Designed by S Foley								
File WEST CATCHMENT MODEL_...			Checked by								
XP Solutions			Network 2013.1								
Manhole Schedules for Storm											
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam.,L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes In Invert Level (m)	Diameter (mm)	Backdrop (mm)
TL_SW01	6.380	1.210	Open Manhole	1050	1.000	5.170	300				
TL_SW02	6.790	1.871	Open Manhole	1200	1.001	4.919	300	1.000	4.919	300	
Parcel A2_1	6.800	1.600	Open Manhole	1200	2.000	5.200	300				
Parcel A2_2	6.900	1.900	Open Manhole	1200	2.001	5.000	150	2.000	5.000	300	
TL_SW03	6.800	2.044	Open Manhole	1200	1.002	4.756	300	1.001	4.756	300	
								2.001	4.920	150	14
Parcel B6_1	6.900	1.900	Open Manhole	1200	3.000	5.000	300				
Parcel B6_2	6.900	2.100	Open Manhole	1200	3.001	4.800	150	3.000	4.800	300	
TL_SW04	6.780	2.145	Open Manhole	1200	1.003	4.635	300	1.002	4.635	300	
								3.001	4.733	150	
TL_SW05	6.380	2.045	Open Manhole	1200	1.004	4.335	300	1.003	4.335	300	
Parcel B1&CH_1	7.220	3.020	Open Manhole	1200	4.000	4.200	300				
Parcel B1&CH 2	7.220	3.085	Open Manhole	1200	4.001	4.135	150	4.000	4.135	300	
Ex. SB10	7.055	3.145	Open Manhole	1200	1.005	3.910	300	1.004	3.910	300	
								4.001	4.038	150	
Ex. SB9	6.900	3.130	Open Manhole	1200	1.006	3.770	300	1.005	3.770	300	
Block B_1	6.380	1.880	Open Manhole	1200	5.000	4.500	300				
Block B_2	6.380	2.475	Open Manhole	1200	5.001	3.905	150	5.000	3.905	300	
Ex. SB17	6.360	2.710	Open Manhole	1200	5.002	3.650	300	5.001	3.800	150	
Ex. SB8	6.570	3.070	Open Manhole	1350	1.007	3.500	300	1.006	3.500	300	
								5.002	3.500	300	
BovisA_1	5.600	1.500	Open Manhole	1200	6.000	4.100	375				
BovisA_2	5.600	1.600	Open Manhole	1200	6.001	4.000	375	6.000	4.000	375	
Ex SB7	5.810	2.685	Open Manhole	1350	1.008	3.125	375	1.007	3.200	300	
								6.001	3.125	375	
BovisB_1	4.650	1.250	Open Manhole	1200	7.000	3.400	375				
BovisB_2	4.650	1.425	Open Manhole	1200	7.001	3.225	375	7.000	3.225	375	
Dummy Node	4.700	1.975	Open Manhole	1200	1.009	2.725	450	1.008	2.725	375	
								7.001	2.800	375	
Plots 123 - 126	4.050	0.895	Open Manhole	450	8.000	3.155	150				
Plots 111 - 116	4.050	0.914	Open Manhole	450	9.000	3.136	150				
SW01, G01&G02	3.850	0.810	Open Manhole	1200	8.001	3.040	225	8.000	3.090	150	
								9.000	3.090	150	
Permbase 01	3.850	0.830	Open Manhole	1200	8.002	3.020	225	8.001	3.020	225	
Plots 117 - 122	4.050	0.885	Open Manhole	450	10.000	3.165	150				
Stub SW02/2	4.500	1.632	Open Manhole	450	10.001	2.868	225	10.000	2.868	150	
Plots 101-110	4.400	1.400	Open Manhole	450	11.000	3.000	225				
SW02	4.360	1.530	Open Manhole	1200	8.003	2.830	225	8.002	2.830	225	
								10.001	2.830	225	
								11.000	2.938	225	108
Ex SB6	4.700	2.075	Open Manhole	1500	1.010	2.625	450	1.009	2.700	450	75
								8.003	2.700	225	
Ret Block A	4.700	1.700	Open Manhole	1200	12.000	3.000	300				
Ret Block A	4.600	1.700	Open Manhole	1050	12.001	2.900	150	12.000	2.900	300	
Plots 95-100	4.600	1.600	Open Manhole	450	13.000	3.000	225				
SW03	4.370	1.900	Open Manhole	1500	1.011	2.470	450	1.010	2.470	450	
								12.001	2.770	150	
©1982-2012 Micro Drainage Ltd											

Mayer Brown Ltd							Page 8			
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands							
Date January 2018 File WEST CATCHMENT MODEL_...			Designed by S Foley Checked by							
XP Solutions			Network 2013.1							
Manhole Schedules for Storm										
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes In Invert Level (m)	Diameter (mm)
SW04	4.440	2.150	Open Manhole	1500	1.012	2.290	450	13.000	2.897	225
SW-FUT-01-PlotsN	4.000	1.200	Open Manhole	450	14.000	2.800	150	1.011	2.290	450
SW-FUT-01-PlotsS	4.000	1.200	Open Manhole	450	15.000	2.800	150			
SW-FUT-01	4.000	1.440	Open Manhole	1200	14.001	2.560	300	14.000	2.650	150
								15.000	2.650	150
Permbase 02	3.800	1.380	Open Manhole	1200	14.002	2.420	300	14.001	2.420	300
Plots 80-86	4.100	1.550	Open Manhole	450	16.000	2.550	150			
Plots 87-94	4.300	1.698	Open Manhole	450	17.000	2.602	225			
SW05	4.170	2.020	Open Manhole	1500	1.013	2.150	450	1.012	2.150	450
								14.002	2.300	300
								16.000	2.300	150
								17.000	2.300	225
C2 Resiblock A	4.300	1.980	Open Manhole	450	18.000	2.320	225			
SW06	3.700	1.710	Open Manhole	1500	1.014	1.990	450	1.013	1.990	450
								18.000	2.054	225
Permbase 03	3.600	1.700	Open Manhole	1500	1.015	1.900	450	1.014	1.900	450
SW-FUT-02-PlotN	3.700	1.100	Open Manhole	450	19.000	2.600	150			
SW-FUT-02-Plots	3.700	1.100	Open Manhole	450	20.000	2.600	150			
SW-FUT-02	4.280	1.960	Open Manhole	1200	19.001	2.320	300	19.000	2.470	150
								20.000	2.470	150
Permbase 04	4.000	1.825	Open Manhole	1200	19.002	2.175	300	19.001	2.175	300
Plots 60-73	3.900	1.300	Open Manhole	450	21.000	2.600	150			
Plots 74-78	3.900	1.300	Open Manhole	450	22.000	2.600	150			
SW07	3.870	1.770	Open Manhole	1200	19.003	2.100	300	19.002	2.100	300
								21.000	2.560	150
								22.000	2.500	150
Permbase 05	3.760	1.705	Open Manhole	1200	19.004	2.055	300	19.003	2.055	300
Plots 39-46	4.300	1.060	Open Manhole	1200	23.000	3.240	150			
SW-LYM 01	5.040	1.300	Open Manhole	1200	24.000	3.740	225			
Non resi	5.200	1.200	Open Manhole	1200	25.000	4.000	450			
Non resi	5.200	1.480	Open Manhole	1200	25.001	3.720	225	25.000	3.720	450
SW-LYM 02	5.500	1.860	Open Manhole	1200	24.001	3.640	225	24.000	3.640	225
								25.001	3.640	225
Parcel A1	7.000	3.000	Open Manhole	1200	26.000	4.000	450			
As-built SA8	6.000	2.237	Open Manhole	1200	26.001	3.763	225	26.000	3.763	450
Non Resi	6.000	2.000	Open Manhole	1200	27.000	4.000	450			
SW Stub 02	6.000	2.360	Open Manhole	1200	27.001	3.640	225	27.000	3.640	450
SW-LYM 03/1	5.920	2.350	Open Manhole	1200	26.002	3.570	225	26.001	3.570	225
								27.001	3.570	225
SW-LYM 03	6.300	2.950	Open Manhole	1200	24.002	3.350	225	24.001	3.425	225
								26.002	3.425	225
SW-LYM 04	6.640	3.415	Open Manhole	1200	24.003	3.225	300	24.002	3.225	225
SW-LYM 07	5.370	1.500	Open Manhole	1200	28.000	3.870	225			
SW-LYM 08	6.140	2.470	Open Manhole	1200	28.001	3.670	225	28.000	3.670	225
SW-LYM 05A	7.570	0.370	Open Manhole	1200	29.000	7.200	300			
SW-LYM 05	7.250	1.710	Open Manhole	1200	29.001	5.540	300	29.000	6.070	300
©1982-2012 Micro Drainage Ltd										

Mayer Brown Ltd					Page 9						
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands								
Date January 2018 File WEST CATCHMENT MODEL_...		Designed by S Foley Checked by									
XP Solutions		Network 2013.1									
Manhole Schedules for Storm											
MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam.,L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes In Invert Level (m)	Diameter (mm)	Backdrop (mm)
SW-LYM 10	6.640	3.650	Open Manhole	1500	24.004	2.990	375	24.003	3.065	300	2475
								28.001	3.140	225	
								29.001	5.540	300	
SW-LYM11	5.900	3.220	Open Manhole	1350	24.005	2.680	450	24.004	2.760	375	5
ExSB17_Dum Node	6.360	2.660	Open Manhole	1200	30.000	3.700	225				415
SW-LYM 12	6.380	3.860	Open Manhole	1350	24.006	2.520	450	24.005	2.520	450	
								30.000	3.160	225	
SW-FUT-03	6.260	4.020	Open Manhole	1350	24.007	2.240	450	24.006	2.240	450	5
Stub SW18/1	4.300	1.800	Open Manhole	1200	31.000	2.500	225				
SW18	4.680	2.300	Open Manhole	1200	31.001	2.380	225	31.000	2.380	225	
SW19	5.100	3.130	Open Manhole	1350	24.008	1.970	450	24.007	1.970	450	125
								31.001	2.200	225	
SW20	5.000	3.240	Open Manhole	1800	24.009	1.760	525	24.008	1.800	450	150
Car Park	5.000	1.500	Open Manhole	1200	32.000	3.500	450				
Car Park	5.000	1.600	Open Manhole	1200	32.001	3.400	150	32.000	3.400	450	
Non Resi	5.300	2.600	Open Manhole	1200	33.000	2.700	450				330
Stub SW9/1	5.300	2.700	Open Manhole	1200	33.001	2.600	225	33.000	2.600	450	
SW08	4.900	1.350	Open Manhole	1200	34.000	3.550	225				
Non Resi	5.100	2.400	Open Manhole	1200	35.000	2.700	450				150
Stub SW9/2	5.100	2.600	Open Manhole	1200	35.001	2.500	225	35.000	2.500	450	
Plots 1 - 4	5.200	0.890	Open Manhole	450	36.000	4.310	150				
SW09	5.070	2.670	Open Manhole	1200	33.002	2.400	225	33.001	2.400	225	125
								34.000	2.400	225	
								35.001	2.400	225	
								36.000	2.600	150	150
SW12	4.320	1.530	Open Manhole	1200	37.000	2.790	225				
SW13	4.020	1.340	Open Manhole	1200	37.001	2.680	225	37.000	2.680	225	
SW14	4.020	1.500	Open Manhole	1200	37.002	2.600	225	37.001	2.520	225	330
SW15	4.600	2.430	Open Manhole	1200	37.003	2.170	300	37.002	2.230	225	
Plots 16-22	4.700	1.260	Open Manhole	450	38.000	3.440	150				
SW16	4.650	2.550	Open Manhole	1200	33.003	2.100	300	33.002	2.100	225	150
								37.003	2.100	300	
								38.000	2.400	150	
SW17	5.000	3.180	Open Manhole	1200	33.004	1.820	450	33.003	1.820	300	330
SW21	5.000	3.340	Open Manhole	1800	24.010	1.660	900	24.009	1.660	525	
								32.001	1.710	150	
								33.004	1.660	450	330
SW22	4.270	2.640	Open Manhole	1800	23.001	1.630	900	23.000	2.305	150	
								24.010	1.630	900	
Plots 47-55	4.100	1.600	Open Manhole	1200	39.000	2.500	225				330
SW23	3.900	2.405	Open Manhole	1800	23.002	1.495	900	23.001	1.495	900	
								39.000	2.500	225	
SW24	3.810	2.400	Open Manhole	1800	1.016	1.410	900	1.015	1.860	450	330
								19.004	2.010	300	
								23.002	1.410	900	
Permbase 06	3.800	2.500	Open Manhole	1800	1.017	1.300	900	1.016	1.300	900	330
Plots	3.700	1.330	Open Manhole	1200	40.000	2.370	225				
©1982-2012 Micro Drainage Ltd											

Mayer Brown Ltd		Page 10
Lion House	Littlehampton	
Oriental Road	Overall Surface Network	
Woking GU22 8AR	West of Wetlands	
Date January 2018	Designed by S Foley	
File WEST CATCHMENT MODEL_...	Checked by	
XP Solutions	Network 2013.1	

Manhole Schedules for Storm

MH Name	MH CL (m)	MH Depth (m)	MH Connection	MH Diam., L*W (mm)	PN	Pipe Out Invert Level (m)	Diameter (mm)	PN	Pipes In Invert Level (m)	Diameter (mm)	Backdrop (mm)
Stub SW25/1	3.720	1.730	Open Manhole	1200	40.001	1.990	225	40.000	2.140	225	150
Stub SW25/2	3.680	1.640	Open Manhole	1200	41.000	2.040	225				
SW25	3.600	2.400	Open Manhole	1800	1.018	1.200	525	1.017	1.280	900	455
								40.001	1.960	225	460
								41.000	1.960	225	460
Outfall B	1.750	0.750	Open Manhole	0		OUTFALL		1.018	1.000	525	

Mayer Brown Ltd				Page 11				
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands					
Date January 2018			Designed by S Foley					
File WEST CATCHMENT MODEL_...			Checked by					
XP Solutions			Network 2013.1					
PIPELINE SCHEDULES for Storm								
Upstream Manhole								
PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
1.000	o	300	TL_SW01	6.380	5.170	0.910	Open Manhole	1050
1.001	o	300	TL_SW02	6.790	4.919	1.571	Open Manhole	1200
2.000	o	300	Parcel A2_1	6.800	5.200	1.300	Open Manhole	1200
2.001	o	150	Parcel A2_2	6.900	5.000	1.750	Open Manhole	1200
1.002	o	300	TL_SW03	6.800	4.756	1.744	Open Manhole	1200
3.000	o	300	Parcel B6_1	6.900	5.000	1.600	Open Manhole	1200
3.001	o	150	Parcel B6_2	6.900	4.800	1.950	Open Manhole	1200
1.003	o	300	TL_SW04	6.780	4.635	1.845	Open Manhole	1200
1.004	o	300	TL_SW05	6.380	4.335	1.745	Open Manhole	1200
4.000	o	300	Parcel B1&CH_1	7.220	4.200	2.720	Open Manhole	1200
4.001	o	150	Parcel B1&CH 2	7.220	4.135	2.935	Open Manhole	1200
1.005	o	300	Ex. SB10	7.055	3.910	2.845	Open Manhole	1200
1.006	o	300	Ex. SB9	6.900	3.770	2.830	Open Manhole	1200
5.000	o	300	Block B_1	6.380	4.500	1.580	Open Manhole	1200
5.001	o	150	Block B_2	6.380	3.905	2.325	Open Manhole	1200
5.002	o	300	Ex. SB17	6.360	3.650	2.410	Open Manhole	1200
1.007	o	300	Ex. SB8	6.570	3.500	2.770	Open Manhole	1350
6.000	o	375	BovisA_1	5.600	4.100	1.125	Open Manhole	1200
6.001	o	375	BovisA_2	5.600	4.000	1.225	Open Manhole	1200
Downstream Manhole								
PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
1.000	59.000	235.1	TL_SW02	6.790	4.919	1.571	Open Manhole	1200
1.001	38.000	233.1	TL_SW03	6.800	4.756	1.744	Open Manhole	1200
2.000	12.808	64.0	Parcel A2_2	6.900	5.000	1.600	Open Manhole	1200
2.001	12.001	150.0	TL_SW03	6.800	4.920	1.730	Open Manhole	1200
1.002	27.675	228.7	TL_SW04	6.780	4.635	1.845	Open Manhole	1200
3.000	19.930	99.7	Parcel B6_2	6.900	4.800	1.800	Open Manhole	1200
3.001	10.000	149.3	TL_SW04	6.780	4.733	1.897	Open Manhole	1200
1.003	70.062	233.5	TL_SW05	6.380	4.335	1.745	Open Manhole	1200
1.004	94.210	221.7	Ex. SB10	7.055	3.910	2.845	Open Manhole	1200
4.000	20.000	307.7	Parcel B1&CH 2	7.220	4.135	2.785	Open Manhole	1200
4.001	14.532	149.8	Ex. SB10	7.055	4.038	2.867	Open Manhole	1200
1.005	30.500	217.9	Ex. SB9	6.900	3.770	2.830	Open Manhole	1200
1.006	59.368	219.9	Ex. SB8	6.570	3.500	2.770	Open Manhole	1350
5.000	19.999	33.6	Block B_2	6.380	3.905	2.175	Open Manhole	1200
5.001	14.532	138.4	Ex. SB17	6.360	3.800	2.410	Open Manhole	1200
5.002	36.500	243.3	Ex. SB8	6.570	3.500	2.770	Open Manhole	1350
1.007	88.421	294.7	Ex SB7	5.810	3.200	2.310	Open Manhole	1350
6.000	20.006	200.1	BovisA_2	5.600	4.000	1.225	Open Manhole	1200
6.001	14.650	16.7	Ex SB7	5.810	3.125	2.310	Open Manhole	1350
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 12					
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands						
Date January 2018 File WEST CATCHMENT MODEL_...			Designed by S Foley Checked by						
XP Solutions			Network 2013.1						
PIPELINE SCHEDULES for Storm									
Upstream Manhole									
PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)	
1.008	o	375	Ex SB7	5.810	3.125	2.310	Open Manhole	1350	
7.000	o	375	BovisB_1	4.650	3.400	0.875	Open Manhole	1200	
7.001	o	375	BovisB_2	4.650	3.225	1.050	Open Manhole	1200	
1.009	o	450	Dummy Node	4.700	2.725	1.525	Open Manhole	1200	
8.000	o	150	Plots 123 - 126	4.050	3.155	0.745	Open Manhole	450	
9.000	o	150	Plots 111 - 116	4.050	3.136	0.764	Open Manhole	450	
8.001	o	225	SW01, G01&G02	3.850	3.040	0.585	Open Manhole	1200	
8.002	o	225	Permbase 01	3.850	3.020	0.605	Open Manhole	1200	
10.000	o	150	Plots 117 - 122	4.050	3.165	0.735	Open Manhole	450	
10.001	o	225	Stub SW02/2	4.500	2.868	1.407	Open Manhole	450	
11.000	o	225	Plots 101-110	4.400	3.000	1.175	Open Manhole	450	
8.003	o	225	SW02	4.360	2.830	1.305	Open Manhole	1200	
1.010	o	450	Ex SB6	4.700	2.625	1.625	Open Manhole	1500	
12.000	o	300	Ret Block A	4.700	3.000	1.400	Open Manhole	1200	
12.001	o	150	Ret Block A	4.600	2.900	1.550	Open Manhole	1050	
13.000	o	225	Plots 95-100	4.600	3.000	1.375	Open Manhole	450	
Downstream Manhole									
PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)	
1.008	77.584	194.0	Dummy Node	4.700	2.725	1.600	Open Manhole	1200	
7.000	20.000	114.3	BovisB_2	4.650	3.225	1.050	Open Manhole	1200	
7.001	13.401	31.5	Dummy Node	4.700	2.800	1.525	Open Manhole	1200	
1.009	4.916	196.6	Ex SB6	4.700	2.700	1.550	Open Manhole	1500	
8.000	23.339	359.1	SW01, G01&G02	3.850	3.090	0.610	Open Manhole	1200	
9.000	3.876	84.3	SW01, G01&G02	3.850	3.090	0.610	Open Manhole	1200	
8.001	5.600	280.0	Permbase 01	3.850	3.020	0.605	Open Manhole	1200	
8.002	45.386	238.9	SW02	4.360	2.830	1.305	Open Manhole	1200	
10.000	33.343	112.3	Stub SW02/2	4.500	2.868	1.482	Open Manhole	450	
10.001	6.800	178.9	SW02	4.360	2.830	1.305	Open Manhole	1200	
11.000	6.800	109.7	SW02	4.360	2.938	1.197	Open Manhole	1200	
8.003	43.824	337.1	Ex SB6	4.700	2.700	1.775	Open Manhole	1500	
1.010	34.073	219.8	SW03	4.370	2.470	1.450	Open Manhole	1500	
12.000	40.643	406.4	Ret Block A	4.600	2.900	1.400	Open Manhole	1050	
12.001	9.903	76.2	SW03	4.370	2.770	1.450	Open Manhole	1500	
13.000	6.000	58.3	SW03	4.370	2.897	1.248	Open Manhole	1500	
©1982-2012 Micro Drainage Ltd									

Mayer Brown Ltd				Page 13					
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands						
Date January 2018 File WEST CATCHMENT MODEL_...			Designed by S Foley Checked by						
XP Solutions			Network 2013.1						
PIPELINE SCHEDULES for Storm									
Upstream Manhole									
PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)	
1.011	o	450	SW03	4.370	2.470	1.450	Open Manhole	1500	
1.012	o	450	SW04	4.440	2.290	1.700	Open Manhole	1500	
14.000	o	150	SW-FUT-01-PlotsN	4.000	2.800	1.050	Open Manhole	450	
15.000	o	150	SW-FUT-01-PlotsS	4.000	2.800	1.050	Open Manhole	450	
14.001	o	300	SW-FUT-01	4.000	2.560	1.140	Open Manhole	1200	
14.002	o	300	Permbase 02	3.800	2.420	1.080	Open Manhole	1200	
16.000	o	150	Plots 80-86	4.100	2.550	1.400	Open Manhole	450	
17.000	o	225	Plots 87-94	4.300	2.602	1.473	Open Manhole	450	
1.013	o	450	SW05	4.170	2.150	1.570	Open Manhole	1500	
18.000	o	225	C2 Resiblock A	4.300	2.320	1.755	Open Manhole	450	
1.014	o	450	SW06	3.700	1.990	1.260	Open Manhole	1500	
1.015	o	450	Permbase 03	3.600	1.900	1.250	Open Manhole	1500	
19.000	o	150	SW-FUT-02-PlotN	3.700	2.600	0.950	Open Manhole	450	
20.000	o	150	SW-FUT-02-PlotS	3.700	2.600	0.950	Open Manhole	450	
19.001	o	300	SW-FUT-02	4.280	2.320	1.660	Open Manhole	1200	
19.002	o	300	Permbase 04	4.000	2.175	1.525	Open Manhole	1200	
Downstream Manhole									
PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)	
1.011	28.223	156.8	SW04	4.440	2.290	1.700	Open Manhole	1500	
1.012	22.432	160.2	SW05	4.170	2.150	1.570	Open Manhole	1500	
14.000	22.905	152.7	SW-FUT-01	4.000	2.650	1.200	Open Manhole	1200	
15.000	28.097	187.3	SW-FUT-01	4.000	2.650	1.200	Open Manhole	1200	
14.001	35.213	251.5	Permbase 02	3.800	2.420	1.080	Open Manhole	1200	
14.002	28.603	238.4	SW05	4.170	2.300	1.570	Open Manhole	1500	
16.000	12.624	50.5	SW05	4.170	2.300	1.720	Open Manhole	1500	
17.000	7.200	23.8	SW05	4.170	2.300	1.645	Open Manhole	1500	
1.013	37.575	234.8	SW06	3.700	1.990	1.260	Open Manhole	1500	
18.000	8.659	32.6	SW06	3.700	2.054	1.421	Open Manhole	1500	
1.014	22.449	249.4	Permbase 03	3.600	1.900	1.250	Open Manhole	1500	
1.015	10.000	250.0	SW24	3.810	1.860	1.500	Open Manhole	1800	
19.000	26.210	201.6	SW-FUT-02	4.280	2.470	1.660	Open Manhole	1200	
20.000	28.840	221.8	SW-FUT-02	4.280	2.470	1.660	Open Manhole	1200	
19.001	35.611	245.6	Permbase 04	4.000	2.175	1.525	Open Manhole	1200	
19.002	18.889	251.9	SW07	3.870	2.100	1.470	Open Manhole	1200	
©1982-2012 Micro Drainage Ltd									

Mayer Brown Ltd						Page 14		
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands					
Date January 2018 File WEST CATCHMENT MODEL_...			Designed by S Foley Checked by					
XP Solutions			Network 2013.1					
PIPELINE SCHEDULES for Storm								
Upstream Manhole								
PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
21.000	o	150	Plots 60-73	3.900	2.600	1.150	Open Manhole	450
22.000	o	150	Plots 74-78	3.900	2.600	1.150	Open Manhole	450
19.003	o	300	SW07	3.870	2.100	1.470	Open Manhole	1200
19.004	o	300	Permbase 05	3.760	2.055	1.405	Open Manhole	1200
23.000	o	150	Plots 39-46	4.300	3.240	0.910	Open Manhole	1200
24.000	o	225	SW-LYM 01	5.040	3.740	1.075	Open Manhole	1200
25.000	o	450	Non resi	5.200	4.000	0.750	Open Manhole	1200
25.001	o	225	Non resi	5.200	3.720	1.255	Open Manhole	1200
24.001	o	225	SW-LYM 02	5.500	3.640	1.635	Open Manhole	1200
26.000	o	450	Parcel A1	7.000	4.000	2.550	Open Manhole	1200
26.001	o	225	As-built SA8	6.000	3.763	2.012	Open Manhole	1200
27.000	o	450	Non Resi	6.000	4.000	1.550	Open Manhole	1200
27.001	o	225	SW Stub 02	6.000	3.640	2.135	Open Manhole	1200
26.002	o	225	SW-LYM 03/1	5.920	3.570	2.125	Open Manhole	1200
24.002	o	225	SW-LYM 03	6.300	3.350	2.725	Open Manhole	1200
24.003	o	300	SW-LYM 04	6.640	3.225	3.115	Open Manhole	1200
Downstream Manhole								
PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
21.000	7.800	195.0	SW07	3.870	2.560	1.160	Open Manhole	1200
22.000	9.600	96.0	SW07	3.870	2.500	1.220	Open Manhole	1200
19.003	11.498	255.5	Permbase 05	3.760	2.055	1.405	Open Manhole	1200
19.004	10.000	222.2	SW24	3.810	2.010	1.500	Open Manhole	1800
23.000	6.005	6.4	SW22	4.270	2.305	1.815	Open Manhole	1800
24.000	24.867	248.7	SW-LYM 02	5.500	3.640	1.635	Open Manhole	1200
25.000	39.317	140.4	Non resi	5.200	3.720	1.030	Open Manhole	1200
25.001	13.808	172.6	SW-LYM 02	5.500	3.640	1.635	Open Manhole	1200
24.001	44.896	208.8	SW-LYM 03	6.300	3.425	2.650	Open Manhole	1200
26.000	39.613	167.1	As-built SA8	6.000	3.763	1.787	Open Manhole	1200
26.001	28.513	147.7	SW-LYM 03/1	5.920	3.570	2.125	Open Manhole	1200
27.000	34.498	95.8	SW Stub 02	6.000	3.640	1.910	Open Manhole	1200
27.001	5.111	73.0	SW-LYM 03/1	5.920	3.570	2.125	Open Manhole	1200
26.002	16.877	116.4	SW-LYM 03	6.300	3.425	2.650	Open Manhole	1200
24.002	25.768	206.1	SW-LYM 04	6.640	3.225	3.190	Open Manhole	1200
24.003	43.680	273.0	SW-LYM 10	6.640	3.065	3.275	Open Manhole	1500
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 15				
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands					
Date January 2018			Designed by S Foley					
File WEST CATCHMENT MODEL_...			Checked by					
XP Solutions			Network 2013.1					
PIPELINE SCHEDULES for Storm								
Upstream Manhole								
PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
28.000	o	225	SW-LYM 07	5.370	3.870	1.275	Open Manhole	1200
28.001	o	225	SW-LYM 08	6.140	3.670	2.245	Open Manhole	1200
29.000	o	300	SW-LYM 05A	7.570	7.200	0.070	Open Manhole	1200
29.001	o	300	SW-LYM 05	7.250	5.540	1.410	Open Manhole	1200
24.004	o	375	SW-LYM 10	6.640	2.990	3.275	Open Manhole	1500
24.005	o	450	SW-LYM11	5.900	2.680	2.770	Open Manhole	1350
30.000	o	225	ExSB17_Dum Node	6.360	3.700	2.435	Open Manhole	1200
24.006	o	450	SW-LYM 12	6.380	2.520	3.410	Open Manhole	1350
24.007	o	450	SW-FUT-03	6.260	2.240	3.570	Open Manhole	1350
31.000	o	225	Stub SW18/1	4.300	2.500	1.575	Open Manhole	1200
31.001	o	225	SW18	4.680	2.380	2.075	Open Manhole	1200
24.008	o	450	SW19	5.100	1.970	2.680	Open Manhole	1350
24.009	o	525	SW20	5.000	1.760	2.715	Open Manhole	1800
32.000	o	450	Car Park	5.000	3.500	1.050	Open Manhole	1200
32.001	o	150	Car Park	5.000	3.400	1.450	Open Manhole	1200
33.000	o	450	Non Resi	5.300	2.700	2.150	Open Manhole	1200
33.001	o	225	Stub SW9/1	5.300	2.600	2.475	Open Manhole	1200
34.000	o	225	SW08	4.900	3.550	1.125	Open Manhole	1200
Downstream Manhole								
PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
28.000	25.335	126.7	SW-LYM 08	6.140	3.670	2.245	Open Manhole	1200
28.001	34.164	64.5	SW-LYM 10	6.640	3.140	3.275	Open Manhole	1500
29.000	64.700	57.3	SW-LYM 05	7.250	6.070	0.880	Open Manhole	1200
29.001	30.927	0.0	SW-LYM 10	6.640	5.540	0.800	Open Manhole	1500
24.004	45.590	198.2	SW-LYM11	5.900	2.760	2.765	Open Manhole	1350
24.005	38.840	242.7	SW-LYM 12	6.380	2.520	3.410	Open Manhole	1350
30.000	26.634	49.3	SW-LYM 12	6.380	3.160	2.995	Open Manhole	1350
24.006	37.201	132.9	SW-FUT-03	6.260	2.240	3.570	Open Manhole	1350
24.007	63.944	236.8	SW19	5.100	1.970	2.680	Open Manhole	1350
31.000	24.684	205.7	SW18	4.680	2.380	2.075	Open Manhole	1200
31.001	35.227	195.7	SW19	5.100	2.200	2.675	Open Manhole	1350
24.008	19.302	113.5	SW20	5.000	1.800	2.750	Open Manhole	1800
24.009	42.970	429.7	SW21	5.000	1.660	2.815	Open Manhole	1800
32.000	7.262	72.6	Car Park	5.000	3.400	1.150	Open Manhole	1200
32.001	27.748	16.4	SW21	5.000	1.710	3.140	Open Manhole	1800
33.000	20.005	200.1	Stub SW9/1	5.300	2.600	2.250	Open Manhole	1200
33.001	30.526	152.6	SW09	5.070	2.400	2.445	Open Manhole	1200
34.000	30.576	26.6	SW09	5.070	2.400	2.445	Open Manhole	1200
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 16				
Lion House Oriental Road Woking GU22 8AR			Littlehampton Overall Surface Network West of Wetlands					
Date January 2018			Designed by S Foley					
File WEST CATCHMENT MODEL_...			Checked by					
XP Solutions			Network 2013.1					
PIPELINE SCHEDULES for Storm								
Upstream Manhole								
PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
35.000	o	450	Non Resi	5.100	2.700	1.950	Open Manhole	1200
35.001	o	225	Stub SW9/2	5.100	2.500	2.375	Open Manhole	1200
36.000	o	150	Plots 1 - 4	5.200	4.310	0.740	Open Manhole	450
33.002	o	225	SW09	5.070	2.400	2.445	Open Manhole	1200
37.000	o	225	SW12	4.320	2.790	1.305	Open Manhole	1200
37.001	o	225	SW13	4.020	2.680	1.115	Open Manhole	1200
37.002	o	225	SW14	4.020	2.600	1.195	Open Manhole	1200
37.003	o	300	SW15	4.600	2.170	2.130	Open Manhole	1200
38.000	o	150	Plots 16-22	4.700	3.440	1.110	Open Manhole	450
33.003	o	300	SW16	4.650	2.100	2.250	Open Manhole	1200
33.004	o	450	SW17	5.000	1.820	2.730	Open Manhole	1200
24.010	o	900	SW21	5.000	1.660	2.440	Open Manhole	1800
23.001	o	900	SW22	4.270	1.630	1.740	Open Manhole	1800
39.000	o	225	Plots 47-55	4.100	2.500	1.375	Open Manhole	1200
23.002	o	900	SW23	3.900	1.495	1.505	Open Manhole	1800
1.016	o	900	SW24	3.810	1.410	1.500	Open Manhole	1800
1.017	o	900	Permbase 06	3.800	1.300	1.600	Open Manhole	1800
Downstream Manhole								
PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
35.000	22.482	112.4	Stub SW9/2	5.100	2.500	2.150	Open Manhole	1200
35.001	5.638	56.4	SW09	5.070	2.400	2.445	Open Manhole	1200
36.000	16.786	9.8	SW09	5.070	2.600	2.320	Open Manhole	1200
33.002	45.139	150.5	SW16	4.650	2.100	2.325	Open Manhole	1200
37.000	21.924	199.3	SW13	4.020	2.680	1.115	Open Manhole	1200
37.001	23.225	145.2	SW14	4.020	2.520	1.275	Open Manhole	1200
37.002	42.860	115.8	SW15	4.600	2.230	2.145	Open Manhole	1200
37.003	16.004	228.6	SW16	4.650	2.100	2.250	Open Manhole	1200
38.000	5.880	5.7	SW16	4.650	2.400	2.100	Open Manhole	1200
33.003	7.752	27.7	SW17	5.000	1.820	2.880	Open Manhole	1200
33.004	49.146	307.2	SW21	5.000	1.660	2.890	Open Manhole	1800
24.010	7.734	257.8	SW22	4.270	1.630	1.740	Open Manhole	1800
23.001	49.171	364.2	SW23	3.900	1.495	1.505	Open Manhole	1800
39.000	5.695	0.0	SW23	3.900	2.500	1.175	Open Manhole	1800
23.002	34.760	408.9	SW24	3.810	1.410	1.500	Open Manhole	1800
1.016	45.616	414.7	Permbase 06	3.800	1.300	1.600	Open Manhole	1800
1.017	6.000	300.0	SW25	3.600	1.280	1.420	Open Manhole	1800
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd		Page 17
Lion House Oriental Road Woking GU22 8AR	Littlehampton Overall Surface Network West of Wetlands	
Date January 2018 File WEST CATCHMENT MODEL_...	Designed by S Foley Checked by	
XP Solutions	Network 2013.1	

PIPELINE SCHEDULES for Storm

Upstream Manhole

PN	Hyd Sect	Diam (mm)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
40.000	o	225	Plots	3.700	2.370	1.105	Open Manhole	1200
40.001	o	225	Stub SW25/1	3.720	1.990	1.505	Open Manhole	1200
41.000	o	225	Stub SW25/2	3.680	2.040	1.415	Open Manhole	1200
1.018	o	525	SW25	3.600	1.200	1.875	Open Manhole	1800

Downstream Manhole

PN	Length (m)	Slope (1:X)	MH Name	C.Level (m)	I.Level (m)	D.Depth (m)	MH Connection	MH DIAM., L*W (mm)
40.000	34.385	149.5	Stub SW25/1	3.720	2.140	1.355	Open Manhole	1200
40.001	26.630	887.7	SW25	3.600	1.960	1.415	Open Manhole	1800
41.000	30.249	378.1	SW25	3.600	1.960	1.415	Open Manhole	1800
1.018	21.220	106.1	Outfall B	1.750	1.000	0.225	Open Manhole	0

Surcharged Outfall Details for Storm

Outfall Pipe Number	Outfall Name	C. Level (m)	I. Level (m)	Min I. Level (m)	D,L (mm)	W (mm)
---------------------	--------------	--------------	--------------	------------------	----------	--------

1.018 Outfall B 1.750 1.000 1.000 0 0

Datum (m) 1.000 Offset (mins) 0

Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)
1	0.800	28	0.800	55	0.800	82	0.800	109	0.800	136	0.800	163	0.800	190	0.800
2	0.800	29	0.800	56	0.800	83	0.800	110	0.800	137	0.800	164	0.800	191	0.800
3	0.800	30	0.800	57	0.800	84	0.800	111	0.800	138	0.800	165	0.800	192	0.800
4	0.800	31	0.800	58	0.800	85	0.800	112	0.800	139	0.800	166	0.800	193	0.800
5	0.800	32	0.800	59	0.800	86	0.800	113	0.800	140	0.800	167	0.800	194	0.800
6	0.800	33	0.800	60	0.800	87	0.800	114	0.800	141	0.800	168	0.800	195	0.800
7	0.800	34	0.800	61	0.800	88	0.800	115	0.800	142	0.800	169	0.800	196	0.800
8	0.800	35	0.800	62	0.800	89	0.800	116	0.800	143	0.800	170	0.800	197	0.800
9	0.800	36	0.800	63	0.800	90	0.800	117	0.800	144	0.800	171	0.800	198	0.800
10	0.800	37	0.800	64	0.800	91	0.800	118	0.800	145	0.800	172	0.800	199	0.800
11	0.800	38	0.800	65	0.800	92	0.800	119	0.800	146	0.800	173	0.800	200	0.800
12	0.800	39	0.800	66	0.800	93	0.800	120	0.800	147	0.800	174	0.800	201	0.800
13	0.800	40	0.800	67	0.800	94	0.800	121	0.800	148	0.800	175	0.800	202	0.800
14	0.800	41	0.800	68	0.800	95	0.800	122	0.800	149	0.800	176	0.800	203	0.800
15	0.800	42	0.800	69	0.800	96	0.800	123	0.800	150	0.800	177	0.800	204	0.800
16	0.800	43	0.800	70	0.800	97	0.800	124	0.800	151	0.800	178	0.800	205	0.800
17	0.800	44	0.800	71	0.800	98	0.800	125	0.800	152	0.800	179	0.800	206	0.800
18	0.800	45	0.800	72	0.800	99	0.800	126	0.800	153	0.800	180	0.800	207	0.800
19	0.800	46	0.800	73	0.800	100	0.800	127	0.800	154	0.800	181	0.800	208	0.800
20	0.800	47	0.800	74	0.800	101	0.800	128	0.800	155	0.800	182	0.800	209	0.800
21	0.800	48	0.800	75	0.800	102	0.800	129	0.800	156	0.800	183	0.800	210	0.800
22	0.800	49	0.800	76	0.800	103	0.800	130	0.800	157	0.800	184	0.800	211	0.800
23	0.800	50	0.800	77	0.800	104	0.800	131	0.800	158	0.800	185	0.800	212	0.800
24	0.800	51	0.800	78	0.800	105	0.800	132	0.800	159	0.800	186	0.800	213	0.800
25	0.800	52	0.800	79	0.800	106	0.800	133	0.800	160	0.800	187	0.800	214	0.800
26	0.800	53	0.800	80	0.800	107	0.800	134	0.800	161	0.800	188	0.800	215	0.800
27	0.800	54	0.800	81	0.800	108	0.800	135	0.800	162	0.800	189	0.800	216	0.800

Mayer Brown Ltd		Page 18	
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands	
Date January 2018		Designed by S Foley	
File WEST CATCHMENT MODEL_...		Checked by	
XP Solutions		Network 2013.1	



Surcharged Outfall Details for Storm

Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)	Time (mins)	Depth (m)
217	0.800	240	0.800	263	0.800	286	0.800	309	0.800	332	0.800	355	0.800
218	0.800	241	0.800	264	0.800	287	0.800	310	0.800	333	0.800	356	0.800
219	0.800	242	0.800	265	0.800	288	0.800	311	0.800	334	0.800	357	0.800
220	0.800	243	0.800	266	0.800	289	0.800	312	0.800	335	0.800	358	0.800
221	0.800	244	0.800	267	0.800	290	0.800	313	0.800	336	0.800	359	0.800
222	0.800	245	0.800	268	0.800	291	0.800	314	0.800	337	0.800	360	0.800
223	0.800	246	0.800	269	0.800	292	0.800	315	0.800	338	0.800	361	0.800
224	0.800	247	0.800	270	0.800	293	0.800	316	0.800	339	0.800	362	0.800
225	0.800	248	0.800	271	0.800	294	0.800	317	0.800	340	0.800	363	0.800
226	0.800	249	0.800	272	0.800	295	0.800	318	0.800	341	0.800	364	0.800
227	0.800	250	0.800	273	0.800	296	0.800	319	0.800	342	0.800	365	0.800
228	0.800	251	0.800	274	0.800	297	0.800	320	0.800	343	0.800	366	0.800
229	0.800	252	0.800	275	0.800	298	0.800	321	0.800	344	0.800	367	0.800
230	0.800	253	0.800	276	0.800	299	0.800	322	0.800	345	0.800	368	0.800
231	0.800	254	0.800	277	0.800	300	0.800	323	0.800	346	0.800	369	0.800
232	0.800	255	0.800	278	0.800	301	0.800	324	0.800	347	0.800	370	0.800
233	0.800	256	0.800	279	0.800	302	0.800	325	0.800	348	0.800	371	0.800
234	0.800	257	0.800	280	0.800	303	0.800	326	0.800	349	0.800	372	0.800
235	0.800	258	0.800	281	0.800	304	0.800	327	0.800	350	0.800	373	0.800
236	0.800	259	0.800	282	0.800	305	0.800	328	0.800	351	0.800	374	0.800
237	0.800	260	0.800	283	0.800	306	0.800	329	0.800	352	0.800	375	0.800
238	0.800	261	0.800	284	0.800	307	0.800	330	0.800	353	0.800	376	0.800
239	0.800	262	0.800	285	0.800	308	0.800	331	0.800	354	0.800	377	0.800

Simulation Criteria for Storm

Volumetric Runoff Coeff	0.750	Additional Flow - % of Total Flow	0.000
Areal Reduction Factor	1.000	MADD Factor * 10m ³ /ha Storage	2.000
Hot Start (mins)	0	Inlet Coeffiecient	0.800
Hot Start Level (mm)	0	Flow per Person per Day (l/per/day)	0.000
Manhole Headloss Coeff (Global)	0.500	Run Time (mins)	60
Foul Sewage per hectare (l/s)	0.000	Output Interval (mins)	1

Number of Input Hydrographs	0	Number of Offline Controls	2	Number of Time/Area Diagrams	0
Number of Online Controls	14	Number of Storage Structures	20	Number of Real Time Controls	0

Synthetic Rainfall Details

Rainfall Model	FEH	E (1km)	0.314
Return Period (years)	2	F (1km)	2.329
Site Location	GB 502850 104400 TQ 02850 04400	Summer Storms	Yes
C (1km)	-0.027	Winter Storms	No
D1 (1km)	0.393	Cv (Summer)	0.750
D2 (1km)	0.274	Cv (Winter)	0.840
D3 (1km)	0.407	Storm Duration (mins)	30

©1982-2012 Micro Drainage Ltd

Mayer Brown Ltd		Page 19	
Lion House	Littlehampton		
Oriental Road	Overall Surface Network		
Woking GU22 8AR	West of Wetlands		
Date January 2018	Designed by S Foley		
File WEST CATCHMENT MODEL_...	Checked by		
XP Solutions	Network 2013.1		

Online Controls for Storm

Hydro-Brake® Manhole: Parcel A2_2, DS/PN: 2.001, Volume (m³): 3.0

Design Head (m) 1.200

Hydro-Brake® Type Md4

Invert Level (m) 5.000

Design Flow (l/s) 5.0

Diameter (mm) 76

Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	2.3	0.800	4.0	2.000	6.4	4.000	9.0	7.000	11.9
0.200	3.0	1.000	4.5	2.200	6.7	4.500	9.5	7.500	12.3
0.300	2.6	1.200	4.9	2.400	7.0	5.000	10.1	8.000	12.7
0.400	2.9	1.400	5.3	2.600	7.3	5.500	10.6	8.500	13.1
0.500	3.2	1.600	5.7	3.000	7.8	6.000	11.0	9.000	13.5
0.600	3.5	1.800	6.0	3.500	8.4	6.500	11.5	9.500	13.9

Hydro-Brake® Manhole: Parcel B6_2, DS/PN: 3.001, Volume (m³): 3.7

Design Head (m) 0.800

Hydro-Brake® Type Md4

Invert Level (m) 4.800

Design Flow (l/s) 5.0

Diameter (mm) 84

Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	2.6	0.800	4.9	2.000	7.8	4.000	11.0	7.000	14.5
0.200	4.0	1.000	5.5	2.200	8.2	4.500	11.7	7.500	15.1
0.300	3.4	1.200	6.0	2.400	8.5	5.000	12.3	8.000	15.6
0.400	3.5	1.400	6.5	2.600	8.9	5.500	12.9	8.500	16.0
0.500	3.9	1.600	7.0	3.000	9.5	6.000	13.5	9.000	16.5
0.600	4.3	1.800	7.4	3.500	10.3	6.500	14.0	9.500	16.9

Hydro-Brake® Manhole: Parcel B1&CH 2, DS/PN: 4.001, Volume (m³): 4.8

Design Head (m) 1.000

Hydro-Brake® Type Md4

Invert Level (m) 4.135

Design Flow (l/s) 10.0

Diameter (mm) 113

Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	3.3	0.800	8.9	2.000	14.1	4.000	19.9	7.000	26.3
0.200	8.2	1.000	10.0	2.200	14.8	4.500	21.1	7.500	27.3
0.300	8.0	1.200	10.9	2.400	15.4	5.000	22.2	8.000	28.1
0.400	7.1	1.400	11.8	2.600	16.0	5.500	23.3	8.500	29.0
0.500	7.2	1.600	12.6	3.000	17.2	6.000	24.4	9.000	29.9
0.600	7.8	1.800	13.3	3.500	18.6	6.500	25.4	9.500	30.7

Hydro-Brake® Manhole: Block B_2, DS/PN: 5.001, Volume (m³): 4.1

Design Head (m) 1.000

Hydro-Brake® Type Md4

Invert Level (m) 3.905

Design Flow (l/s) 5.0

Diameter (mm) 80

Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0	7.000	13.2
0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6	7.500	13.7
0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2	8.000	14.1
0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7	8.500	14.5
0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2	9.000	15.0
0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7	9.500	15.4

Hydro-Brake® Manhole: BovISA_2, DS/PN: 6.001, Volume (m³): 3.9

Design Head (m) 1.200

Hydro-Brake® Type Md5 SW Only

Invert Level (m) 4.000

Design Flow (l/s) 60.0

Diameter (mm) 293

Mayer Brown Ltd				Page 20			
Lion House				Littlehampton			
Oriental Road				Overall Surface Network			
Woking GU22 8AR				West of Wetlands			
Date January 2018				Designed by S Foley			
File WEST CATCHMENT MODEL_...				Checked by			
XP Solutions				Network 2013.1			
Hydro-Brake® Manhole: BovisA_2, DS/PN: 6.001, Volume (m³): 3.9							
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	10.6	0.800	57.7	2.000	73.3	4.000	103.3
0.200	27.7	1.000	57.8	2.200	76.7	4.500	109.6
0.300	43.3	1.200	59.7	2.400	80.1	5.000	115.5
0.400	52.6	1.400	62.7	2.600	83.3	5.500	121.2
0.500	56.9	1.600	66.1	3.000	89.5	6.000	126.6
0.600	58.3	1.800	69.7	3.500	96.7	6.500	131.7
						7.000	136.7
						7.500	141.5
						8.000	146.1
						8.500	150.6
						9.000	155.0
						9.500	159.3
Hydro-Brake® Manhole: BovisB_2, DS/PN: 7.001, Volume (m³): 3.7							
Design Head (m) 1.200 Hydro-Brake® Type Md5 SW Only Invert Level (m) 3.225							
Design Flow (l/s) 60.0 Diameter (mm) 293							
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	10.6	0.800	57.7	2.000	73.3	4.000	103.3
0.200	27.7	1.000	57.8	2.200	76.7	4.500	109.6
0.300	43.3	1.200	59.7	2.400	80.1	5.000	115.5
0.400	52.6	1.400	62.7	2.600	83.3	5.500	121.2
0.500	56.9	1.600	66.1	3.000	89.5	6.000	126.6
0.600	58.3	1.800	69.7	3.500	96.7	6.500	131.7
						7.000	136.7
						7.500	141.5
						8.000	146.1
						8.500	150.6
						9.000	155.0
						9.500	159.3
Hydro-Brake® Manhole: Ret Block A, DS/PN: 12.001, Volume (m³): 4.3							
Design Head (m) 1.000 Hydro-Brake® Type Md4 Invert Level (m) 2.900							
Design Flow (l/s) 5.0 Diameter (mm) 80							
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0
0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6
0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2
0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7
0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2
0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7
						7.000	13.2
						7.500	13.7
						8.000	14.1
						8.500	14.5
						9.000	15.0
						9.500	15.4
Hydro-Brake® Manhole: Non resi, DS/PN: 25.001, Volume (m³): 7.7							
Design Head (m) 1.000 Hydro-Brake® Type Md4 Invert Level (m) 3.720							
Design Flow (l/s) 5.0 Diameter (mm) 80							
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0
0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6
0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2
0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7
0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2
0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7
						7.000	13.2
						7.500	13.7
						8.000	14.1
						8.500	14.5
						9.000	15.0
						9.500	15.4
Hydro-Brake® Manhole: As-built SA8, DS/PN: 26.001, Volume (m³): 8.6							
Design Head (m) 2.000 Hydro-Brake® Type Md4 Invert Level (m) 3.763							
Design Flow (l/s) 34.5 Diameter (mm) 176							
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
0.100	4.2	0.800	22.1	2.000	34.1	4.000	48.3
0.200	15.1	1.000	24.2	2.200	35.8	4.500	51.2
0.300	24.2	1.200	26.5	2.400	37.4	5.000	54.0
0.400	25.7	1.400	28.6	2.600	38.9	5.500	56.6
0.500	23.3	1.600	30.5	3.000	41.8	6.000	59.1
0.600	21.6	1.800	32.4	3.500	45.2	6.500	61.5
						7.000	63.9
						7.500	66.1
						8.000	68.3
						8.500	70.4
						9.000	72.4
						9.500	74.4
©1982-2012 Micro Drainage Ltd							

Mayer Brown Ltd			Page 21																																																																																																																																																																																																																																																																																																																																												
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands																																																																																																																																																																																																																																																																																																																																													
Date January 2018		Designed by S Foley																																																																																																																																																																																																																																																																																																																																													
File WEST CATCHMENT MODEL_...		Checked by																																																																																																																																																																																																																																																																																																																																													
XP Solutions		Network 2013.1																																																																																																																																																																																																																																																																																																																																													
<u>Hydro-Brake® Manhole: SW Stub 02, DS/PN: 27.001, Volume (m³): 8.0</u> Design Head (m) 1.000 Hydro-Brake® Type Md4 Invert Level (m) 3.640 Design Flow (l/s) 5.0 Diameter (mm) 80 <table><tr><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th></tr><tr><td>0.100</td><td>2.4</td><td>0.800</td><td>4.5</td><td>2.000</td><td>7.1</td><td>4.000</td><td>10.0</td><td>7.000</td><td>13.2</td></tr><tr><td>0.200</td><td>3.5</td><td>1.000</td><td>5.0</td><td>2.200</td><td>7.4</td><td>4.500</td><td>10.6</td><td>7.500</td><td>13.7</td></tr><tr><td>0.300</td><td>3.0</td><td>1.200</td><td>5.5</td><td>2.400</td><td>7.7</td><td>5.000</td><td>11.2</td><td>8.000</td><td>14.1</td></tr><tr><td>0.400</td><td>3.2</td><td>1.400</td><td>5.9</td><td>2.600</td><td>8.0</td><td>5.500</td><td>11.7</td><td>8.500</td><td>14.5</td></tr><tr><td>0.500</td><td>3.5</td><td>1.600</td><td>6.3</td><td>3.000</td><td>8.6</td><td>6.000</td><td>12.2</td><td>9.000</td><td>15.0</td></tr><tr><td>0.600</td><td>3.9</td><td>1.800</td><td>6.7</td><td>3.500</td><td>9.3</td><td>6.500</td><td>12.7</td><td>9.500</td><td>15.4</td></tr></table> <u>Hydro-Brake® Manhole: Car Park, DS/PN: 32.001, Volume (m³): 2.8</u> Design Head (m) 1.500 Hydro-Brake® Type Md4 Invert Level (m) 3.400 Design Flow (l/s) 5.0 Diameter (mm) 72 <table><tr><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th></tr><tr><td>0.100</td><td>2.1</td><td>0.800</td><td>3.6</td><td>2.000</td><td>5.7</td><td>4.000</td><td>8.1</td><td>7.000</td><td>10.7</td></tr><tr><td>0.200</td><td>2.5</td><td>1.000</td><td>4.0</td><td>2.200</td><td>6.0</td><td>4.500</td><td>8.6</td><td>7.500</td><td>11.1</td></tr><tr><td>0.300</td><td>2.3</td><td>1.200</td><td>4.4</td><td>2.400</td><td>6.3</td><td>5.000</td><td>9.0</td><td>8.000</td><td>11.4</td></tr><tr><td>0.400</td><td>2.6</td><td>1.400</td><td>4.8</td><td>2.600</td><td>6.5</td><td>5.500</td><td>9.5</td><td>8.500</td><td>11.8</td></tr><tr><td>0.500</td><td>2.9</td><td>1.600</td><td>5.1</td><td>3.000</td><td>7.0</td><td>6.000</td><td>9.9</td><td>9.000</td><td>12.1</td></tr><tr><td>0.600</td><td>3.1</td><td>1.800</td><td>5.4</td><td>3.500</td><td>7.6</td><td>6.500</td><td>10.3</td><td>9.500</td><td>12.5</td></tr></table> <u>Hydro-Brake® Manhole: Stub SW9/1, DS/PN: 33.001, Volume (m³): 6.0</u> Design Head (m) 1.000 Hydro-Brake® Type Md4 Invert Level (m) 2.600 Design Flow (l/s) 5.0 Diameter (mm) 80 <table><tr><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th></tr><tr><td>0.100</td><td>2.4</td><td>0.800</td><td>4.5</td><td>2.000</td><td>7.1</td><td>4.000</td><td>10.0</td><td>7.000</td><td>13.2</td></tr><tr><td>0.200</td><td>3.5</td><td>1.000</td><td>5.0</td><td>2.200</td><td>7.4</td><td>4.500</td><td>10.6</td><td>7.500</td><td>13.7</td></tr><tr><td>0.300</td><td>3.0</td><td>1.200</td><td>5.5</td><td>2.400</td><td>7.7</td><td>5.000</td><td>11.2</td><td>8.000</td><td>14.1</td></tr><tr><td>0.400</td><td>3.2</td><td>1.400</td><td>5.9</td><td>2.600</td><td>8.0</td><td>5.500</td><td>11.7</td><td>8.500</td><td>14.5</td></tr><tr><td>0.500</td><td>3.5</td><td>1.600</td><td>6.3</td><td>3.000</td><td>8.6</td><td>6.000</td><td>12.2</td><td>9.000</td><td>15.0</td></tr><tr><td>0.600</td><td>3.9</td><td>1.800</td><td>6.7</td><td>3.500</td><td>9.3</td><td>6.500</td><td>12.7</td><td>9.500</td><td>15.4</td></tr></table> <u>Hydro-Brake® Manhole: Stub SW9/2, DS/PN: 35.001, Volume (m³): 6.3</u> Design Head (m) 1.000 Hydro-Brake® Type Md4 Invert Level (m) 2.500 Design Flow (l/s) 5.0 Diameter (mm) 80 <table><tr><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th></tr><tr><td>0.100</td><td>2.4</td><td>0.800</td><td>4.5</td><td>2.000</td><td>7.1</td><td>4.000</td><td>10.0</td><td>7.000</td><td>13.2</td></tr><tr><td>0.200</td><td>3.5</td><td>1.000</td><td>5.0</td><td>2.200</td><td>7.4</td><td>4.500</td><td>10.6</td><td>7.500</td><td>13.7</td></tr><tr><td>0.300</td><td>3.0</td><td>1.200</td><td>5.5</td><td>2.400</td><td>7.7</td><td>5.000</td><td>11.2</td><td>8.000</td><td>14.1</td></tr><tr><td>0.400</td><td>3.2</td><td>1.400</td><td>5.9</td><td>2.600</td><td>8.0</td><td>5.500</td><td>11.7</td><td>8.500</td><td>14.5</td></tr><tr><td>0.500</td><td>3.5</td><td>1.600</td><td>6.3</td><td>3.000</td><td>8.6</td><td>6.000</td><td>12.2</td><td>9.000</td><td>15.0</td></tr><tr><td>0.600</td><td>3.9</td><td>1.800</td><td>6.7</td><td>3.500</td><td>9.3</td><td>6.500</td><td>12.7</td><td>9.500</td><td>15.4</td></tr></table> <u>Hydro-Brake® Manhole: SW25, DS/PN: 1.018, Volume (m³): 10.9</u> Design Head (m) 1.870 Hydro-Brake® Type Md10 Invert Level (m) 1.200 Design Flow (l/s) 285.0 Diameter (mm) 386 <table><tr><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th><th>Depth (m)</th><th>Flow (l/s)</th></tr><tr><td>0.100</td><td>14.1</td><td>0.500</td><td>111.9</td><td>1.200</td><td>227.7</td><td>2.000</td><td>293.9</td><td>3.000</td><td>360.0</td></tr><tr><td>0.200</td><td>36.0</td><td>0.600</td><td>136.1</td><td>1.400</td><td>245.9</td><td>2.200</td><td>308.3</td><td>3.500</td><td>388.9</td></tr><tr><td>0.300</td><td>60.7</td><td>0.800</td><td>178.2</td><td>1.600</td><td>262.9</td><td>2.400</td><td>322.0</td><td>4.000</td><td>415.7</td></tr><tr><td>0.400</td><td>86.4</td><td>1.000</td><td>207.8</td><td>1.800</td><td>278.9</td><td>2.600</td><td>335.2</td><td>4.500</td><td>440.9</td></tr></table>						Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0	7.000	13.2	0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6	7.500	13.7	0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2	8.000	14.1	0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7	8.500	14.5	0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2	9.000	15.0	0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7	9.500	15.4	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	0.100	2.1	0.800	3.6	2.000	5.7	4.000	8.1	7.000	10.7	0.200	2.5	1.000	4.0	2.200	6.0	4.500	8.6	7.500	11.1	0.300	2.3	1.200	4.4	2.400	6.3	5.000	9.0	8.000	11.4	0.400	2.6	1.400	4.8	2.600	6.5	5.500	9.5	8.500	11.8	0.500	2.9	1.600	5.1	3.000	7.0	6.000	9.9	9.000	12.1	0.600	3.1	1.800	5.4	3.500	7.6	6.500	10.3	9.500	12.5	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0	7.000	13.2	0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6	7.500	13.7	0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2	8.000	14.1	0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7	8.500	14.5	0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2	9.000	15.0	0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7	9.500	15.4	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0	7.000	13.2	0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6	7.500	13.7	0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2	8.000	14.1	0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7	8.500	14.5	0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2	9.000	15.0	0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7	9.500	15.4	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	0.100	14.1	0.500	111.9	1.200	227.7	2.000	293.9	3.000	360.0	0.200	36.0	0.600	136.1	1.400	245.9	2.200	308.3	3.500	388.9	0.300	60.7	0.800	178.2	1.600	262.9	2.400	322.0	4.000	415.7	0.400	86.4	1.000	207.8	1.800	278.9	2.600	335.2	4.500	440.9
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)																																																																																																																																																																																																																																																																																																																																						
0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0	7.000	13.2																																																																																																																																																																																																																																																																																																																																						
0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6	7.500	13.7																																																																																																																																																																																																																																																																																																																																						
0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2	8.000	14.1																																																																																																																																																																																																																																																																																																																																						
0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7	8.500	14.5																																																																																																																																																																																																																																																																																																																																						
0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2	9.000	15.0																																																																																																																																																																																																																																																																																																																																						
0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7	9.500	15.4																																																																																																																																																																																																																																																																																																																																						
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)																																																																																																																																																																																																																																																																																																																																						
0.100	2.1	0.800	3.6	2.000	5.7	4.000	8.1	7.000	10.7																																																																																																																																																																																																																																																																																																																																						
0.200	2.5	1.000	4.0	2.200	6.0	4.500	8.6	7.500	11.1																																																																																																																																																																																																																																																																																																																																						
0.300	2.3	1.200	4.4	2.400	6.3	5.000	9.0	8.000	11.4																																																																																																																																																																																																																																																																																																																																						
0.400	2.6	1.400	4.8	2.600	6.5	5.500	9.5	8.500	11.8																																																																																																																																																																																																																																																																																																																																						
0.500	2.9	1.600	5.1	3.000	7.0	6.000	9.9	9.000	12.1																																																																																																																																																																																																																																																																																																																																						
0.600	3.1	1.800	5.4	3.500	7.6	6.500	10.3	9.500	12.5																																																																																																																																																																																																																																																																																																																																						
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)																																																																																																																																																																																																																																																																																																																																						
0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0	7.000	13.2																																																																																																																																																																																																																																																																																																																																						
0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6	7.500	13.7																																																																																																																																																																																																																																																																																																																																						
0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2	8.000	14.1																																																																																																																																																																																																																																																																																																																																						
0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7	8.500	14.5																																																																																																																																																																																																																																																																																																																																						
0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2	9.000	15.0																																																																																																																																																																																																																																																																																																																																						
0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7	9.500	15.4																																																																																																																																																																																																																																																																																																																																						
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)																																																																																																																																																																																																																																																																																																																																						
0.100	2.4	0.800	4.5	2.000	7.1	4.000	10.0	7.000	13.2																																																																																																																																																																																																																																																																																																																																						
0.200	3.5	1.000	5.0	2.200	7.4	4.500	10.6	7.500	13.7																																																																																																																																																																																																																																																																																																																																						
0.300	3.0	1.200	5.5	2.400	7.7	5.000	11.2	8.000	14.1																																																																																																																																																																																																																																																																																																																																						
0.400	3.2	1.400	5.9	2.600	8.0	5.500	11.7	8.500	14.5																																																																																																																																																																																																																																																																																																																																						
0.500	3.5	1.600	6.3	3.000	8.6	6.000	12.2	9.000	15.0																																																																																																																																																																																																																																																																																																																																						
0.600	3.9	1.800	6.7	3.500	9.3	6.500	12.7	9.500	15.4																																																																																																																																																																																																																																																																																																																																						
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)																																																																																																																																																																																																																																																																																																																																						
0.100	14.1	0.500	111.9	1.200	227.7	2.000	293.9	3.000	360.0																																																																																																																																																																																																																																																																																																																																						
0.200	36.0	0.600	136.1	1.400	245.9	2.200	308.3	3.500	388.9																																																																																																																																																																																																																																																																																																																																						
0.300	60.7	0.800	178.2	1.600	262.9	2.400	322.0	4.000	415.7																																																																																																																																																																																																																																																																																																																																						
0.400	86.4	1.000	207.8	1.800	278.9	2.600	335.2	4.500	440.9																																																																																																																																																																																																																																																																																																																																						
©1982-2012 Micro Drainage Ltd																																																																																																																																																																																																																																																																																																																																															

Mayer Brown Ltd		Page 22							
Lion House	Littlehampton								
Oriental Road	Overall Surface Network								
Woking GU22 8AR	West of Wetlands								
Date January 2018	Designed by S Foley								
File WEST CATCHMENT MODEL_...	Checked by								
XP Solutions	Network 2013.1								
<u>Hydro-Brake® Manhole: SW25, DS/PN: 1.018, Volume (m³): 10.9</u>									
Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)	Depth (m)	Flow (l/s)
5.000	464.8	6.000	509.1	7.000	549.9	8.000	587.9	9.000	623.6
5.500	487.5	6.500	529.9	7.500	569.2	8.500	606.0	9.500	640.6

Mayer Brown Ltd		Page 23
Lion House	Littlehampton	
Oriental Road	Overall Surface Network	
Woking GU22 8AR	West of Wetlands	
Date January 2018	Designed by S Foley	
File WEST CATCHMENT MODEL_...	Checked by	
XP Solutions	Network 2013.1	

Offline Controls for Storm

Pipe Manhole: Ex. SB17, DS/PN: 5.002, Loop to PN: 30.000

Diameter (m)	0.225	Roughness k (mm)	0.600
Section Type	Pipe/Conduit	Entry Loss Coefficient	0.500
Slope (1:X)	40.0	Coefficient of Contraction	0.600
Length (m)	2.000	Upstream Invert Level (m)	3.800

Pipe Manhole: SW01, G01&G02, DS/PN: 8.001, Loop to PN: None

Diameter (m)	0.225	Roughness k (mm)	0.600
Section Type	Pipe/Conduit	Entry Loss Coefficient	0.500
Slope (1:X)	170.0	Coefficient of Contraction	0.600
Length (m)	17.000	Upstream Invert Level (m)	3.500

©1982-2012 Micro Drainage Ltd

Mayer Brown Ltd			Page 24																				
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands																					
Date January 2018		Designed by S Foley																					
File WEST CATCHMENT MODEL_...		Checked by																					
XP Solutions		Network 2013.1																					
Storage Structures for Storm																							
Cellular Storage Manhole: Parcel A2_1, DS/PN: 2.000																							
Invert Level (m)5.200Safety Factor2.0																							
Infiltration Coefficient Base (m/hr)0.00000Porosity0.95																							
Infiltration Coefficient Side (m/hr)0.00000																							
<table><tr><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td></tr><tr><td>0.000</td><td>402.1</td><td>349.7</td><td>1.000</td><td>402.2</td><td>424.5</td><td>1.100</td><td>0.0</td><td>424.5</td></tr></table>						Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	402.1	349.7	1.000	402.2	424.5	1.100	0.0	424.5
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)															
0.000	402.1	349.7	1.000	402.2	424.5	1.100	0.0	424.5															
Cellular Storage Manhole: Parcel B6_1, DS/PN: 3.000																							
Invert Level (m)5.000Safety Factor2.0																							
Infiltration Coefficient Base (m/hr)0.00000Porosity0.95																							
Infiltration Coefficient Side (m/hr)0.00000																							
<table><tr><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td></tr><tr><td>0.000</td><td>92.0</td><td>80.0</td><td>1.000</td><td>92.0</td><td>128.0</td><td>1.100</td><td>0.0</td><td>128.0</td></tr></table>						Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	92.0	80.0	1.000	92.0	128.0	1.100	0.0	128.0
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)															
0.000	92.0	80.0	1.000	92.0	128.0	1.100	0.0	128.0															
Cellular Storage Manhole: Parcel B1&CH_1, DS/PN: 4.000																							
Invert Level (m)4.200Safety Factor2.0																							
Infiltration Coefficient Base (m/hr)0.00000Porosity0.95																							
Infiltration Coefficient Side (m/hr)0.00000																							
<table><tr><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td></tr><tr><td>0.000</td><td>345.0</td><td>300.0</td><td>1.000</td><td>345.0</td><td>380.0</td><td>1.100</td><td>0.0</td><td>380.0</td></tr></table>						Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	345.0	300.0	1.000	345.0	380.0	1.100	0.0	380.0
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)															
0.000	345.0	300.0	1.000	345.0	380.0	1.100	0.0	380.0															
Cellular Storage Manhole: Block B_1, DS/PN: 5.000																							
Invert Level (m)4.500Safety Factor2.0																							
Infiltration Coefficient Base (m/hr)0.00000Porosity0.95																							
Infiltration Coefficient Side (m/hr)0.00000																							
<table><tr><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td></tr><tr><td>0.000</td><td>310.5</td><td>270.0</td><td>1.000</td><td>310.5</td><td>344.0</td><td>1.100</td><td>0.0</td><td>344.0</td></tr></table>						Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	310.5	270.0	1.000	310.5	344.0	1.100	0.0	344.0
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)															
0.000	310.5	270.0	1.000	310.5	344.0	1.100	0.0	344.0															
Cellular Storage Manhole: BovisA_1, DS/PN: 6.000																							
Invert Level (m)4.100Safety Factor2.0																							
Infiltration Coefficient Base (m/hr)0.00000Porosity0.95																							
Infiltration Coefficient Side (m/hr)0.00000																							
<table><tr><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td></tr><tr><td>0.000</td><td>258.8</td><td>225.0</td><td>1.200</td><td>258.8</td><td>297.0</td><td>1.300</td><td>0.0</td><td>297.0</td></tr></table>						Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	258.8	225.0	1.200	258.8	297.0	1.300	0.0	297.0
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)															
0.000	258.8	225.0	1.200	258.8	297.0	1.300	0.0	297.0															
Cellular Storage Manhole: BovisB_1, DS/PN: 7.000																							
Invert Level (m)3.400Safety Factor2.0																							
Infiltration Coefficient Base (m/hr)0.00000Porosity0.95																							
Infiltration Coefficient Side (m/hr)0.00000																							
<table><tr><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td><td>Depth (m)</td><td>Area (m²)</td><td>Inf. Area (m²)</td></tr><tr><td>0.000</td><td>258.8</td><td>225.0</td><td>1.200</td><td>258.8</td><td>297.0</td><td>1.300</td><td>0.0</td><td>297.0</td></tr></table>						Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	258.8	225.0	1.200	258.8	297.0	1.300	0.0	297.0
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)															
0.000	258.8	225.0	1.200	258.8	297.0	1.300	0.0	297.0															
©1982-2012 Micro Drainage Ltd																							

Mayer Brown Ltd		Page 25
Lion House Oriental Road Woking GU22 8AR	Littlehampton Overall Surface Network West of Wetlands	
Date January 2018 File WEST CATCHMENT MODEL_...	Designed by S Foley Checked by	
XP Solutions	Network 2013.1	

Porous Car Park Manhole: Permbase 01, DS/PN: 8.002

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.0
Membrane Percolation (mm/hr)	1000	Length (m)	48.0
Max Percolation (l/s)	80.0	Slope (1:X)	240.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	3.300	Cap Volume Depth (m)	0.460

Cellular Storage Manhole: Ret Block A, DS/PN: 12.000

Invert Level (m)	3.000	Safety Factor	2.0
Infiltration Coefficient Base (m/hr)	0.00000	Porosity	0.95
Infiltration Coefficient Side (m/hr)	0.00000		

Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)
0.000	517.5	450.0	1.000	517.5	560.0	1.100	0.0	560.0

Porous Car Park Manhole: Permbase 02, DS/PN: 14.002

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	8.0
Membrane Percolation (mm/hr)	1000	Length (m)	29.0
Max Percolation (l/s)	64.4	Slope (1:X)	145.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	3.080	Cap Volume Depth (m)	0.460

Porous Car Park Manhole: Permbase 03, DS/PN: 1.015

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.8
Membrane Percolation (mm/hr)	1000	Length (m)	30.0
Max Percolation (l/s)	56.7	Slope (1:X)	150.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	2.880	Cap Volume Depth (m)	0.460

Porous Car Park Manhole: Permbase 04, DS/PN: 19.002

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	6.8
Membrane Percolation (mm/hr)	1000	Length (m)	42.0
Max Percolation (l/s)	79.3	Slope (1:X)	140.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	3.080	Cap Volume Depth (m)	0.460

Porous Car Park Manhole: Permbase 05, DS/PN: 19.004

Infiltration Coefficient Base (m/hr)	0.00000	Width (m)	18.0
Membrane Percolation (mm/hr)	1000	Length (m)	18.0
Max Percolation (l/s)	90.0	Slope (1:X)	140.0
Safety Factor	2.0	Depression Storage (mm)	5
Porosity	0.30	Evaporation (mm/day)	3
Invert Level (m)	3.000	Cap Volume Depth (m)	0.460

Cellular Storage Manhole: Non resi, DS/PN: 25.000

Invert Level (m)	4.000	Safety Factor	2.0
Infiltration Coefficient Base (m/hr)	0.00000	Porosity	0.95
Infiltration Coefficient Side (m/hr)	0.00000		

Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)
0.000	414.0	360.0	1.000	414.0	452.0	1.100	0.0	452.0

©1982-2012 Micro Drainage Ltd

Mayer Brown Ltd		Page 26																																																																																													
Lion House Oriental Road Woking GU22 8AR	Littlehampton Overall Surface Network West of Wetlands																																																																																														
Date January 2018 File WEST CATCHMENT MODEL_...	Designed by S Foley Checked by																																																																																														
XP Solutions	Network 2013.1																																																																																														
<u>Cellular Storage Manhole: Parcel A1, DS/PN: 26.000</u> Invert Level (m) 4.000 Safety Factor 2.0 Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95 Infiltration Coefficient Side (m/hr) 0.00000 <table><tr><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th></tr><tr><td>0.000</td><td>575.0</td><td>500.0</td><td>1.000</td><td>575.0</td><td>590.0</td><td>1.100</td><td>0.0</td><td>590.0</td></tr></table> <u>Cellular Storage Manhole: Non Resi, DS/PN: 27.000</u> Invert Level (m) 4.000 Safety Factor 2.0 Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95 Infiltration Coefficient Side (m/hr) 0.00000 <table><tr><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th></tr><tr><td>0.000</td><td>506.0</td><td>400.0</td><td>1.000</td><td>506.0</td><td>500.0</td><td>1.100</td><td>0.0</td><td>500.0</td></tr></table> <u>Porous Car Park Manhole: Car Park, DS/PN: 32.000</u> Infiltration Coefficient Base (m/hr) 0.00000 Width (m) 50.0 Membrane Percolation (mm/hr) 1000 Length (m) 50.0 Max Percolation (l/s) 694.4 Slope (1:X) 0.0 Safety Factor 2.0 Depression Storage (mm) 5 Porosity 0.30 Evaporation (mm/day) 3 Invert Level (m) 4.500 Cap Volume Depth (m) 0.450 <u>Cellular Storage Manhole: Non Resi, DS/PN: 33.000</u> Invert Level (m) 2.700 Safety Factor 2.0 Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95 Infiltration Coefficient Side (m/hr) 0.00000 <table><tr><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th></tr><tr><td>0.000</td><td>506.0</td><td>400.0</td><td>1.000</td><td>506.0</td><td>500.0</td><td>1.100</td><td>0.0</td><td>500.0</td></tr></table> <u>Cellular Storage Manhole: Non Resi, DS/PN: 35.000</u> Invert Level (m) 2.700 Safety Factor 2.0 Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95 Infiltration Coefficient Side (m/hr) 0.00000 <table><tr><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th></tr><tr><td>0.000</td><td>126.5</td><td>110.0</td><td>1.000</td><td>126.5</td><td>152.0</td><td>1.100</td><td>0.0</td><td>152.0</td></tr></table> <u>Cellular Storage Manhole: SW21, DS/PN: 24.010</u> Invert Level (m) 1.710 Safety Factor 2.0 Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.95 Infiltration Coefficient Side (m/hr) 0.00000 <table><tr><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th><th>Depth (m)</th><th>Area (m²)</th><th>Inf. Area (m²)</th></tr><tr><td>0.000</td><td>1050.0</td><td>1050.0</td><td>1.500</td><td>1050.0</td><td>1263.0</td><td>1.600</td><td>0.0</td><td>1263.0</td></tr></table> <u>Porous Car Park Manhole: Permbase 06, DS/PN: 1.017</u> Infiltration Coefficient Base (m/hr) 0.00000 Porosity 0.30 Membrane Percolation (mm/hr) 1000 Invert Level (m) 2.880 Max Percolation (l/s) 71.1 Width (m) 16.0 Safety Factor 2.0 Length (m) 16.0 <tr><td colspan="3">©1982-2012 Micro Drainage Ltd</td></tr>			Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	575.0	500.0	1.000	575.0	590.0	1.100	0.0	590.0	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	506.0	400.0	1.000	506.0	500.0	1.100	0.0	500.0	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	506.0	400.0	1.000	506.0	500.0	1.100	0.0	500.0	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	126.5	110.0	1.000	126.5	152.0	1.100	0.0	152.0	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	0.000	1050.0	1050.0	1.500	1050.0	1263.0	1.600	0.0	1263.0	©1982-2012 Micro Drainage Ltd		
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)																																																																																							
0.000	575.0	500.0	1.000	575.0	590.0	1.100	0.0	590.0																																																																																							
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)																																																																																							
0.000	506.0	400.0	1.000	506.0	500.0	1.100	0.0	500.0																																																																																							
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)																																																																																							
0.000	506.0	400.0	1.000	506.0	500.0	1.100	0.0	500.0																																																																																							
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)																																																																																							
0.000	126.5	110.0	1.000	126.5	152.0	1.100	0.0	152.0																																																																																							
Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)	Depth (m)	Area (m²)	Inf. Area (m²)																																																																																							
0.000	1050.0	1050.0	1.500	1050.0	1263.0	1.600	0.0	1263.0																																																																																							
©1982-2012 Micro Drainage Ltd																																																																																															

Mayer Brown Ltd		Page 27
Lion House	Littlehampton	
Oriental Road	Overall Surface Network	
Woking GU22 8AR	West of Wetlands	
Date January 2018	Designed by S Foley	
File WEST CATCHMENT MODEL_...	Checked by	
XP Solutions		Network 2013.1
<u>Porous Car Park Manhole: Permbase 06, DS/PN: 1.017</u> Slope (1:X) 53.0 Evaporation (mm/day) 3 Depression Storage (mm) 5 Cap Volume Depth (m) 0.460		
©1982-2012 Micro Drainage Ltd		

APPENDIX F: Windes – 1in100yr Simulation Results

Mayer Brown Ltd		Page 1						
Lion House	Littlehampton							
Oriental Road	Overall Surface Network							
Woking GU22 8AR	West of Wetlands							
Date January 2018	Designed by S Foley							
File WEST CATCHMENT MODEL_...	Checked by							
XP Solutions	Network 2013.1							
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
Simulation Criteria								
Areal Reduction Factor 1.000		Additional Flow - % of Total Flow 0.000						
Hot Start (mins) 0		MADD Factor * 10m³/ha Storage 2.000						
Hot Start Level (mm) 0		Inlet Coefficient 0.800						
Manhole Headloss Coeff (Global) 0.500		Flow per Person per Day (l/per/day) 0.000						
Foul Sewage per hectare (l/s) 0.000								
Number of Input Hydrographs 0		Number of Offline Controls 2						
Number of Online Controls 14		Number of Storage Structures 20						
		Number of Time/Area Diagrams 0						
		Number of Real Time Controls 0						
Synthetic Rainfall Details								
Rainfall Model FEH		D3 (1km) 0.407						
Site Location GB 502850 104400 TQ 02850 04400		E (1km) 0.314						
C (1km) -0.027		F (1km) 2.329						
D1 (1km) 0.393		Cv (Summer) 0.750						
D2 (1km) 0.274		Cv (Winter) 0.840						
Margin for Flood Risk Warning (mm) 300.0								
Analysis Timestep 2.5 Second Increment (Extended)								
DTS Status ON								
DVD Status ON								
Inertia Status ON								
Profile(s) Winter								
Duration(s) (mins) 15, 30, 60, 120, 240, 360, 480, 960, 1440								
Return Period(s) (years) 100								
Climate Change (%) 30								
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.
1.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			3
1.001	15 Winter	100	+30%	100/15 Winter				
2.000	480 Winter	100	+30%	100/15 Winter				
2.001	480 Winter	100	+30%	100/15 Winter				
1.002	15 Winter	100	+30%	100/15 Winter				
3.000	60 Winter	100	+30%	100/15 Winter				
3.001	60 Winter	100	+30%	100/15 Winter				
1.003	15 Winter	100	+30%	100/15 Winter				
1.004	15 Winter	100	+30%	100/15 Winter	100/15 Winter			2
4.000	120 Winter	100	+30%	100/15 Winter				
4.001	120 Winter	100	+30%	100/15 Winter				
1.005	15 Winter	100	+30%	100/15 Winter				
1.006	15 Winter	100	+30%	100/15 Winter				
5.000	360 Winter	100	+30%	100/15 Winter				
5.001	240 Winter	100	+30%	100/15 Winter				
5.002	15 Winter	100	+30%	100/15 Winter		100/15 Winter	8	
1.007	15 Winter	100	+30%	100/15 Winter				
6.000	30 Winter	100	+30%	100/15 Winter				
6.001	60 Winter	100	+30%	100/15 Winter				
1.008	15 Winter	100	+30%	100/15 Winter				
7.000	240 Winter	100	+30%	100/15 Winter				
7.001	240 Winter	100	+30%	100/15 Winter				
1.009	240 Winter	100	+30%	100/15 Winter				
8.000	15 Winter	100	+30%	100/15 Winter				
9.000	15 Winter	100	+30%	100/15 Winter				
8.001	30 Winter	100	+30%	100/15 Winter		100/15 Winter	8	
8.002	30 Winter	100	+30%	100/15 Winter	100/15 Winter			5
10.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			4
10.001	15 Winter	100	+30%	100/15 Winter				
11.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			1
8.003	15 Winter	100	+30%	100/15 Winter				
1.010	240 Winter	100	+30%	100/15 Winter				
12.000	480 Winter	100	+30%	100/15 Winter				
12.001	480 Winter	100	+30%	100/15 Winter				
13.000	30 Winter	100	+30%	100/15 Winter				
1.011	240 Winter	100	+30%	100/15 Winter				
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd		Page 2							
Lion House		Littlehampton							
Oriental Road		Overall Surface Network							
Woking GU22 8AR		West of Wetlands							
Date January 2018		Designed by S Foley							
File WEST CATCHMENT MODEL_...		Checked by							
XP Solutions		Network 2013.1							
Summary of Critical Results by Maximum Level (Rank 1) for Storm									
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.	
1.012	240 Winter	100	+30%	100/15 Winter					
14.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			3	
15.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			3	
14.001	15 Winter	100	+30%	100/15 Winter					
14.002	240 Winter	100	+30%	100/15 Winter	100/15 Winter			5	
16.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			2	
17.000	15 Winter	100	+30%	100/15 Winter					
1.013	240 Winter	100	+30%	100/15 Winter					
18.000	15 Winter	100	+30%	100/15 Winter					
1.014	240 Winter	100	+30%	100/15 Winter	100/240 Winter			1	
1.015	240 Winter	100	+30%	100/15 Winter	100/240 Winter			1	
19.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			2	
20.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			2	
19.001	240 Winter	100	+30%	100/15 Winter					
19.002	240 Winter	100	+30%	100/15 Winter					
21.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			1	
22.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			1	
19.003	240 Winter	100	+30%	100/15 Winter					
19.004	240 Winter	100	+30%	100/15 Winter					
23.000	240 Winter	100	+30%	100/15 Winter					
24.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			3	
25.000	480 Winter	100	+30%	100/30 Winter					
25.001	480 Winter	100	+30%	100/15 Winter	100/60 Winter			1	
24.001	15 Winter	100	+30%	100/15 Winter	100/15 Winter			1	
26.000	120 Winter	100	+30%	100/60 Winter					
26.001	120 Winter	100	+30%	100/15 Winter					
27.000	480 Winter	100	+30%	100/30 Winter					
27.001	960 Winter	100	+30%	100/15 Winter					
26.002	15 Winter	100	+30%	100/15 Winter	100/15 Winter				
24.002	15 Winter	100	+30%	100/15 Winter					
24.003	15 Winter	100	+30%	100/15 Winter					
28.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			3	
28.001	15 Winter	100	+30%	100/15 Winter	100/15 Winter				
29.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			2	
29.001	15 Winter	100	+30%	100/15 Winter					
24.004	15 Winter	100	+30%	100/15 Winter					
24.005	15 Winter	100	+30%	100/15 Winter					
30.000	15 Winter	100	+30%	100/15 Winter					
24.006	15 Winter	100	+30%	100/15 Winter					
24.007	15 Winter	100	+30%	100/15 Winter					
31.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			3	
31.001	15 Winter	100	+30%	100/15 Winter					
24.008	240 Winter	100	+30%	100/15 Winter					
24.009	240 Winter	100	+30%	100/15 Winter					
32.000	360 Winter	100	+30%	100/15 Winter					
32.001	15 Winter	100	+30%	100/15 Winter	100/15 Winter			2	
33.000	480 Winter	100	+30%	100/30 Winter					
33.001	480 Winter	100	+30%	100/15 Winter					
34.000	15 Winter	100	+30%	100/15 Winter	100/15 Winter			1	
35.000	360 Winter	100	+30%	100/15 Winter					
35.001	360 Winter	100	+30%	100/15 Winter					
36.000	15 Winter	100	+30%	100/15 Winter					
33.002	15 Winter	100	+30%	100/15 Winter					
37.000	15 Winter	100	+30%	100/15 Winter					
37.001	15 Winter	100	+30%	100/15 Winter	100/15 Winter			2	
37.002	15 Winter	100	+30%	100/15 Winter	100/15 Winter			1	
37.003	240 Winter	100	+30%	100/15 Winter					
38.000	240 Winter	100	+30%	100/15 Winter					
33.003	240 Winter	100	+30%	100/15 Winter					
33.004	240 Winter	100	+30%	100/15 Winter					
24.010	240 Winter	100	+30%	100/15 Winter					
23.001	240 Winter	100	+30%	100/15 Winter					
39.000	240 Winter	100	+30%	100/15 Winter					
23.002	240 Winter	100	+30%	100/15 Winter					
1.016	240 Winter	100	+30%	100/15 Winter					
1.017	240 Winter	100	+30%	100/15 Winter					
©1982-2012 Micro Drainage Ltd									



Mayer Brown Ltd				Page 3				
Lion House		Littlehampton						
Oriental Road		Overall Surface Network						
Woking GU22 8AR		West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	Storm	Return Period	Climate Change	First X Surcharge	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.
40.000	15 Winter	100	+30%	100/15 Winter				
40.001	240 Winter	100	+30%	100/15 Winter				
41.000	240 Winter	100	+30%	100/15 Winter				
1.018	240 Winter	100	+30%	100/15 Winter	100/240 Winter			
PN	US/MH Name	Water Level (m)	Surch'd Depth (m)	Flooded Volume (m³)	Flow / Cap.	O'flow (l/s)	Pipe Flow (l/s)	Status
1.000	TL_SW01	6.398	0.928	18.461	1.15	0.0	78.6	FLOOD
1.001	TL_SW02	6.707	1.488	0.000	1.09	0.0	73.1	FLOOD RISK
2.000	Parcel A2_1	6.080	0.580	0.000	0.05	0.0	5.1	SURCHARGED
2.001	Parcel A2_2	6.088	0.938	0.000	0.36	0.0	4.7	SURCHARGED
1.002	TL_SW03	6.743	1.687	0.000	1.11	0.0	73.3	FLOOD RISK
3.000	Parcel B6_1	5.921	0.621	0.000	0.07	0.0	6.7	SURCHARGED
3.001	Parcel B6_2	5.915	0.965	0.000	0.45	0.0	5.8	SURCHARGED
1.003	TL_SW04	6.669	1.734	0.000	1.05	0.0	72.8	FLOOD RISK
1.004	TL_SW05	6.406	1.771	25.728	1.31	0.0	94.5	FLOOD
4.000	Parcel B1&CH_1	4.887	0.387	0.000	0.19	0.0	10.4	SURCHARGED
4.001	Parcel B1&CH_2	5.094	0.809	0.000	0.62	0.0	8.3	SURCHARGED
1.005	Ex. SB10	6.588	2.378	0.000	1.30	0.0	88.5	SURCHARGED
1.006	Ex. SB9	6.504	2.434	0.000	1.58	0.0	111.8	SURCHARGED
5.000	Block B_1	5.196	0.396	0.000	0.03	0.0	5.7	SURCHARGED
5.001	Block B_2	5.201	1.146	0.000	0.40	0.0	5.6	SURCHARGED
5.002	Ex. SB17	5.880	1.930	0.000	0.38	79.7	24.8	SURCHARGED
1.007	Ex. SB8	5.945	2.145	0.000	1.80	0.0	111.9	SURCHARGED
6.000	BovisA_1	4.992	0.517	0.000	0.49	0.0	57.8	SURCHARGED
6.001	BovisA_2	5.513	1.138	0.000	0.16	0.0	58.2	FLOOD RISK
1.008	Ex SB7	4.691	1.191	0.000	1.09	0.0	148.3	SURCHARGED
7.000	BovisB_1	4.370	0.595	0.000	0.28	0.0	44.1	FLOOD RISK
7.001	BovisB_2	4.357	0.757	0.000	0.17	0.0	44.4	FLOOD RISK
1.009	Dummy Node	4.203	1.028	0.000	1.03	0.0	132.9	SURCHARGED
8.000	Plots 123 - 126	4.047	0.742	0.000	2.13	0.0	18.7	FLOOD RISK
9.000	Plots 111 - 116	4.046	0.760	0.000	2.45	0.0	32.9	FLOOD RISK
8.001	SW01, G01&G02	3.829	0.564	0.000	1.74	57.7	40.1	FLOOD RISK
8.002	Permbase 01	3.854	0.609	3.836	0.43	0.0	13.8	FLOOD
10.000	Plots 117 - 122	4.067	0.752	17.342	1.19	0.0	19.2	FLOOD
10.001	Stub SW02/2	4.364	1.271	0.000	1.33	0.0	39.8	FLOOD RISK
11.000	Plots 101-110	4.404	1.179	3.828	1.69	0.0	59.2	FLOOD
8.003	SW02	4.294	1.239	0.000	2.40	0.0	64.2	FLOOD RISK
1.010	Ex SB6	4.192	1.117	0.000	0.78	0.0	148.6	SURCHARGED
12.000	Ret Block A	3.871	0.571	0.000	0.27	0.0	13.8	SURCHARGED
12.001	Ret Block A	4.138	1.088	0.000	0.27	0.0	4.9	SURCHARGED
13.000	Plots 95-100	4.149	0.924	0.000	0.72	0.0	32.5	SURCHARGED
1.011	SW03	4.077	1.157	0.000	0.71	0.0	155.0	FLOOD RISK
1.012	SW04	3.944	1.204	0.000	0.75	0.0	157.0	SURCHARGED
14.000	SW-FUT-01-PlotsN	4.016	1.066	16.434	1.87	0.0	25.4	FLOOD
15.000	SW-FUT-01-PlotsS	4.012	1.062	12.296	1.80	0.0	22.2	FLOOD
14.001	SW-FUT-01	3.944	1.084	0.000	1.72	0.0	110.5	FLOOD RISK
14.002	Permbase 02	3.824	1.104	23.596	0.50	0.0	32.3	FLOOD
16.000	Plots 80-86	4.106	1.406	6.112	1.94	0.0	44.3	FLOOD
17.000	Plots 87-94	3.951	1.124	0.000	0.98	0.0	76.2	SURCHARGED
1.013	SW05	3.816	1.216	0.000	1.12	0.0	208.6	SURCHARGED
18.000	C2 Resiblock A	4.095	1.550	0.000	1.45	0.0	105.5	FLOOD RISK
1.014	SW06	3.704	1.264	3.849	1.34	0.0	224.7	FLOOD
1.015	Permbase 03	3.607	1.257	7.040	1.80	0.0	254.7	FLOOD
19.000	SW-FUT-02-PlotN	3.704	0.954	4.082	2.23	0.0	26.4	FLOOD
20.000	SW-FUT-02-Plots	3.706	0.956	6.079	2.50	0.0	28.4	FLOOD
19.001	SW-FUT-02	3.621	1.001	0.000	0.36	0.0	23.3	SURCHARGED
19.002	Permbase 04	3.609	1.134	0.000	0.39	0.0	23.7	SURCHARGED
21.000	Plots 60-73	3.900	1.150	0.166	4.03	0.0	44.2	FLOOD
22.000	Plots 74-78	3.901	1.151	1.462	2.73	0.0	43.9	FLOOD
19.003	SW07	3.604	1.204	0.000	0.96	0.0	53.2	FLOOD RISK
19.004	Permbase 05	3.596	1.241	0.000	0.93	0.0	53.7	FLOOD RISK
23.000	Plots 39-46	3.634	0.244	0.000	0.16	0.0	9.7	SURCHARGED
24.000	SW-LYM 01	5.063	1.098	22.944	1.74	0.0	52.6	FLOOD
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 4				
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	US/MH Name	Water Level (m)	Surch'ed Depth (m)	Flooded Volume (m³)	Flow / Cap.	0'flow (l/s)	Pipe Flow (l/s)	Status
25.000	Non resi	4.915	0.465	0.000	0.07	0.0	16.5	FLOOD RISK
25.001	Non resi	5.200	1.255	0.018	0.14	0.0	4.9	FLOOD
24.001	SW-LYM 02	5.502	1.637	1.654	1.44	0.0	49.3	FLOOD
26.000	Parcel A1	4.498	0.048	0.000	0.12	0.0	26.9	SURCHARGED
26.001	As-built SA8	4.522	0.534	0.000	0.59	0.0	23.3	SURCHARGED
27.000	Non Resi	4.822	0.372	0.000	0.04	0.0	12.7	SURCHARGED
27.001	SW Stub 02	5.138	1.273	0.000	0.13	0.0	4.9	SURCHARGED
26.002	SW-LYM 03/1	5.824	2.029	0.007	0.78	0.0	33.6	FLOOD
24.002	SW-LYM 03	5.978	2.403	0.000	1.94	0.0	64.6	SURCHARGED
24.003	SW-LYM 04	6.191	2.666	0.000	1.05	0.0	65.9	SURCHARGED
28.000	SW-LYM 07	5.394	1.299	24.635	1.72	0.0	73.2	FLOOD
28.001	SW-LYM 08	6.116	2.221	0.103	1.22	0.0	74.7	FLOOD
29.000	SW-LYM 05A	7.590	0.090	20.019	0.98	0.0	138.1	FLOOD
29.001	SW-LYM 05	6.919	1.079	0.000	6.79	0.0	168.4	SURCHARGED
24.004	SW-LYM 10	6.214	2.849	0.000	1.63	0.0	212.0	SURCHARGED
24.005	SW-LYM11	5.862	2.732	0.000	1.78	0.0	325.9	FLOOD RISK
30.000	ExSB17_Dum Node	5.720	1.795	0.000	1.00	0.0	68.7	SURCHARGED
24.006	SW-LYM 12	5.393	2.423	0.000	1.56	0.0	386.5	SURCHARGED
24.007	SW-FUT-03	4.692	2.002	0.000	2.06	0.0	398.8	SURCHARGED
31.000	Stub SW18/1	4.324	1.599	23.582	2.23	0.0	74.1	FLOOD
31.001	SW18	4.173	1.568	0.000	2.45	0.0	85.6	SURCHARGED
24.008	SW19	3.823	1.403	0.000	0.95	0.0	220.2	SURCHARGED
24.009	SW20	3.690	1.405	0.000	1.07	0.0	218.6	SURCHARGED
32.000	Car Park	4.720	0.770	0.000	0.03	0.0	5.7	FLOOD RISK
32.001	Car Park	5.000	1.450	0.301	0.10	0.0	4.4	FLOOD
33.000	Non Resi	3.681	0.531	0.000	0.05	0.0	9.7	SURCHARGED
33.001	Stub SW9/1	3.893	1.068	0.000	0.12	0.0	4.6	SURCHARGED
34.000	SW08	4.901	1.126	0.650	0.61	0.0	57.5	FLOOD
35.000	Non Resi	3.870	0.720	0.000	0.02	0.0	4.9	SURCHARGED
35.001	Stub SW9/2	3.869	1.144	0.000	0.10	0.0	4.4	SURCHARGED
36.000	Plots 1 - 4	4.784	0.324	0.000	0.33	0.0	17.5	SURCHARGED
33.002	SW09	4.627	2.002	0.000	2.09	0.0	84.4	SURCHARGED
37.000	SW12	4.271	1.256	0.000	1.44	0.0	48.3	FLOOD RISK
37.001	SW13	4.037	1.132	17.216	1.61	0.0	63.8	FLOOD
37.002	SW14	4.020	1.195	0.246	1.45	0.0	66.6	FLOOD
37.003	SW15	3.802	1.332	0.000	0.50	0.0	31.2	SURCHARGED
38.000	Plots 16-22	3.794	0.204	0.000	0.13	0.0	8.2	SURCHARGED
33.003	SW16	3.783	1.383	0.000	0.43	0.0	57.1	SURCHARGED
33.004	SW17	3.727	1.457	0.000	0.34	0.0	56.6	SURCHARGED
24.010	SW21	3.640	1.080	0.000	0.36	0.0	218.3	SURCHARGED
23.001	SW22	3.631	1.101	0.000	0.26	0.0	219.8	SURCHARGED
39.000	Plots 47-55	3.608	0.883	0.000	0.78	0.0	18.0	SURCHARGED
23.002	SW23	3.615	1.220	0.000	0.29	0.0	219.6	FLOOD RISK
1.016	SW24	3.596	1.286	0.000	0.41	0.0	323.7	FLOOD RISK
1.017	Permbase 06	3.567	1.367	0.000	0.52	0.0	258.6	FLOOD RISK
40.000	Plots	3.561	0.966	0.000	0.92	0.0	36.7	FLOOD RISK
40.001	Stub SW25/1	3.541	1.326	0.000	1.58	0.0	19.8	FLOOD RISK
41.000	Stub SW25/2	3.528	1.263	0.000	0.79	0.0	19.6	FLOOD RISK
1.018	SW25	3.585	1.860	0.059	0.77	0.0	265.5	FLOOD
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd			Page 1					
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
Simulation Criteria								
Areal Reduction Factor		1.000		Additional Flow - % of Total Flow 0.000				
Hot Start (mins)		0		MADD Factor * 10m³/ha Storage 2.000				
Hot Start Level (mm)		0		Inlet Coefficient 0.800				
Manhole Headloss Coeff (Global)		0.500		Flow per Person per Day (l/per/day) 0.000				
Foul Sewage per hectare (l/s)		0.000						
Number of Input Hydrographs 0		Number of Offline Controls 2		Number of Time/Area Diagrams 0				
Number of Online Controls 14		Number of Storage Structures 20		Number of Real Time Controls 0				
Synthetic Rainfall Details								
Rainfall Model		FEH		D3 (1km) 0.407				
Site Location GB 502850 104400 TQ 02850 04400				E (1km) 0.314				
C (1km)		-0.027		F (1km) 2.329				
D1 (1km)		0.393		Cv (Summer) 0.750				
D2 (1km)		0.274		Cv (Winter) 0.840				
Margin for Flood Risk Warning (mm)				300.0				
Analysis Timestep		2.5 Second Increment (Extended)						
DTS Status				ON				
DVD Status				ON				
Inertia Status				ON				
Profile(s) Winter								
Duration(s) (mins)		240						
Return Period(s) (years)		100						
Climate Change (%)		30						
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.
1.000	240 Winter	100	+30%					
1.001	240 Winter	100	+30%					
2.000	240 Winter	100	+30%	100/240 Winter				
2.001	240 Winter	100	+30%	100/240 Winter				
1.002	240 Winter	100	+30%					
3.000	240 Winter	100	+30%	100/240 Winter				
3.001	240 Winter	100	+30%	100/240 Winter				
1.003	240 Winter	100	+30%					
1.004	240 Winter	100	+30%	100/240 Winter				
4.000	240 Winter	100	+30%	100/240 Winter				
4.001	240 Winter	100	+30%	100/240 Winter				
1.005	240 Winter	100	+30%	100/240 Winter				
1.006	240 Winter	100	+30%	100/240 Winter				
5.000	240 Winter	100	+30%	100/240 Winter				
5.001	240 Winter	100	+30%	100/240 Winter				
5.002	240 Winter	100	+30%	100/240 Winter		100/240 Winter	1	
1.007	240 Winter	100	+30%	100/240 Winter				
6.000	240 Winter	100	+30%	100/240 Winter				
6.001	240 Winter	100	+30%	100/240 Winter				
1.008	240 Winter	100	+30%	100/240 Winter				
7.000	240 Winter	100	+30%	100/240 Winter				
7.001	240 Winter	100	+30%	100/240 Winter				
1.009	240 Winter	100	+30%	100/240 Winter				
8.000	240 Winter	100	+30%	100/240 Winter				
9.000	240 Winter	100	+30%	100/240 Winter				
8.001	240 Winter	100	+30%	100/240 Winter		100/240 Winter	1	
8.002	240 Winter	100	+30%	100/240 Winter	100/240 Winter			1
10.000	240 Winter	100	+30%	100/240 Winter	100/240 Winter			1
10.001	240 Winter	100	+30%	100/240 Winter				
11.000	240 Winter	100	+30%	100/240 Winter				
8.003	240 Winter	100	+30%	100/240 Winter				
1.010	240 Winter	100	+30%	100/240 Winter				
12.000	240 Winter	100	+30%	100/240 Winter				
12.001	240 Winter	100	+30%	100/240 Winter				
13.000	240 Winter	100	+30%	100/240 Winter				
1.011	240 Winter	100	+30%	100/240 Winter				
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 2				
Lion House			Littlehampton					
Oriental Road			Overall Surface Network					
Woking GU22 8AR			West of Wetlands					
Date January 2018			Designed by S Foley					
File WEST CATCHMENT MODEL_...			Checked by					
XP Solutions			Network 2013.1					
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.
1.012	240 Winter	100	+30%	100/240 Winter				
14.000	240 Winter	100	+30%	100/240 Winter				
15.000	240 Winter	100	+30%	100/240 Winter				
14.001	240 Winter	100	+30%	100/240 Winter				
14.002	240 Winter	100	+30%	100/240 Winter	100/240 Winter			1
16.000	240 Winter	100	+30%	100/240 Winter				
17.000	240 Winter	100	+30%	100/240 Winter				
1.013	240 Winter	100	+30%	100/240 Winter				
18.000	240 Winter	100	+30%	100/240 Winter				
1.014	240 Winter	100	+30%	100/240 Winter	100/240 Winter			1
1.015	240 Winter	100	+30%	100/240 Winter	100/240 Winter			1
19.000	240 Winter	100	+30%	100/240 Winter				
20.000	240 Winter	100	+30%	100/240 Winter				
19.001	240 Winter	100	+30%	100/240 Winter				
19.002	240 Winter	100	+30%	100/240 Winter				
21.000	240 Winter	100	+30%	100/240 Winter				
22.000	240 Winter	100	+30%	100/240 Winter				
19.003	240 Winter	100	+30%	100/240 Winter				
19.004	240 Winter	100	+30%	100/240 Winter				
23.000	240 Winter	100	+30%	100/240 Winter				
24.000	240 Winter	100	+30%	100/240 Winter				
25.000	240 Winter	100	+30%	100/240 Winter				
25.001	240 Winter	100	+30%	100/240 Winter				
24.001	240 Winter	100	+30%	100/240 Winter				
26.000	240 Winter	100	+30%	100/240 Winter				
26.001	240 Winter	100	+30%	100/240 Winter				
27.000	240 Winter	100	+30%	100/240 Winter				
27.001	240 Winter	100	+30%	100/240 Winter				
26.002	240 Winter	100	+30%	100/240 Winter				
24.002	240 Winter	100	+30%	100/240 Winter				
24.003	240 Winter	100	+30%	100/240 Winter				
28.000	240 Winter	100	+30%	100/240 Winter				
28.001	240 Winter	100	+30%	100/240 Winter				
29.000	240 Winter	100	+30%					
29.001	240 Winter	100	+30%	100/240 Winter				
24.004	240 Winter	100	+30%	100/240 Winter				
24.005	240 Winter	100	+30%	100/240 Winter				
30.000	240 Winter	100	+30%	100/240 Winter				
24.006	240 Winter	100	+30%	100/240 Winter				
24.007	240 Winter	100	+30%	100/240 Winter				
31.000	240 Winter	100	+30%	100/240 Winter				
31.001	240 Winter	100	+30%	100/240 Winter				
24.008	240 Winter	100	+30%	100/240 Winter				
24.009	240 Winter	100	+30%	100/240 Winter				
32.000	240 Winter	100	+30%	100/240 Winter				
32.001	240 Winter	100	+30%	100/240 Winter				
33.000	240 Winter	100	+30%	100/240 Winter				
33.001	240 Winter	100	+30%	100/240 Winter				
34.000	240 Winter	100	+30%	100/240 Winter				
35.000	240 Winter	100	+30%	100/240 Winter				
35.001	240 Winter	100	+30%	100/240 Winter				
36.000	240 Winter	100	+30%					
33.002	240 Winter	100	+30%	100/240 Winter				
37.000	240 Winter	100	+30%	100/240 Winter				
37.001	240 Winter	100	+30%	100/240 Winter				
37.002	240 Winter	100	+30%	100/240 Winter				
37.003	240 Winter	100	+30%	100/240 Winter				
38.000	240 Winter	100	+30%	100/240 Winter				
33.003	240 Winter	100	+30%	100/240 Winter				
33.004	240 Winter	100	+30%	100/240 Winter				
24.010	240 Winter	100	+30%	100/240 Winter				
23.001	240 Winter	100	+30%	100/240 Winter				
39.000	240 Winter	100	+30%	100/240 Winter				
23.002	240 Winter	100	+30%	100/240 Winter				
1.016	240 Winter	100	+30%	100/240 Winter				
1.017	240 Winter	100	+30%	100/240 Winter				
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 3					
Lion House		Littlehampton							
Oriental Road		Overall Surface Network							
Woking GU22 8AR		West of Wetlands							
Date January 2018		Designed by S Foley							
File WEST CATCHMENT MODEL_...		Checked by							
XP Solutions		Network 2013.1							
Summary of Critical Results by Maximum Level (Rank 1) for Storm									
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.	
40.000	240 Winter	100	+30%	100/240 Winter					
40.001	240 Winter	100	+30%	100/240 Winter					
41.000	240 Winter	100	+30%	100/240 Winter					
1.018	240 Winter	100	+30%	100/240 Winter	100/240 Winter				
PN	US/MH Name	Water Level (m)	Surch'd Depth (m)	Flooded Volume (m³)	Flow / Cap.	O'flow (l/s)	Pipe Flow (l/s)	Status	
1.000	TL_SW01	5.238	-0.232	0.000	0.12	0.0	8.0	OK	
1.001	TL_SW02	5.007	-0.212	0.000	0.19	0.0	12.8	OK	
2.000	Parcel A2_1	6.014	0.514	0.000	0.04	0.0	4.9	SURCHARGED	
2.001	Parcel A2_2	6.023	0.873	0.000	0.35	0.0	4.5	SURCHARGED	
1.002	TL_SW03	4.874	-0.182	0.000	0.33	0.0	21.8	OK	
3.000	Parcel B6_1	5.865	0.565	0.000	0.06	0.0	6.0	SURCHARGED	
3.001	Parcel B6_2	5.867	0.917	0.000	0.44	0.0	5.7	SURCHARGED	
1.003	TL_SW04	4.778	-0.157	0.000	0.46	0.0	32.0	OK	
1.004	TL_SW05	4.709	0.074	0.000	0.67	0.0	48.4	SURCHARGED	
4.000	Parcel B1&CH_1	4.883	0.383	0.000	0.19	0.0	10.6	SURCHARGED	
4.001	Parcel B1&CH_2	5.000	0.715	0.000	0.62	0.0	8.3	SURCHARGED	
1.005	Ex. SB10	4.611	0.401	0.000	0.82	0.0	56.3	SURCHARGED	
1.006	Ex. SB9	4.521	0.451	0.000	0.93	0.0	66.1	SURCHARGED	
5.000	Block B_1	5.195	0.395	0.000	0.04	0.0	6.3	SURCHARGED	
5.001	Block B_2	5.201	1.146	0.000	0.40	0.0	5.6	SURCHARGED	
5.002	Ex. SB17	4.321	0.371	0.000	0.15	49.3	9.9	SURCHARGED	
1.007	Ex. SB8	4.396	0.596	0.000	0.99	0.0	61.7	SURCHARGED	
6.000	BovisA_1	4.644	0.169	0.000	0.46	0.0	54.7	SURCHARGED	
6.001	BovisA_2	4.609	0.234	0.000	0.15	0.0	53.5	SURCHARGED	
1.008	Ex SB7	4.322	0.822	0.000	0.81	0.0	110.6	SURCHARGED	
7.000	BovisB_1	4.370	0.595	0.000	0.28	0.0	44.1	FLOOD RISK	
7.001	BovisB_2	4.357	0.757	0.000	0.17	0.0	44.4	FLOOD RISK	
1.009	Dummy Node	4.203	1.028	0.000	1.03	0.0	132.9	SURCHARGED	
8.000	Plots 123 - 126	3.766	0.461	0.000	0.46	0.0	4.0	FLOOD RISK	
9.000	Plots 111 - 116	3.759	0.473	0.000	0.43	0.0	5.7	FLOOD RISK	
8.001	SW01, G01&G02	3.754	0.489	0.000	0.58	48.9	13.5	FLOOD RISK	
8.002	Permbase 01	3.850	0.605	0.367	0.47	0.0	14.9	FLOOD	
10.000	Plots 117 - 122	4.053	0.738	3.381	0.49	0.0	8.0	FLOOD	
10.001	Stub SW02/2	4.060	0.967	0.000	0.47	0.0	14.1	SURCHARGED	
11.000	Plots 101-110	4.063	0.838	0.000	0.41	0.0	14.5	SURCHARGED	
8.003	SW02	4.058	1.003	0.000	0.84	0.0	22.6	SURCHARGED	
1.010	Ex SB6	4.192	1.117	0.000	0.78	0.0	148.6	SURCHARGED	
12.000	Ret Block A	3.786	0.486	0.000	0.26	0.0	13.5	SURCHARGED	
12.001	Ret Block A	4.131	1.081	0.000	0.25	0.0	4.6	SURCHARGED	
13.000	Plots 95-100	4.080	0.855	0.000	0.23	0.0	10.4	SURCHARGED	
1.011	SW03	4.077	1.157	0.000	0.71	0.0	155.0	FLOOD RISK	
1.012	SW04	3.944	1.204	0.000	0.75	0.0	157.0	SURCHARGED	
14.000	SW-FUT-01-PlotsN	3.887	0.937	0.000	0.86	0.0	11.6	FLOOD RISK	
15.000	SW-FUT-01-PlotsS	3.877	0.927	0.000	0.75	0.0	9.3	FLOOD RISK	
14.001	SW-FUT-01	3.843	0.983	0.000	0.50	0.0	32.4	FLOOD RISK	
14.002	Permbase 02	3.824	1.104	23.596	0.50	0.0	32.3	FLOOD	
16.000	Plots 80-86	3.836	1.136	0.000	0.60	0.0	13.7	FLOOD RISK	
17.000	Plots 87-94	3.821	0.994	0.000	0.20	0.0	15.2	SURCHARGED	
1.013	SW05	3.816	1.216	0.000	1.12	0.0	208.6	SURCHARGED	
18.000	C2 Resiblock A	3.712	1.167	0.000	0.31	0.0	22.3	SURCHARGED	
1.014	SW06	3.704	1.264	3.849	1.34	0.0	224.7	FLOOD	
1.015	Permbase 03	3.607	1.257	7.040	1.80	0.0	254.7	FLOOD	
19.000	SW-FUT-02-PlotN	3.634	0.884	0.000	0.61	0.0	7.2	FLOOD RISK	
20.000	SW-FUT-02-Plots	3.638	0.888	0.000	0.70	0.0	8.0	FLOOD RISK	
19.001	SW-FUT-02	3.621	1.001	0.000	0.36	0.0	23.3	SURCHARGED	
19.002	Permbase 04	3.609	1.134	0.000	0.39	0.0	23.7	SURCHARGED	
21.000	Plots 60-73	3.611	0.861	0.000	1.07	0.0	11.8	FLOOD RISK	
22.000	Plots 74-78	3.613	0.863	0.000	0.87	0.0	13.9	FLOOD RISK	
19.003	SW07	3.604	1.204	0.000	0.96	0.0	53.2	FLOOD RISK	
19.004	Permbase 05	3.596	1.241	0.000	0.93	0.0	53.7	FLOOD RISK	
23.000	Plots 39-46	3.634	0.244	0.000	0.16	0.0	9.7	SURCHARGED	
24.000	SW-LYM 01	4.405	0.440	0.000	0.21	0.0	6.3	SURCHARGED	
©1982-2012 Micro Drainage Ltd									

Mayer Brown Ltd				Page 4				
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	US/MH Name	Water Level (m)	Surch'ed Depth (m)	Flooded Volume (m³)	Flow / Cap.	0'flow (l/s)	Pipe Flow (l/s)	Status
25.000	Non resi	4.849	0.399	0.000	0.10	0.0	23.9	SURCHARGED
25.001	Non resi	5.100	1.155	0.000	0.14	0.0	4.7	FLOOD RISK
24.001	SW-LYM 02	4.398	0.533	0.000	0.42	0.0	14.5	SURCHARGED
26.000	Parcel A1	4.486	0.036	0.000	0.12	0.0	26.4	SURCHARGED
26.001	As-built SA8	4.518	0.530	0.000	0.62	0.0	24.6	SURCHARGED
27.000	Non Resi	4.782	0.332	0.000	0.05	0.0	14.2	SURCHARGED
27.001	SW Stub 02	5.029	1.164	0.000	0.12	0.0	4.6	SURCHARGED
26.002	SW-LYM 03/1	4.387	0.592	0.000	0.68	0.0	29.4	SURCHARGED
24.002	SW-LYM 03	4.372	0.797	0.000	1.39	0.0	46.2	SURCHARGED
24.003	SW-LYM 04	4.339	0.814	0.000	0.79	0.0	49.2	SURCHARGED
28.000	SW-LYM 07	4.352	0.257	0.000	0.16	0.0	6.9	SURCHARGED
28.001	SW-LYM 08	4.344	0.449	0.000	0.31	0.0	19.0	SURCHARGED
29.000	SW-LYM 05A	7.306	-0.194	0.000	0.27	0.0	38.0	FLOOD RISK
29.001	SW-LYM 05	5.892	0.052	0.000	1.87	0.0	46.4	SURCHARGED
24.004	SW-LYM 10	4.316	0.951	0.000	0.82	0.0	107.2	SURCHARGED
24.005	SW-LYM11	4.201	1.071	0.000	0.73	0.0	133.3	SURCHARGED
30.000	ExSB17_Dum Node	4.250	0.325	0.000	0.72	0.0	49.6	SURCHARGED
24.006	SW-LYM 12	4.088	1.118	0.000	0.74	0.0	183.4	SURCHARGED
24.007	SW-FUT-03	3.939	1.249	0.000	0.96	0.0	186.8	SURCHARGED
31.000	Stub SW18/1	3.906	1.181	0.000	0.73	0.0	24.3	SURCHARGED
31.001	SW18	3.871	1.266	0.000	0.83	0.0	28.9	SURCHARGED
24.008	SW19	3.823	1.403	0.000	0.95	0.0	220.2	SURCHARGED
24.009	SW20	3.690	1.405	0.000	1.07	0.0	218.6	SURCHARGED
32.000	Car Park	4.718	0.768	0.000	0.03	0.0	5.7	FLOOD RISK
32.001	Car Park	4.755	1.205	0.000	0.11	0.0	4.6	FLOOD RISK
33.000	Non Resi	3.572	0.422	0.000	0.05	0.0	8.4	SURCHARGED
33.001	Stub SW9/1	3.762	0.937	0.000	0.11	0.0	4.2	SURCHARGED
34.000	SW08	3.816	0.041	0.000	0.12	0.0	11.6	SURCHARGED
35.000	Non Resi	3.758	0.608	0.000	0.02	0.0	4.6	SURCHARGED
35.001	Stub SW9/2	3.773	1.048	0.000	0.09	0.0	4.0	SURCHARGED
36.000	Plots 1 - 4	4.334	-0.126	0.000	0.06	0.0	3.3	OK
33.002	SW09	3.798	1.173	0.000	0.53	0.0	21.4	SURCHARGED
37.000	SW12	3.877	0.862	0.000	0.23	0.0	7.8	SURCHARGED
37.001	SW13	3.867	0.962	0.000	0.40	0.0	15.6	FLOOD RISK
37.002	SW14	3.846	1.021	0.000	0.51	0.0	23.4	FLOOD RISK
37.003	SW15	3.802	1.332	0.000	0.50	0.0	31.2	SURCHARGED
38.000	Plots 16-22	3.794	0.204	0.000	0.13	0.0	8.2	SURCHARGED
33.003	SW16	3.783	1.383	0.000	0.43	0.0	57.1	SURCHARGED
33.004	SW17	3.727	1.457	0.000	0.34	0.0	56.6	SURCHARGED
24.010	SW21	3.640	1.080	0.000	0.36	0.0	218.3	SURCHARGED
23.001	SW22	3.631	1.101	0.000	0.26	0.0	219.8	SURCHARGED
39.000	Plots 47-55	3.608	0.883	0.000	0.78	0.0	18.0	SURCHARGED
23.002	SW23	3.615	1.220	0.000	0.29	0.0	219.6	FLOOD RISK
1.016	SW24	3.596	1.286	0.000	0.41	0.0	323.7	FLOOD RISK
1.017	Permbase 06	3.567	1.367	0.000	0.52	0.0	258.6	FLOOD RISK
40.000	Plots	3.537	0.942	0.000	0.31	0.0	12.3	FLOOD RISK
40.001	Stub SW25/1	3.541	1.326	0.000	1.58	0.0	19.8	FLOOD RISK
41.000	Stub SW25/2	3.528	1.263	0.000	0.79	0.0	19.6	FLOOD RISK
1.018	SW25	3.585	1.860	0.059	0.77	0.0	265.5	FLOOD
©1982-2012 Micro Drainage Ltd								

APPENDIX G: Windes – 1in30yr & 1in1yr Simulation Results

Mayer Brown Ltd		Page 1						
Lion House	Littlehampton							
Oriental Road	Overall Surface Network							
Woking GU22 8AR	West of Wetlands							
Date January 2018	Designed by S Foley							
File WEST CATCHMENT MODEL_...	Checked by							
XP Solutions	Network 2013.1							
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
Simulation Criteria								
Areal Reduction Factor		1.000	Additional Flow - % of Total Flow	0.000				
Hot Start (mins)		0	MADD Factor * 10m³/ha Storage	2.000				
Hot Start Level (mm)		0	Inlet Coefficient	0.800				
Manhole Headloss Coeff (Global)		0.500	Flow per Person per Day (l/per/day)	0.000				
Foul Sewage per hectare (l/s)		0.000						
Number of Input Hydrographs		0	Number of Offline Controls	2				
Number of Online Controls		14	Number of Storage Structures	20				
		Number of Time/Area Diagrams		0				
		Number of Real Time Controls		0				
Synthetic Rainfall Details								
Rainfall Model		FEH	D3 (1km)	0.407				
Site Location		GB 502850 104400 TQ 02850 04400	E (1km)	0.314				
C (1km)		-0.027	F (1km)	2.329				
D1 (1km)		0.393	Cv (Summer)	0.750				
D2 (1km)		0.274	Cv (Winter)	0.840				
Margin for Flood Risk Warning (mm)		300.0						
Analysis Timestep		2.5 Second Increment (Extended)						
DTS Status		ON						
DVD Status		ON						
Inertia Status		ON						
Profile(s)		Winter						
Duration(s) (mins)		15, 30, 60, 120, 240, 360, 480, 960, 1440						
Return Period(s) (years)		30						
Climate Change (%)		0						
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.
1.000	15 Winter	30	0%					
1.001	15 Winter	30	0%	30/15 Winter				
2.000	480 Winter	30	0%	30/60 Winter				
2.001	480 Winter	30	0%	30/15 Winter				
1.002	15 Winter	30	0%	30/15 Winter				
3.000	120 Winter	30	0%	30/15 Winter				
3.001	120 Winter	30	0%	30/15 Winter				
1.003	15 Winter	30	0%	30/15 Winter				
1.004	15 Winter	30	0%	30/15 Winter				
4.000	120 Winter	30	0%					
4.001	120 Winter	30	0%	30/15 Winter				
1.005	15 Winter	30	0%	30/15 Winter				
1.006	15 Winter	30	0%	30/15 Winter				
5.000	240 Winter	30	0%	30/120 Winter				
5.001	240 Winter	30	0%	30/15 Winter				
5.002	15 Winter	30	0%	30/15 Winter		30/15 Winter	5	
1.007	15 Winter	30	0%	30/15 Winter				
6.000	30 Winter	30	0%					
6.001	30 Winter	30	0%	30/15 Winter				
1.008	15 Winter	30	0%	30/15 Winter				
7.000	30 Winter	30	0%	30/30 Winter				
7.001	30 Winter	30	0%	30/15 Winter				
1.009	15 Winter	30	0%	30/15 Winter				
8.000	15 Winter	30	0%	30/15 Winter				
9.000	15 Winter	30	0%	30/15 Winter				
8.001	30 Winter	30	0%	30/15 Winter		30/15 Winter	4	
8.002	30 Winter	30	0%	30/15 Winter				
10.000	15 Winter	30	0%	30/15 Winter				
10.001	15 Winter	30	0%	30/15 Winter				
11.000	15 Winter	30	0%	30/15 Winter				
8.003	15 Winter	30	0%	30/15 Winter				
1.010	30 Winter	30	0%	30/15 Winter				
12.000	480 Winter	30	0%	30/120 Winter				
12.001	480 Winter	30	0%	30/15 Winter				
13.000	30 Winter	30	0%	30/15 Winter				
1.011	30 Winter	30	0%	30/15 Winter				
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 2			
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands					
Date January 2018		Designed by S Foley					
File WEST CATCHMENT MODEL_...		Checked by					
XP Solutions		Network 2013.1					
Summary of Critical Results by Maximum Level (Rank 1) for Storm							
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act. Lvl Exc.
1.012	30 Winter	30	0%	30/15 Winter			
14.000	15 Winter	30	0%	30/15 Winter			
15.000	15 Winter	30	0%	30/15 Winter			
14.001	30 Winter	30	0%	30/15 Winter			
14.002	30 Winter	30	0%	30/15 Winter			
16.000	30 Winter	30	0%	30/15 Winter			
17.000	30 Winter	30	0%	30/15 Winter			
1.013	30 Winter	30	0%	30/15 Winter			
18.000	240 Winter	30	0%	30/15 Winter			
1.014	240 Winter	30	0%	30/15 Winter			
1.015	240 Winter	30	0%	30/15 Winter			
19.000	15 Winter	30	0%	30/15 Winter			
20.000	15 Winter	30	0%	30/15 Winter			
19.001	15 Winter	30	0%	30/15 Winter			
19.002	240 Winter	30	0%	30/15 Winter			
21.000	15 Winter	30	0%	30/15 Winter			
22.000	15 Winter	30	0%	30/15 Winter			
19.003	240 Winter	30	0%	30/15 Winter			
19.004	240 Winter	30	0%	30/15 Winter			
23.000	15 Winter	30	0%				
24.000	15 Winter	30	0%	30/15 Winter			
25.000	480 Winter	30	0%				
25.001	480 Winter	30	0%	30/15 Winter			
24.001	15 Winter	30	0%	30/15 Winter			
26.000	30 Winter	30	0%				
26.001	15 Winter	30	0%	30/15 Winter			
27.000	480 Winter	30	0%				
27.001	480 Winter	30	0%	30/15 Winter			
26.002	15 Winter	30	0%	30/15 Winter			
24.002	15 Winter	30	0%	30/15 Winter			
24.003	15 Winter	30	0%	30/15 Winter			
28.000	15 Winter	30	0%	30/15 Winter			
28.001	15 Winter	30	0%	30/15 Winter			
29.000	15 Winter	30	0%				
29.001	15 Winter	30	0%	30/15 Winter			
24.004	15 Winter	30	0%	30/15 Winter			
24.005	15 Winter	30	0%	30/15 Winter			
30.000	15 Winter	30	0%	30/15 Winter			
24.006	15 Winter	30	0%	30/15 Winter			
24.007	15 Winter	30	0%	30/15 Winter			
31.000	15 Winter	30	0%	30/15 Winter			
31.001	15 Winter	30	0%	30/15 Winter			
24.008	360 Winter	30	0%	30/15 Winter			
24.009	360 Winter	30	0%	30/15 Winter			
32.000	240 Winter	30	0%	30/15 Winter			
32.001	15 Winter	30	0%	30/15 Winter			
33.000	480 Winter	30	0%				
33.001	480 Winter	30	0%	30/15 Winter			
34.000	15 Winter	30	0%				
35.000	240 Winter	30	0%				
35.001	240 Winter	30	0%	30/15 Winter			
36.000	15 Winter	30	0%				
33.002	15 Winter	30	0%	30/15 Winter			
37.000	15 Winter	30	0%	30/15 Winter			
37.001	15 Winter	30	0%	30/15 Winter			
37.002	15 Winter	30	0%	30/15 Winter			
37.003	240 Winter	30	0%	30/15 Winter			
38.000	15 Winter	30	0%				
33.003	360 Winter	30	0%	30/15 Winter			
33.004	360 Winter	30	0%	30/15 Winter			
24.010	360 Winter	30	0%	30/60 Winter			
23.001	240 Winter	30	0%	30/60 Winter			
39.000	240 Winter	30	0%	30/15 Winter			
23.002	240 Winter	30	0%	30/15 Winter			
1.016	240 Winter	30	0%	30/15 Winter			
1.017	240 Winter	30	0%	30/15 Winter			
©1982-2012 Micro Drainage Ltd							

Mayer Brown Ltd				Page 3				
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.
40.000	240 Winter	30	0%	30/15 Winter				
40.001	240 Winter	30	0%	30/15 Winter				
41.000	240 Winter	30	0%	30/15 Winter				
1.018	240 Winter	30	0%	30/15 Winter				
PN	US/MH Name	Water Level (m)	Surch'd Depth (m)	Flooded Volume (m³)	Flow / Cap.	O'flow (l/s)	Pipe Flow (l/s)	Status
1.000	TL_SW01	5.302	-0.168	0.000	0.37	0.0	25.5	OK
1.001	TL_SW02	5.283	0.064	0.000	0.58	0.0	38.7	SURCHARGED
2.000	Parcel A2_1	5.636	0.136	0.000	0.03	0.0	3.9	SURCHARGED
2.001	Parcel A2_2	5.642	0.492	0.000	0.27	0.0	3.6	SURCHARGED
1.002	TL_SW03	5.275	0.219	0.000	0.73	0.0	47.9	SURCHARGED
3.000	Parcel B6_1	5.402	0.102	0.000	0.05	0.0	5.2	SURCHARGED
3.001	Parcel B6_2	5.405	0.455	0.000	0.33	0.0	4.2	SURCHARGED
1.003	TL_SW04	5.252	0.317	0.000	0.73	0.0	50.4	SURCHARGED
1.004	TL_SW05	5.170	0.535	0.000	1.03	0.0	74.3	SURCHARGED
4.000	Parcel B1&CH_1	4.496	-0.004	0.000	0.15	0.0	8.3	OK
4.001	Parcel B1&CH_2	4.476	0.191	0.000	0.61	0.0	8.2	SURCHARGED
1.005	Ex. SB10	4.791	0.581	0.000	1.05	0.0	71.5	SURCHARGED
1.006	Ex. SB9	4.634	0.564	0.000	1.17	0.0	83.0	SURCHARGED
5.000	Block B_1	4.815	0.015	0.000	0.04	0.0	6.3	SURCHARGED
5.001	Block B_2	4.811	0.756	0.000	0.34	0.0	4.7	SURCHARGED
5.002	Ex. SB17	4.137	0.187	0.000	0.32	58.6	21.1	SURCHARGED
1.007	Ex. SB8	4.238	0.438	0.000	1.16	0.0	71.9	SURCHARGED
6.000	BovisA_1	4.452	-0.023	0.000	0.45	0.0	53.6	OK
6.001	BovisA_2	4.411	0.036	0.000	0.14	0.0	52.6	SURCHARGED
1.008	Ex SB7	3.999	0.499	0.000	0.91	0.0	123.8	SURCHARGED
7.000	BovisB_1	3.805	0.030	0.000	0.31	0.0	48.7	SURCHARGED
7.001	BovisB_2	3.773	0.173	0.000	0.19	0.0	47.4	SURCHARGED
1.009	Dummy Node	3.622	0.447	0.000	1.26	0.0	162.2	SURCHARGED
8.000	Plots 123 - 126	3.701	0.396	0.000	1.31	0.0	11.5	SURCHARGED
9.000	Plots 111 - 116	3.657	0.371	0.000	1.22	0.0	16.4	SURCHARGED
8.001	SW01, G01&G02	3.611	0.346	0.000	1.41	16.9	32.5	FLOOD RISK
8.002	Permbase 01	3.613	0.368	0.000	0.75	0.0	23.8	FLOOD RISK
10.000	Plots 117 - 122	4.045	0.730	0.000	1.01	0.0	16.3	FLOOD RISK
10.001	Stub SW02/2	3.776	0.683	0.000	1.04	0.0	31.0	SURCHARGED
11.000	Plots 101-110	3.765	0.540	0.000	1.14	0.0	39.8	SURCHARGED
8.003	SW02	3.707	0.652	0.000	2.08	0.0	55.8	SURCHARGED
1.010	Ex SB6	3.593	0.518	0.000	0.97	0.0	184.0	SURCHARGED
12.000	Ret Block A	3.402	0.102	0.000	0.23	0.0	11.6	SURCHARGED
12.001	Ret Block A	3.594	0.544	0.000	0.20	0.0	3.6	SURCHARGED
13.000	Plots 95-100	3.487	0.262	0.000	0.39	0.0	17.7	SURCHARGED
1.011	SW03	3.480	0.560	0.000	0.85	0.0	187.3	SURCHARGED
1.012	SW04	3.347	0.607	0.000	0.89	0.0	187.8	SURCHARGED
14.000	SW-FUT-01-PlotsN	3.986	1.036	0.000	2.05	0.0	27.9	FLOOD RISK
15.000	SW-FUT-01-PlotsS	3.860	0.910	0.000	1.83	0.0	22.6	FLOOD RISK
14.001	SW-FUT-01	3.358	0.498	0.000	0.86	0.0	55.5	SURCHARGED
14.002	Permbase 02	3.272	0.552	0.000	0.67	0.0	43.3	SURCHARGED
16.000	Plots 80-86	3.338	0.638	0.000	0.91	0.0	20.8	SURCHARGED
17.000	Plots 87-94	3.233	0.406	0.000	0.34	0.0	26.4	SURCHARGED
1.013	SW05	3.220	0.620	0.000	1.28	0.0	238.3	SURCHARGED
18.000	C2 Resiblock A	3.053	0.508	0.000	0.22	0.0	15.8	SURCHARGED
1.014	SW06	3.040	0.600	0.000	1.17	0.0	197.3	SURCHARGED
1.015	Permbase 03	2.937	0.587	0.000	1.39	0.0	197.1	SURCHARGED
19.000	SW-FUT-02-PlotN	3.152	0.402	0.000	1.28	0.0	15.2	SURCHARGED
20.000	SW-FUT-02-Plots	3.256	0.506	0.000	1.55	0.0	17.6	SURCHARGED
19.001	SW-FUT-02	2.938	0.318	0.000	0.75	0.0	48.9	SURCHARGED
19.002	Permbase 04	2.897	0.422	0.000	0.21	0.0	12.9	SURCHARGED
21.000	Plots 60-73	2.930	0.180	0.000	2.36	0.0	25.8	SURCHARGED
22.000	Plots 74-78	2.991	0.241	0.000	1.84	0.0	29.6	SURCHARGED
19.003	SW07	2.894	0.494	0.000	0.47	0.0	26.3	SURCHARGED
19.004	Permbase 05	2.892	0.537	0.000	0.46	0.0	26.7	SURCHARGED
23.000	Plots 39-46	3.313	-0.077	0.000	0.48	0.0	28.1	OK
24.000	SW-LYM 01	4.407	0.442	0.000	0.75	0.0	22.6	SURCHARGED
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 4				
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	US/MH Name	Water Level (m)	Surch'ed Depth (m)	Flooded Volume (m³)	Flow / Cap.	0'flow (l/s)	Pipe Flow (l/s)	Status
25.000	Non resi	4.414	-0.036	0.000	0.02	0.0	5.2	OK
25.001	Non resi	4.410	0.465	0.000	0.12	0.0	4.1	SURCHARGED
24.001	SW-LYM 02	4.401	0.536	0.000	0.88	0.0	30.2	SURCHARGED
26.000	Parcel A1	4.182	-0.268	0.000	0.13	0.0	28.9	OK
26.001	As-built SA8	4.178	0.190	0.000	0.62	0.0	24.8	SURCHARGED
27.000	Non Resi	4.403	-0.047	0.000	0.02	0.0	5.3	OK
27.001	SW Stub 02	4.417	0.552	0.000	0.12	0.0	4.3	SURCHARGED
26.002	SW-LYM 03/1	4.325	0.530	0.000	0.75	0.0	32.1	SURCHARGED
24.002	SW-LYM 03	4.377	0.802	0.000	1.49	0.0	49.7	SURCHARGED
24.003	SW-LYM 04	4.360	0.835	0.000	0.82	0.0	51.0	SURCHARGED
28.000	SW-LYM 07	4.417	0.322	0.000	0.56	0.0	23.9	SURCHARGED
28.001	SW-LYM 08	4.396	0.501	0.000	0.88	0.0	54.0	SURCHARGED
29.000	SW-LYM 05A	7.402	-0.098	0.000	0.77	0.0	107.9	FLOOD RISK
29.001	SW-LYM 05	6.347	0.507	0.000	5.20	0.0	129.0	SURCHARGED
24.004	SW-LYM 10	4.336	0.971	0.000	1.49	0.0	194.4	SURCHARGED
24.005	SW-LYM11	3.950	0.820	0.000	1.33	0.0	243.3	SURCHARGED
30.000	ExSB17_Dum Node	4.010	0.085	0.000	0.81	0.0	55.5	SURCHARGED
24.006	SW-LYM 12	3.742	0.772	0.000	1.13	0.0	280.5	SURCHARGED
24.007	SW-FUT-03	3.402	0.712	0.000	1.43	0.0	278.1	SURCHARGED
31.000	Stub SW18/1	3.709	0.984	0.000	1.85	0.0	61.6	SURCHARGED
31.001	SW18	3.410	0.805	0.000	2.05	0.0	71.5	SURCHARGED
24.008	SW19	3.013	0.593	0.000	0.38	0.0	89.0	SURCHARGED
24.009	SW20	2.873	0.588	0.000	0.43	0.0	88.3	SURCHARGED
32.000	Car Park	4.588	0.638	0.000	0.03	0.0	5.5	SURCHARGED
32.001	Car Park	4.709	1.159	0.000	0.10	0.0	4.3	FLOOD RISK
33.000	Non Resi	3.138	-0.012	0.000	0.02	0.0	4.2	OK
33.001	Stub SW9/1	3.143	0.318	0.000	0.09	0.0	3.6	SURCHARGED
34.000	SW08	3.643	-0.132	0.000	0.36	0.0	33.7	OK
35.000	Non Resi	3.067	-0.083	0.000	0.02	0.0	4.5	OK
35.001	Stub SW9/2	3.066	0.341	0.000	0.08	0.0	3.5	SURCHARGED
36.000	Plots 1 - 4	4.353	-0.107	0.000	0.18	0.0	9.5	OK
33.002	SW09	3.005	0.380	0.000	1.34	0.0	54.0	SURCHARGED
37.000	SW12	3.389	0.374	0.000	0.57	0.0	19.2	SURCHARGED
37.001	SW13	3.338	0.433	0.000	0.97	0.0	38.3	SURCHARGED
37.002	SW14	3.185	0.360	0.000	1.24	0.0	57.2	SURCHARGED
37.003	SW15	2.877	0.407	0.000	0.28	0.0	17.3	SURCHARGED
38.000	Plots 16-22	3.504	-0.086	0.000	0.38	0.0	23.9	OK
33.003	SW16	2.871	0.471	0.000	0.23	0.0	30.0	SURCHARGED
33.004	SW17	2.862	0.592	0.000	0.18	0.0	29.8	SURCHARGED
24.010	SW21	2.853	0.293	0.000	0.25	0.0	147.1	SURCHARGED
23.001	SW22	2.859	0.329	0.000	0.14	0.0	116.4	SURCHARGED
39.000	Plots 47-55	2.896	0.171	0.000	0.56	0.0	12.9	SURCHARGED
23.002	SW23	2.888	0.493	0.000	0.14	0.0	102.3	SURCHARGED
1.016	SW24	2.901	0.591	0.000	0.29	0.0	226.0	SURCHARGED
1.017	Permbase 06	2.888	0.688	0.000	0.43	0.0	215.8	SURCHARGED
40.000	Plots	2.864	0.269	0.000	0.27	0.0	10.7	SURCHARGED
40.001	Stub SW25/1	2.865	0.650	0.000	1.65	0.0	20.6	SURCHARGED
41.000	Stub SW25/2	2.887	0.622	0.000	0.61	0.0	15.2	SURCHARGED
1.018	SW25	2.880	1.155	0.000	0.60	0.0	207.4	SURCHARGED
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd		Page 1						
Lion House	Littlehampton							
Oriental Road	Overall Surface Network							
Woking GU22 8AR	West of Wetlands							
Date January 2018	Designed by S Foley							
File WEST CATCHMENT MODEL_...	Checked by							
XP Solutions	Network 2013.1							
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
Simulation Criteria								
Areal Reduction Factor		1.000	Additional Flow - % of Total Flow	0.000				
Hot Start (mins)		0	MADD Factor * 10m³/ha Storage	2.000				
Hot Start Level (mm)		0	Inlet Coeffiecient	0.800				
Manhole Headloss Coeff (Global)		0.500	Flow per Person per Day (l/per/day)	0.000				
Foul Sewage per hectare (l/s)		0.000						
Number of Input Hydrographs		0	Number of Offline Controls	2				
Number of Online Controls		14	Number of Storage Structures	20				
		Number of Time/Area Diagrams		0				
		Number of Real Time Controls		0				
Synthetic Rainfall Details								
Rainfall Model		FEH	D3 (1km)	0.407				
Site Location		GB 502850 104400 TQ 02850 04400	E (1km)	0.314				
C (1km)		-0.027	F (1km)	2.329				
D1 (1km)		0.393	Cv (Summer)	0.750				
D2 (1km)		0.274	Cv (Winter)	0.840				
Margin for Flood Risk Warning (mm)		300.0						
Analysis Timestep		2.5 Second Increment (Extended)						
DTS Status		ON						
DVD Status		ON						
Inertia Status		ON						
Profile(s)		Winter						
Duration(s) (mins)		15, 30, 60, 120, 240, 360, 480, 960, 1440						
Return Period(s) (years)		1						
Climate Change (%)		0						
PN	Storm	Return Period	Climate Change	First X Surcharge	First Y Flood	First Z Overflow	0/F Act.	Lvl Exc.
1.000	15 Winter	1	0%					
1.001	15 Winter	1	0%					
2.000	480 Winter	1	0%					
2.001	480 Winter	1	0%	1/15 Winter				
1.002	15 Winter	1	0%					
3.000	60 Winter	1	0%					
3.001	60 Winter	1	0%	1/15 Winter				
1.003	15 Winter	1	0%					
1.004	15 Winter	1	0%					
4.000	240 Winter	1	0%					
4.001	240 Winter	1	0%					
1.005	15 Winter	1	0%					
1.006	15 Winter	1	0%					
5.000	120 Winter	1	0%					
5.001	120 Winter	1	0%	1/15 Winter				
5.002	30 Winter	1	0%				0	
1.007	30 Winter	1	0%					
6.000	60 Winter	1	0%					
6.001	60 Winter	1	0%					
1.008	30 Winter	1	0%					
7.000	30 Winter	1	0%					
7.001	30 Winter	1	0%					
1.009	30 Winter	1	0%					
8.000	15 Winter	1	0%					
9.000	15 Winter	1	0%					
8.001	15 Winter	1	0%					
8.002	15 Winter	1	0%				0	
10.000	15 Winter	1	0%					
10.001	15 Winter	1	0%	1/15 Winter				
11.000	15 Winter	1	0%					
8.003	15 Winter	1	0%	1/15 Winter				
1.010	30 Winter	1	0%					
12.000	480 Winter	1	0%					
12.001	480 Winter	1	0%	1/60 Winter				
13.000	15 Winter	1	0%					
1.011	30 Winter	1	0%					


©1982-2012 Micro Drainage Ltd

Mayer Brown Ltd			Page 2					
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	Storm	Return Period	Climate Change	First X Surcharge	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.
1.012	480 Winter	1	0%					
14.000	15 Winter	1	0%					
15.000	15 Winter	1	0%					
14.001	15 Winter	1	0%					
14.002	15 Winter	1	0%					
16.000	15 Winter	1	0%					
17.000	15 Winter	1	0%					
1.013	480 Winter	1	0%					
18.000	480 Winter	1	0%					
1.014	480 Winter	1	0%	1/240 Winter				
1.015	480 Winter	1	0%	1/480 Winter				
19.000	15 Winter	1	0%					
20.000	15 Winter	1	0%					
19.001	15 Winter	1	0%					
19.002	480 Winter	1	0%					
21.000	15 Winter	1	0%					
22.000	15 Winter	1	0%					
19.003	480 Winter	1	0%					
19.004	480 Winter	1	0%					
23.000	15 Winter	1	0%					
24.000	15 Winter	1	0%					
25.000	360 Winter	1	0%					
25.001	360 Winter	1	0%	1/15 Winter				
24.001	15 Winter	1	0%					
26.000	120 Winter	1	0%					
26.001	120 Winter	1	0%					
27.000	360 Winter	1	0%					
27.001	360 Winter	1	0%	1/15 Winter				
26.002	120 Winter	1	0%					
24.002	120 Winter	1	0%					
24.003	15 Winter	1	0%					
28.000	15 Winter	1	0%					
28.001	15 Winter	1	0%					
29.000	15 Winter	1	0%					
29.001	15 Winter	1	0%	1/15 Winter				
24.004	15 Winter	1	0%					
24.005	15 Winter	1	0%					
30.000	480 Winter	1	0%					
24.006	15 Winter	1	0%					
24.007	15 Winter	1	0%					
31.000	15 Winter	1	0%					
31.001	15 Winter	1	0%					
24.008	480 Winter	1	0%	1/480 Winter				
24.009	480 Winter	1	0%	1/240 Winter				
32.000	240 Winter	1	0%	1/30 Winter				
32.001	240 Winter	1	0%	1/15 Winter				
33.000	480 Winter	1	0%					
33.001	480 Winter	1	0%	1/240 Winter				
34.000	15 Winter	1	0%					
35.000	60 Winter	1	0%					
35.001	60 Winter	1	0%	1/15 Winter				
36.000	15 Winter	1	0%					
33.002	15 Winter	1	0%					
37.000	15 Winter	1	0%					
37.001	15 Winter	1	0%					
37.002	15 Winter	1	0%					
37.003	480 Winter	1	0%					
38.000	15 Winter	1	0%					
33.003	480 Winter	1	0%	1/480 Winter				
33.004	480 Winter	1	0%	1/240 Winter				
24.010	480 Winter	1	0%					
23.001	480 Winter	1	0%					
39.000	15 Winter	1	0%					
23.002	480 Winter	1	0%					
1.016	480 Winter	1	0%					
1.017	480 Winter	1	0%					
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 3				
Lion House		Littlehampton						
Oriental Road		Overall Surface Network						
Woking GU22 8AR		West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	Storm	Return Period	Climate Change	First X Surchage	First Y Flood	First Z Overflow	O/F Act.	Lvl Exc.
40.000	15 Winter	1	0%					
40.001	480 Winter	1	0%					
41.000	480 Winter	1	0%					
1.018	480 Winter	1	0%	1/15 Winter				
PN	US/MH Name	Water Level (m)	Surch'd Depth (m)	Flooded Volume (m³)	Flow / Cap.	O'flow (l/s)	Pipe Flow (l/s)	Status
1.000	TL_SW01	5.240	-0.230	0.000	0.11	0.0	7.7	OK
1.001	TL_SW02	5.001	-0.218	0.000	0.16	0.0	11.0	OK
2.000	Parcel A2_1	5.335	-0.165	0.000	0.03	0.0	3.9	OK
2.001	Parcel A2_2	5.333	0.183	0.000	0.22	0.0	2.9	SURCHARGED
1.002	TL_SW03	4.861	-0.195	0.000	0.26	0.0	17.2	OK
3.000	Parcel B6_1	5.094	-0.206	0.000	0.07	0.0	6.3	OK
3.001	Parcel B6_2	5.091	0.141	0.000	0.30	0.0	3.9	SURCHARGED
1.003	TL_SW04	4.759	-0.176	0.000	0.34	0.0	23.6	OK
1.004	TL_SW05	4.483	-0.152	0.000	0.46	0.0	32.8	OK
4.000	Parcel B1&CH_1	4.297	-0.203	0.000	0.11	0.0	6.1	OK
4.001	Parcel B1&CH_2	4.283	-0.002	0.000	0.46	0.0	6.1	OK
1.005	Ex. SB10	4.071	-0.139	0.000	0.55	0.0	37.8	OK
1.006	Ex. SB9	3.937	-0.133	0.000	0.58	0.0	41.4	OK
5.000	Block B_1	4.583	-0.217	0.000	0.05	0.0	7.9	OK
5.001	Block B_2	4.579	0.524	0.000	0.30	0.0	4.1	SURCHARGED
5.002	Ex. SB17	3.738	-0.212	0.000	0.13	0.0	8.4	OK
1.007	Ex. SB8	3.712	-0.088	0.000	0.82	0.0	51.0	OK
6.000	BovisA_1	4.220	-0.255	0.000	0.19	0.0	22.8	OK
6.001	BovisA_2	4.171	-0.204	0.000	0.06	0.0	22.7	OK
1.008	Ex SB7	3.325	-0.175	0.000	0.55	0.0	74.8	OK
7.000	BovisB_1	3.506	-0.269	0.000	0.18	0.0	28.1	OK
7.001	BovisB_2	3.427	-0.173	0.000	0.11	0.0	28.0	OK
1.009	Dummy Node	3.028	-0.147	0.000	0.79	0.0	101.9	OK
8.000	Plots 123 - 126	3.222	-0.083	0.000	0.41	0.0	3.6	OK
9.000	Plots 111 - 116	3.201	-0.085	0.000	0.38	0.0	5.1	OK
8.001	SW01, G01&G02	3.174	-0.091	0.000	0.65	0.0	15.0	OK
8.002	Permbase 01	3.140	-0.105	0.000	0.44	0.0	14.1	OK
10.000	Plots 117 - 122	3.227	-0.088	0.000	0.34	0.0	5.6	OK
10.001	Stub SW02/2	3.109	0.016	0.000	0.31	0.0	9.3	SURCHARGED
11.000	Plots 101-110	3.106	-0.119	0.000	0.36	0.0	12.6	OK
8.003	SW02	3.100	0.045	0.000	1.17	0.0	31.3	SURCHARGED
1.010	Ex SB6	2.883	-0.192	0.000	0.62	0.0	118.4	OK
12.000	Ret Block A	3.119	-0.181	0.000	0.07	0.0	3.6	OK
12.001	Ret Block A	3.115	0.065	0.000	0.18	0.0	3.2	SURCHARGED
13.000	Plots 95-100	3.064	-0.161	0.000	0.18	0.0	8.2	OK
1.011	SW03	2.712	-0.208	0.000	0.56	0.0	124.2	OK
1.012	SW04	2.575	-0.165	0.000	0.29	0.0	61.5	OK
14.000	SW-FUT-01-PlotsN	2.902	-0.048	0.000	0.77	0.0	10.5	OK
15.000	SW-FUT-01-PlotsS	2.893	-0.057	0.000	0.68	0.0	8.4	OK
14.001	SW-FUT-01	2.703	-0.157	0.000	0.44	0.0	28.0	OK
14.002	Permbase 02	2.557	-0.163	0.000	0.42	0.0	27.5	OK
16.000	Plots 80-86	2.625	-0.075	0.000	0.50	0.0	11.4	OK
17.000	Plots 87-94	2.664	-0.163	0.000	0.17	0.0	13.1	OK
1.013	SW05	2.530	-0.070	0.000	0.37	0.0	69.6	OK
18.000	C2 Resiblock A	2.457	-0.088	0.000	0.03	0.0	2.5	OK
1.014	SW06	2.454	0.014	0.000	0.42	0.0	71.3	SURCHARGED
1.015	Permbase 03	2.352	0.002	0.000	0.50	0.0	70.7	SURCHARGED
19.000	SW-FUT-02-PlotN	2.671	-0.079	0.000	0.45	0.0	5.3	OK
20.000	SW-FUT-02-Plots	2.681	-0.069	0.000	0.56	0.0	6.3	OK
19.001	SW-FUT-02	2.433	-0.187	0.000	0.28	0.0	18.5	OK
19.002	Permbase 04	2.319	-0.156	0.000	0.05	0.0	3.1	OK
21.000	Plots 60-73	2.694	-0.056	0.000	0.72	0.0	7.8	OK
22.000	Plots 74-78	2.681	-0.069	0.000	0.57	0.0	9.1	OK
19.003	SW07	2.316	-0.084	0.000	0.10	0.0	5.5	OK
19.004	Permbase 05	2.313	-0.042	0.000	0.17	0.0	9.9	OK
23.000	Plots 39-46	3.278	-0.112	0.000	0.14	0.0	8.5	OK
24.000	SW-LYM 01	3.814	-0.151	0.000	0.23	0.0	7.0	OK
©1982-2012 Micro Drainage Ltd								

Mayer Brown Ltd				Page 4				
Lion House Oriental Road Woking GU22 8AR		Littlehampton Overall Surface Network West of Wetlands						
Date January 2018		Designed by S Foley						
File WEST CATCHMENT MODEL_...		Checked by						
XP Solutions		Network 2013.1						
Summary of Critical Results by Maximum Level (Rank 1) for Storm								
PN	US/MH Name	Water Level (m)	Surch'ed Depth (m)	Flooded Volume (m³)	Flow / Cap.	O'flow (l/s)	Pipe Flow (l/s)	Status
25.000	Non resi	4.121	-0.329	0.000	0.02	0.0	4.7	OK
25.001	Non resi	4.120	0.175	0.000	0.10	0.0	3.5	SURCHARGED
24.001	SW-LYM 02	3.734	-0.131	0.000	0.35	0.0	12.1	OK
26.000	Parcel A1	4.068	-0.382	0.000	0.06	0.0	12.3	OK
26.001	As-built SA8	3.938	-0.050	0.000	0.31	0.0	12.2	OK
27.000	Non Resi	4.117	-0.333	0.000	0.02	0.0	5.0	OK
27.001	SW Stub 02	4.116	0.251	0.000	0.09	0.0	3.5	SURCHARGED
26.002	SW-LYM 03/1	3.664	-0.131	0.000	0.36	0.0	15.6	OK
24.002	SW-LYM 03	3.484	-0.091	0.000	0.66	0.0	22.0	OK
24.003	SW-LYM 04	3.351	-0.174	0.000	0.36	0.0	22.7	OK
28.000	SW-LYM 07	3.932	-0.163	0.000	0.17	0.0	7.3	OK
28.001	SW-LYM 08	3.748	-0.147	0.000	0.26	0.0	16.2	OK
29.000	SW-LYM 05A	7.299	-0.201	0.000	0.24	0.0	33.0	FLOOD RISK
29.001	SW-LYM 05	5.874	0.034	0.000	1.57	0.0	39.0	SURCHARGED
24.004	SW-LYM 10	3.197	-0.168	0.000	0.58	0.0	75.0	OK
24.005	SW-LYM11	2.908	-0.222	0.000	0.50	0.0	92.1	OK
30.000	ExSB17_Dum Node	3.700	-0.225	0.000	0.00	0.0	0.0	OK
24.006	SW-LYM 12	2.713	-0.257	0.000	0.38	0.0	94.0	OK
24.007	SW-FUT-03	2.464	-0.226	0.000	0.49	0.0	94.5	OK
31.000	Stub SW18/1	2.639	-0.086	0.000	0.68	0.0	22.6	OK
31.001	SW18	2.529	-0.076	0.000	0.77	0.0	26.8	OK
24.008	SW19	2.431	0.011	0.000	0.16	0.0	37.4	SURCHARGED
24.009	SW20	2.424	0.139	0.000	0.18	0.0	37.4	SURCHARGED
32.000	Car Park	4.508	0.558	0.000	0.03	0.0	5.4	SURCHARGED
32.001	Car Park	4.548	0.998	0.000	0.10	0.0	4.2	SURCHARGED
33.000	Non Resi	2.834	-0.316	0.000	0.03	0.0	4.5	OK
33.001	Stub SW9/1	2.835	0.010	0.000	0.08	0.0	3.3	SURCHARGED
34.000	SW08	3.599	-0.176	0.000	0.11	0.0	10.3	OK
35.000	Non Resi	2.784	-0.366	0.000	0.02	0.0	5.8	OK
35.001	Stub SW9/2	2.783	0.058	0.000	0.08	0.0	3.4	SURCHARGED
36.000	Plots 1 - 4	4.333	-0.127	0.000	0.05	0.0	2.9	OK
33.002	SW09	2.519	-0.106	0.000	0.54	0.0	21.6	OK
37.000	SW12	2.863	-0.152	0.000	0.22	0.0	7.5	OK
37.001	SW13	2.777	-0.128	0.000	0.38	0.0	14.9	OK
37.002	SW14	2.710	-0.115	0.000	0.47	0.0	21.5	OK
37.003	SW15	2.427	-0.043	0.000	0.08	0.0	4.8	OK
38.000	Plots 16-22	3.474	-0.116	0.000	0.12	0.0	7.3	OK
33.003	SW16	2.426	0.026	0.000	0.12	0.0	15.3	SURCHARGED
33.004	SW17	2.422	0.152	0.000	0.09	0.0	15.1	SURCHARGED
24.010	SW21	2.419	-0.141	0.000	0.16	0.0	97.5	OK
23.001	SW22	2.407	-0.123	0.000	0.12	0.0	97.5	OK
39.000	Plots 47-55	2.596	-0.129	0.000	0.37	0.0	8.5	OK
23.002	SW23	2.367	-0.028	0.000	0.15	0.0	112.4	OK
1.016	SW24	2.310	0.000	0.000	0.22	0.0	171.6	OK
1.017	Permbase 06	2.200	0.000	0.000	0.34	0.0	169.0	OK
40.000	Plots	2.428	-0.167	0.000	0.15	0.0	5.9	OK
40.001	Stub SW25/1	2.174	-0.041	0.000	0.16	0.0	2.0	OK
41.000	Stub SW25/2	2.174	-0.091	0.000	0.06	0.0	1.6	OK
1.018	SW25	2.171	0.446	0.000	0.49	0.0	167.5	SURCHARGED
©1982-2012 Micro Drainage Ltd								

APPENDIX H: Pre-Demolition Drainage

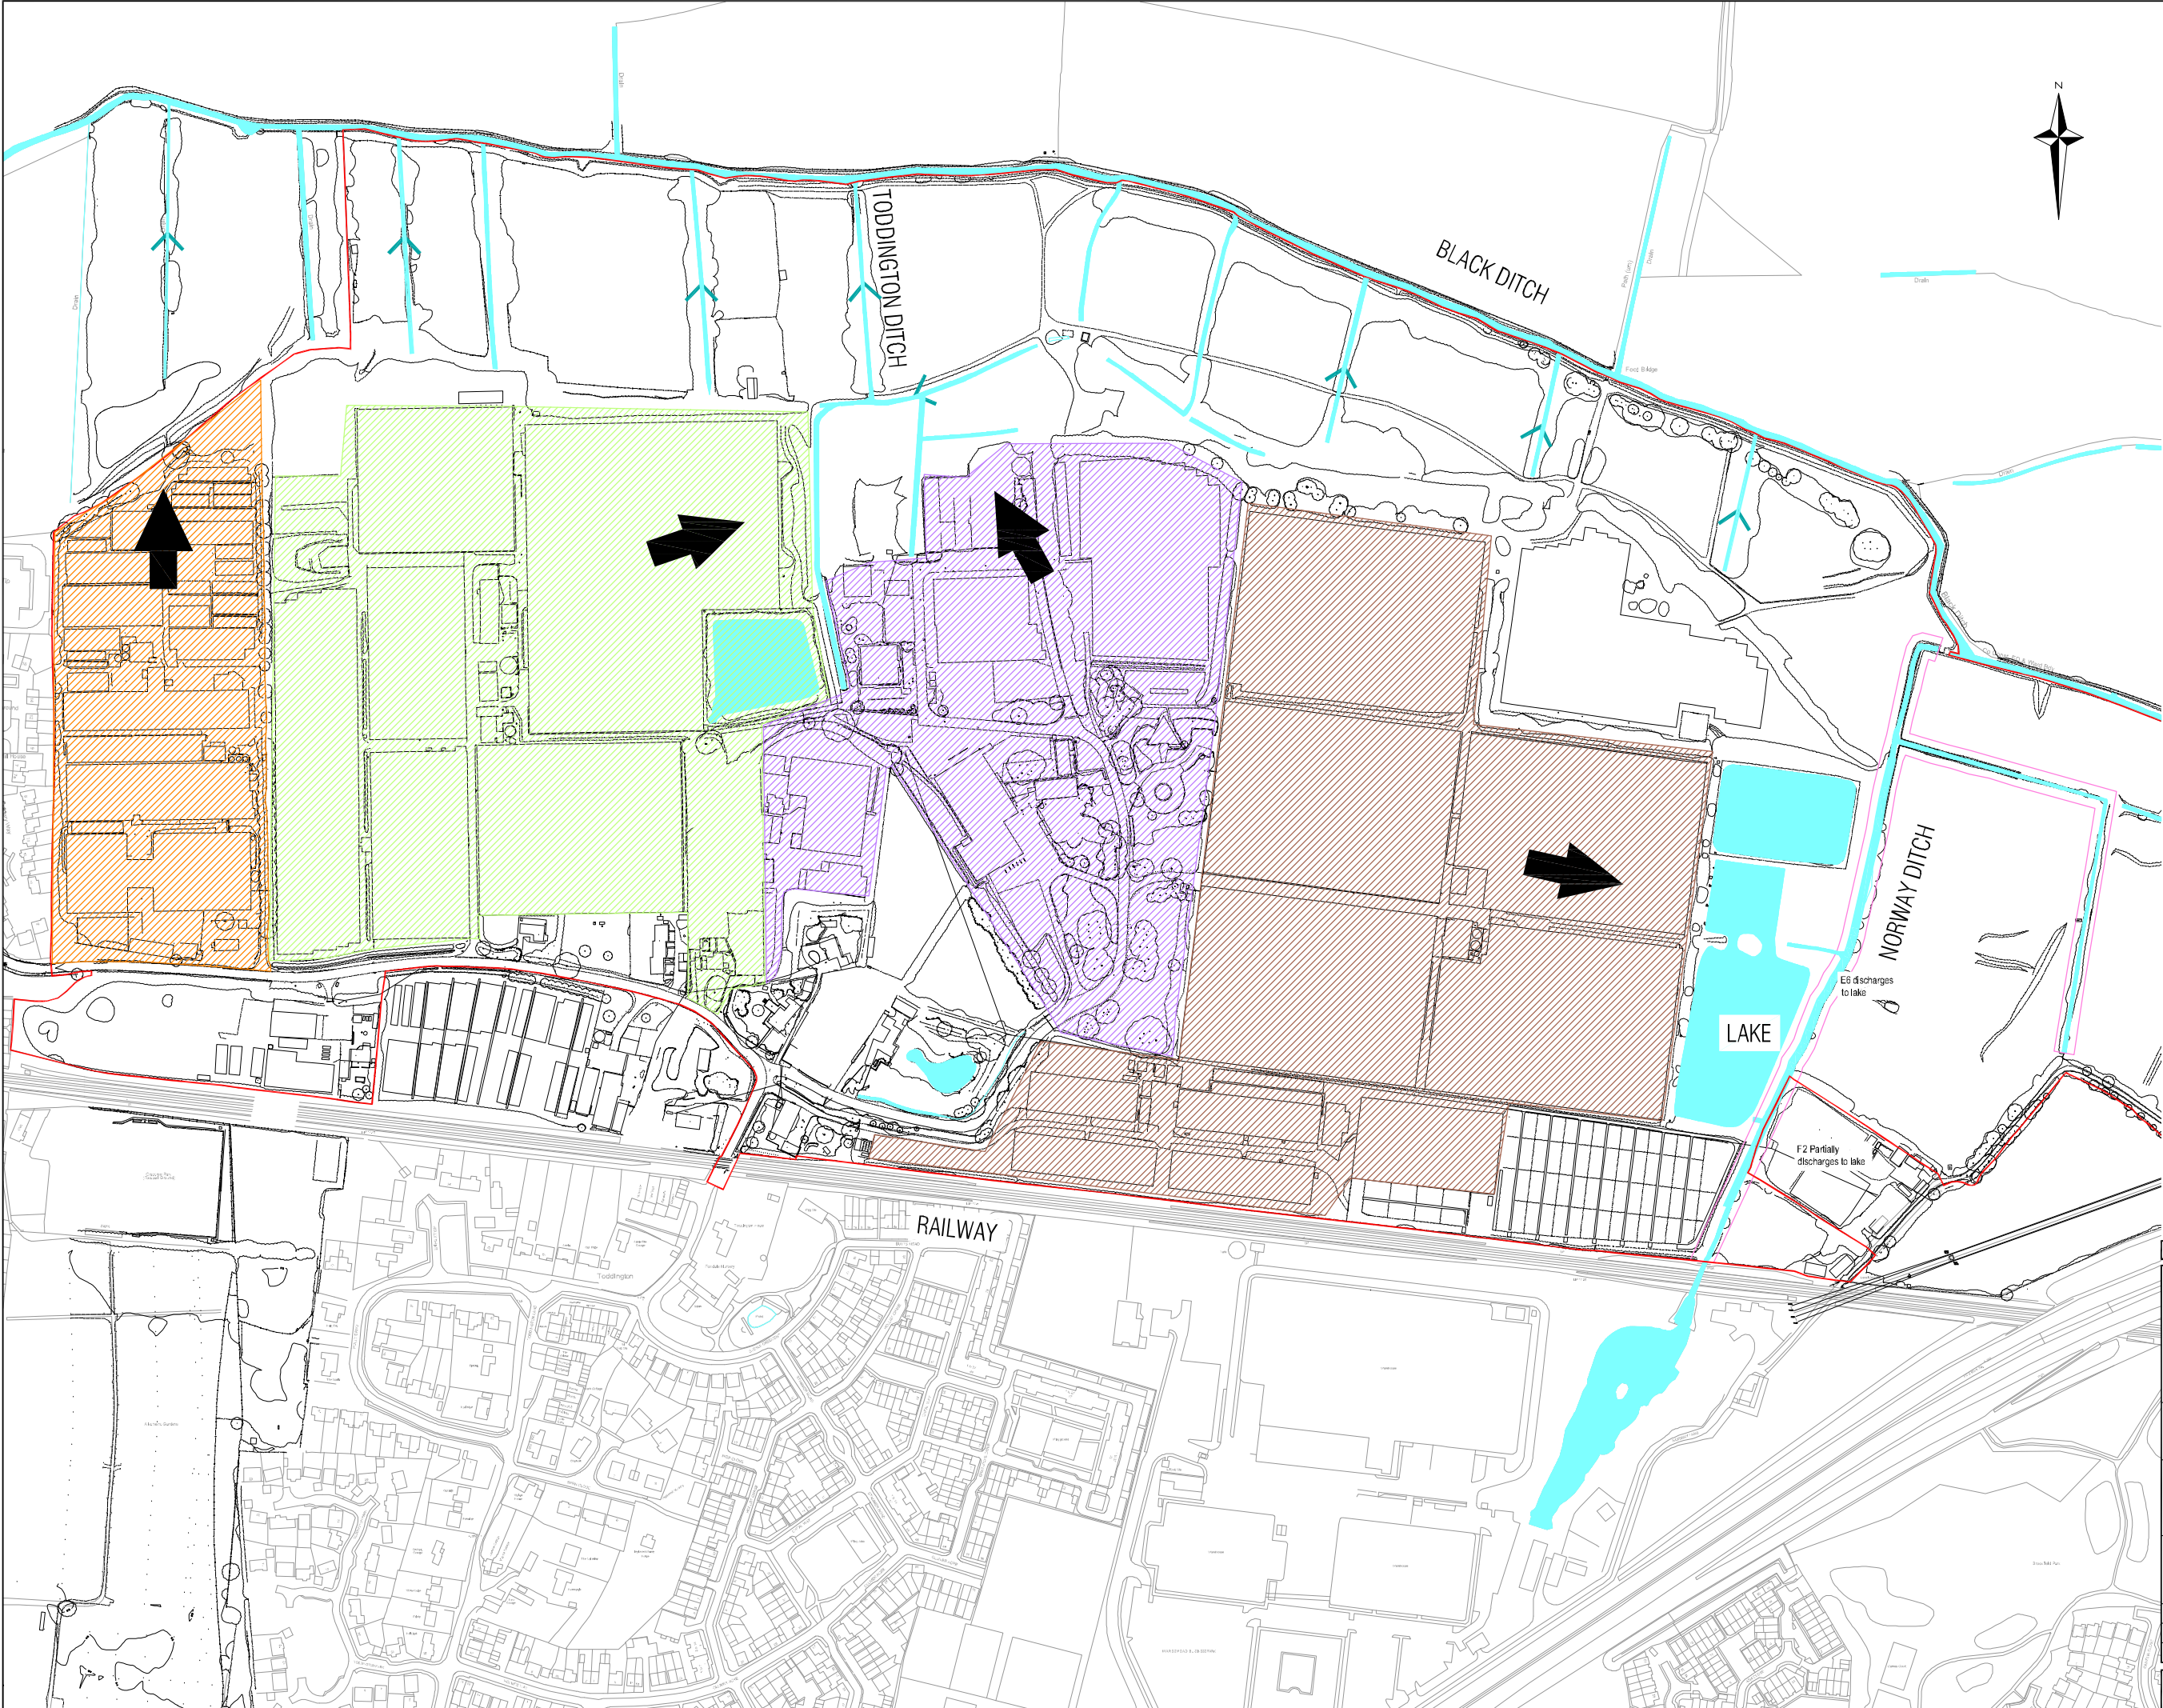

NOTES

- 1. Do not scale.

KEY

-  Western Area - Former Toddington Nursery. Outfalls to northern floodplain area via pipe connection and overland flow mechanisms.
-  Central West - former Holland Nursery, discharge to Toddington Ditch.
-  Central East Area. Outfall to Toddington Ditch.
-  Eastern Area - Former Zuider Zee Nursery. Discharge to existing lake and Norway Ditch.

Rev.	Description	Date	Chkd
 Glanville Cornerstone House 62 Foxhall Road, Didcot Oxon, OX11 7AD Tel: (01235) 515650 Fax: (01235) 817799 postbox@glanvillegroup.com www.glanvillegroup.com			
Client : Persimmon Homes			
Project : North Littlehampton			
Title : Illustrative Existing Surface Water Regime			
Project Engineer : S. Hudson		Scale : 1:2000	
Project Director : K. Rayner		Date : September 2014	
Status : Preliminary			
Drawing No. 8140927/107		Rev	

Appendix F

Drainage Survey Record Drawings

TODDINGTON LANE, LITTLEHAMPTON, WEST SUSSEX
DRAINAGE SURVEY
Date: 18th February 2014
Job No: 20644

Drainage
All drainage was traced with pipe sizes and inverts recorded. Wherever possible the chamber data has been recorded and positioned on the drawing. All connections from gullies, external rainwater pipes and external soil stacks have been proven wherever possible using manholes and cover logs. Drains between manholes are assumed to be straight. All sub surface drainage positions should be cross checked in critical areas by RFI or GPR survey or hand dug trial holes.



Notes:

1. DRAINAGE INFORMATION ADDED TO TOPOGRAPHICAL SURVEY PRODUCED BY MAYER BROWN LTD. JOB NO. A9111111 E 2004 DATE AUGUST 2014. NO SITE VERIFICATION CARRIED OUT BY MK SURVEYS UNLESS SPECIFIC TO DRAINAGE.
2. DRAINAGE INFORMATION HAS BEEN DETERMINED WITHOUT MAN ENTRY INTO CHAMBERS AND WHILE EVERY EFFORT HAS BEEN MADE TO CORRECTLY IDENTIFY THIS INFORMATION, IT SHOULD ALWAYS BE CHECKED IN AREAS THAT ARE CRITICAL TO THE FUTURE PROJECT.
3. ALL SEWERS ARE PRESUMED TO BE STRAIGHT BETWEEN CHAMBERS, WITH ROUTES CONNECTIVITY OBTAINED USING ACOUSTIC METHODS. ONLY THESE ARE TO BE CONSIDERED ASSUMED AND SHOULD BE INVESTIGATED FURTHER IN CRITICAL AREAS.

ABBREVIATIONS

ACPI	ASSUMED CONNECTION POINT	UH	LAIRY HOLE
AGD	ABOVE GROUND	UM	MANHOLE
AR	ASSUMED ROUTE	UP	NO PIPES VISIBLE
BD	BACK DROP	UL	OUTLET
BR	BRICK	OU	OUTFALL
BL	BASE LEVEL	PP	POLYPROPYLENE
CI	CAST IRON	PO	PIPE ON WALL
CL	COVER LEVEL	PT	AT-TRAP
CO	CONCRETE	PI	PIPE TO GROUND
CU	CULVERT	PVC	POLYVINYL CHLORIDE
CP	CATCHMENT	PVCU	ULTRA HIGH POLYETHYLENE
CWS	COMBINED WATER SEWER	RE	RODDING EYE
DCH	DRAINAGE CHANNEL	RMP	RIGID MAIN
DI	DUCTILE IRON	RWP	RAIN WATER PIPE
FD	FILTER DRAIN	SOP	SOFT
FWS	FOUL WATER SEWER	SVP	SOIL VENT PIPE
GY	GULLY	SWS	SURFACE WATER SEWER
IL	INSPECTION COVER	UTL	UNABLE TO LIFT
IR	INVERT LEVEL	UTS	UNABLE TO SURVEY
INT	INTERCEPTOR	VC	VERIFIED CLAY
IT	IRREG	VP	VENT PIPE
KE	KERR OUTLET	VL	WATER LEVEL

LEGEND

CAUTIONARY NOTES

1. Pipe sizes are shown from visual inspection or taken from record information. Pipe sizes are recorded in abbreviations and depths in meters.
2. Completed drainage features have been proven using the following (acoustic methods). It is advised that a CCTV survey is carried out to confirm connections. Please ring for further details if a CCTV survey is required.

CAUTIONARY NOTES

1. Pipe sizes are shown from visual inspection or taken from record information. Pipe sizes are recorded in abbreviations and depths in meters.

2. Completed drainage features have been proven using the following (acoustic methods). It is advised that a CCTV survey is carried out to confirm connections. Please ring for further details if a CCTV survey is required.

mk surveys

101103 01001
101103 01002
101103 01003
101103 01004
101103 01005
101103 01006
101103 01007
101103 01008
101103 01009
101103 01010
101103 01011
101103 01012
101103 01013
101103 01014
101103 01015
101103 01016
101103 01017
101103 01018
101103 01019
101103 01020
101103 01021
101103 01022
101103 01023
101103 01024
101103 01025
101103 01026
101103 01027
101103 01028
101103 01029
101103 01030
101103 01031
101103 01032
101103 01033
101103 01034
101103 01035
101103 01036
101103 01037
101103 01038
101103 01039
101103 01040
101103 01041
101103 01042
101103 01043
101103 01044
101103 01045
101103 01046
101103 01047
101103 01048
101103 01049
101103 01050
101103 01051
101103 01052
101103 01053
101103 01054
101103 01055
101103 01056
101103 01057
101103 01058
101103 01059
101103 01060
101103 01061
101103 01062
101103 01063
101103 01064
101103 01065
101103 01066
101103 01067
101103 01068
101103 01069
101103 01070
101103 01071
101103 01072
101103 01073
101103 01074
101103 01075
101103 01076
101103 01077
101103 01078
101103 01079
101103 01080
101103 01081
101103 01082
101103 01083
101103 01084
101103 01085
101103 01086
101103 01087
101103 01088
101103 01089
101103 01090
101103 01091
101103 01092
101103 01093
101103 01094
101103 01095
101103 01096
101103 01097
101103 01098
101103 01099
101103 01100
101103 01101
101103 01102
101103 01103
101103 01104
101103 01105
101103 01106
101103 01107
101103 01108
101103 01109
101103 01110
101103 01111
101103 01112
101103 01113
101103 01114
101103 01115
101103 01116
101103 01117
101103 01118
101103 01119
101103 01120
101103 01121
101103 01122
101103 01123
101103 01124
101103 01125
101103 01126
101103 01127
101103 01128
101103 01129
101103 01130
101103 01131
101103 01132
101103 01133
101103 01134
101103 01135
101103 01136
101103 01137
101103 01138
101103 01139
101103 01140
101103 01141
101103 01142
101103 01143
101103 01144
101103 01145
101103 01146
101103 01147
101103 01148
101103 01149
101103 01150
101103 01151
101103 01152
101103 01153
101103 01154
101103 01155
101103 01156
101103 01157
101103 01158
101103 01159
101103 01160
101103 01161
101103 01162
101103 01163
101103 01164
101103 01165
101103 01166
101103 01167
101103 01168
101103 01169
101103 01170
101103 01171
101103 01172
101103 01173
101103 01174
101103 01175
101103 01176
101103 01177
101103 01178
101103 01179
101103 01180
101103 01181
101103 01182
101103 01183
101103 01184
101103 01185
101103 01186
101103 01187
101103 01188
101103 01189
101103 01190
101103 01191
101103 01192
101103 01193
101103 01194
101103 01195
101103 01196
101103 01197
101103 01198
101103 01199
101103 01200
101103 01201
101103 01202
101103 01203
101103 01204
101103 01205
101103 01206
101103 01207
101103 01208
101103 01209
101103 01210
101103 01211
101103 01212
101103 01213
101103 01214
101103 01215
101103 01216
101103 01217
101103 01218
101103 01219
101103 01220
101103 01221
101103 01222
101103 01223
101103 01224
101103 01225
101103 01226
101103 01227
101103 01228
101103 01229
101103 01230
101103 01231
101103 01232
101103 01233
101103 01234
101103 01235
101103 01236
101103 01237
101103 01238
101103 01239
101103 01240
101103 01241
101103 01242
101103 01243
101103 01244
101103 01245
101103 01246
101103 01247
101103 01248
101103 01249
101103 01250
101103 01251
101103 01252
101103 01253
101103 01254
101103 01255
101103 01256
101103 01257
101103 01258
101103 01259
101103 01260
101103 01261
101103 01262
101103 01263
101103 01264
101103 01265
101103 01266
101103 01267
101103 01268
101103 01269
101103 01270
101103 01271
101103 01272
101103 01273
101103 01274
101103 01275
101103 01276
101103 01277
101103 01278
101103 01279
101103 01280
101103 01281
101103 01282
101103 01283
101103 01284
101103 01285
101103 01286
101103 01287
101103 01288
101103 01289
101103 01290
101103 01291
101103 01292
101103 01293
101103 01294
101103 01295
101103 01296
101103 01297
101103 01298
101103 01299
101103 01300
101103 01301
101103 01302
101103 01303
101103 01304
101103 01305
101103 01306
101103 01307
101103 01308
101103 01309
101103 01310
101103 01311
101103 01312
101103 01313
101103 01314
101103 01315
101103 01316
101103 01317
101103 01318
101103 01319
101103 01320
101103 01321
101103 01322
101103 01323
101103 01324
101103 01325
101103 01326
101103 01327
101103 01328
101103 01329
101103 01330
101103 01331
101103 01332
101103 01333
101103 01334
101103 01335
101103 01336
101103 01337
101103 01338
101103 01339
101103 01340
101103 01341
101103 01342
101103 01343
101103 01344
101103 01345
101103 01346
101103 01347
101103 01348
101103 01349
101103 01350
101103 01351
101103 01352
101103 01353
101103 01354
101103 01355
101103 01356
101103 01357
101103 01358
101103 01359
101103 01360
101103 01361
101103 01362
101103 01363
101103 01364
101103 01365
101103 01366
101103 01367
101103 01368
101103 01369
101103 01370
101103 01371
101103 01372
101103 01373
101103 01374
101103 01375
101103 01376
101103 01377
101103 01378
101103 01379
101103 01380
101103 01381
101103 01382
101103 01383
101103 01384
101103 01385
101103 01386
101103 01387
101103 01388
101103 01389
101103 01390
101103 01391
101103 01392
101103 01393
101103 01394
101103 01395
101103 01396
101103 01397
101103 01398
101103 01399
101103 01400
101103 01401
101103 01402
101103 01403
101103 01404
101103 01405
101103 01406
101103 01407
101103 01408
101103 01409
101103 01410
101103 01411
101103 01412
101103 01413
101103 01414
101103 01415
101103 01416
101103 01417
101103 01418
101103 01419
101103 01420
101103 01421
101103 01422
101103 01423
101103 01424
101103 01425
101103 01426
101103 01427
101103 01428
101103 01429
101103 01430
101103 01431
101103 01432
101103 01433
101103 01434
101103 01435
101103 01436
101103 01437
101103 01438
101103 01439
101103 01440
101103 01441
101103 01442
101103 01443
101103 01444
101103 01445
101103 01446
101103 01447
101103 01448
101103 01449
101103 01450
101103 01451
101103 01452
101103 01453
101103 01454
101103 01455
101103 01456
101103 01457
101103 01458
101103 01459
101103 01460
101103 01461
101103 01462
101103 01463
101103 01464
101103 01465
101103 01466
101103 01467
101103 01468
101103 01469
101103 01470
101103 01471
101103 01472
101103 01473
101103 01474
101103 01475
101103 01476
101103 01477
101103 01478
101103 01479
101103 01480
101103 01481
101103 01482
101103 01483
101103 01484
101103 01485
101103 01486
101103 01487
101103 01488
101103 01489
101103 01490
101103 01491
101103 01492
101103 01493
101103 01494
101103 01495
101103 01496
101103 01497
101103 01498
101103 01499
101103 01500
101103 01501
101103 01502
101103 01503
101103 01504
101103 01505
101103 01506
101103 01507
101103 01508
101103 01509
101103 01510
101103 01511
101103 01512
101103 01513
101103 01514
101103 01515
101103 01516
101103 01517
101103 01518
101103 01519
101103 01520
101103 01521
101103 01522
101103 01523
101103 01524
101103 01525
101103 01526
101103 01527
101103 01528
101103 01529
101103 01530
101103 01531
101103 01532
101103 01533
101103 01534
101103 01535
101103 01536
101103 01537
101103 01538
101103 01539
101103 01540
101103 01541
101103 01542
101103 01543
101103 01544
101103 01545
101103 01546
101103 01547
101103 01548
101103 01549
101103 01550
101103 01551
101103 01552
101103 01553
101103 01554
101103 01555
101103 01556
101103 01557
101103 01558
101103 01559
101103 01560
101103 01561
101103 01562
101103 01563
101103 01564
101103 01565
101103 01566
101103 01567
101103 01568
101103 01569
101103 01570
101103 01571
101103 01572
101103 01573
101103 01574
101103 01575
101103 01576
101103 01577
101103 01578
101103 01579
101103 01580
101103 01581
101103 01582
101103 01583
101103 01584
101103 01585
101103 01586
101103 01587
101103 01588
101103 01589
101103 01590
101103 01591
101103 01592
101103 01593
101103 01594
101103 01595
101103 01596
101103 01597
101103 01598
101103 01599
101103 01600
101103 01601
101103 01602
101103 01603
101103 01604
101103 01605
101103 01606
101103 01607
101103 01608
101103 01609
101103 01610
101103 01611
101103 01612
101103 01613
101103 01614
101103 01615
101103 01616
101103 01617
101103 01618
101103 01619
101103 01620
101103 01621
101103 01622
101103 01623
101103 01624
101103 01625
101103 01626
101103 01627
101103 01628
101103 01629
101103 01630
101103 01631
101103 01632
101103 01633
101103 01634
101103 01635
101103 01636
101103 01637
101103 01638
101103 01639
101103 01640
101103 01641
101103 01642
101103 01643
101103 01644
101103 01645
101103 01646
101103 01647
101103 01648
101103 01649
101103 01650
101103 01651
101103 01652
101103 01653
101103 01654
101103 01655
101103 01656
101103 01657
101103 01658
101103 01659
101103 01660
101103 01661
101103 01662
101103 01663
101103 01664
101103 01665
101103 01666
101103 01667
101103 01668
101103 01669
101103 01670
101103 01671
101103 01672
101103 01673
101103 01674
101103 01675
101103 01676
101103 01677
101103 01678
101103 01679
101103 01680
101103 01681
101103 01682
101103 01683
101103 01684
101103 01685
101103 01686
101103 01687
101103 01688
101103 01689
101103 01690
101103 01691
101103 01692
101103 01693
101103 01694
101103 01695
101103 01696
101103 01697
101103 01698
101103 01699
101103 01700
101103 01701
101103 01702
101103 01703
101103 01704
101103 01705
101103 01706
101103 01707
101103 01708
101103 01709
101103 01710
101103 01711
101103 01712
101103 01713
101103 01714
101103 01715
101103 01716
101103 01717
101103 01718
101103 01719
101103 01720
101103 01721
101103 01722
101103 01723
101103 01724
101103 01725
101103 01726
101103 01727
101103 01728
101103 01729
101103 01730
101103 01731
101103 01732
101103 01733
101103 01734
101103 01735
101103 01736
101103 01737
101103 01738
101103 01739
101103 01740
101103 01741
101103 01742
101103 01743
101103 01744
101103 01745
101103 01746
101103 01747
101103 01748
101103 01749
101103 01750
101103 01751
101103 01752
101103 01753
101103 01754
101103 01755
101103 01756
101103 01757
101103 01758
101103 01759
101103 01760
101103 01761
101103 01762
101103 01763
101103 01764
101103 01765
101103 01766
101103 01767
101103 01768
101103 01769
101103 01770
101103 01771
101103 01772
101103 01773
101103 01774
101103 01775
101103 01776
101103 01777
101103 01778
101103 0177