


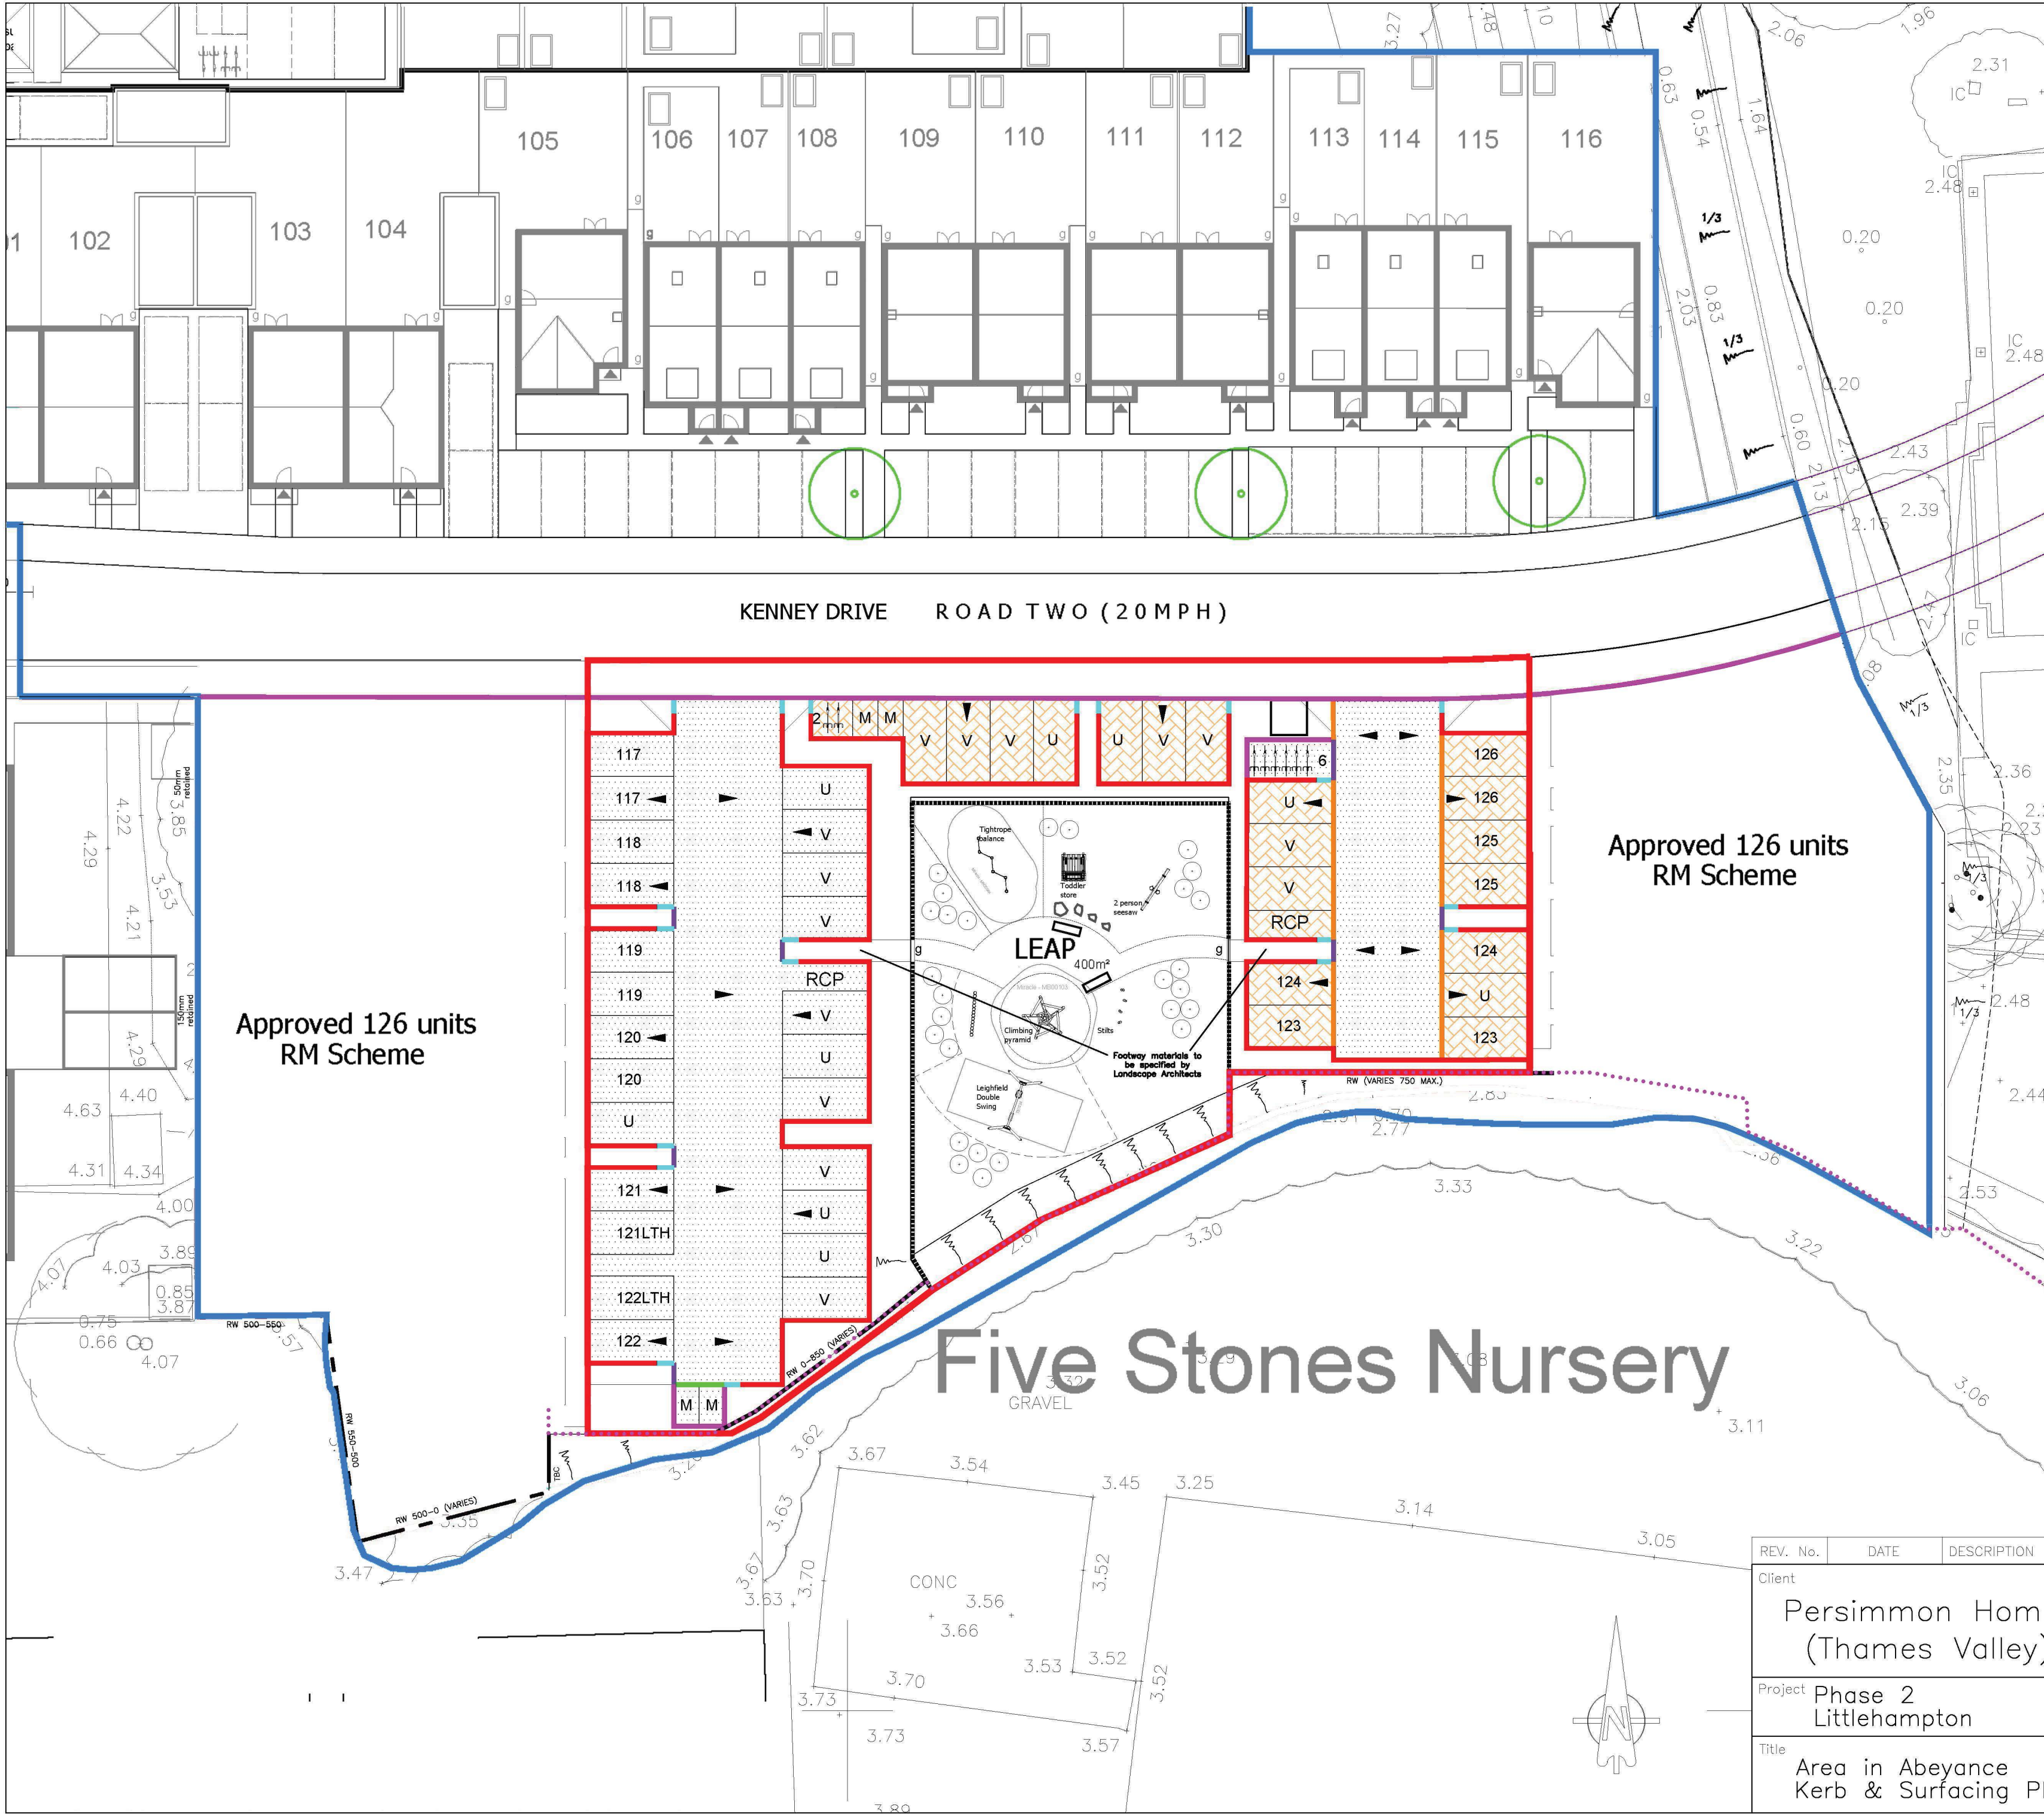

- KERBING KEY:**
- 125x255 HB2 Kerb with 125mm upstand
 - 125x255 BN Kerb with 20mm upstand at vehicle crossovers
 - 125x255 BN Kerb laid flush and inverted with slight tilt to prevent ponding
 - Transition Kerb
 - 150x150 CS Square Channel laid flush
 - 50x150 EF Kerb laid flush

- SURFACING KEY:**
- Impermeable Concrete Block Paving laid in herringbone pattern
 - Impermeable Macadam

- Construction Notes:**
- Do not scale from this drawing.
 - All dimensions in metres.
 - All levels relate to ordnance datum.
 - This drawing is based on the latest Architectural planning layout and shall be read in conjunction with all other relevant longitudinal sections and construction drawings.
 - Any discrepancies with any of the drawings shall be reported to MJA Consulting Engineer.
 - The level and location of all existing services shall be verified on site by the Contractor before commencing any construction work.
 - Contractor must comply with all current legislation relating to CDM, Health and Safety and COSHH.
 - All material in excess of 20kg (i.e. kerbs, manhole units cover etc.) shall be mechanically lifted and laid where possible at all times.
- Proposed 2.8m High Acoustic Fence Location - details to be provided by Persimmon Homes
- For landscaping details refer to the landscaping architect's proposals

REV. No.	DATE	DESCRIPTION	INITIALS
Client Persimmon Homes (Thames Valley)			
Project Phase 2 Littlehampton			
Title Area in Abeyance Kerb & Surfacing Plan		Scale 1:250 @A2	Date July 2020
Checked RC		Drawn AT	Drawing No. 5691:07PL
		Rev —	