


The P Series: Filter Mats from filter class G2 - G4 (EU2 – EU4)

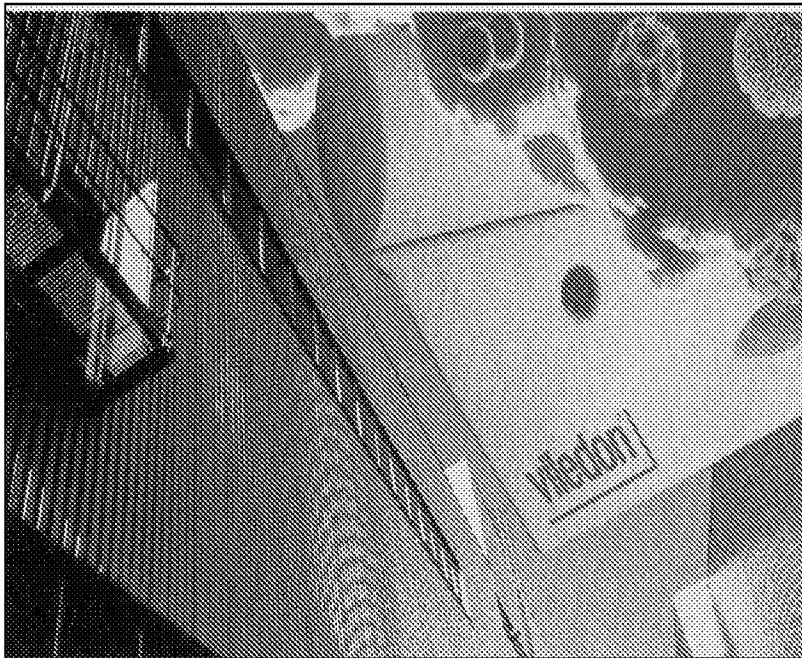

Coarse Filtration
P 200
G2 EU 2
P300
G3 EU 3
P400
G4 EU 4

The filters

The filter mats are used for intake filtration in all kinds of ventilation systems.

- ◆ In industrial processes (engineering, pharmaceuticals, foodstuffs, etc.)
- ◆ In air conditioning applications (hospitals, laboratories, etc.)
- ◆ As prefilters to bag filters.
- ◆ In compact air-conditioners

P Series Filter Mats		P 200	P 300	P400
Weight	g/m ²	120	180	300
Thickness	mm	10	15	20
Roll length	m/m	2/40	2/20	2/20
Cut pieces To customer specification		On request	On request	On request

The filter media and the design

- ◆ 100% **synthetic** media, structured to provide low pressure loss and good dust holding capacity.
- ◆ All three filter mats have been tested according to EN 779.
- ◆ Made from non-breaking synthetic polyester fibres.
- ◆ Thermally bonded fibres provide high mechanical strength and optimum resistance from moisture.
- ◆ Available in both 2m x 20m rolls or supplied as cut pads.



Technical filter test data


To EN 779


Filter specification

P Series Filter Mats		P 200	P 300	P 400
Filter class		G 2	G 3	G 4
Nominal media velocity	m/s	1.5	1.5	1.5
Initial pressure drop	Pa	10	20	40
Recommended final pressure drop	Pa	125	200	200
Average arrestance	%	67	81	90
Moisture resistance	%RH	100	100	100
Thermal Stability	°C	100	100	100



Pressure drop data

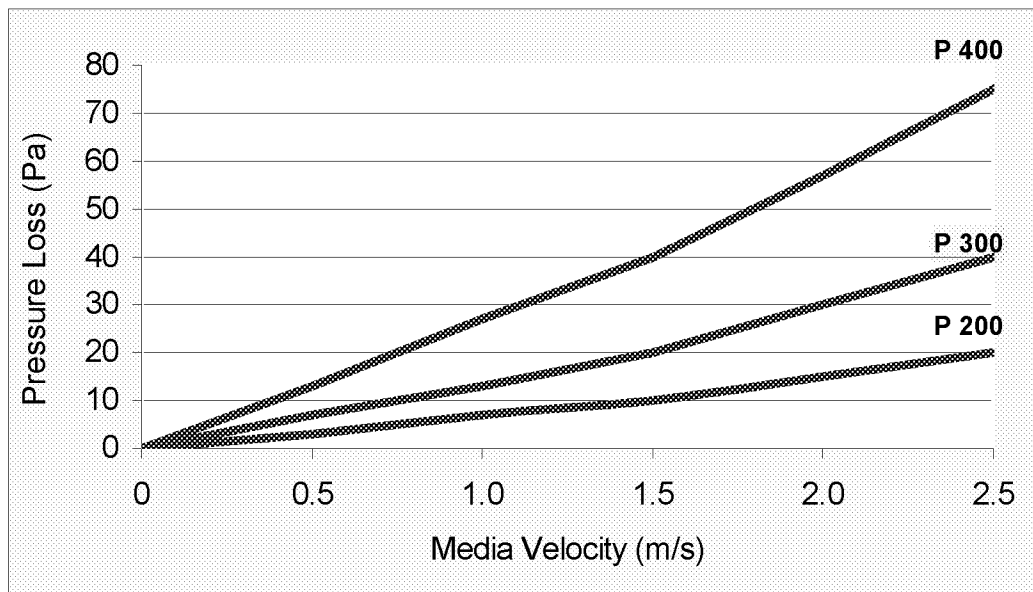

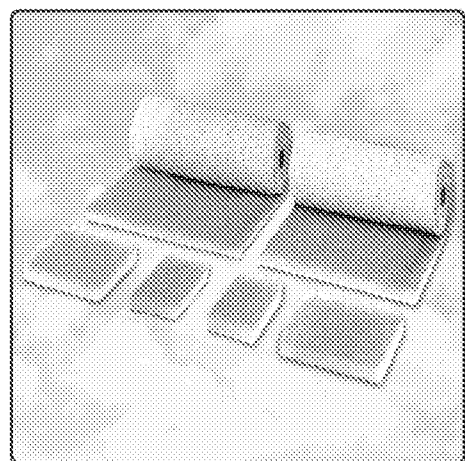

Dust-Stop (yellow)




Dust-Stop (yellow)



Paint-Stop (green)

Glass fibre mats

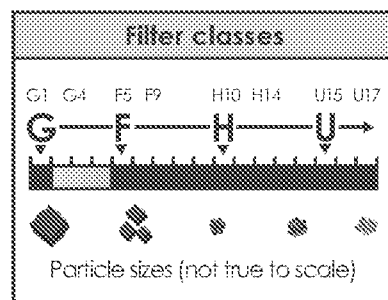

Applications

Paint-Stop (green):

For use in separation of ink mist in paint shops and colour spraying cabins

- In automotive industry
- Manufacturing plants for furniture, windows, machines, etc.

Dust-Stop (yellow):

For separation of dry dust types

- In carpenters' workshops, metal working industry, etc.

Classification acc. to EN 779

- Filter class **G2 (EU2)** - green version
- yellow version
- Filter class **G3 (EU3)** - green version
- yellow version
- Filter class **G4 (EU4)** - green version
- yellow version

Versions

- Standard rolls e.g. 20 x 1m and 20 x 2m
- Special sizes on request
- Precuts for finished dimensions
- **Information concerning disposal:**
The disposal is subject to local restrictions. Depending on separated substances, used filter-medium has to be dried and disposed

Material characteristics


Paint-Stop (green):

- Temperature resistant up to max. 180°C
- Contains no silicone or other lacquer harming substances

Dust-Stop (yellow):


- Temperature resistant up to max. 80°C
- Additionally impregnated with antibacterial dust adhesive
- Contains no silicone

Benefits of VOLZ Filters




Shape elastic fibre structure

- The low compressibility of inordinately bedded glass fibres prevents the used medium from becoming compressed and enhances a higher separation




Paint-Stop (green)

- Separates ink mist from exhausted air. Thereby, exhaust air channels, fans and motors are protected from paint deposits. For identification reasons, dust air side is coloured green



Dust-Stop (yellow)

- Medium is additionally impregnated with an antibacterial dust adhesive. For identification reasons, dust air side is coloured yellow



- Glass fibre mats are produced in our plant in Germany
- Quality control of the complete production with internal filter test equipment and modern quality-management-tools

Standard versions glass fibre mats G2 – G4

Product	Filter classes	Material thickness approx.	Roll length*	Roll width*
		mm	m	m
Paint-Stop (green) 2"	G2 (EU2)	50	20 / 25 / 80 / 91	2.0 / 1.0 / 0.7 / 0.5
Paint-Stop (green) 3"	G3 (EU3)	75	20 / 25 / 80 / 91	2.0 / 1.0 / 0.7 / 0.5
Paint-Stop (green) 4"	G4 (EU4)	100	20 / 25	2.0 / 1.0 / 0.7 / 0.5
Dust-Stop (yellow) 1"	G2 (EU2)	25	20	2.0 / 1.0 / 0.7 / 0.5
Dust-Stop (yellow) 2"	G3 (EU3)	50	20	2.0 / 1.0 / 0.7 / 0.5
Dust-Stop (yellow) 4"	G4 (EU4)	100	20	2.0 / 1.0 / 0.7 / 0.5

* further dimensions on request

Glass fibre mat G3

Product	Colour	Material thickness approx.	Initial pressure drop	Recommended final pressure drop	Nominal air flow rate	Lacquer separation arrestance*
		mm	Pa	Pa	m³ / h / m²	%
Paint-Stop 3"	green	75	4 - 10	80	2500 - 6300	95

The measured data relates to 1m² filter surface

* The lacquer separation arrestance depends on the kind of lacquer, ink mist or environmental conditions like temperature or pressure in paint cabin

VOLZ Luftfilter GmbH & Co. KG

 Robert-Bosch-Straße 25 Phone: +49 - (0)7451 - 5516 - 0 info@volzfilters.com
 D-72160 Horb am Neckar Fax: +49 - (0)7451 - 5516 - 120 www.volzfilters.com

All information, images and pictures are property of VOLZ Luftfilter GmbH & Co. KG and are provided to the best knowledge. However VOLZ Luftfilter GmbH & Co. KG does not guarantee the completeness or correctness and cannot be held responsible for damages caused by the recipient's usage or his confidence in the completeness or correctness of the information. The stated data contains average values with tolerances as a result of production irregularities; therefore it does not relieve the recipient of own examination and tests. For the correctness of the information in particular cases, an explicit and written affirmation through VOLZ Luftfilter GmbH & Co. KG is required. Furthermore, the data serves as a service description and cannot be interpreted as warranted properties or durabilities.

Pocket filters

Filtration mats

Pleated filters (consertas)

HEPA filters

Extra-/special filters

Accessories