

Conservation Roof Windows

For traditional buildings

Flashing,
Insulation Collar
and Underfelt
Collar included in
all Conservation
Packages



CONSERVATION ROOF WINDOWS

All the technically superior features of a VELUX Roof Window in a traditional black conservation style.

- Available in either Centre-Pivot or Top-Hung.
- Black external profiles and glazing bar. RAL colour 9005.
- Recessed installation for slate and tiled roofs.
- Other sizes and glazing options available – please contact VELUX for more details.
- Top-Hung Windows listed below are suitable for emergency escape.



Conservation Roof Windows

(Other sizes of Conservation Roof Windows are available subject to lead times).

External frame size (nominal w x h) cm

Code	Description	C04	C06	F06	M06	M08	U04
Packages include: GGL Centre-Pivot or GHL Top-Hung Roof Window with glazing bar, flashing, Insulation Collar (BDX) and Underfelt Collar (BFX).							
Centre-Pivot Roof Windows, pine. Toughened outer pane (--59). U-value 1.4 W/m²K.							
GGL SD5N1	GGL 3559 Roof Window + EDN Recessed Flashing for slate up to 8mm thick (min 20° roof pitch)	£410	£424	£464	£532	£568	£664
GGL SD5P1	GGL 3559 Roof Window + EDP Flashing for plain tiles up to 15mm thick (min 25° roof pitch)	£368	£380	£416	£482	£516	£608
GGL SD5W1	GGL 3559 Roof Window + EDW Flashing for tiles up to 120mm in profile (min 15° roof pitch)	£380	£392	£430	£496	£532	£624
GGL SD5J1	GGL 3559 Roof Window + EDJ Recessed Flashing for tiles up to 90mm in profile (min 20° roof pitch)	£410	£424	£464	£532	£568	£664
Top-Hung Roof Windows, pine. Toughened outer pane (--59). Suitable for emergency escape. U-value 1.4 W/m²K.							
GHL SD5N1	GHL 3559 Roof Window + EDN Recessed Flashing for slate up to 8mm thick (min 20° roof pitch)	–	–	–	–	£644	–
GHL SD5P1	GHL 3559 Roof Window + EDP Flashing for plain tiles up to 15mm thick (min 25° roof pitch)	–	–	–	–	£592	–
GHL SD5W1	GHL 3559 Roof Window + EDW Flashing for tiles up to 120mm in profile (min 15° roof pitch)	–	–	–	–	£608	–
GHL SD5J1	GHL 3559 Roof Window + EDJ Recessed Flashing for tiles up to 90mm in profile (min 20° roof pitch)	–	–	–	–	£644	–



OPTIONAL GLAZING BARS FOR STANDARD VELUX ROOF WINDOWS

Create a traditional style appearance by adding conservation glazing bars to standard grey VELUX Roof Windows.

- Grey glazing bar to match grey exterior finish of all standard VELUX Roof Windows.

Optional glazing bars for standard windows	C02	C04	M04	U04	C06	F06	M06	S06	M08	P08	U08	P10
2 glazing bars for U04, S06 & U08	ZGA W02 0024 £50	ZGA W04 0024 £52			ZGA W06 0024 £54				ZGA W08 0024 £56			ZGA W10 0024 £58

- ▶ All windows and glazing bars have a delivery time of 2 days.
- ▶ Delivery time is in working days from receipt of orders placed before 4pm.
- ▶ Glazing bars not available for --65 glazing variant.

Sloping and Vertical Combinations

Expand your view



Combine vertical and sloping lacquered natural pine Roof Windows to extend the possibilities for view and daylight. Ideal for storey-and-a-half houses.

Follow the steps below to find the best solution for your room:

1. Decide on your combination – single, twin or triple.
2. Select your pine Roof Window(s) in size M04, M06 or M08 (prices not included below). Choose from:
 - Top-Hung see page 20.
 - Centre-Pivot see page 16.
 - INTEGRA® see page 18.



Pine Vertical Elements

External frame size (nominal w x h) cm

Code	Glazing	M31	M34
VFE 3073 U-value 1.4 W/m²K	Laminated inner, toughened outer pane. Clear and Clean coating	£464	£500
VFE 3060 U-value 1.3 W/m²K	Laminated inner, toughened outer pane. Clear and Clean coating	£488	£524

Flashings

External frame size (nominal w x h) cm

Code	Description	M04	M06	M08
EFL 0000	Single installation, for slate up to 8mm thick	£104	£110	£114
EFW 0000	Single installation, for tiles up to 120mm in profile	£104	£110	£114
EFL 0002	Twin installation, for slate up to 8mm thick	£270	£288	£296
EFW 0002	Twin installation, for tiles up to 120mm in profile	£270	£288	£296
EFL 0003	Triple installation, for slate up to 8mm thick	£416	£442	£454
EFW 0003	Triple installation, for tiles up to 120mm in profile	£416	£442	£454

Internal Trimmer – Pine


Code	Description			
EBY W10 3100	18mm gap adjustable trimmer (x1 for Twin installation, x2 for Triple installation)	–	–	£386

- ▶ All windows, flashings and trimmers have a delivery time of 7 days.
- ▶ Delivery time is in working days from receipt of orders placed by 4pm.

3. Select your bottom vertical element(s) – size M31 or M34. Vertical element is bottom-hung and opens inwards for added ventilation and cleaning.

4. Select the appropriate flashing system for your Roof Window size, combination and roofing material.
 - If selecting twin or triple combinations, VELUX recommend the use of an EBY trimmer for added support and a harmonious internal finish.

Other combinations can be created – contact VELUX for further information.

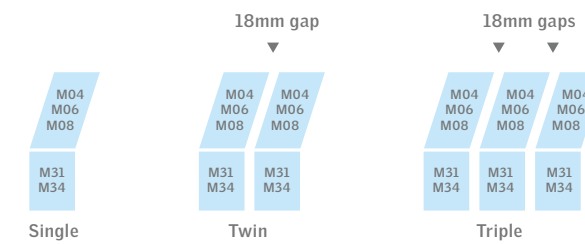

Single	Twin	Triple
	78x60	78x95

Code	Description	M04	M06	M08
		78x98	78x118	78x140