

New Acoustic Fence

Height 2.5m

Set in Conc Base Min 900mm Fig 2.6m post


125mm x100mm Posts @1.8 c/c

Cladding 150mm x 22mm boards with 50mm gap

Second layer 100mm x 22mm boards laid over gaps min cover 25mm

Mass 85.5 kg/m² based on softwood of 550 kg/cu m

Elevation Of New Acoustic Fence

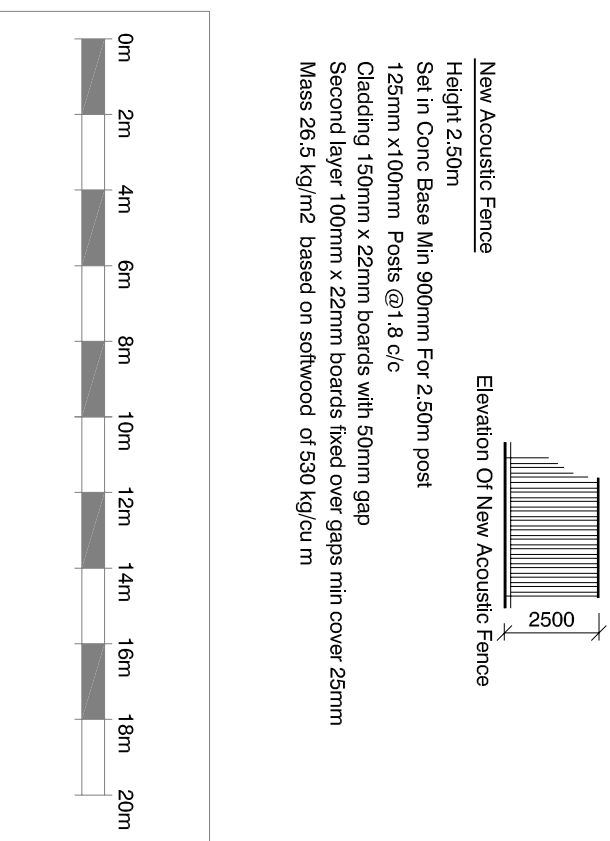

F	Boundaries defined	27/07/15
E	Plots 5 and 6 repositioned, Garden and green space confg alt'd.	13/03/15
D	Plots 5 and 6 repositioned, Garage confg alt'd, Garage 3 added, confg alt'd.	08/03/15
C	Garages for Plots 44 and 45 repositioned.	08/04/14
B	Waste storage and collection areas added	15/07/13
A	Plots 1,10,4 moved south east by 1500mm, and rear fence moved north west by 1000mm.	06/06/13
REV	DESCRIPTION	DATE
REVISION		

job no.	drawing no.	rev.
023 001	100	F

scale	drawn by	date
1:200 @ A1	SMM	17/03/2015

Residential Development
The Poplars (Former HRI Site)
Worthing Road, Littlehampton
West Sussex. BN17 6GZ

Hargreaves

Rustington House, Worthing Road, Rustington, West Sussex, BN16 3PS
Tel No: (01903) 777777 Fax No: (01903) 777700