

Lynnyrd Wolfe

From: Richard Castro-Parker
Sent: 10 July 2019 11:49
To: Planning.Responses
Subject: FW: Windroos, Littlehampton
Attachments: Calculations.zip; DRAWINGS.zip

Please could the plans and docs at the following link be uploaded to

LU/24/19/DOC

N:_EveryoneFolders\Engineers\Laura Link\Windroos Cond 9 documents

See action sheet

Thank you

Richard Castro-Parker
Senior Planning Officer (Contract)
Arun District Council

From: David Innes [REDACTED]
Sent: 04 July 2019 15:51
To: [REDACTED]
Cc: [REDACTED]
Subject: Fwd: Windroos, Littlehampton

Hi Richard

Below is the email sent on 3 May to Laura and copied to Andrew Wood with the zip files containing drawings and calculations documents. In Laura's email agreeing to the discharge of condition 9 she has had the files unzipped and provided the link:-

I am happy with the proposals now. Therefore, I recommend discharge of condition 9. I believe that the most up to date drawings and calculations are as contained within the folder here: N:_EveryoneFolders\Engineers\Laura Link\Windroos Cond 9 documents

You mentioned that you may wish to consult Environment Agency and Southern Water. I have looked at the Southern Water Comments on both reserved matters and the outline application and can't see a reason for re-consulting SW. They simply require and SUDS to be addressed by the applicant and set out requirements for the Local Authority to be satisfied. Clearly Laura Gibbons has diligently carried out the local authority role. The Environment Agency did not comment on this condition that I could see.

I would therefore urge the local planning authority to discharge the condition as agreed by the Drainage section on 22 May. The 8 week period for the discharge of conditions has expired some time ago.

I look forward to receiving your confirmation in due course.

regards

David Innes
[REDACTED]

Blueprint Planning & Development Ltd

Blueprint Planning & Development Ltd is registered in Scotland, SC361579.

Our Registered Office is c/o John Kerr & Co, Hamilton Street, Saltcoats KA21 5DS

This message is confidential and/or may be privileged or protected by other legal rules and is intended for a particular recipient only. If you have received this message by mistake please notify us by return email. Do not copy this email message or disclose its contents to anyone else. Please then delete it from your system.

Begin forwarded message:

From: James Bragg <[REDACTED]>
Subject: RE: Windroos, Littlehampton
Date: 3 May 2019 at 12:12:34 BST
To: Laura Gibbons [REDACTED]

[REDACTED]

Hi Laura

Please see below responses to your comments.

1. There are inconsistencies between the modelled depths and depths shown on plan of soakaways. Furthermore, some of the soakaways have depths greater than the difference between the cover (nearby levels, levels not given at soakaway) and invert levels specified. Please ensure that minimum cover requirements are met and that details are consistent. Cover levels have been added to soakaway structures and minimum cover levels have been ensured.
2. I am not happy with the infiltration rates used for soakaways 10 and 11. The nearest infiltration test gave a result of $1.04 \times 10^{-6} \text{ms}^{-1}$, this is what should be used in design not $1.16 \times 10^{-4} \text{ms}^{-1}$. These trench soakaways have been removed and re-directed to the 9 no. ring soakaways. The catchment areas, design and drainage modelling outputs have all been updated.
3. The calculation for 5 ring soakaways use a diameter of 3m. Yet 2.7m diameter is specified on plan. Again calculations and details need to be consistent. The 5 no. ring soakaways have a diameter of 3.0m which is now reflected in both the plans and on the calculations.
4. Updated calculations for the 9 ring soakaways have not been provided and need to be. These are provided as attached.
5. Catchpits are not shown upstream of all connections into soakaways. These must be provided. Catchpits have been included upstream of all soakaways.
6. Cover levels at soakaways are not provided. These must be detailed. These are now included in the plans.
7. Catchpits need to be labelled with sump depths. Sump depths included in the plans.

8. Ring soakaway drawings need updating to show step irons, clean granular surround, geotextile, hole in base, etc. Please see attached document for an example.
A construction detail has been provided for the ring soakaways.
9. Construction detail drawings need to be provided of pipe bed and surround, manholes and catchpits.
Construction details for these items have been provided as attached.


We trust that the attached information is now sufficient. You requested a lot of new information in the last round of comments which we have provided and understand that you require it, however had it been mentioned in the first round of comments we could have provided these sooner, saving time. We believe that the attached now provides all the information you require to discharge the condition.

Kind Regards

James Bragg
Civil Engineer




Southampton Office



Lancaster Court, 8 Barnes Wallis Road, Fareham, Hampshire, PO15 5TU
 www.paulbashamassociates.com

Oxford Office



Cranbrook House, 287-291 Banbury Road, Oxford, OX2 7JQ
 www.paulbashamassociates.com

From: Laura Gibbons

Sent: 25 April 2019 16:46

To: Adam Shephard

Cc: Christian O'Brien

James Bragg

; Chris

Subject: RE: Windroos, Littlehampton

Hi Adam,

There are still some issues with the details:

1. There are inconsistencies between the modelled depths and depths shown on plan of soakaways. Furthermore, some of the soakaways have depths greater than the difference between the cover (nearby levels, levels not given at soakaway) and invert levels specified. Please ensure that minimum cover requirements are met and that details are consistent.
2. I am not happy with the infiltration rates used for soakaways 10 and 11. The nearest infiltration test gave a result of $1.04 \times 10^{-6} \text{ms}^{-1}$, this is what should be used in design not $1.16 \times 10^{-4} \text{ms}^{-1}$.
3. The calculation for 5 ring soakaways use a diameter of 3m. Yet 2.7m diameter is specified on plan. Again calculations and details need to be consistent.
4. Updated calculations for the 9 ring soakaways have not been provided and need to be.
5. Catchpits are not shown upstream of all connections into soakaways. These must be provided.

6. Cover levels at soakaways are not provided. These must be detailed.
7. Catchpits need to be labelled with sump depths.
8. Ring soakaway drawings need updating to show step irons, clean granular surround, geotextile, hole in base, etc. Please see attached document for an example.
9. Construction detail drawings need to be provided of pipe bed and surround, manholes and catchpits.

Overall, a lot of points are still outstanding. And I am unlikely to be able to dedicate further time to review for this app this week or next.

Thanks,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

From: Adam Shephard [REDACTED]
Sent: 24 April 2019 17:45
To: Laura Gibbons
Cc: Christian O'Brien; Rob Wilson; James Bragg; David Innes; Andrew Wood; Chris Harrison
Subject: RE: Windroos, Littlehampton

Hi Laura

Further to our discussion earlier, please see attached the updated files and Microdrainage outputs with a $C_v=0.75$ and the Factors of Safety of 3, 4 and 6.5 (for <100m², 100m² to 1000m², and >1000m² respectively), for 1 in 10, 30 and 100 year + 30%.

The trench soakaway catchment area for trench 08 is now also showing.

Thea attached should address all your previous comments, but please feel free to discuss if you have any questions on this.

Kind Regards

Adam Shephard
Principal Engineer
BEng MSc CEng MICE

Fareham Office



 p Lancaster Court, 8 Barnes Wallis Road, Fareham, Hampshire, PO15 5TU
 w www.paulbashamassociates.com

From: Laura Gibbons <[REDACTED]>

Sent: 23 April 2019 13:00

To: Adam Shephard <[REDACTED]>

Cc: Christian O'Brien <[REDACTED]>

James Bragg <[REDACTED]>

Subject: RE: Windroos, Littlehampton

Hi Adam,

Thank you for supplying the additional information. I have provided my comments in green:

1. ~~Agreed below~~
2. ~~Agreed below~~
3. All calculations are attached. Please provide calculations for the 1 in 30 year plus cc event and the 1 in 100 year plus cc event. Factors of safety etc. have changed since the previous calculations. These calculations are required in order to demonstrate adequate capacity is provided.
4. Catchment areas provided as attached drawings 147.5001.402 and 403. Catchments and destination infiltration structures are colour coded. Catchment areas are also provided that have been used for the calculations. The catchment area for SA08 isn't provided on the plan. I am currently experiencing problems with our plotters so haven't as yet managed to review catchment areas fully, I hope to do this later today or tomorrow (JT dependant).
5. Updated Microdrainage modelling calculations are attached. Each drained area total shown in 402/403 has had 10% added to allow for urban creep, which is the catchment area figure you will see in the outputs. Okay.
6. As mentioned below, the PCC soakaways for the southern catchment have been amended to the appropriate depth. Okay.
7. The strategy for the northern catchment has been updated. We have proposed 5 no. PCC ring soakaways in the vicinity of TP2 and the drainage system for the northern catchment all route to these. The infiltration rate from the ground investigation has been applied and the outputs attached show an appropriate half-drain time. Half drain times will be reviewed again following point 9 being addressed. As detailed in point 3, please provide results from other storm durations to demonstrate adequate capacity.
8. The half drain times attached for the 1 in 10 year storm plus 30% climate change are all now acceptable for the PCC ring soakaways and the rear garden trenches. Half drain times will be reviewed again following point 9 being addressed.
9. All factors of safety have been updated and used in line with the Arun drainage guidance (i.e. 2 for <100m², 3 for >100m²<1,000m², and 5 for >1,000m²) These are shown in the attached Microdrainage outputs. Factors of safety need revising, you are using a Cv of 0.75 not 1.

Thanks,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

[REDACTED]

From: Adam Shephard [REDACTED]
Sent: 18 April 2019 16:32
To: Laura Gibbons
Cc: Christian O'Brien; Rob Wilson; James Bragg; David Innes; Andrew Wood; Chris Harrison
Subject: RE: Windroos, Littlehampton

Hi Laura

Please see attached updates considering the previous comments. I have provided responses in the numbered list below- the numbers correspond to the numbers of the points you have raised previously in this thread. I haven't included all previous comments to avoid confusion:

1. Agreed below
2. Agreed below
3. All calculations are attached
4. Catchment areas provided as attached drawings 147.5001.402 and 403. Catchments and destination infiltration structures are colour coded. Catchment areas are also provided that have been used for the calculations.
5. Updated Microdrainage modelling calculations are attached. Each drained area total shown in 402/403 has had 10% added to allow for urban creep, which is the catchment area figure you will see in the outputs.
6. As mentioned below, the PCC soakaways for the southern catchment have been amended to the appropriate depth.
7. The strategy for the northern catchment has been updated. We have proposed 5 no. PCC ring soakaways in the vicinity of TP2 and the drainage system for the northern catchment all route to these. The infiltration rate from the ground investigation has been applied and the outputs attached show an appropriate half-drain time.
8. The half drain times attached for the 1 in 10 year storm plus 30% climate change are all now acceptable for the PCC ring soakaways and the rear garden trenches.
9. All factors of safety have been updated and used in line with the Arun drainage guidance (i.e. 2 for <100m², 3 for >100m²<1,000m², and 5 for >1,000m²) These are shown in the attached Microdrainage outputs.

Hopefully the above provides the information required but please do let me know if you would like to talk through this at all.

Kind Regards

Adam Shephard
Principal Engineer
BEng MSc CEng MICE

Fareham Office
[REDACTED]

 Lancaster Court, 8 Barnes Wallis Road, Fareham, Hampshire, PO15 5TU
 www.paulbashamassociates.com

From: Laura Gibbons <[REDACTED]>
Sent: 12 April 2019 10:00
To: Adam Shephard <[REDACTED]>
Cc: Christian O'Brien <[REDACTED]>
James Bragg <[REDACTED]> David Innes <[REDACTED]>


Subject: RE: Windroos, Littlehampton

Adam,

Comments below in *green*.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

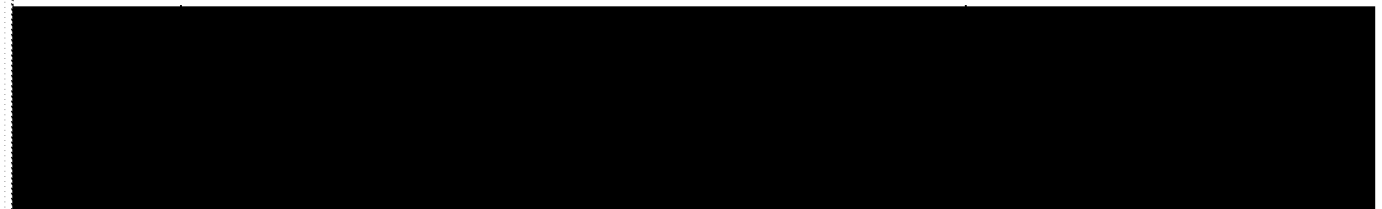

 Save the environment - think before you print.

From: Adam Shephard <[REDACTED]>
Sent: 11 April 2019 16:10
To: David Innes; Laura Gibbons; Andrew Wood
Cc: Christian O'Brien; Rob Wilson; James Bragg
Subject: RE: Windroos, Littlehampton

Good afternoon Laura,

Further to your correspondence with David and Christian, they have asked me to forward on some further information to you. I have therefore provided below and attached some additional commentary and information which should provide you with the clarity that is required.

Please see attached the updated drainage layout plan and calcs. The updates include the following in order to address the comments:

- Changing the ring soakaway size to 2.4mØ x 3.6m dp which addresses the comment from about suitability of the strata. This is adequate in terms of modelling which is also attached.
- Updating the trench soakaway references to have specific numbering which tie in with the attached modelling outputs from Microdrainage for them

Whilst the Microdrainage calculations for the northern crate show that the half-drain time for the 1 in 100 year storm +30% storm is not adequate, the infiltration crates have been oversized to double what they need to be, in effect after the 1 in 100 year storm they are already half-drained/at half capacity. This is the same approach to the strategy as when it was consented which was agreed on the above basis. For this design, there has been no change in approach.

The other point regarding the factors of safety has also been previously explained by James, in that the factors of safety are appropriate for the number of soakage tests undertaken.

Hopefully this clarifies everything and I trust the attached files and the below comments in my previous email are adequate.

As a direct response to the list you queried on:

Thank you for sending over the revised information. I have the following comments:

1. No on site winter groundwater monitoring results have been provided. These must be provided. Email from David clarifies that the council accepted the previous results *Noted, please note I only previously accepted these results because Tom had put in writing that he had. In future this level of monitoring and infiltration testing will not be accepted.*
2. Infiltration testing has not been completed in the winter or at the depth of proposed structures. Again this is a standard requirement of this condition and must be complied with. Email from David clarifies that the council accepted the previous results. *Noted, please note I only previously accepted these results because Tom had put in writing that he had. In future this level of monitoring and infiltration testing will not be accepted.*
3. Three sets of calculations have been provided, yet many infiltrating structures are proposed. Calculations must be submitted of the entire proposed drainage scheme. We provided a 'worst case' gravel infiltration soakaway calculation in the report but have now attached all of the microdrainage outputs for the scheme. *Please always supply all calculations.*
4. A catchment area plan should be provided. A catchment area plan is not included in the checklist, as this is a detailed design the pipe layout shows where all the surface water is being channelled to, a catchment plan would provide no additional information on top of this. *I do not understand how this is difficult to produce and provide as you should have been using it in design anyway. It is common place for us to ask for a catchment area plan on larger developments, they expedite our review. Please provide this.*
5. One of the sets of calculations provided does not seem to equate to anything proposed on paper. I.e. the modelled dimensions are not reflected on plan. All the calcs had a reference against the design but hopefully the provision of all of the gravel trench soakaways clears this up.
Please ensure that all calculation dimensions match up with those shown on plan. There are inconsistencies in:
Northern soakaway
Trench soakaway 1
Trench soakaway 3
Trench soakaway 4
Trench soakaway 5
Trench soakaway 6
Trench soakaway 8
Trench soakaway 9
Trench soakaway 10 -Please also provide 1 in 10 year plus cc event half drain time results.
Trench soakaway 11
Please also ensure that modelled cover and invert levels match with those shown on plan.
6. The ring soakaways are proposed to be located at 2m depth, yet rely on infiltration testing completed at 4.2m depth. The strata at these depths differs significantly. Again I stress the importance of completing winter infiltration testing at the proposed depth and location of infiltrating structures. We have provided a calculation for the specification of a ring soakaways at 3.6m depth with a 2.4m diameter, which is in the appropriate strata. The latter part of this point relates to the responses to points 1 and 2.
7. Having a half drain time in excess of 7 days is not acceptable. It must be demonstrated that proposed infiltrating structures half drain in less than 24 hours for the 10 year plus climate change event. If this cannot be demonstrated the design is unacceptable. The half drain time showed is for the 1 in 100 year storm. The strategy and specification for the northern crates has not changed from the consented scheme. We have previously provided

commentary on this and mentioned that during a 1 in 100 year storm, the infiltration crates fill up to less than 50% volume and therefore are in effect half-drained. This was accepted for the consented scheme and the approach has not changed. *Please provide half drain times for the 1 in 10 year plus climate change event. If you cannot get this half drain time to meet our requirements please look at providing a high level overflow to an area where better infiltration rates have been observed. My comments are fully in accordance with building regs, CIRIA, and WSCC policy for surface water drainage.*

8. Infiltration is proposed at locations where infiltration rates have been found to be less than $\times 10^{-6} \text{ms}^{-1}$. This is not advised. The sizing proposed is commensurate with the nearest infiltration rate that we have for the scheme and are therefore appropriately sized. Again, this strategy was accepted previously and has not changed. *See point 7 response above.*
9. Factors of safety used in design should be in accordance with the values set out in our surface water drainage checklist. This is applicable to any structure where infiltration is proposed/modelled through the base. We've previously advised that the factors of safety are suitable for the number of tests, the same factors of safety have been approved previously. *Please use the values set out in the checklist, you have not completed infiltration testing in the winter or at the depth of proposed structures, you are utilising infiltration through the base of structures, my requirements are therefore completely in line with CIRIA and I will not accept lower factors of safety.*

Kind Regards

Adam Shephard
Principal Engineer
BEng MSc CEng MICE

Fareham Office




 p Lancaster Court, 8 Barnes Wallis Road, Fareham, Hampshire, PO15 5TU
 w www.paulbashamassociates.com

Fareham | Oxford | Bristol | Cambridge

From: David Innes 

Sent: 08 April 2019 14:52



Subject: Fwd: Windroos, Littlehampton

Hi Laura,

Further to your comments received requesting winter monitoring I have included an email from yourself that confirmed that no further winter monitoring and percolation tests would be required.

We had sought and received this confirmation last September from yourself prior to Dandara purchasing the site as it would be a critical issue given the need to discharge all the pre-commencement conditions and make a legal start on site prior to the end of April.

A meeting is taking place today to address your other points so either PBA or myself will be in touch.

Regards

David Innes



Begin forwarded message:

From: Laura Gibbons <[REDACTED]>
Date: 14 September 2018 at 10:32:19 BST



Subject: RE: Windroos, Littlehampton LU/201/16/RES LU/229/10


Hi David,

Thanks for your email.

I can confirm that no further groundwater monitoring or percolation tests are required based on the information previously provided. A DOC application with the full surface water drainage scheme will need to be provided, which I will review.

Kind Regards,

Laura Gibbons, MEng, GMICE
Engineer (Drainage & Coastal)

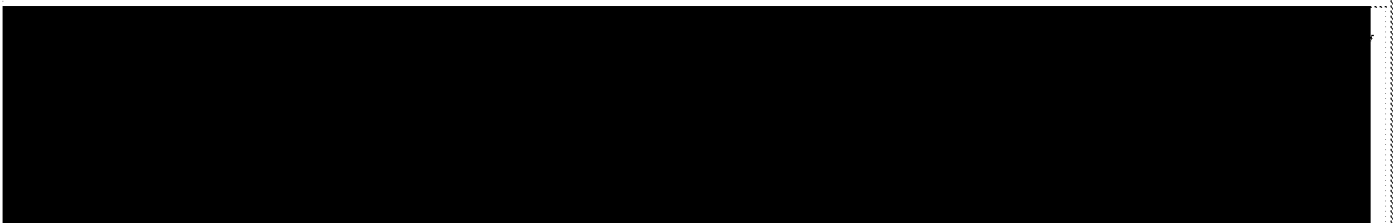

Save the environment. Think before you print.

From: Paul Cann
Sent: 10 September 2018 15:37
To: 'David Innes'
Cc: Laura Gibbons
Subject: RE: Windroos, Littlehampton LU/201/16/RES LU/229/10

Hi David

Good to hear from you!

My colleague Laura will be dealing with the application so I have copied her in so she can respond to you directly.

Regards

Paul Cann



Save the environment - think before you print.

From: David Innes [REDACTED]
Sent: 07 September 2018 11:25
To: Paul Cann
Subject: Windroos, Littlehampton LU/201/16/RES LU/229/10

Hi Paul,

I hope you are well.

Further to the phone message I have been asked to check with you the position regarding the drainage requirements for the Windroos site. You will see in the email below that Tom Callaway confirmed that the level of groundwater monitoring was sufficient.

The infiltration design had been included in the reserved matters. I have also included Tom's email of 15 March 2017 confirming the solution and for a DOC application to be submitted. There is no further requirement for monitoring on the basis of earlier submissions as confirmed by Tom.

The application expires on 5 May and the developer is seeking to get the DOC application in the very near future.


Can you confirm that you agree with this position.

regards

David Innes
[REDACTED]

Blueprint Planning & Development Ltd is registered in Scotland, SC361579.
Our Registered Office is c/o John Kerr & Co, Hamilton Street, Saltcoats KA21 5DS
This message is confidential and/or may be privileged or protected by other legal rules and is intended for a particular recipient only.
If you have received this message by mistake please notify us by return email. Do not copy this email message or disclose its contents to anyone else. Please then delete it from your system.

--Forwarded Message Attachment--



Subject: RE: Windroos Nursery -LU/229/10

Date: Thu, 10 Apr 2014 09:50:47 +0000

Dear Joseph

Thank you for forwarding the information.

I am happy with the amount of groundwater monitoring done, and if the wording of the condition needs to be adjusted I have no problem with that. Results from February 2014 are likely to show high groundwater readings, which would be sufficient to design to.


Any further soakaway testing should take place where you would hope to be installing the soakaways and at the same level that you would hope to be installing them. This should be at a greater level than the highest recorded groundwater level from the monitoring. We do not wish to see surface water being discharged to the sewer.

The detailed drainage design is required in advance of clearing the condition, and should show that the system can contain the 1 in 100 year storm event plus 30%, with a half-drain time of up to 24 hours. The base of the soakaways should not be below the highest recorded groundwater level. Soakaways should be designed to the slowest infiltration rate of the nearest test pit where possible.

I would recommend submitting a design with the revised soakaway test results so that it can be initially checked before submitting a DOC application.

Regards

Tom Callaway

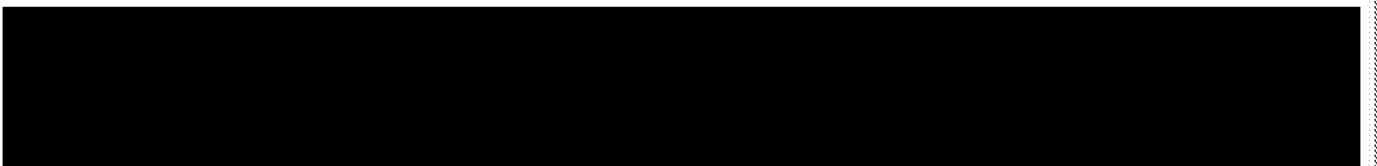

Arun is Working in Partnership with Chichester District Council

Visit our web site at www.arun.gov.uk and www.chichester.gov.uk



Save the environment - think before you print.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The

Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.

<http://www.arun.gov.uk>

DX 57406 Littlehampton

You can view Arun District Council's Privacy Policy from <https://www.arun.gov.uk/privacy-policy>

Important Notice This e-mail is intended exclusively for the addressee and may contain information that is confidential and/or privileged. If you are not the intended recipient (or authorised to receive it for the addressee), please notify the sender and delete the e-mail immediately; using, copying, or disclosing it to anyone else, is strictly prohibited and may be unlawful. Any views, opinions or options presented are solely those of the author and do not necessarily represent those of Arun District Council. The information in this e-mail may be subject to public disclosure under the Freedom of Information Act 2000, therefore we cannot guarantee that we will not provide the whole or part of this e-mail to a third party. The Council reserves the right to monitor e-mails in accordance with relevant legislation. Whilst outgoing e-mails are checked for viruses, we cannot guarantee this e-mail is virus-free or has not been intercepted or changed and we do not accept liability for any damage caused. Any reference to "e-mail" in this disclaimer includes any attachments.
