

FIRE STRATEGY LEGEND:

DB32 Fire Appliance
 Overall Length 8.680m
 Overall Width 2.180m
 Overall Body Height 3.452m
 Min Body Ground Clearance 0.337m
 Max Track Width 2.121m
 Lock to lock time 6.00s
 Kerb to Kerb Turning Radius 7.910m

Length of access route for a pump appliance to furthest point of house. (max 45m)

DR Approx. Dry Riser position

BIN COLLECTION LEGEND:

Phoenix 2 Duo (P2-12W with Elite 6x4 chassis)
 Overall Length 10.200m
 Overall Width 2.530m
 Overall Body Height 3.751m
 Min Body Ground Clearance 0.304m
 Max Track Width 2.500m
 Lock to lock time 4.00s
 Kerb to Kerb Turning Radius 7.800m


REFUSE STRATEGY:

Private Refuse storage for houses is generally located in rear gardens, and moved by residents on collection day, to kerbside (on curtilage) or communal refuse collection points.

Private Refuse collection is from within the property boundary, adjacent to the highway or from communal refuse collection points.

Travel Distances
 Operatives generally 15m, maximum 25m
 Residents Carry / wheeled maximum 30m

Scale bar (1:500)
 0m 10m 20m 30m

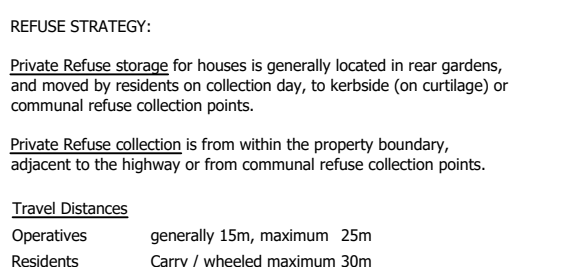

Site Address: Local Centre
Hampton Park
Littlehampton

Client: Persimmon Homes [Thames Valley]

Status:	PLANNING	Rev. B
Scale. 1-500 @ A1	Project No. 011042	Dwg No. PL - 109
Date: 28.11.2025	Drawn By. ST	Chk. AS

