


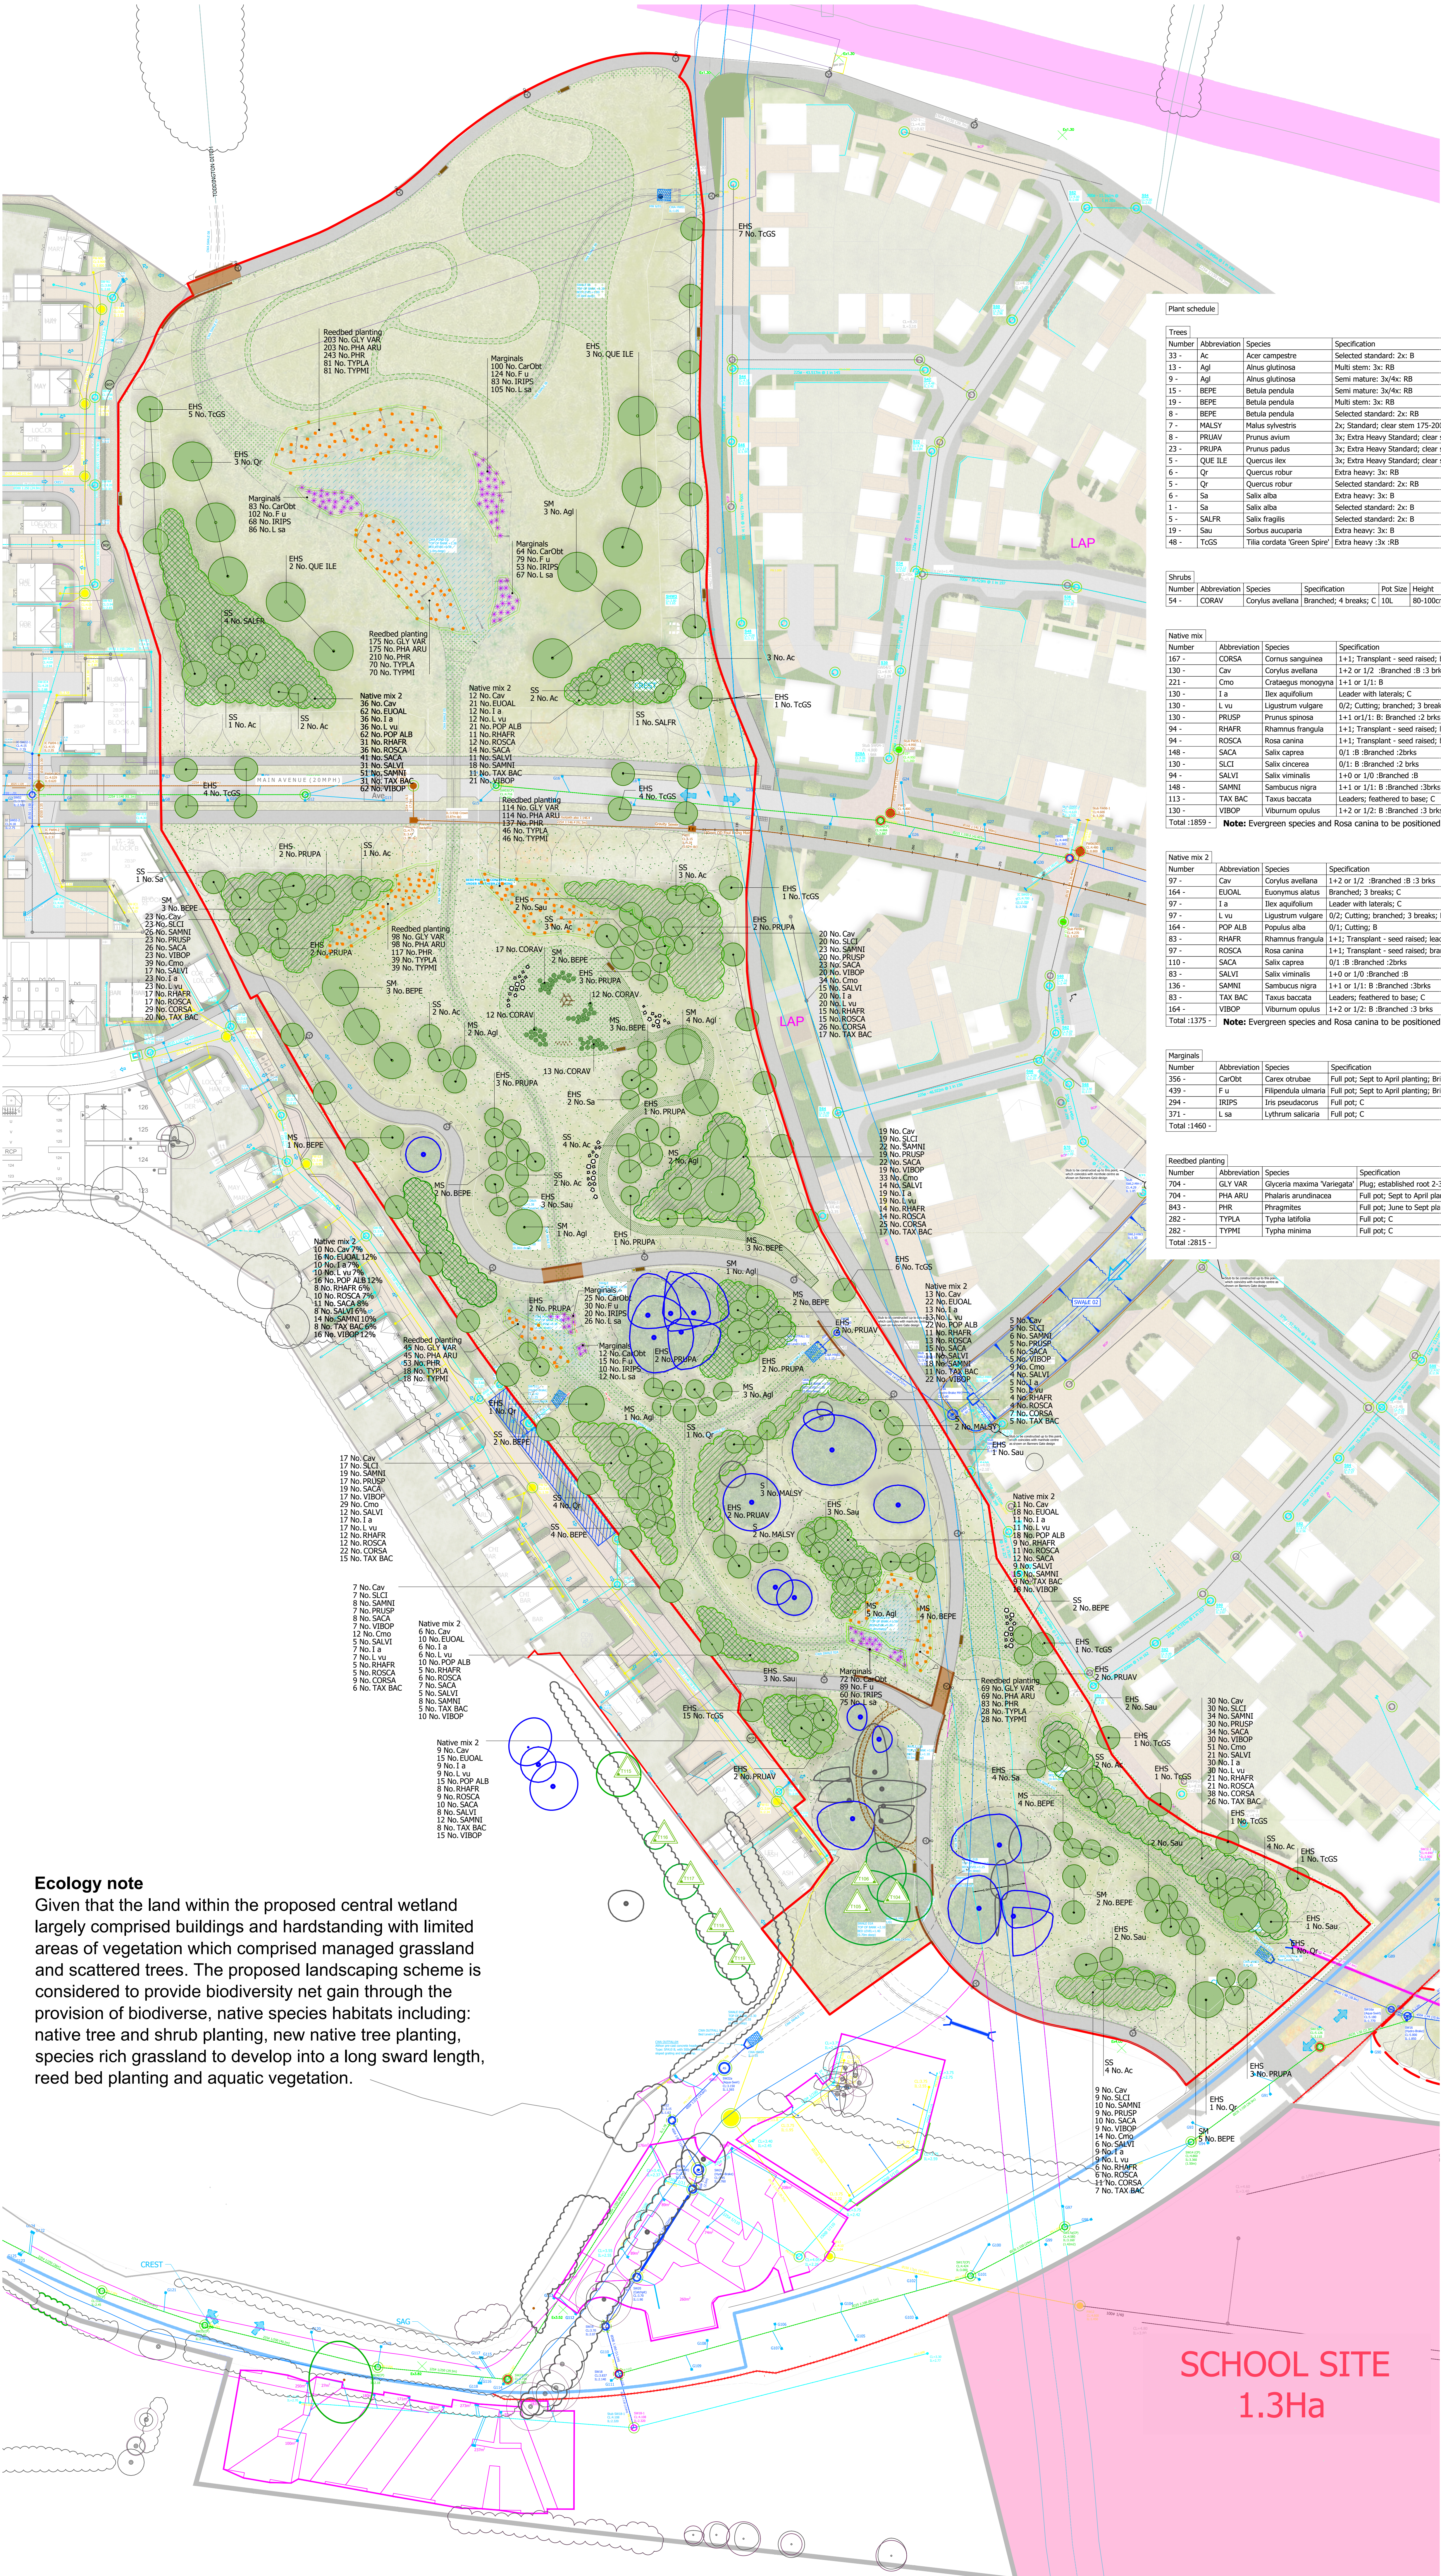

Plant schedule

Trees						
Number	Abbreviation	Species	Specification	Grth	Height	
33	Ac	Acer campestre	Selected standard: 2x: B		10-12cm	300-350cm
13	Ag	Alnus glutinosa	Multi stem: 3x: RB		20-25cm	550-600cm
9	Ag	Alnus glutinosa	Semi mature: 3x/4x: RB		20-25cm	550-600cm
15	BEPE	Betula pendula	Semi mature: 3x/4x: RB		20-25cm	550-600cm
19	BEPE	Betula pendula	Multi stem: 3x: RB		20-25cm	550-600cm
9	BEPE	Betula pendula	Selected standard: 2x: RB		10-12cm	300-350cm
7	MALSY	Malus sylvestris	2x: Standard; clear stem 175-200cm; 4 breaks; B		6-10cm	250-300cm
8	PRUAV	Prunus avium	3x; Extra Heavy Standard; clear stem 175-200cm; 5 breaks; B		14-16cm	400-450cm
23	PRUAP	Prunus padus	3x; Extra Heavy Standard; clear stem 175-200cm; 5 breaks; RB		14-16cm	400-450cm
5	QUE ILE	Quercus ilex	3x; Extra Heavy Standard; clear stem 175-200cm; RB		18-20cm	450-625cm
6	Qr	Quercus robur	Extra heavy: 3x: RB		18-20cm	450-600cm
5	Qr	Quercus robur	Selected standard: 2x: RB		10-12cm	300-350cm
6	Sa	Salix alba	Extra heavy: 3x: B		16-18cm	400-450cm
1	Sa	Salix alba	Selected standard: 2x: B		10-12cm	300-350cm
5	SALFR	Salix fragilis	Selected standard: 2x: B		10-12cm	300-350cm
19	Sau	Sorbus aucuparia	Extra heavy: 3x: B		16-18cm	400-450cm
48	TcGS	Tilia cordata 'Green Spire'	Extra heavy :3x :RB		16-18cm	450-500cm

Shrubs

Number	Abbreviation	Species	Specification	Pot Size	Height	Density
54	CORAV	Corylus avellana	Branched; 4 breaks; C	10L	80-100cm	Counted

Native mix

Number	Abbreviation	Species	Specification	Height	Pot Size	Density	Percentage Contribution
167	CORSA	Cornus sanguinea	1+1; Transplant - seed raised; branched; 3 breaks; B	60-80cm	1.25Cr	9%	
130	Cav	Corylus avellana	1+2 or 1/2 :Branched :B :3 brks	60-80cm	1.25Cr	7%	
221	Cmo	Cotoneaster monogyna	1+1 or 1/1 :B	60-80cm	1.25Cr	12%	
130	1a	Ilex aquifolium	Leader with laterals; C	60-80cm	3L	1.25Cr	7%
130	Lvu	Ligustrum vulgare	0/2; Cutting; branched; 3 breaks; B	60-80cm	1.25Cr	7%	
130	PRUSP	Prunus spinosa	1+1 or 1/1 :B :Branched :2 brks	60-80cm	1.25Cr	7%	
94	RHAFR	Rhamnus frangula	1+1; Transplant - seed raised; leader with laterals; 3 breaks; B	60-80cm	1.25Cr	5%	
94	ROSCA	Rosa canina	1+1; Transplant - seed raised; branched; 3 breaks; B	60-80cm	1.25Cr	5%	
148	SACA	Salix caprea	0/1 :B :Branched :2 brks	60-80cm	1.25Cr	9%	
130	SLCI	Salix cinerea	0/1 :B :Branched :2 brks	60-80cm	1.25Cr	7%	
94	SALVI	Salix viminalis	1+0 or 1/0 :Branched :B	30-40cm	1.25Cr	5%	
148	SAMNI	Sambucus nigra	1+1 or 1/1 :B :Branched :3 brks	60-80cm	1.25Cr	10%	
113	TAX BAC	Taxus baccata	Leaders; feathered to base; C	40-60cm	3L	1.25Cr	6%
130	VIBOP	Viburnum opulus	1+2 or 1/2 :B :Branched :3 brks	60-80cm	1.25Cr	7%	
Total :1859 - Note: Evergreen species and Rosa canina to be positioned on drier land							

Native mix 2

Number	Abbreviation	Species	Specification	Density	Pot Size	Height	Percentage Contribution
97	Cav	Corylus avellana	1+2 or 1/2 :Branched :B :3 brks	1.25Cr		60-80cm	7%
164	EUOAL	Eucalyptus alatus	Branched; 3 breaks; C	1.25Cr	3L	30-40cm	12%
97	1a	Ilex aquifolium	Leader with laterals; C	1.25Cr	3L	60-80cm	7%
97	Lvu	Ligustrum vulgare	0/2; Cutting; branched; 3 breaks; B	1.25Cr		60-80cm	7%
164	POP ALB	Populus alba	0/1; Cutting; B	1.25Cr		60-80cm	12%
83	RHAFR	Rhamnus frangula	1+1; Transplant - seed raised; leader with laterals; 3 breaks; B	1.25Cr		60-80cm	6%
97	ROSCA	Rosa canina	1+1; Transplant - seed raised; branched; 3 breaks; B	1.25Cr		60-80cm	7%
110	SACA	Salix caprea	0/1 :B :Branched :2 brks	1.25Cr		60-80cm	8%
83	SALVI	Salix viminalis	1+0 or 1/0 :Branched :B	1.25Cr		30-40cm	6%
136	SAMNI	Sambucus nigra	1+1 or 1/1 :B :Branched :3 brks	1.25Cr		60-80cm	10%
83	TAX BAC	Taxus baccata	Leaders; feathered to base; C	1.25Cr	3L	40-60cm	6%
164	VIBOP	Viburnum opulus	1+2 or 1/2 :B :Branched :3 brks	1.25Cr		60-80cm	12%
Total :1375 - Note: Evergreen species and Rosa canina to be positioned on drier land							

Marginals

Number	Abbreviation	Species	Specification	Pot Size	Density	Percentage Contribution
356	CarObt	Carex otrubae	Full pot; Sept to April planting; British native-origin; C	1L	0.5Cr	30%
439	Fu	Filipendula ulmaria	Full pot; Sept to April planting; British native-origin; C	1L	0.45Cr	30%
294	IRIPS	Iris pseudacorus	Full pot; C	0.5L	0.45Cr	20%
371	Lsa	Lythrum salicaria	Full pot; C	0.5L	0.4Cr	20%
Total :1460 -						

Reedbed planting

Number	Abbreviation	Species	Specification	Pot Size	Density	Percentage Contribution
704	GLY VAR	Glyceria maxima 'Variegata'	Plug; established root 2-3 months minimum; Sept to April planting; British native-origin; 50cm min	0.7Cr	25%	
704	PHARU	Phalaris arundinacea	Full pot; Sept to April planting; British native-origin; C	1-1.5L	0.7Cr	25%
843	PHR	Phragmites	Full pot; June to Sept planting; British native-origin; C	1-1.5L	0.7Cr	30%
282	TYPLA	Typha latifolia	Full pot; C	1L	0.7Cr	10%
282	TYPMI	Typha minima	Full pot; C	1L	0.7Cr	10%
Total :2815 -						

- S: Standard
SS: Selected Standard
HS: Heavy Standard
EHS: Extra Heavy Standard
SM: Semi Mature
SM: Multi-Stem
- Existing Category A trees to be retained
- Existing Category B trees to be retained
- Existing Category C trees to be retained
- Root protection areas of existing trees
- Native tree and shrub planting: whips/transplants to be implemented from day 1.
- Native mix 2: tree and shrub planting: whips/transplants to be implemented from day 1.
- Proposed native tree planting: Standard/ Selected Standard/ Heavy Standard/ Extra Heavy Standard/ Semi-mature sizes/ Multi-stem to be implemented from day 1.
- Proposed species-rich grass/ natural regeneration: to be kept long and cut once a year
- Proposed species-rich grass: to be kept short and cut regularly throughout the year
- Grass reinforcement
- Hazel coppice
- Reed bed planting/ natural regeneration
- Marginal aquatics
- Bark mulch path through trees with stone edging. No dig through trees
- Pond to capture and hold water for interest
- Lighting columns
- Timber bench (9no. including along top edge of wetland)
- Bin (9no. including along top edge of wetland)
- Jupiter Play (or similar) Trunk Pile
- Jupiter Play (or similar) Stepping Stilts
- Boulders
- Protection to shared use path: 1.5m high post and 3 rail timber fence