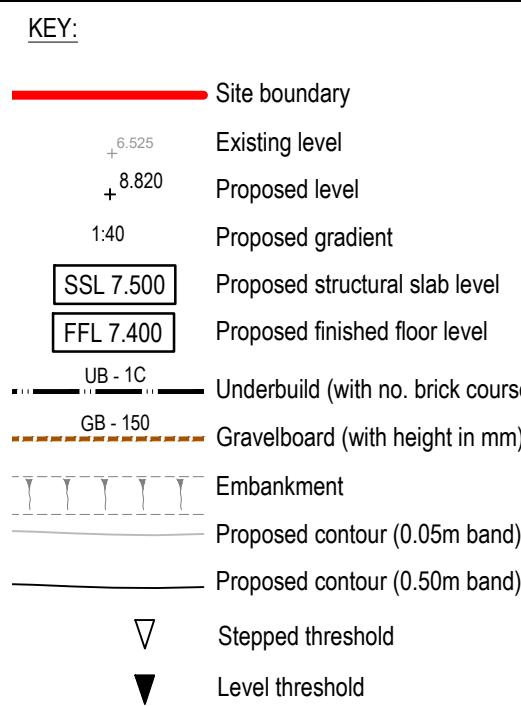
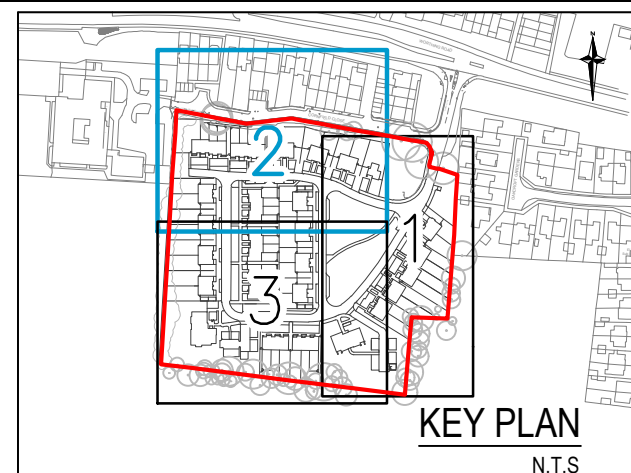
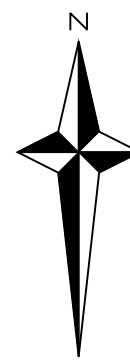


**CRATE SOAKAWAY NOTES:**

- Refer to Drainage Details Sheet 2 and 4 (M637_15.005 and 15.007) for soakaway construction details and installation guidance.
- Construction detail and product specifications to be approved by Polypipe prior to construction. All Polypipe units to be installed in accordance with Polypipe installation guidance, and where necessary the manufacturer should be consulted prior to installation.
- 1 no. Polystorm Access Manhole to be provided per inlet and outlet as shown, for use for inspection only. Maintenance activities, such as rodding and flushing, to be carried out from inlet manholes S1, S10, S20 and S30, and outlet manhole S40.
- The functioning of the soakaway structure relies upon the continued appropriate maintenance of all upstream catchpits and silt traps. All features to be maintained in accordance with the Management and Maintenance Plan.

SOAKAWAY CONSTRUCTION PRECAUTIONS

Many soakaway failures result from actions carried out during the construction process.

All infiltration devices should be protected from contamination by silt, cement washings etc. during the construction period.

It is recommended that until all construction works have been completed within the contributory areas, that the manholes upstream of the soakaway are used as catchpits and regularly inspected and cleaned throughout the construction process.

REF:	CHAMBER TYPE:
RE	Rodding Eye
CP	Catchpit / Silt Trap
RCP	Ridgstorm Catchpit
T1-CP	Type 1 Manhole - Catchpit
T3	Type 3 Inspection Chamber
T4	Type 4 Inspection Chamber
RAM	Ridgstorm Access Manhole



CHAMBER REFERENCE:	S41
FLOW CONTROL TYPE:	HydroBrake Optimum
MANUFACTURER UNIT REFERENCE:	SHE-0037-7000-1200-7000
DISCHARGE RATE:	0.7 l/s
DESIGN HEAD:	1.20m

Drawing reference no.
M637_11.001 - 11.005
M637_12.001
M637_13.001/13.002/13.003/13.004
M637_14.001/14.002/14.003/14.004
M637_15.001/15.002/15.003
M637_15.004/15.005/15.006/15.007
M637_16.001
M637_16.002
M637_17.001/17.002
M637_18.001/18.002/18.003/18.004
THA21635-03A
GY46241/1001A

Drawing Title
- Setting Out
- Longitudinal Sections
- Technical Layout
- Surface Finishes Layout
- Engineering Details
- Drainage Details
- Out and Fill
- Tensar Geogrid Plan
- S278 Agreement Plans
- Combined Services
- Tree Protection Plan, 2018.08.11
ACD Environmental
- Topographical Survey, 2017.11.27
Sunshine Survey Ltd

NOTES:

- This drawing is to be read in conjunction with all other drawings and specifications.
- Any discrepancies found between information shown on this or any other drawing shall be reported to the Engineer immediately and prior to works commencing on site.
- Dimensions not to be scaled.
- All works to be to Building Regulations Part H and Part M(1).
- This drawing details all below ground drainage up to finish floor level. For details of drainage above finish floor levels refer to Architect's drawings.
- Refer to Architects drawings for rain water pipe locations.
- All stack connections under buildings to be 100mmØ at minimum gradient of 1 in 40 (SVP) or 1 in 30 (FS) unless otherwise noted.
- All RWP's to be provided with above ground roddable access points.
- Where pipe diameters and gradients are not shown, foul and surface water pipes to be 100mm laid at a minimum gradient of 1:60 unless otherwise noted.
- Private pipework to be plastic up to 450mm diameter and comply with BS EN 13476 and WIS 4-35-01 v2. Pipes shall be BSI Kitemarked, or have equivalent third party certification.
- All pipework shall join at soffit level unless otherwise stated on drawing or schedules.
- Refer to Table 1 for chamber type key. Where chamber types are not shown, chamber to be Type 3 (>2m deep) or Type 4 (<2m deep) inspection chamber.
- Cover grade of chambers with depth to invert >1.2m to be D400. Cover grade of chambers with depth to invert <1.2m, refer to Table C of Drainage Details Sheet 3 (M637_15.006).
- For all other details of manhole, inspection chamber and cover sizing and specification refer to Drainage Details Sheets 3 and 4 (M637_15.006/15.007).
- All manhole / inspection chamber covers to be installed parallel to final kerbs, edgings, paving joints or building lines as appropriate. Cover levels are approximate only. All covers to be set flush with finished surface.
- Invert levels of existing chambers have been taken from third party information and should be confirmed onsite prior to commencement of drainage works. Any discrepancies in the levels of the drainage should be reported immediately to the Engineer.
- Threshold drains to be provided according to Architect's details.
- Gravelboard heights indicative only and to be used where retained heights at property boundaries are 600mm or less.
- Proposed road levels provided at channel level unless noted otherwise.
- It is to the contractor's responsibility to ensure that all services that are affected by the works are located prior to works commencing. Trial holes are to be dug if necessary.
- Existing drainage that will serve no purpose post development is to be either removed or suitably stopped up by end capping or in infilling with concrete with no hindrance to the retained system.
- Drainage works in connection to the existing foul Southern Water sewer to be undertaken by the chosen contractor under Section 106 of the Water Industry Act 1991. The contractor is to arrange for final inspection of the adoptable works with Southern Water Developer Services (Tel. 01962 716042).
- Buried concrete to be Design Sulphate Class DS-2 and ACEC AC-2 within Made Ground, and DS-1 and AC-1 within River Terrace Deposits or Chalk Bedrock.

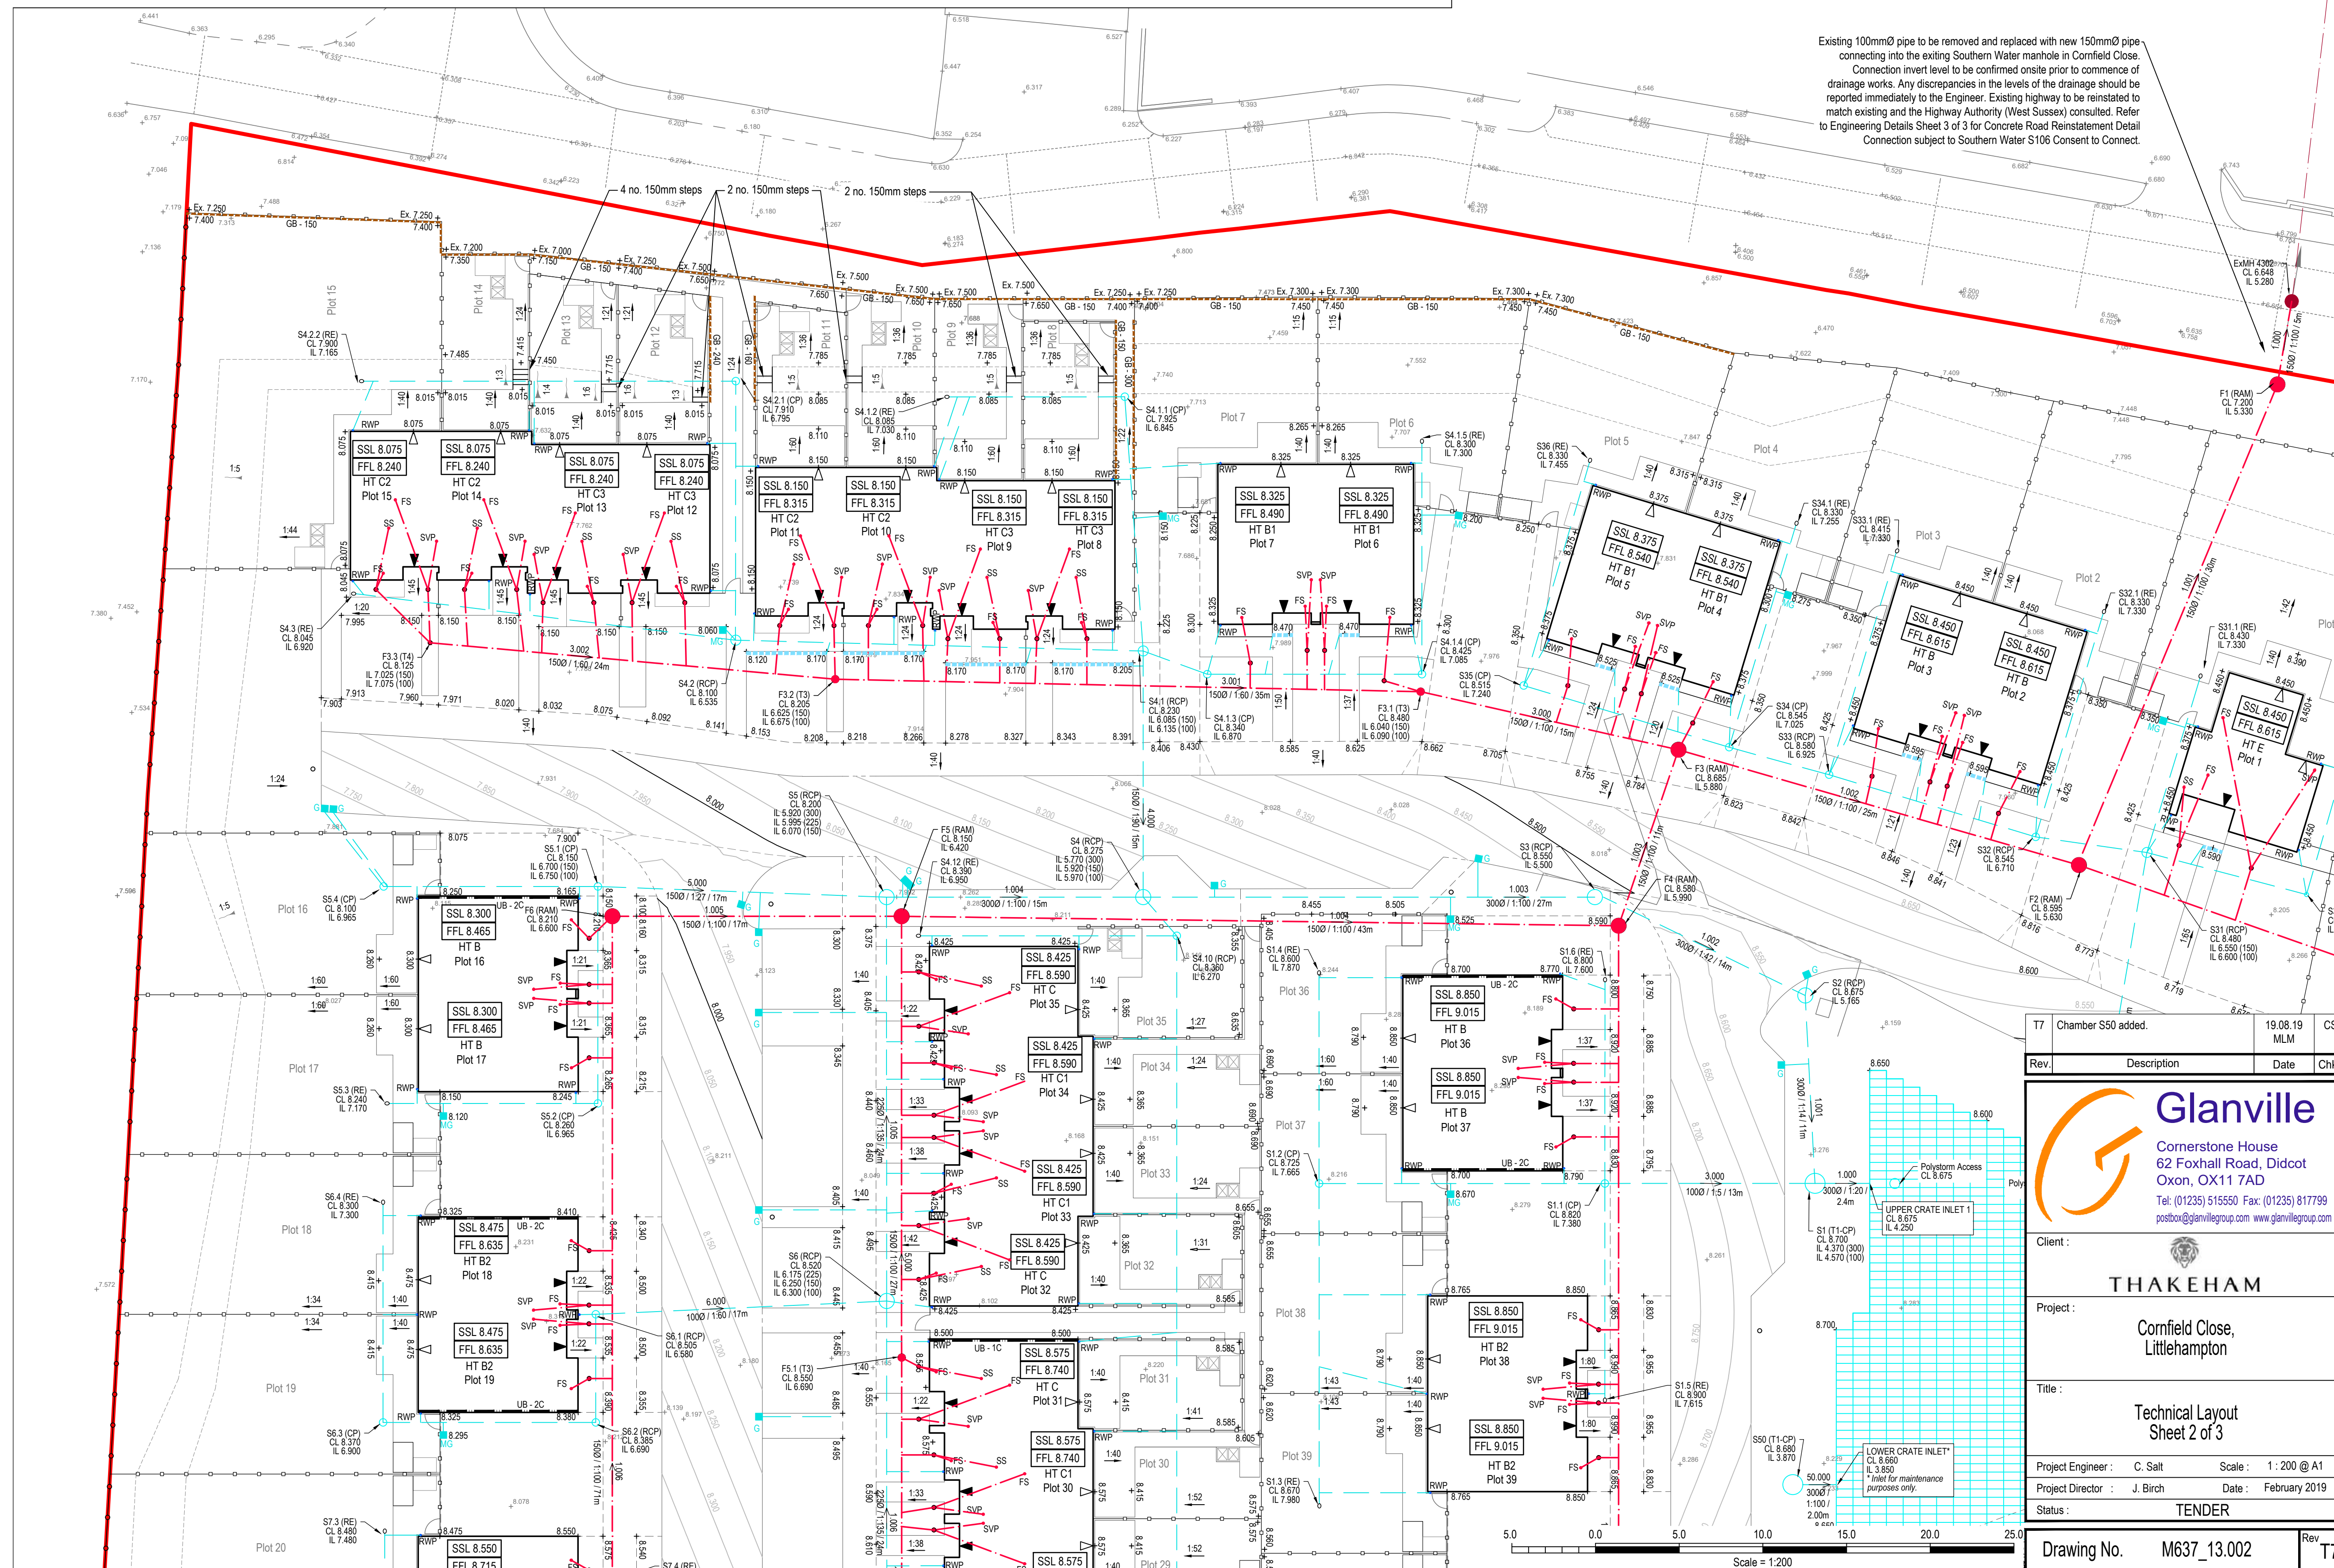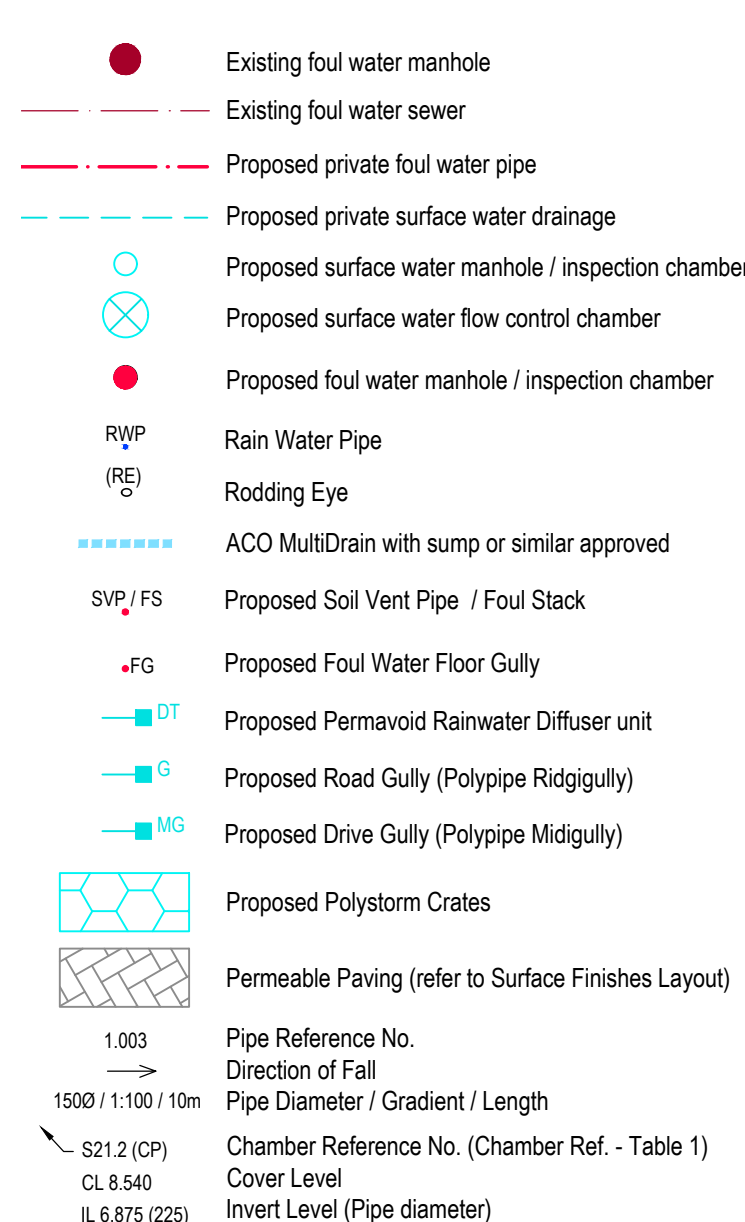KEY:

Rev.	Description	Date	Chkd
T7	Chamber S50 added.	19.08.19	MLM

Glanville
Cornerstone House
62 Foxhall Road, Didcot
Oxon, OX11 7AD
Tel. (01235) 515550 Fax: (01235) 817799
postbox@glanvillegroup.com www.glanvillegroup.com

Client: **THAKEHAM**

Project: **Cornfield Close, Littlehampton**

Title: **Technical Layout Sheet 2 of 3**

Project Engineer: C. Salt Scale: 1:200 @ A1
Project Director: J. Birch Date: February 2019
Status: **TENDER**

Drawing No. **M637_13.002** Rev **T7**