


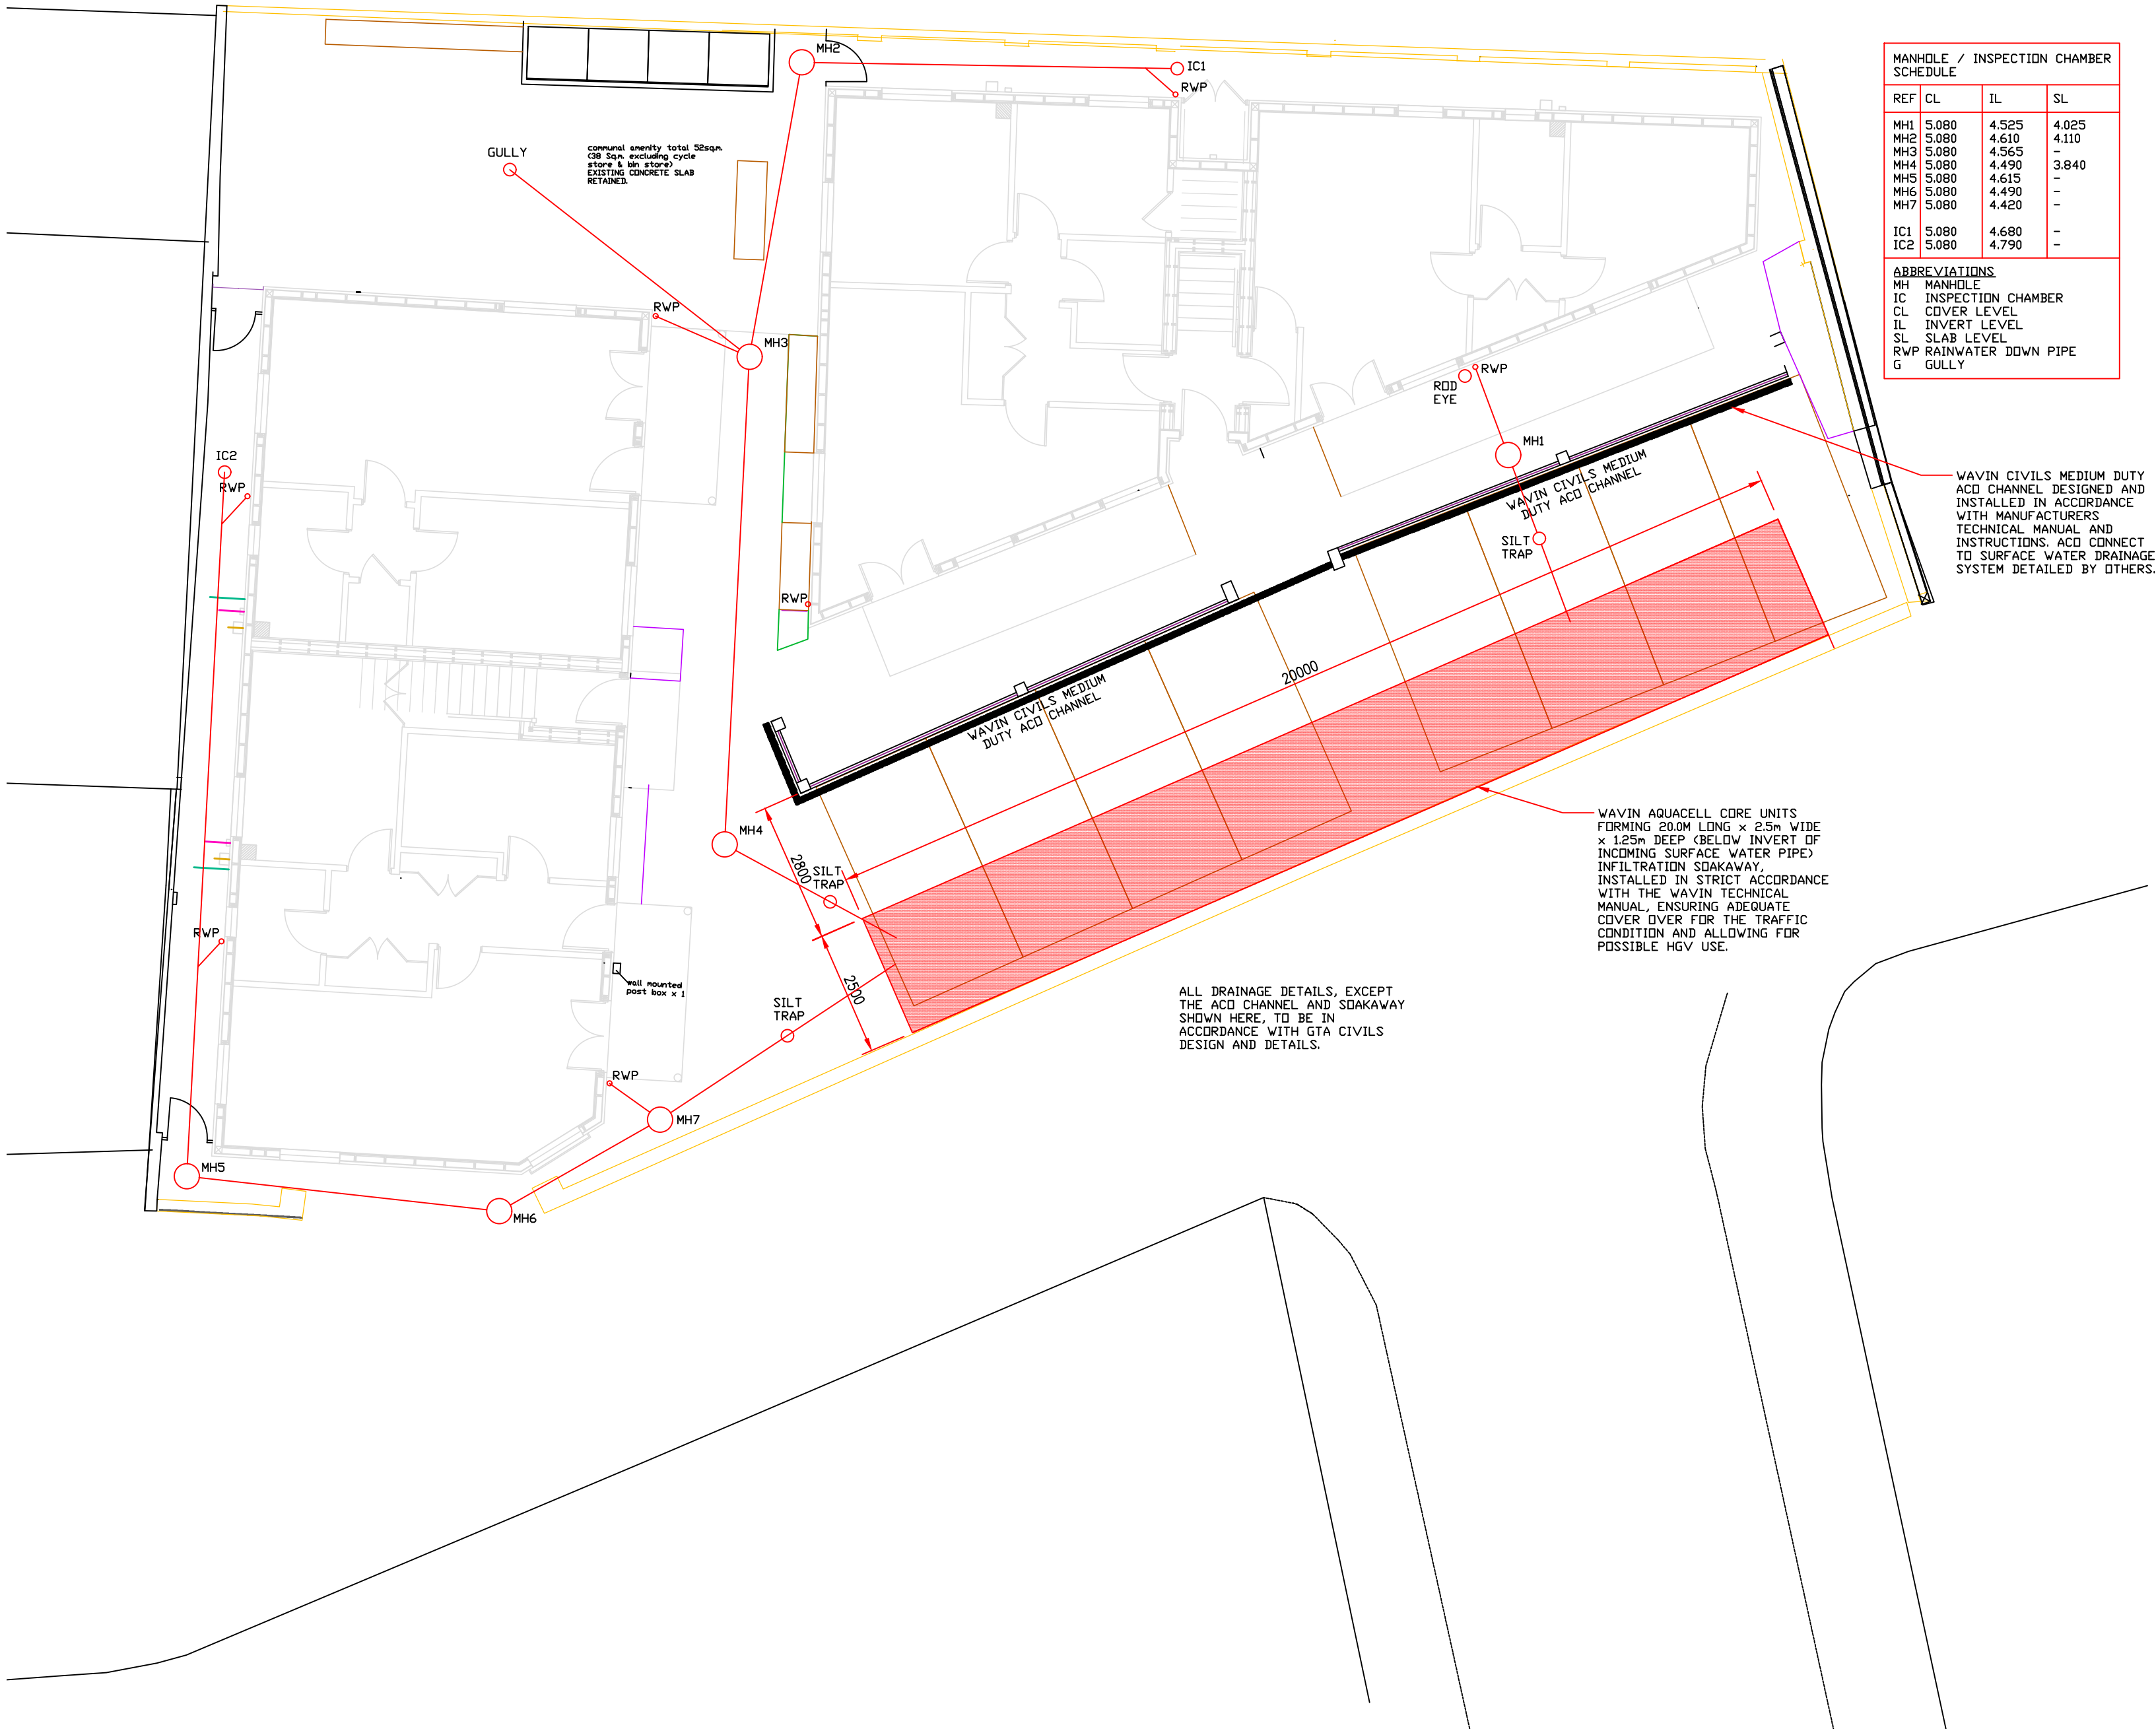

MANHOLE / INSPECTION CHAMBER SCHEDULE			
REF	CL	IL	SL
MH1	5.080	4.525	4.025
MH2	5.080	4.610	4.110
MH3	5.080	4.565	-
MH4	5.080	4.490	3.840
MH5	5.080	4.615	-
MH6	5.080	4.490	-
MH7	5.080	4.420	-
IC1	5.080	4.680	-
IC2	5.080	4.790	-

ABBREVIATIONS
MH MANHOLE
IC INSPECTION CHAMBER
CL COVER LEVEL
IL INVERT LEVEL
SL SLAB LEVEL
RWP RAINWATER DOWN PIPE
G GULLY

- GENERAL NOTES:
- DIMENSIONS ON THIS DRAWING SHALL NOT BE SCALED. ALL DIMENSIONS TO BE CHECKED ON SITE. ALL DETAILS AND DIMENSIONING RELATING TO SUB-CONTRACTOR'S OR SUPPLIER'S WORK MUST BE CHECKED AND AGREED BETWEEN THE SUB-CONTRACTOR OR THE SUPPLIER AND THE GENERAL CONTRACTOR.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECT'S AND ENGINEERS DRAWINGS AND SPECIFICATION.
 - THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL SITE DIMENSIONS BEFORE COMMENCING WORK.
 - THE MAIN CONTRACTOR IS RESPONSIBLE FOR ENSURING THE STABILITY OF THE STRUCTURE WHILST THE WORKS ARE IN PROGRESS.
 - DIFFERENCES BETWEEN THIS DRAWING AND THE SITE CONDITIONS ENCOUNTERED MUST BE REPORTED TO THE ENGINEER.
 - REFER TO NOTES AND CALCULATIONS ALSO.

SAFETY, HEALTH & ENVIRONMENTAL ISSUES ⚠

THE FOLLOWING ITEMS ARE CONSIDERED BY THE DESIGNER TO BE A SIGNIFICANT RISK DURING CONSTRUCTION.

THE LIST IS NOT EXHAUSTIVE BUT HAS BEEN PREPARED TO COMMUNICATE RISKS WHICH HAVE BEEN IDENTIFIED DURING THE DESIGN PROCESS. FOR FURTHER INFORMATION REFER TO THE DESIGN HAZARD INVENTORY.

- DEEP EXCAVATIONS – RISK OF COLLAPSE AND FALLS INTO EXCAVATIONS. CONTRACTOR TO ONLY EXCAVATE DEEP FOUNDATIONS BY MACHINE AND NOT BY HAND. NO PERSONNEL TO ENTER EXCAVATIONS. EXCAVATIONS TO BE BOARDED OVER &/OR PROTECTED BY TEMPORARY FENCING.

PREFIXES TO DRAWING NUMBERS SHALL SIGNIFY THE FOLLOWING :-

- P = PRELIMINARY SHALL NOT BE USED FOR CONTRACT OR CONSTRUCTION PURPOSES.
- T = TENDER SHALL NOT BE USED FOR CONSTRUCTION PURPOSES.
- C = CONSTRUCTION THESE ARE THE ONLY DRAWINGS THAT SHALL BE USED FOR CONSTRUCTION PURPOSES.
- R = RECORD RECORD OF ACTUAL COMPLETED WORK.

REV	DATE	DESCRIPTION	BY	CHK	APP
P3	22.11.19	DRAINAGE INFORMATION FROM CLIENT ADDED TO PLAN WITH LEVELS.	PSG	PSG	
P2	21.11.19	AMENDMENTS FOLLOWING QUERIES AND REVISED DESIGN.	PSG	PSG	
P1	07.10.19	ISSUED FOR BUILDING REGULATIONS APPROVAL.	PSG	PSG	



Paul Grinyer Associates Ltd
Structural Engineers
& Party Wall Surveyors

17 HIGHLANDS ROAD, PORTSLADE
BRIGHTON
EAST SUSSEX, BN3 4EF
T: 07771 516905
E: paul@pgassociatesltd.co.uk
W: www.pgassociatesltd.co.uk

CLIENT	FUTURE FMC LIMITED
ARCHITECT	ADCS
JOB TITLE	LINDEN PARK LITTLEHAMPTON BN17 7BJ

DRAWING TITLE

SOAKAWAY DESIGN ALTERNATIVE TO PERMEABLE PAVED INFILTRATION SYSTEM

DRAWN PSG	ENGINEER PG	CHECKED -	APP. -
DATE OCTOBER 19		SCALE @ A2 1:100	
JOB No. 19119	STATUS P	DRAWING No. 001	REV. 3