
DRAWING LIST

04	– Hard landscaping Layout
502/1	– Engineering layout sheet 1
502/2	– Engineering layout sheet 2
503/1	– Road & Sewer section sheet 1
503/2	– Road & Sewer section sheet 2
504/1	– Typical road details sheet 1
504/2	– Typical Road Details sheet 2
505	– Typical sewer details
506	– Private drive details
507	– Private parking court details
508	– Private footpath details
509	– Typical UPVC house drainage details
510	– Private regrade details
511	– Typical services details
512/1	– Services Layout Sheet 1
512/2	– Services Layout Sheet 2
513	– Trench soakaway details
514	– Kerb details

ENGINEERING LAYOUTS SHOULD BE USED FOR:
All adoptable sewer & highway works – position & level
All private building drainage – position & level
All regrade & retaining works – position & height
Road names & postal numbers
Street lighting & other street furniture / signage

ENGINEERING LAYOUTS SHOULD NOT BE USED FOR:
Fencing & drive positions or materials
Private house paths or patios
House types & positions

Where gravel boards have been utilised post length to be increased accordingly to ensure minimum 600mm embedment in the natural ground on the low side.

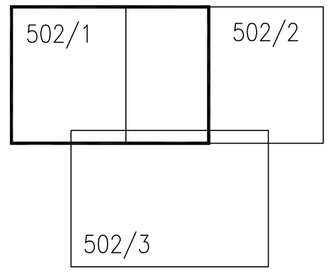


Sheet Layout

SREET LIGHTING SPECIFICATION – PROVISIONAL

Lighting Columns : 6m straight shaft (no outreach bracket), polymer coated (12B21)
Lanterns : WRTL Performer with 36W PLL lamp and dimming ballast HF-R-DALI, fitted with Mayflower six-pin NEMA socket, post top mounted set with no tilt (0 degrees)
Switch controls : Mayflower Intelligent Management Systems (MIMS) remote monitoring Node to plug into six-pin NEMA socket in each lantern.
Dimming : 25% dimming at dusk, 50% dimming at midnight.

Installation & erection shall be carried out in compliance with the current edition of the Hampshire County Council Specification & Electrical Safety Policy, the current edition of BS7671, all relevant British Standards & the Code of Practice for the Erection of Street Lighting equipment published by the Association of Street Lighting Contractors.

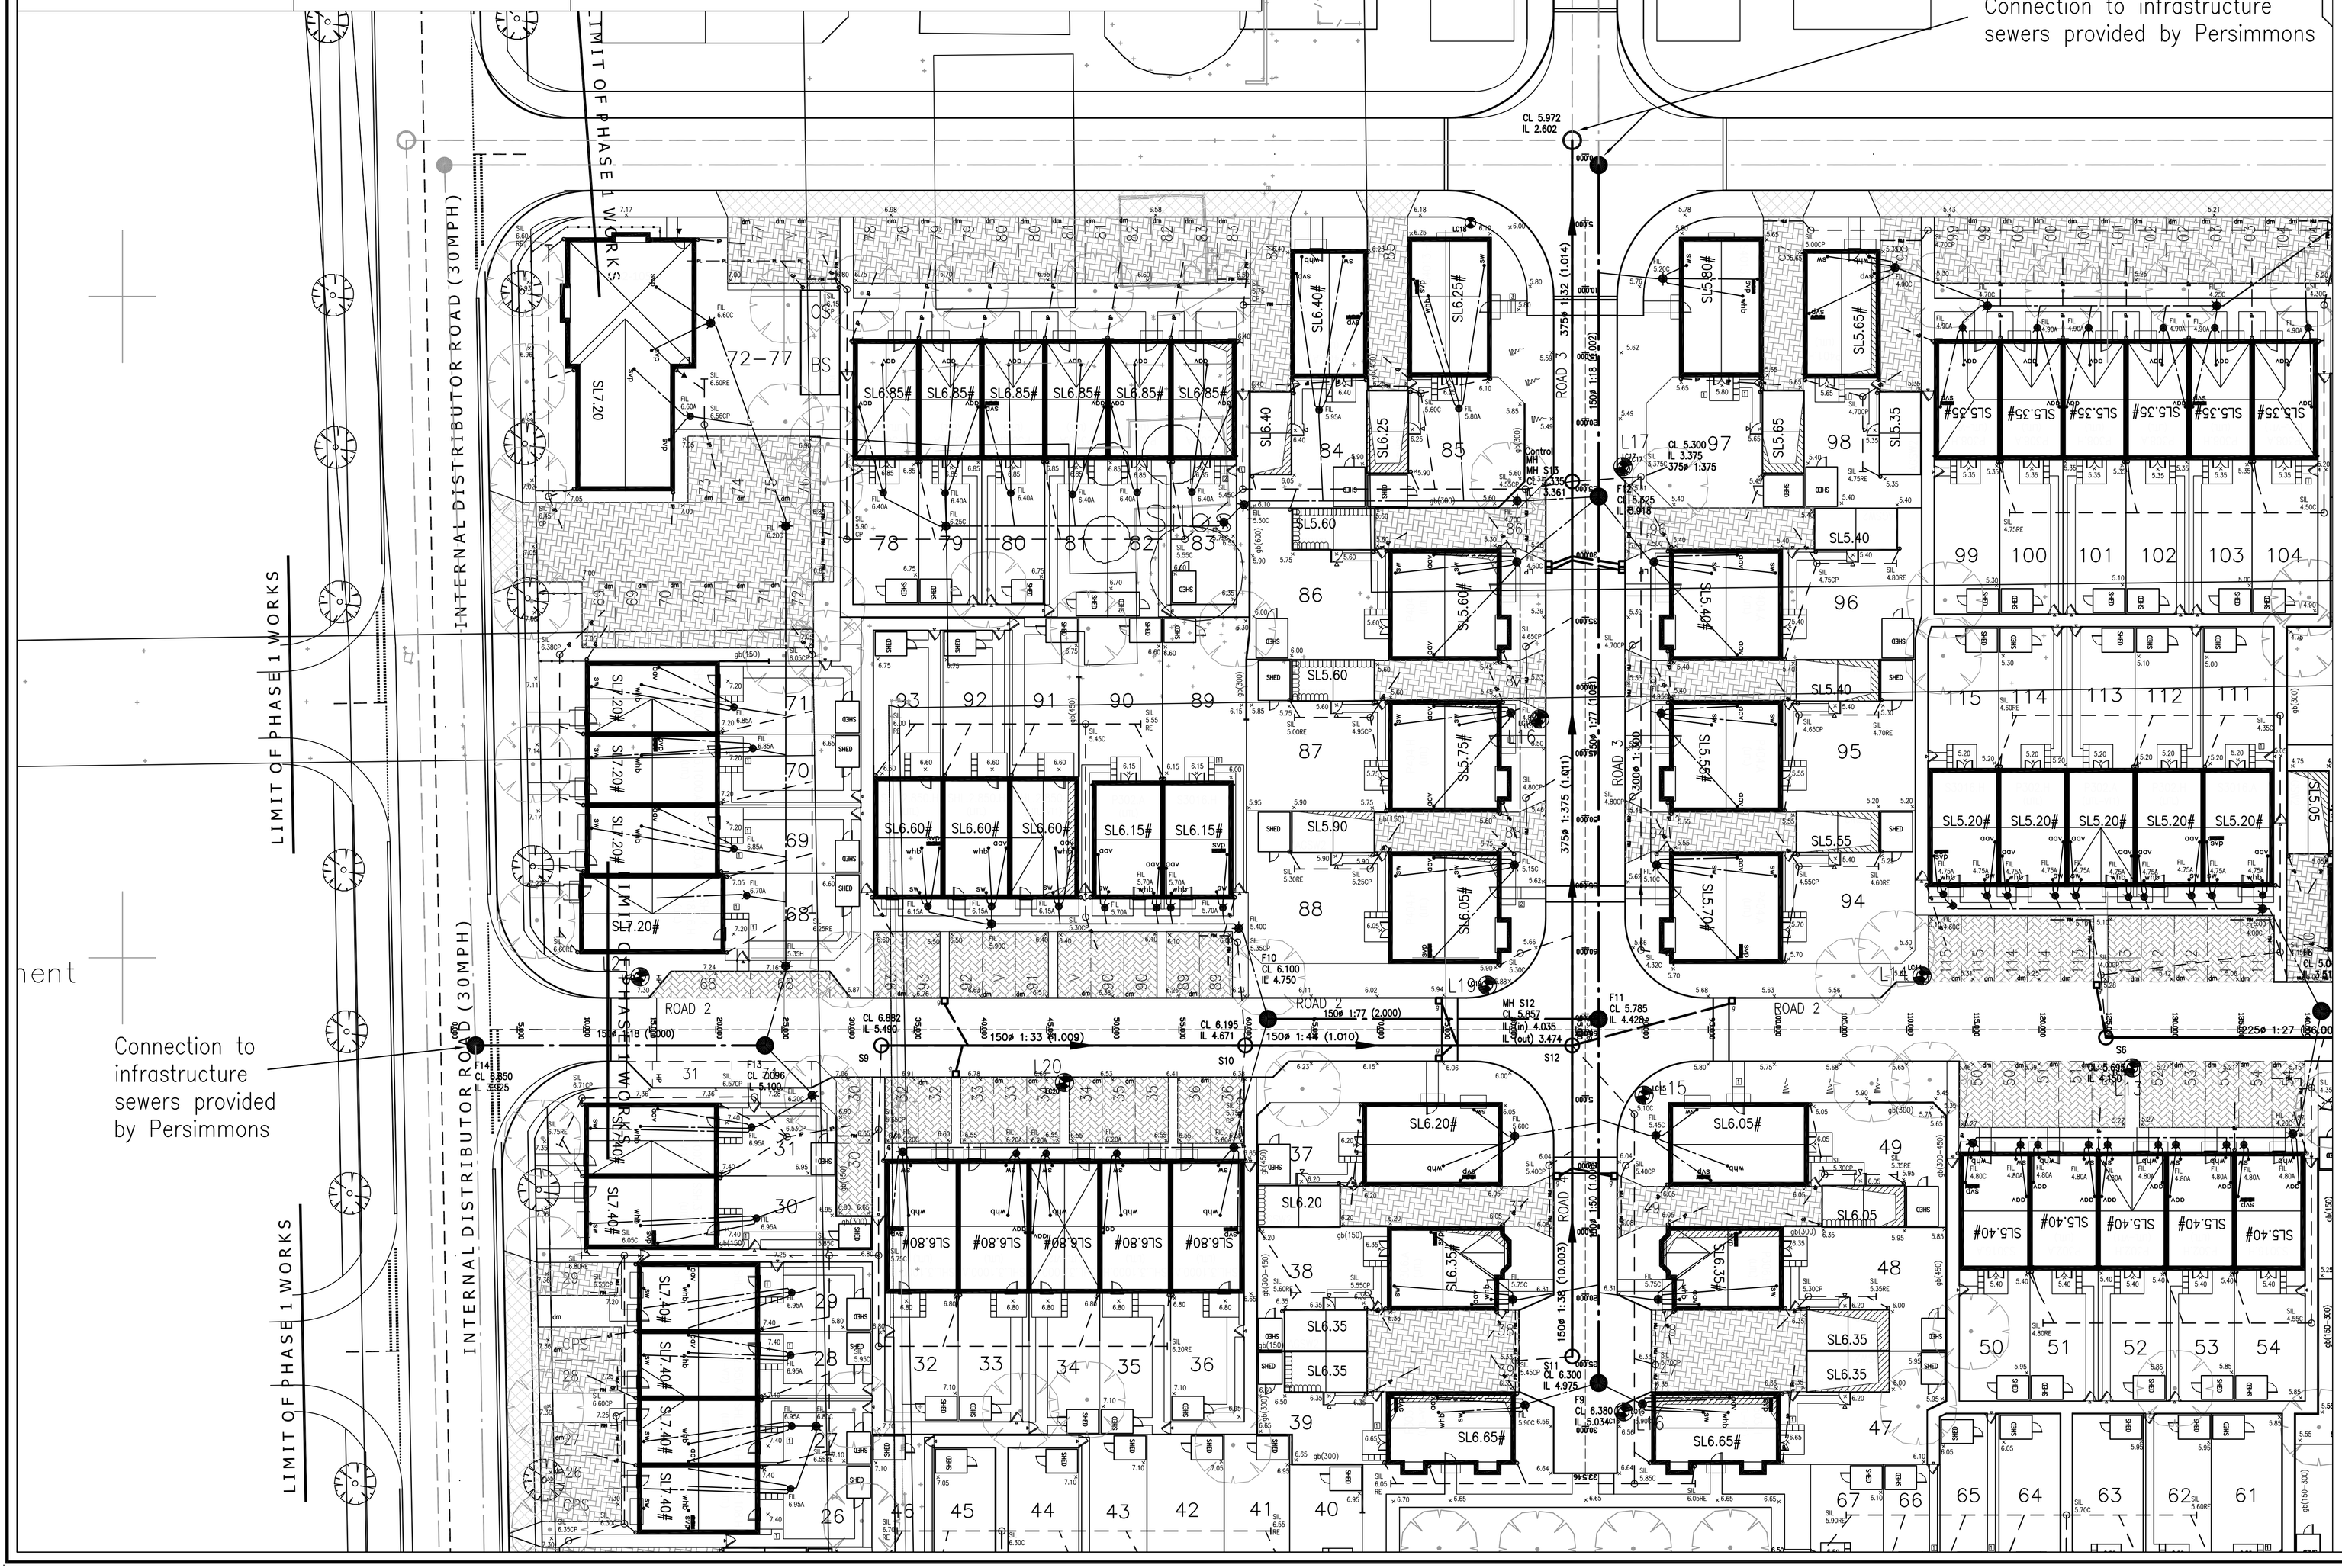

NOTES

1. All adoptable highways and footpaths to be constructed in accordance with West Sussex specification.
2. All adoptable drainage works to be constructed as detailed in the Water Authorities Association Publication 'Sewers For Adoption 6th Edition'.
3. All laterals from adopted sewers to first private chamber to be 150mmø minimum. All house drainage to be 100mm dia. unless shown otherwise, laid in accordance with BS EN752 & BS 5955.
4. Where finished ground levels fall towards a building, an open gully is to be provided at the foot of all rainwater pipes.
5. All drain connections beneath the highway are to be surrounded with concrete where cover is less than 1.2m.
6. All drain and sewer pipes are to be laid soffit to soffit, unless shown otherwise
7. Refer to house type working drawings for exact position of soil waste pipes.
8. Preformed private inspection chambers, size and type:-

Type	Dia	Depth to invert	Symbol FW	Symbol SW
A	225mm	450mm		
B	225mm	600max		
C	450mm	450 min–1200 max.		
D	PCC to BS8301	> 1200		
F	Adoptable demarcation chamber			
H	500mm	> 1200		
J	600mm	> 1200		

Refer to standard detail drawings for types A–D, H & J. Refer to Typical Sewer Detail drawing for Type F

9. House drainage to be bedded on granular material and backfilled with suitable 'as dug' material, as described on the Typical House Drainage Details drawing or as advised by the Engineer.
10. Pipe protection of house drainage runs is required in accordance with the Typical House Drainage Details dwg. The Contractor shall satisfy themselves & agree with the Site Management the actual extent of the pipe protection required.
11. Slotted concrete posts are to be used with concrete gravel boards.
12. Adoptable lay-bys shall be of similar construction to the main carriageway unless stated otherwise.
13. Sewer trench backfill to be in accordance with the Typical Sewer Detail dwg.
14. All private drives and hardstandings taking access across a footway require 1.5 X 1.5m visibility splays both sides & no planting or obstructions over 600mm in height.
15. Setting out of street lights (adoptable) shall be agreed with the Highway Inspector prior to erection.
16. Vision splays / forward visibility in soft landscaped areas to be demarked by continuous concrete edgings.
17. Position & invert levels of all existing laterals to be confirmed prior to construction & any discrepancies reported to the Engineer.
18. Refer to Pre-Construction Information Pack & Construction Phase Health & Safety Plan prior to the commencement of works.
19. All levels relate to Ordnance Datum
20. Postal numbers to be painted onto car parking bays (not individual private drives) using white road paint in 150mm numbers.

KEY

●——●	Proposed adoptable foul sewer.	A431	House type reference.
○——○	Proposed adoptable storm sewer.	20	Plot number.
●——●	Foul drainage	(12)	Postal number.
○——○	Storm drainage.	g □	Highway gully.
bd	Backdrop.	rg □	Road gully.
re	Rodding eye.	fg ▦	Footpath gully.
CL50.00	Cover level.	yg ▦	Yard gully.
FIL50.00	Foul invert level.	ST	Silt Trap
SIL50.00	Storm invert level.	FD	Filter Drain
cd	Channel drain.	○	Catch pit.
bc	Block channel.		Direction of fall.
dc	Dished channel.	hp	High point.
svp	Soil & vent pipe	lp	Low point.
sw; ss	Standing waste; stub stack	pc	Pedestrian crossing.
adv	Air admittance valve.	ms	mountable shoulder
wnb	wash hand basin	R1	Road Sign ref.
wc	water closet	b	Bollard.
o	Rainwater pipe.	rb	Removable Bollard.
SL50.00	Finished Slab level (integral garage to be 150mm lower unless shown).	snp	Street name plate.
+ 50.00	Proposed finished level.	R	Radius.
+ (50.00)	Existing level.		Street lighting.
gb (450)	Gravel board (max retaining height shown)		Existing Street lighting.
rw (0.9)	Retaining wall. (max retaining height shown)		Private lighting.
lw (450)	Log wall (max retaining height shown)		Vehicular crossover.
SE	Slab on Edge		Highway grass verge.
	Screen wall		Concrete Block Paving
	Banking.	dm	Demarcation.
	Underbuild.	hb	Half batter kerbs.
	Tanking	ce	Concrete edgings.
	Steps in paths.	dk	Drop kerb.
[2]	Number of steps		38mm pvc block ducting for private st. light connections or power to remote garages
rs	Railway sleeper steps	IP	Infiltration pipe
HR	Handrail/Guarding		
FG	Foul Gully		
#	Dwelling has double dpc		

Rev	Date	Details	By
E	20.04.17	Surface water house drainage added to plots 68–71, 31 & 72–77.	NM
D	24.03.17	All garage personal doors amended and levels added	PT
C	09.11.16	Extra information added. S12 – Outfall – pipe increase to 375.	NM
B	29.04.16	Information updated to suite latest base plan and surface water design.	SY
A	18.01.16	Information updated to correspond with long section drawings.	SY

Drainage Authority Approval Date

Highway Authority Approval Date

Do not scale from this drawing. Use written dimensions only. When shown relationships between slab levels and ground levels are to be checked on site. Any discrepancy or suggested modification to be reported to Design and Engineering Director.
Note : This drawing is the copyright of Bovis Homes Ltd.

BOVIS HOMES
Bovis Homes Limited
Southern Region.
The Manor House,
North Ash Road,
New Ash Green, Longfield,
Kent, DA3 6HQ.
Tel: 01474 876200
Fax: 01474 876323
DX: 41950 New Ash Green 2

SITE
HAMPTON PARK
LITTLEHAMPTON, WEST SUSSEX

DRAWING TITLE
ENGINEERING LAYOUT
SHEET 1

DRAWN BY	DATE	DRAWING NO.	REV
SY	NOV 2015	LITL-502/1	E
SCALE: 1/250 at A1	CHECKED/DATE		

ARUN DISTRICT COUNCIL LU/351/SD/OC