
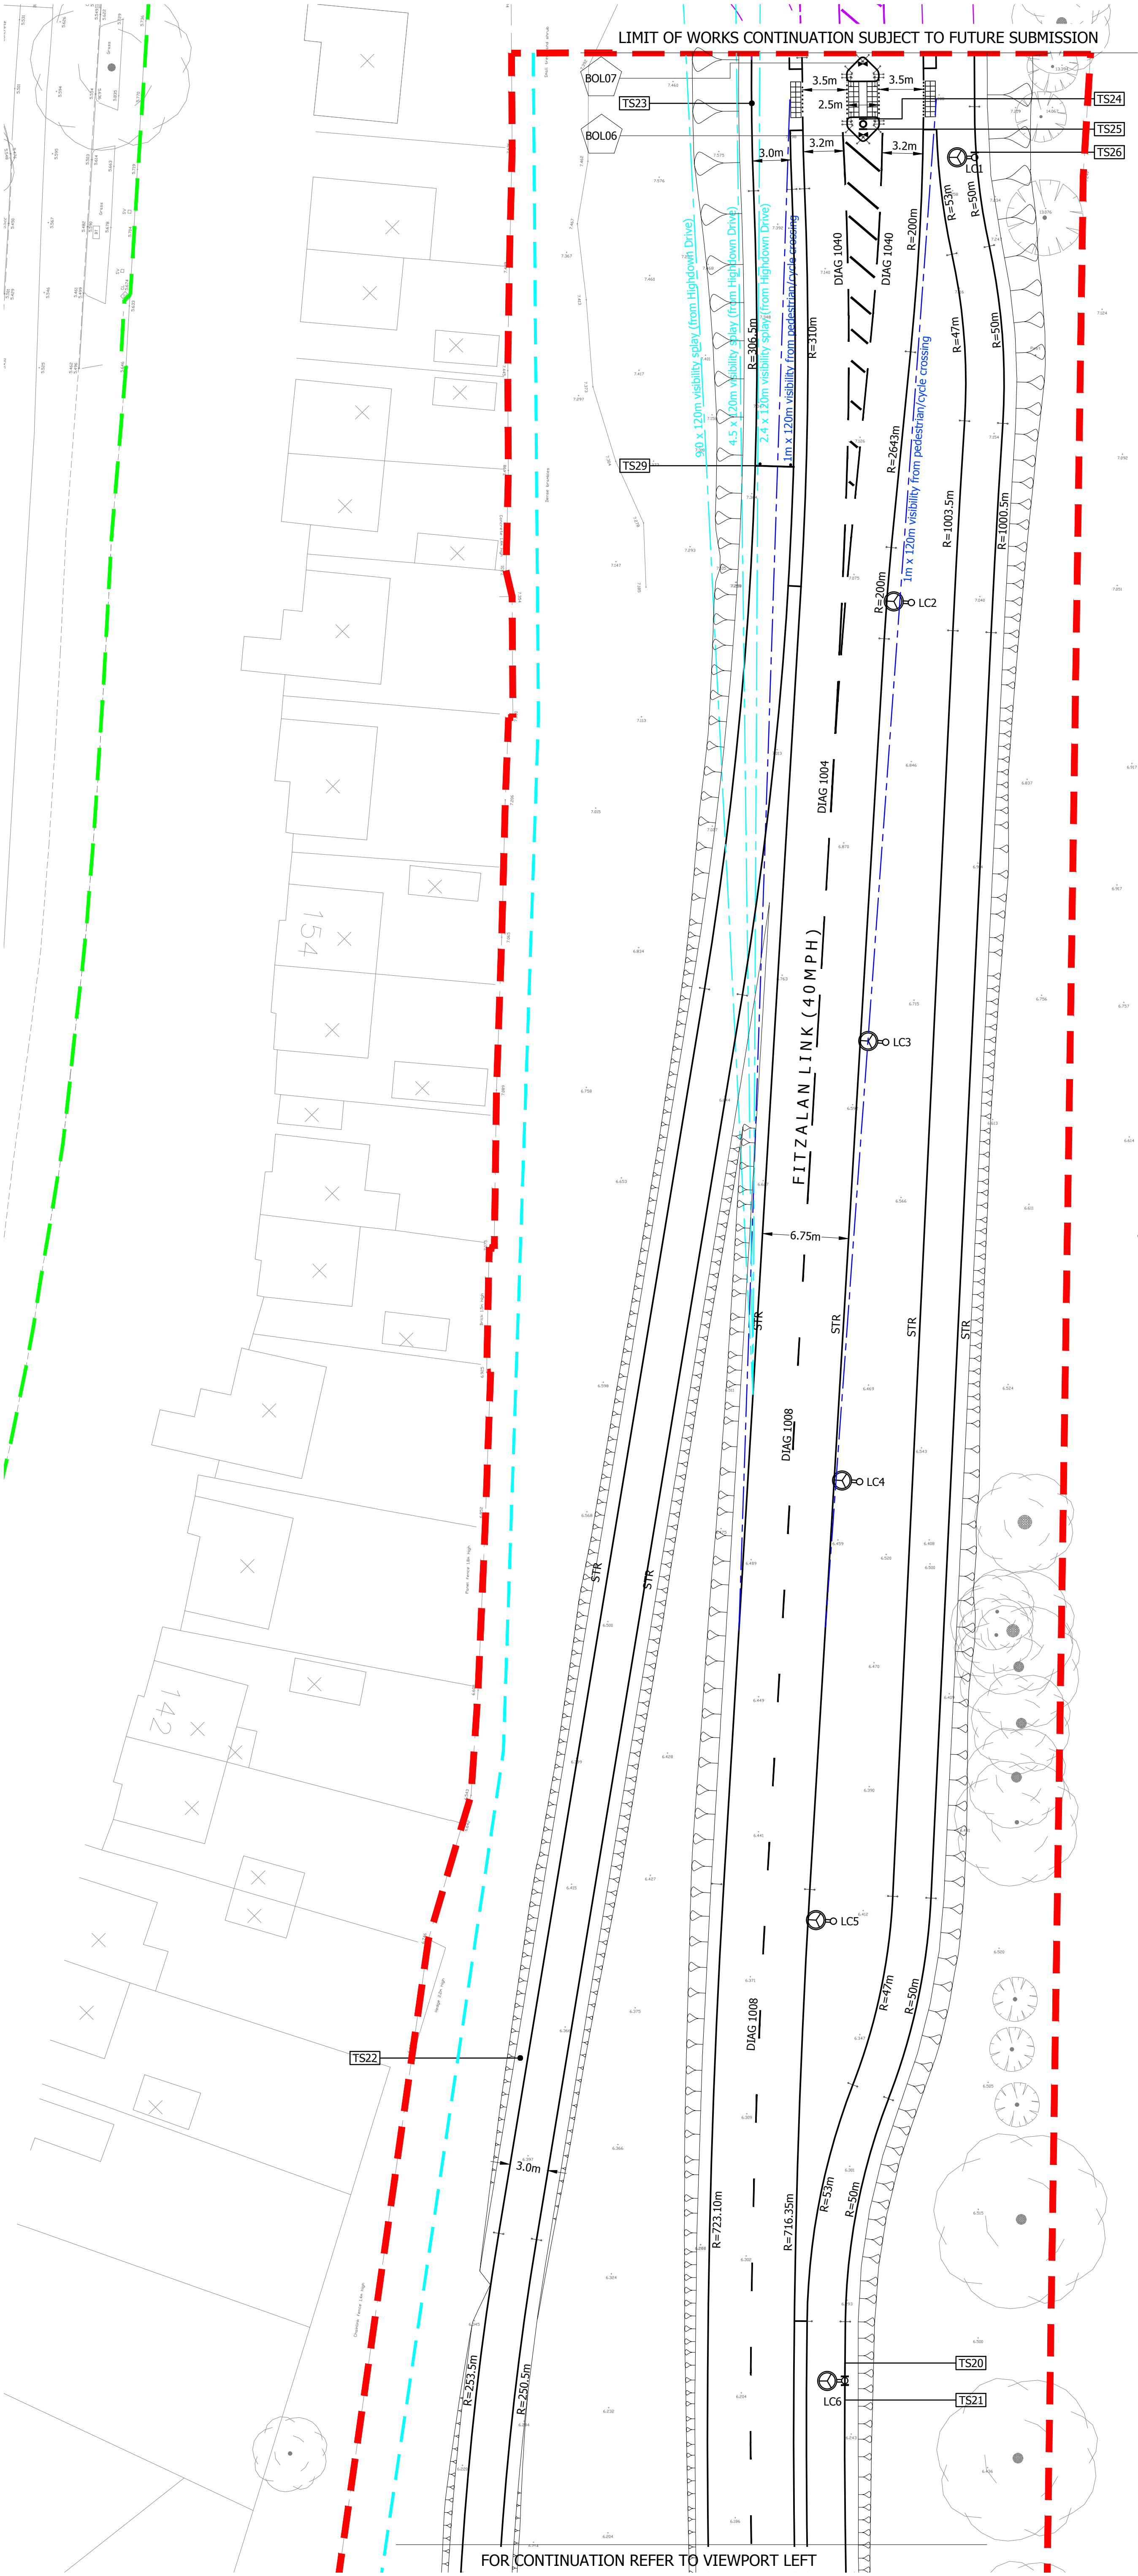


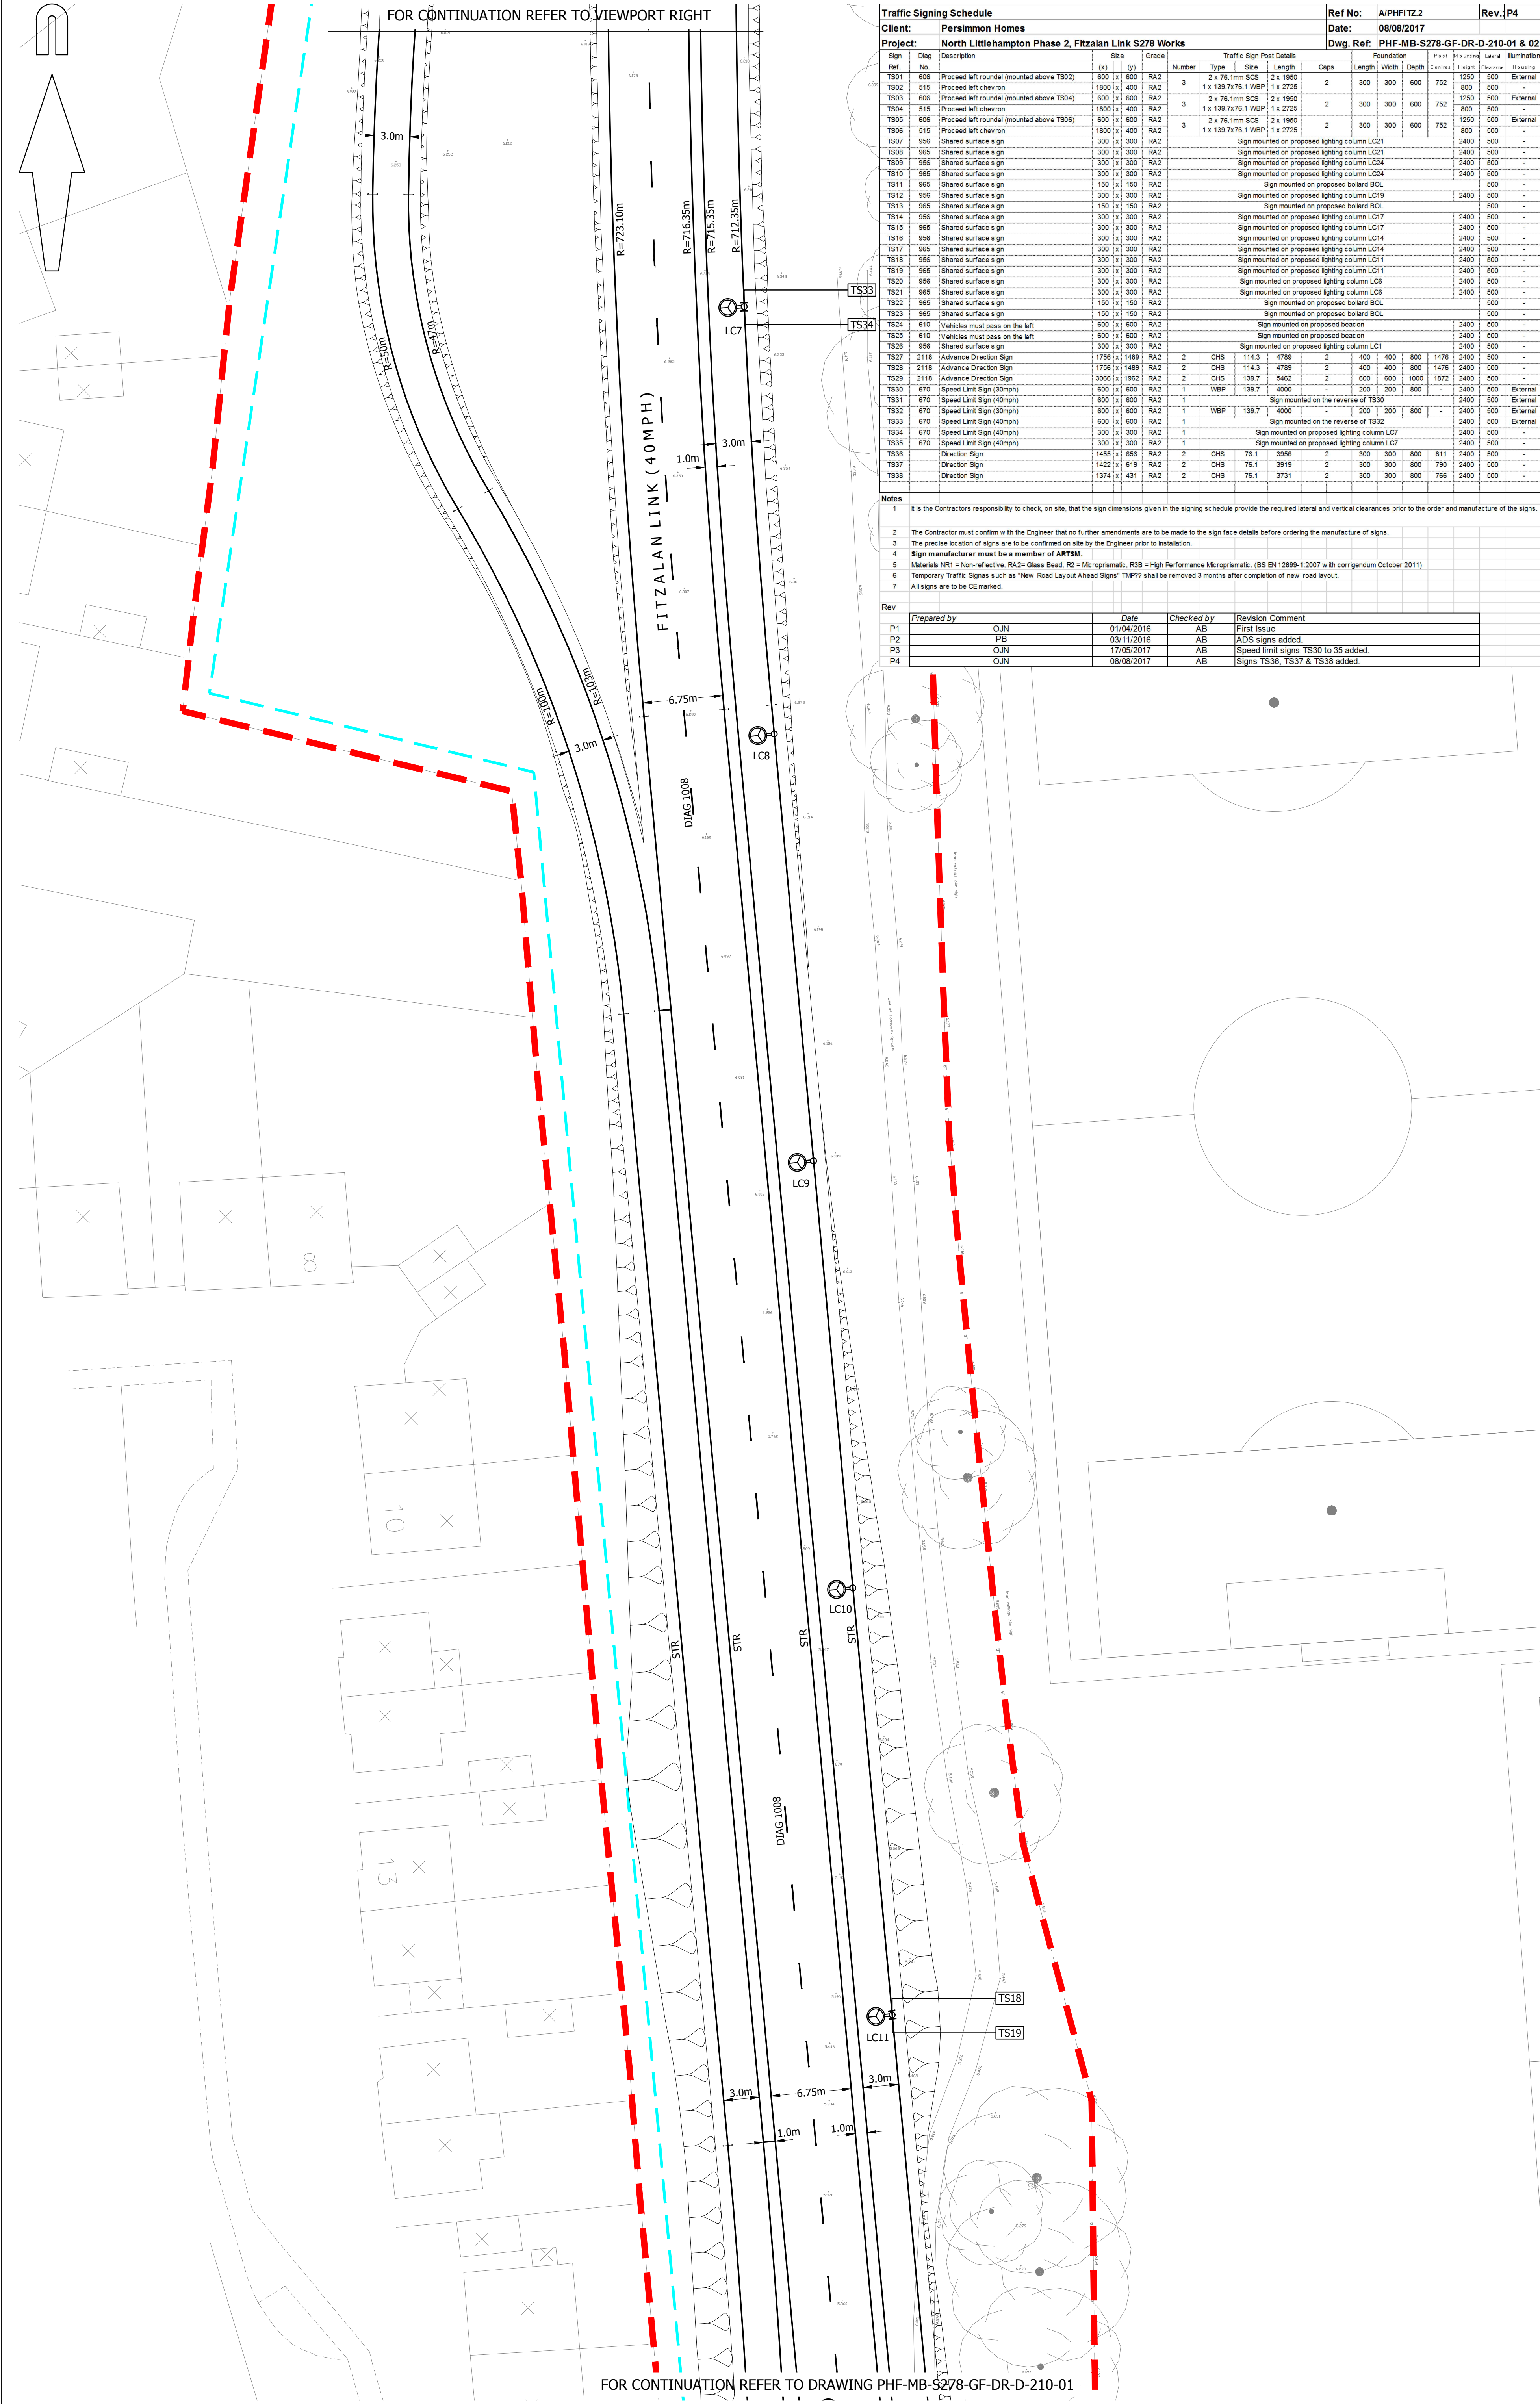

ROAD MARKINGS SCHEDULE				
DIAG NO.	LENGTH (mm)	GAP (mm)	WIDTH (mm)	DESCRIPTION
1003.1	1000	1000	200	Give way at RTD
1004	4000	2000	100	Lanes
1008	2000	4000	100	Lanes
1025.4	1000	1000	100	Bus stop
1040	4000	2000	150	Boundary lines
				Diagonal lines

© Mayer Brown Limited. This drawing, information and data recorded in this document ("the information") is the property of Mayer Brown. The information is provided to you for your use only and is not to be used, copied or reproduced in whole or part for any purpose other than the specific purpose for which it was supplied to you. Mayer Brown makes no representation, warranties or duty and accepts no responsibility for any third party who may rely on or use the information for any purpose other than the specific purpose for which it was supplied to you.

A0 ORIGINAL

© Crown copyright, all rights reserved. 2012. Licence number 300003893.

KEY

- EXISTING KERB LINE
- PROPOSED KERB/EDGING LINE
- PROPOSED DROPPED KERB
- PROPOSED ROAD MARKING
- PROPOSED BUFF COLOURED TACTILE PAVING
- TMP SOLALITE KEEP LEFT REFLECTIVE BOLLARD (REFER TO DETAIL 558022-000002001)
- TMP SOLALITE PLAIN FACED REFLECTIVE BOLLARD (REFER TO DETAIL 558022-000010001)
- PROPOSED BOLLARD REFERENCE
- PROPOSED WSSC S278/38/17 - TYPE 2 BOLLARD
- PROPOSED EARTHWORKS
- PROPOSED SIGN
- PROPOSED SIGN REFERENCE
- LIGHTING COLUMN AND REFERENCE - REFER TO SEE DRAWINGS SSE-976262-SL-DR-001-A AND 002-A FOR DETAILS
- PROPOSED 3.5m HIGH NOISE BARRIER (EXACT ALIGNMENT TO BE DETERMINED)
- PROPOSED VISIBILITY SPLAY
- PROPOSED LIMIT OF WORKS
- ASSUMED LIMIT OF HIGHWAY TAKEN FROM WSSC RECORD PLANS

NOTES

- School site layout has been taken from WSSC drawing 507344_101 received November 2010.
- Tree information has been taken from WYG drawing A089072-LEI-N-TCP-01-16 Rev A (Tree Constraints Plan) received 26/05/15.
- Topo survey has been taken from MB drawing IR.PH.LITTLE.2.21 Rev A received 23/01/15.

FOR APPROVAL

NOT FOR CONSTRUCTION

P9	Bollard on pedestrian island updated following comments from WSSC dated 14/08/2017. (CIN)	SW	17/08/2017
P8	Bollard on pedestrian refuge updated following Stage 3 ISA Addendum Report dated 07/08/2017. (CIN)	AB	08/08/2017
P7	Earthworks amended following comments from WSSC dated 05/07/2017. (CIN)	AB	27/07/2017
P6	Carriageway reduced to 6.75m wide, northbound bus layby added, uncontrolled crossing amended to a signalised town crossing, speed limit limit signs added. (CIN)	AB	17/05/2017
P5	Footway and pedestrian island amended following comments from WSSC dated 21/11/2016. (CIN)	AB	25/11/2016
P4	Earthworks updated after raising levels at the northern end of Fitzalan Link. (CIN)	AB	09/11/2016
P3	Scheme amended following WSSC reserve matters comments dated 21/10/16. (P8)	AB	03/11/2016
P2	Noise barrier height and location updated. (CIN)	AB	22/07/2016

rev.	amendment	checked	date
------	-----------	---------	------

mayer brown

Mayer Brown Limited
Lion House, Oriental Road, Woking, Surrey GU24 0AR
Telephone: 01483 750 508 Fax: 01483 750 437
wokingoffice@mayerbrown.co.uk www.mayerbrown.co.uk

client
PERSIMMON HOMES

project
NORTH LITTLEHAMPTON PHASE 2
FITZALAN LINK S278 WORKS

scale
1:250 @ A0

drawn by
PB

checked by
AB

date
MARCH 2016

cad file
MASTER - FITZ.DWG

title
PROPOSED S278 HIGHWAY WORKS
GENERAL ARRANGEMENT DRAWING (2 OF 2)

drawing number
PHF-MB-S278-GF-DR-D-210-02

rev.
P9