


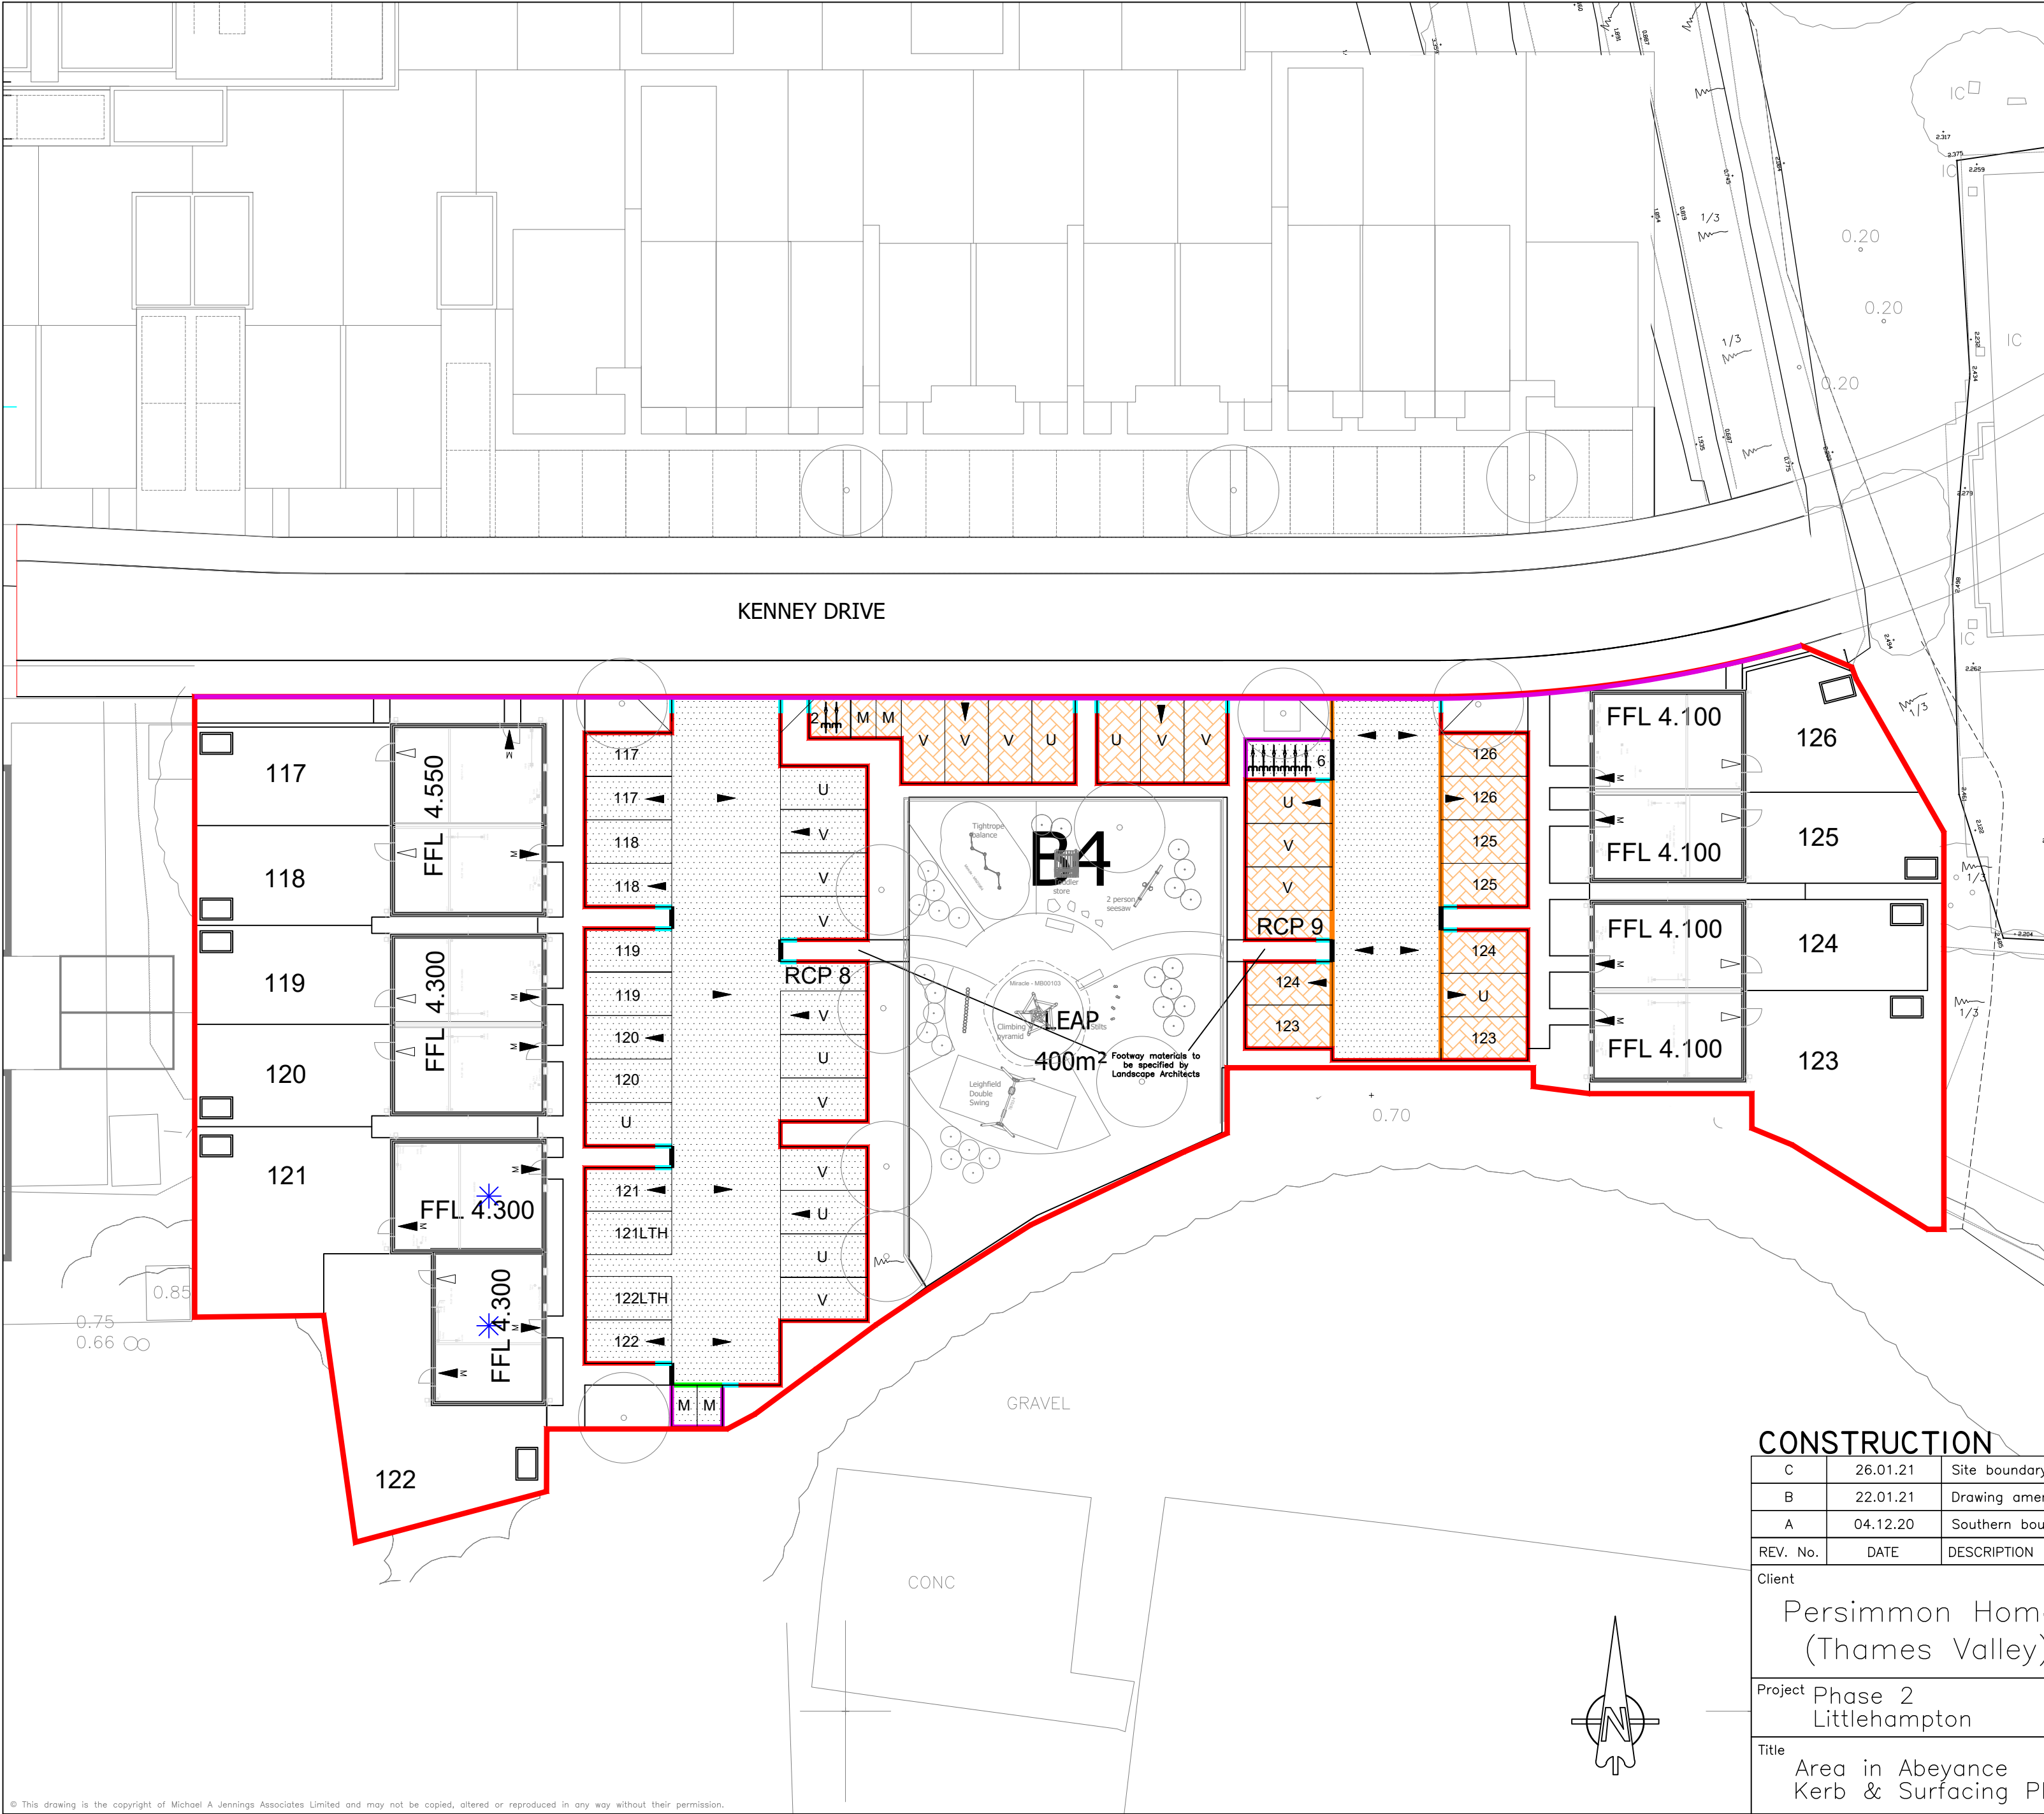

KERBING KEY:

- 125x255 HB2 Kerb with 125mm upstand
- 125x255 BN Kerb with 20mm upstand at vehicle crossovers
- 125x255 BN Kerb laid flush and inverted with slight tilt to prevent ponding
- Transition Kerb
- 150x150 CS Square Channel laid flush
- 50x150 EF Kerb laid flush

Phase Boundary

SURFACING KEY:

- Impermeable Concrete Block Paving laid in herringbone pattern
- Impermeable Macadam

Construction Notes:

- Do not scale from this drawing.
- All dimensions in metres.
- All levels relate to ordnance datum.
- This drawing is based on the latest Architectural planning layout and shall be read in conjunction with all other relevant longitudinal sections and construction drawings.
- Any discrepancies with any of the drawings shall be reported to MJA Consulting Engineer.
- The level and location of all existing services shall be verified on site by the Contractor before commencing any construction work.
- Contractor must comply with all current legislation relating to CDM, Health and Safety and COSHH.
- All material in excess of 20kg (i.e. kerbs, manhole units cover etc.) shall be mechanically lifted and laid where possible at all times.

For landscaping details refer to the landscaping architect's proposals

CONSTRUCTION

C	26.01.21	Site boundary updated, as per client comments.	WJ
B	22.01.21	Drawing amended to suit latest client comments.	WJ
A	04.12.20	Southern boundary revised.	AJW
REV. No.	DATE	DESCRIPTION	INITIALS
Client		Persimmon Homes (Thames Valley)	MJA CONSULTING CIVIL AND STRUCTURAL ENGINEERS Monarch House, Barton Lane, Abingdon, Oxon, OX14 3NB Tel: 01235 555173 Fax: 01235 523226 MJA
Project		Phase 2 Littlehampton	
Title		Area in Abeyance Kerb & Surfacing Plan	Scale 1:250 @A2
		Checked AJW	Date Oct '2019
		Drawn TDF	Drawing No. 5691:07
			Rev C