



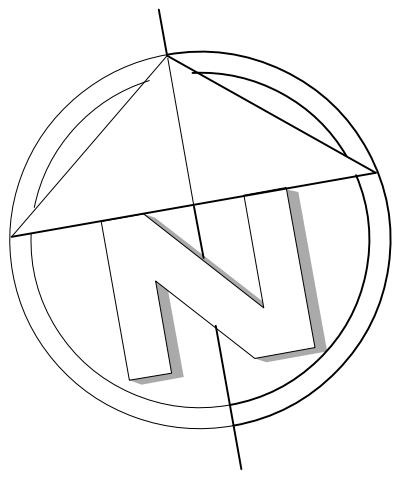

EXISTING KERBLINE EXTENDED, HGV
DUTY SURFACE FINISH

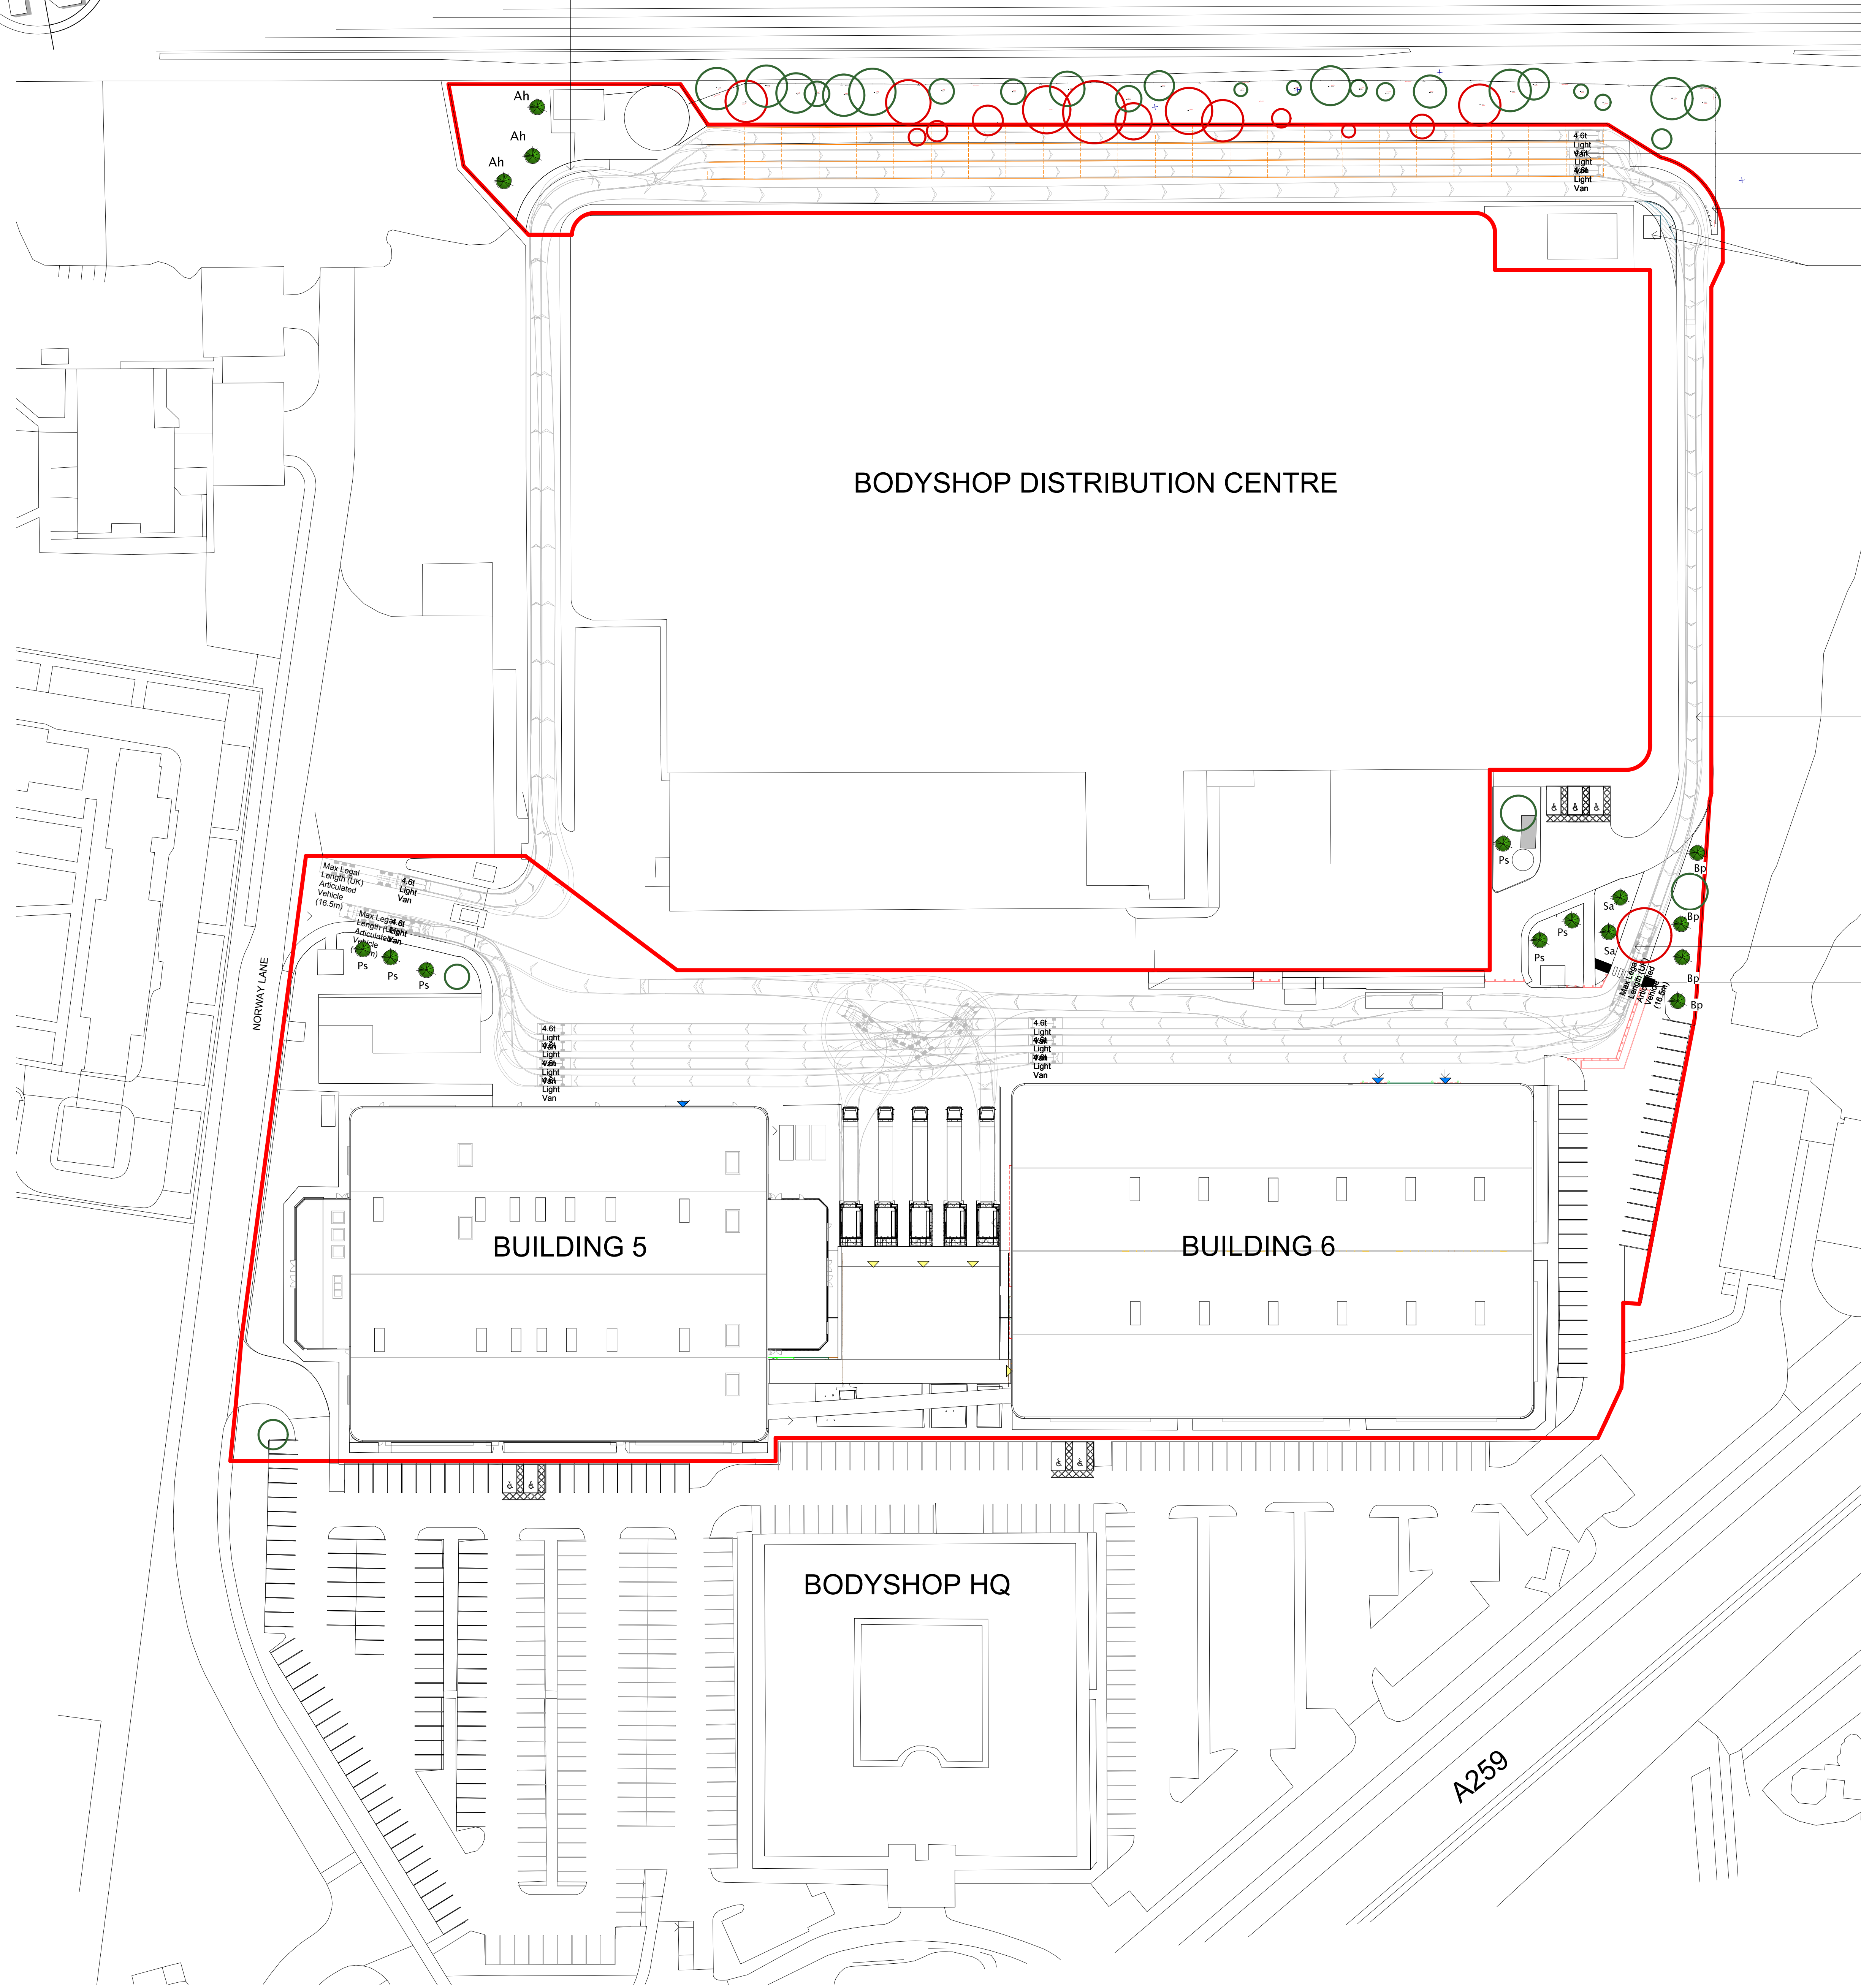

1. Plant handling at the nursery, and during transit up to delivery, shall be in accordance with 'Plant Handling' the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association) which refers to the receipt, unloading and temporary storage of plants.
2. Plants shall be first class examples of their species or variety, free from all pests and diseases with good fibrous root systems and materially undamaged. (Refer to relevant sections of BS5936 Parts 1-4 'Specification of Nursery Stock')
3. All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'.
4. Tree pits to be 750mm x 750mm x 600mm deep
5. One number 80 litre bag of tree planting compost (non peat based) is to be incorporated into the tree pits. Compost must be thoroughly mixed with with excavated (or imported) topsoil.
6. The contractor must ascertain for himself the exact location of any under-ground services and maintenance points.
7. All trees are to be staked and secured as followed: -
i) All Extra Heavy Standard trees (EHS) are to be double staked to 750mm above ground and secured using a single rubber tie and spacer
9. Weed as necessary to ensure the establishment and continued thriving of planted and grassed matter.
10. Carry out all work when soil and weather conditions are suitable:
i) Do not plant during periods of frost or strong winds. Plant only during the following periods: -
- Bare root deciduous trees and shrubs: Late October to late March
- Container grown plants: At any time if ground water and weather conditions are favourable.
11. All planted areas to be mulched to a consolidated depth of 75mm using an approved amenity grade bark mulch
12. Ensure that adequate watering is available.

PLANTING SPECIFICATION

TREE PLANTING			
Species	Size	Type	No.
Aesculus hippocastanum (Ah)	12-14cm girth	Rootballed	3
Betula pendula (Bp)	12-14cm girth	Rootballed	4
Prunus x Sargentii (Ps)	12-14cm girth	Rootballed	6
Sorbus "Sheerwater Seedling" (Sa)	12-14cm girth	Rootballed	2
TOTAL			15

PLANTING SCHEDULE

- Existing trees to be retained
- Existing trees to be removed
- Proposed Extra Heavy Standard (EHS) trees

KEY

Rev A Tree planting positions altered April 2019 VS

New Coutwick Lane, Littlehampton BN17

AMAZON LOGISTICS

Proposed Tree Planting Works

General Arrangement Plan

PR/19 04 02/GA/01 REV A

Contractors are advised to check dimensions with the architect before setting out on site

The
plant
room

Vanessa Swift Bsc Dip LA CMLI
Landscape Architect
M: 07918 081407
F: 08717 145212
E: vanessa@theplantroom.co.uk
www.theplantroom.co.uk

April 2019

1:500 @ A0