


NEW Silent Fan

- From only 12dB(A)
- IPX5 - Zone 1 rated
- Meets current Building Regulations Approved Document F and L
- Extra-long duct run? Models available with speeds adjustable at installation to get the airflow you need
- 8 model variants
- Silent bathroom fan with intermittent and continuous running options
- Back draught shutters included
- High efficiency motor
- Up to 5 year warranty
- Suitable for wall, ceiling, window and panel mounting



Silent Fan Axial Bathroom/Toilet Fan

The new Silent Fan Range from Vent-Axia not only delivers stylish and silent ventilation without compromise on performance, but now comes with even more features and more model options providing flexibility when choosing the right fan.

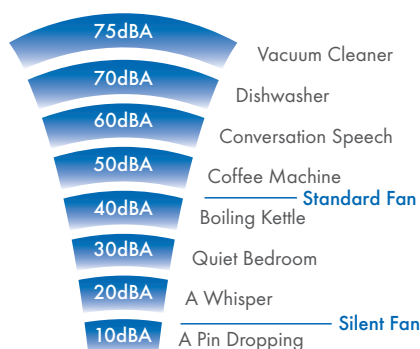

Models

VASF100B (Fixed Speed, Intermittent)

Remote or light switch operation. 2 speed options selectable at install. Intermittent operation.

Model VASF100B **Stock Ref** 446658

VASF100T (Fixed Speed, Intermittent, Timer)

Overrun timer adjustable 5-30 min. 2 speed options selectable at install. Intermittent operation.

Model VASF100T **Stock Ref** 446659

VASF100HT (Fixed Speed, Intermittent, Humidity Timer)

Humidity controlled with fixed 15 min timer overrun. 2 speed options selectable at install. Intermittent operation.

Model VASF100HT **Stock Ref** 477436

VASF100BV (Variable Speed, Intermittent)

Remote or light switch operation. Variable speed options selectable at install. Intermittent operation.

Model VASF100BV **Stock Ref** 479085

VASF100TV (Variable Speed, Intermittent, Timer)

Intermittent Operation. Fixed 15 min overrun timer. Variable speed options selectable at install.

Model VASF100TV **Stock Ref** 479086

VASF100HTV (Variable Speed, Intermittent, Humidity Timer)

Intermittent Operation. Humidity controlled with fixed 15 min timer overrun. Variable speed options selectable at install.

Model VASF100HTV **Stock Ref** 479087

VASF100TC (Variable Speed, Continuous, Timer)

Fixed 15 min overrun timer. Continuous running fan with variable speed selectable at install.

Model VASF100TC **Stock Ref** 479088

VASF100HTC (Variable Speed, Continuous, Humidity Timer)


Humidity controlled with fixed 15 min timer overrun. Continuous running fan with variable speed selectable at install.

Model VASF100HTC **Stock Ref** 479089

Accessories

Model	Stock Ref
Window Kit	442947
Wall Kit White	254102
Wall Kit Brown	254100
Internal Fit Wall Kit White + Backdraught Shutter	474779
Internal Fit Wall Kit Brown + Backdraught Shutter	474780


Dimensions (mm)

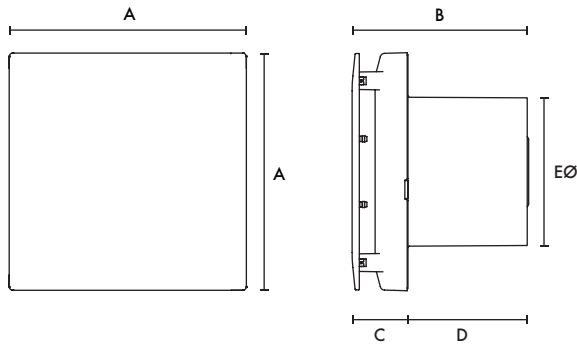

A	B	C	D	EØ
160	117	37	80	99

Weight 0.7kg

Performance Guide

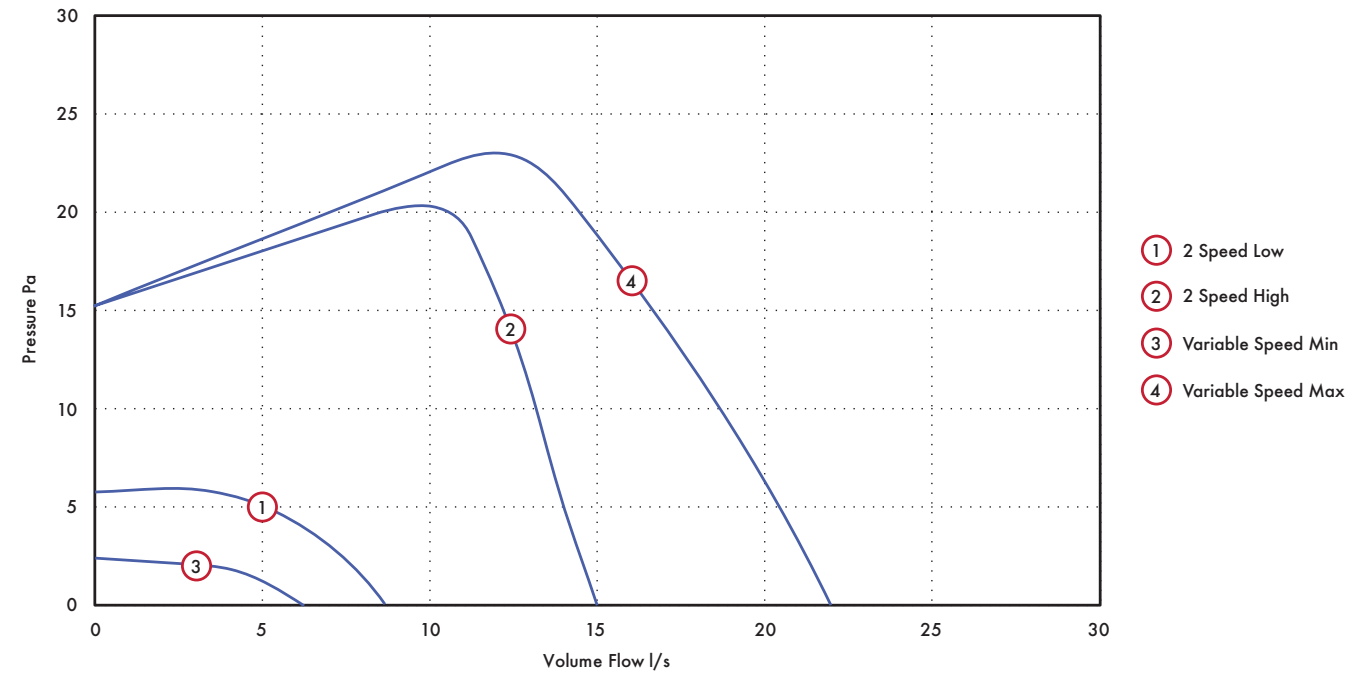

	Model	Speed	l/s	Watts	Warranty (years)
2 Speed	VASF100B/T/HT	Low	6	2.7	2
		High	15	4.8	
Variable Speed	VASF100BV/TV/HTV	Min	6	1.7	5
		Max	22	7.5	
	VASF100TC/HTC	Adjustable Trickle	6 - 15	1.7 - 5	
		Boost	Adjustable Trickle + 10 (Up to a max of 22 installed)	7.5	

All performance testing was done in "through the wall conditions" - installed with 400mm rigid ducting and an exit terminal.