

Arun District Council, Civic Centre, Maltravers Rd, Littlehampton, West Sussex, BN17 5LF

To register to receive notification of planning applications in your area please go to
<https://www1.arun.gov.uk/planning-application-finder>

Sign up to our newsletter [here](#)



From: Ian Stocks [REDACTED] **On Behalf Of** FRS Water and Access
Sent: 20 April 2022 17:02
To: Planning.Responses <Planning.Responses@arun.gov.uk>
Subject: Planning consultation - LU/61/22/PL Linden Park Recreation Ground Littlehampton BN17 7BS

CAUTION: This email originated from outside of the organisation. You should take extra care when clicking links or opening attachments - if you are unsure the content is safe contact the IT Helpdesk before clicking or opening.

FAO: Mrs A Gardner

Dear Mrs Gardner,


Having viewed the plans for planning application LU/61/22/PL, for the New Fibre Broadband Exchange (Use Class B8 Storage and Distribution). This application is in CIL Zone 4 (Zero Rated) as other development, evidence is required to show there is sufficient turning facility provided for a fire appliance to turn and make their exit, a requirement of AD-B Vol 1 B5 section 13. A fire appliance requires. Attached are a guidance for the measurements required for a turning facility.

Regards

Ian Stocks
Water & Access manager

Ian Stocks – Water and Access Manager
Water and Access Office
West Sussex Fire and Rescue Service West Sussex County Council
Location: Bognor Fire Station, West Meads Drive, Bognor, PO21 5TB


Living Our Values Every Day

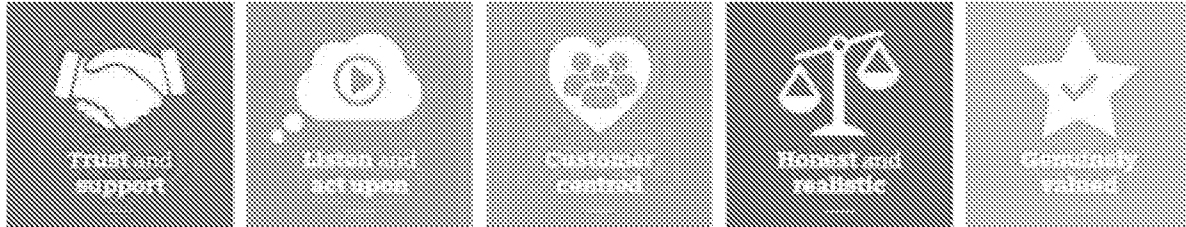

LEGAL DISCLAIMER

This email and any attachments are confidential and intended solely for the persons addressed. If it has come to you in error please reply to advise us but you should not read it, copy it, show it to anyone else nor make any other use of its content. West Sussex County Council takes steps to ensure emails and attachments are virus-free but you should carry out your own checks before opening any attachment.

Fire Appliance Turning head

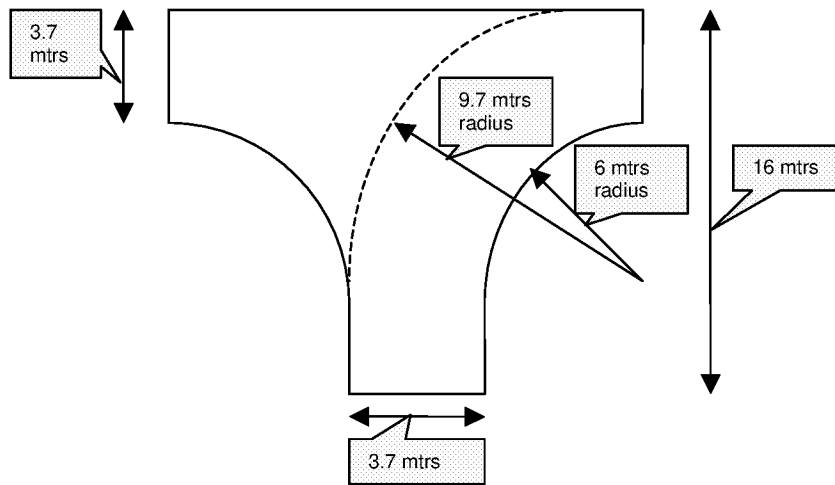

Not to scale

Fire Appliance Dimensions



Length : 8470mm

Width: 2860mm (inc mirrors)

Height: 3150mm

Weight: 17tonnes Gross

Turning circle 14200mm

Track: 1980mm

Wheelbase: 4300mm

|
|
|
|
|
|
|