

KEY TO TREE SCHEDULE	
Column Heading	Explanation
Tree No.	Unique number corresponding with number on plan
Species	English names
HK (n)	Height in metres
Branch Spread	Radius of canopy in metres to cardinal points of the compass
Stem Dia	All measurements conform to Annex C of BS 5837:2012
1.5m above ground level	Single stem - Stem diameter in centimetres measured at 1.5m above ground level
Multi-stemmed tree with 2 to 5 stems	Diameter of each stem
Multi-stemmed tree with more than 5 stems - Average stem diameter and number of stems	
Height of crown clearance	Height in metres between the ground and underside of canopy
Height of first major branch and direction of growth	Height from ground level to base of first major branch and the approximate direction of growth
Abbreviations as suffix to a dimension	Suffix 'e' denotes an estimated dimension
Age Class	Suffix 'y' denotes an average dimension
Category grading and Estimated remaining Contribution (yrs)	Age Class definitions: Y = Young < 5 Semi-mature E = Early mature M = Mature O = Over mature Summary of BS 5837: 2012 categorisation:
	1. Trees unsuitable for retention: U = those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years
	2. Trees to be considered for retention: A1. 2 or 3 + trees of high quality (substantial contribution >40 yrs) B1. 2 or 3 + trees of moderate quality (significant contribution >20 yrs) C1. 2 or 3 + trees of low quality (but adequate, i.e. >10 yrs or young trees - until new planting is established)
Estimated remaining contribution Condition	Note: Useful estimated remaining contribution of the tree or tree group based on current status in BS5837:2012 Brief description including physiological and structural defects
Tree Works	Works required to be undertaken to the trees to facilitate the construction of remedial a defect encountered during the survey
Root Protection Radius	Radius of minimum root protection area in metres calculated from section 4.6 and Annex D of BS5837:2012
Root Protection Area	Total area of minimum root protection area extrapolated from root protection radius


The diagram illustrates a temporary mesh enclosure for a large animal, such as a rhinoceros. The enclosure is rectangular, with a height of 2.2m and a width of 3m. It is constructed using standard scaffold poles (1) and heavy gauge 2m tall galvanized tube and welded mesh infill panels (2). The panels are secured to uprights and cross-members with wire ties (3). The ground level (4) is indicated. Uprights are driven into the ground until secure (minimum depth 0.6m) (5). Standard scaffold clamps (6) are used to secure the mesh panels to the uprights. The diagram also shows a detail of the clamp (6) securing the mesh panel (2) to the upright (5).

Key

- 1 Standard scaffold poles
- 2 Heavy gauge 2m tall galvanized tube and welded mesh infill panels
- 3 Panels secured to uprights and cross-members with wire ties
- 4 Ground level
- 5 Uprights driven into the ground until secure (minimum depth 0.6m)
- 6 Standard scaffold clamps

© Keen Consultants

© Keen Consultants

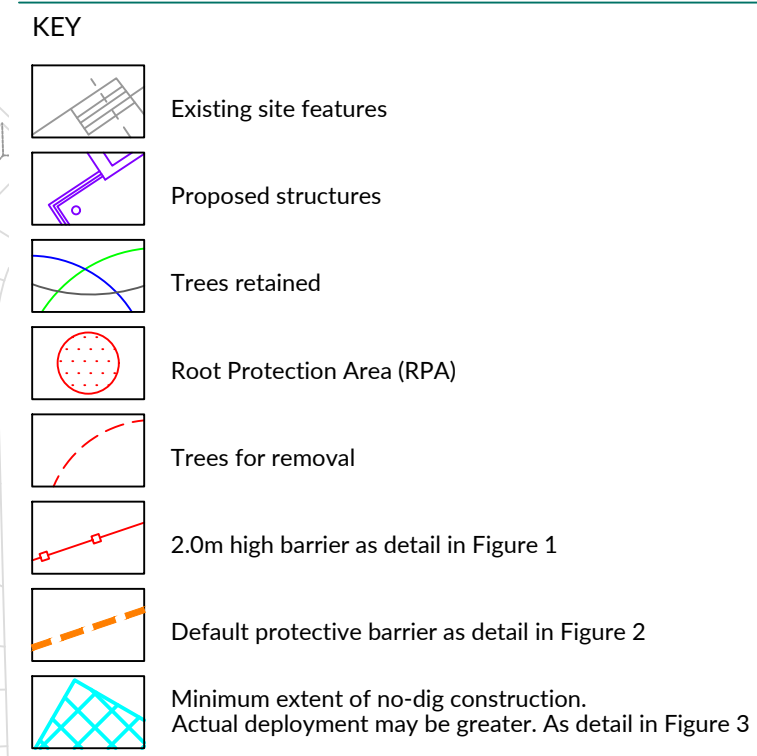

G	Latest layout overlay	05.11.21
F	Default protective barrier and root protection area shown as suggested by tree officer	10.06.21
E	Latest layout overlay	22.03.21
D	Latest layout overlay	27.01.21
C	New layout overlay	08.12.20
B	Latest layout overlay	28.02.20
A	Latest layout overlay	26.02.20
O	Preliminary issue	09.12.19

Rev	Description	Date
		The Studio, Timbers, Gables Road, Church Crookham Fleet, Hampshire GU52 6QY T 01252 850096 mail@keenconsultants.co.uk keenconsultants.co.uk
	Keen Consultants is a trading name of Keen (Europe) Limited. Registered No: 12641584 Registered office: 4 Sudley Road, Bognor Regis, West Sussex, PO21 1EU	

Client
TAYLOR WIMPEY

Project
LAND NORTH OF SEFTER ROAD,
PAGHAM

Title
TREE PROTECTION PLAN

Date	Scale
DEC 2019	1:1250@A1
Drawn by	Checked by
ML	JTK

Drawing Number

9260-KC-XX-YTREE-TPP01RevG