

Air Quality Assessment

Land West of Pagham Road, Pagham

For Hallam Land Management

Quality Management

Prepared by	Will Hunt BSc (Hons), AMIEnvSc	Air Quality Consultant	16/02/2022
Reviewed & checked by	Kathryn Barker MSc, BSc (Hons), MIAQM, AMIEnvSc	Principal Consultant	16/02/2022
Authorised by	Fiona Prismall MSc, BSc (Hons), CEnv, FIAQM, MIEEnvSc	Technical Director	16/02/2022
Date of Issue	16/02/2022	Revision Number	Rev 1
Job Number	JAR02954		

Revision History

Rev	Date	Status	Reason for revision	Comments
0	11/02/2022	Draft	-	-
1	16/02/2022	Final	Client comments	-

Calculations or models file name, link and location

Prepared by	Will Hunt BSc (Hons), AMIEnvSc	Air Quality Consultant	16/02/2022
Checked by	Kathryn Barker MSc, BSc (Hons), MIAQM, AMIEnvSc	Principal Consultant	16/02/2022

DISCLAIMER

RPS has used reasonable skill and care in completing this work and preparing this report, within the terms of its brief and contract and taking account of the resources devoted to it by agreement with the client. We disclaim any responsibility to the client and others in respect of any matters outside the stated scope. This report is confidential to the client and we accept no responsibility to third parties to whom this report, or any part thereof, is made known. The opinions and interpretations presented in this report represent our reasonable technical interpretation of the data made available to us. RPS accepts no responsibility for data provided by other bodies and no legal liability arising from the use by other persons of data or opinions contained in this report.

Except for the provision of professional services on a fee basis, RPS does not have a commercial arrangement with any other person or company involved in the interests that are the subject of this report.

COPYRIGHT © RPS

The material presented in this report is confidential. This report has been prepared for the exclusive use of the client and shall not be distributed or made available to any other company or person without the knowledge and written consent of the client or RPS

Executive Summary

The Land West of Pagham Road development is located within the administrative area of Arun District Council (ADC). The Proposed Development comprises 106 residential units. ADC has not designated any Air Quality Management Areas (AQMA) indicating that the air quality is generally good throughout the district.

This Air Quality Assessment, undertaken to accompany the planning application, considers the air quality impacts from the construction phase and once the Proposed Development is fully operational.

The assessment has been undertaken based upon appropriate information on the Proposed Development provided by Hallam Land Management and its project team. In undertaking this assessment, RPS experts have exercised professional skills and judgement to the best of their abilities and have given professional opinions that are objective, reliable and backed with scientific rigour. These professional responsibilities are in accordance with the code of professional conduct set by the Institution of Environmental Sciences for members of the Institute of Air Quality Management (IAQM).

For the construction phase, the most important consideration is dust. Without appropriate mitigation, dust could cause temporary soiling of surfaces, particularly windows, cars and laundry. The mitigation measures provided within this report should ensure that the risk of adverse dust effects is reduced to a level categorised as 'not significant'.

For the operational phase, arrivals at and departures from the Proposed Development may change the number, type and speed of vehicles using the local road network. Changes in road vehicle emissions are the most important consideration during this phase of the development.

Detailed atmospheric dispersion modelling has been undertaken for the first year in which the development is expected to be fully operational, 2026. Pollutant concentrations are predicted to be well within the relevant health-based air quality objectives at the façades of both existing and proposed receptors. Therefore, air quality is acceptable at the development site, making it suitable for its proposed uses. The operational impact of the Proposed Development on existing receptors is predicted to be 'negligible' taking into account the changes in pollutant concentrations and absolute levels. Using the criteria adopted for this assessment together with professional judgement, the operational air quality effects are considered to be 'not significant' overall.

The Land West of Pagham Road development does not, in air quality terms, conflict with national or local policies. There are no constraints to the development in the context of air quality.

Contents

1	Introduction	1
2	Policy and Legislative Context	2
	Ambient Air Quality Legislation and National Policy	2
	National Planning Policy	3
	Local Planning Policy	6
3	Assessment Methodology	7
	Summary of Key Pollutants Considered	8
	Construction Phase - Methodology	9
	Operational Phase - Methodology	11
4	Baseline Air Quality Conditions	21
	Overview	21
	Review and Assessment Process	21
	Local Urban Background Monitoring	21
	Defra Mapped Concentration Estimates	22
	Appropriate Background Concentrations for the Development Site	23
5	Assessment of Construction-Phase Air Quality Impacts	24
	Construction Dust	24
	Risk of Dust Impacts	24
6	Assessment of Operational-Phase Air Quality Impacts	27
	Assessment of Air Quality Impacts on Surrounding Area	27
	Assessment of New Population Exposure (Site Suitability)	29
	Significance of Effects	30
	Sensitivity and Uncertainty	31
7	Assessment of Cumulative Effects	32
8	Mitigation	33
	Mitigation During Construction	33
	Mitigation for the Operational Impact of the Development on the Surrounding Area	36
	Mitigation for New Population Exposure (Site Suitability)	36
	Mitigation in <i>Air quality and emissions mitigation guidance for Sussex (2021)</i>	36
9	Conclusions	38

Tables, Figures and Appendices

Tables

Table 2.1 Summary of Relevant Air Quality Limit Values and Objectives	3
Table 3.1 Traffic Data Used Within the Assessment	12
Table 3.2 Examples of Where Air Quality Objectives Apply	13
Table 3.3 Modelled Sensitive Receptors	14
Table 3.4 Impact Descriptors for Individual Sensitive Receptors	16
Table 3.5 Approaches to Dealing with Uncertainty used Within the Assessment	19
Table 4.1 Passively Monitored Urban Background Annual-Mean NO ₂ Concentrations	22
Table 4.2 Defra Mapped Annual-Mean Background NO ₂ Concentration Estimates	22
Table 4.3 Summary of Background Annual-Mean (Long-term) Concentrations used in the Assessment	23
Table 5.1 Dust Emission Magnitude for Earthworks, Construction and Trackout	25
Table 5.2 Sensitivity of the Surrounding Area for Demolition, Earthworks and Construction	25
Table 5.3 Sensitivity of the Surrounding Area for Trackout	26
Table 5.4 Dust Impact Risk for Earthworks, Construction and Trackout	26
Table 6.1 Predicted Annual-Mean NO ₂ Impacts at Existing Receptors	27
Table 6.2 Predicted Annual-Mean PM ₁₀ Impacts at Existing Receptors	28
Table 6.3 Predicted Annual-Mean PM _{2.5} Impacts at Existing Receptors	29
Table 6.4 Predicted Annual-Mean NO ₂ , PM ₁₀ and PM _{2.5} Concentrations (µg.m ⁻³) at Proposed Receptors	29

Figures

Figure 3.1 Types of Vehicle Emissions

Figure 3.2 Air Pollution: From Emissions to Exposure

Figure 1: Road Links and Receptors Modelled

Figure 2: Wind Rose – Shoreham Airport (2020)

Figure 3: Construction Dust Buffers

Appendices

Appendix A: Detailed Construction Dust Assessment Methodology

Appendix B: Sensitivity Test

Appendix C: Emissions Mitigation Calculation

1 Introduction

- 1.1 This report details the air quality assessment undertaken for the Proposed Development in Pagham. The Proposed Development comprises 106 residential units. ADC has not designated any Air Quality Management Areas (AQMAs) indicating that the air quality is generally good throughout the district.
- 1.2 This air quality assessment covers the:
- Construction phase - an evaluation of the temporary effects from fugitive construction dust and construction-vehicle exhaust emissions; and the
 - Operational phase – an evaluation of
 - the impacts of the development traffic on the local area
 - the impacts on future occupants of the development from their exposure to the prevailing levels of air pollution, which can be a factor in the suitability of the site for its proposed uses.
- 1.3 This report begins by setting out the policy and legislative context for the assessment. The methods and criteria used to assess potential air quality effects have then been described. The baseline air quality conditions have been established taking into account Defra estimates, local authority documents and the results of any local monitoring. The results of the assessment of air quality impacts have been presented. A conclusion has been drawn on the significance of the residual construction-phase effects and the residual operational-phase effects.

2 Policy and Legislative Context

Ambient Air Quality Legislation and National Policy

Air Quality Standards Regulations

- 2.1 The Air Quality Standards Regulations 2010 [1] sets limit values for ambient air concentrations for the main air pollutants: particulate matter (PM₁₀ and PM_{2.5}), nitrogen dioxide (NO₂), sulphur dioxide (SO₂), ozone (O₃), carbon monoxide (CO), lead (Pb) and benzene, certain toxic heavy metals (arsenic, cadmium and nickel) and polycyclic aromatic hydrocarbons (PAHs). These limit values are legally binding on the Secretary of State. The Government and devolved administrations operate various national ambient air quality monitoring networks to measure compliance and develop plans to meet the limit values.

UK Air Quality Strategy

- 2.2 The Environment Act 1995 established the requirement for the Government and the devolved administrations to produce a National Air Quality Strategy (AQS) for improving ambient air quality, the first being published in 1997 and having been revised several times since, with the latest published in 2007 [2]. The Strategy sets UK air quality standards* and objectives# for the pollutants in the Air Quality Standards Regulations plus 1,3-butadiene and recognises that action at national, regional and local level may be needed, depending on the scale and nature of the air quality problem. There is no legal requirement to meet objectives set within the UK AQS except where equivalent limit values are set within the Air Quality Standards Regulations.
- 2.3 The 1995 Environment Act also established the UK system of Local Air Quality Management (LAQM), that requires local authorities to go through a process of review and assessment of air quality in their areas, identifying places where objectives are not likely to be met, then declaring Air Quality Management Areas (AQMAs) and putting in place Air Quality Action Plans to improve air quality. These plans also contribute, at local level, to the achievement of the limit values in the Air Quality Standards Regulations.

* Standards are concentrations of pollutants in the atmosphere which can broadly be taken to achieve a certain level of environmental quality. Standards, as the benchmarks for setting objectives, are set purely with regard to scientific evidence and medical evidence on the effects of the particular pollutant on health, or on the wider environment, as minimum or zero risk levels.

Objectives are policy targets expressed as a concentration that should be achieved, all the time or for a percentage of time, by a certain date.

- 2.4 The limit values and objectives relevant to this assessment are summarised in Table 2.1. Although the limit values and the AQS objectives are numerically equal, there are some differences in where they apply and who is responsible for their achievement.

Table 2.1 Summary of Relevant Air Quality Limit Values and Objectives

Pollutant	Averaging Period	Objectives/ Limit Values	Not to be Exceeded More Than
Nitrogen Dioxide (NO ₂)	1 hour	200 µg.m ⁻³	18 times per calendar year
	Annual	40 µg.m ⁻³	-
Particulate Matter (PM ₁₀)	24 Hour	50 µg.m ⁻³	35 times per calendar year
	Annual	40 µg.m ⁻³	-
Particulate Matter (PM _{2.5})	Annual	25 µg.m ⁻³	-

- 2.5 On 14 January 2019, Defra published the 'Clean Air Strategy 2019'. The report sets out actions that the Government intends to take to reduce emissions from transport, in the home, from farming and from industry.

National Planning Policy

National Planning Policy Framework

- 2.6 The National Planning Policy Framework (NPPF) [3] is a material consideration for local planning authorities and decision-takers in determining applications. At the heart of the NPPF, is a presumption in favour of sustainable development, subject to caveats where a plan or project affects a habitats site. For determining planning applications, this means approving development proposals if they accord with an up-to-date local development plan, unless material considerations indicate otherwise. If the development plan does not contain relevant policies, or the policies are out of date, then planning permission should be granted unless the application of policies in the NPPF that protect areas or assets of particular importance provides a clear reason for refusing the development, or any adverse impacts would significantly outweigh the benefits.

- 2.7 The NPPF sets out three overarching objectives to achieve sustainable development. The relevant objective in the context of this air quality assessment is:

“an environmental objective – to protect and enhance our natural, built and historic environment; including making effective use of land, improving biodiversity, using natural resources prudently, minimising waste and pollution and mitigating and adapting to climate change, including moving to a low carbon economy” (Paragraph 8c)

- 2.8 Under the heading ‘Promoting sustainable transport’, the NPPF states:

“The planning system should actively manage patterns of growth in support of these objectives. Significant development should be focused on locations which are or can be made sustainable, through limiting the need to travel and offering a genuine choice of transport modes. This can help to reduce congestion and emissions, and improve air quality and public health. However, opportunities to maximise sustainable transport solutions will vary between urban and rural areas, and this should be taken into account in both plan-making and decision-making.” (Paragraph 105)

- 2.9 Under the heading ‘Conserving and enhancing the natural environment’, the NPPF states:

“Planning policies and decisions should contribute to and enhance the natural and local environment by:

...

Preventing new and existing development from contributing to, being put at unacceptable risk from, or being adversely affected by, unacceptable levels of soil, air, water or noise pollution or land instability. Development should, wherever possible, help to improve local environmental conditions such as air and water quality, taking into account relevant information such as river basin management plans; ...” (Paragraph 174)

“Planning policies and decisions should sustain and contribute towards compliance with relevant limit values or national objectives for pollutants, taking into account the presence of Air Quality Management Areas and Clean Air Zones, and the cumulative impacts from individual sites in local areas. Opportunities to improve air quality or mitigate impacts should be identified, such as through traffic and travel management, and green infrastructure provision and enhancement. So far as possible these opportunities should be considered at the plan-making stage, to ensure a strategic approach and limit the need for issues to be reconsidered when determining individual applications. Planning decisions should ensure that any new development in Air Quality Management Areas and Clean Air Zones is consistent with the local air quality action plan.” (Paragraph 186)

National Planning Practice Guidance

2.10 The National Planning Practice Guidance (NPPG) was issued on-line on 6 March 2014 and is updated periodically by government as a live document. The last major update was on 1 November 2019. The Air Quality section of the NPPG describes the circumstances when air quality, odour and dust can be a planning concern, requiring assessment.

2.11 The NPPG advises that whether or not air quality is relevant to a planning decision will depend on the proposed development and its location. Concerns could arise if the development is likely to have an adverse effect on air quality in areas where it is already known to be poor, particularly if it could affect the implementation of air quality strategies and action plans and/or breach legal obligations (including those relating to the conservation of habitats and species). Air quality may also be a material consideration if the proposed development would be particularly sensitive to poor air quality in its vicinity. The NPPG states that when deciding whether air quality is relevant to a planning application, considerations could include whether the development would:

“Lead to changes (including any potential reductions) in vehicle-related emissions in the immediate vicinity of the proposed development or further afield. This could be through the provision of electric vehicle charging infrastructure; altering the level of traffic congestion; significantly changing traffic volumes, vehicle speeds or both; or significantly altering the traffic composition on local roads. Other matters to consider include whether the proposal involves the development of a bus station, coach or lorry park; could add to turnover in a large car park; or involve construction sites that would generate large Heavy Goods Vehicle flows over a period of a year or more;

Introduce new point sources of air pollution. This could include furnaces which require prior notification to local authorities; biomass boilers or biomass-fuelled Combined Heat and Power plant; centralised boilers or plant burning other fuels within or close to an air quality management area or introduce relevant combustion within a Smoke Control Area; or extraction systems (including chimneys) which require approval or permits under pollution control legislation;

Expose people to harmful concentrations of air pollutants, including dust. This could be by building new homes, schools, workplaces or other development in places with poor air quality;

Give rise to potentially unacceptable impacts (such as dust) during construction for nearby sensitive locations;

Have a potential adverse effect on biodiversity, especially where it would affect sites designated for their biodiversity value.”

- 2.12 The NPPG provides advice on how air quality impacts can be mitigated and notes *“Mitigation options will need to be locationally specific, will depend on the proposed development and need to be proportionate to the likely impact. It is important that local planning authorities work with applicants to consider appropriate mitigation so as to ensure new development is appropriate for its location and unacceptable risks are prevented. Planning conditions and obligations can be used to secure mitigation where the relevant tests are met.”*

Local Planning Policy

- 2.13 The Arun Local Plan contains the following policy relevant to this assessment.

“Policy QE DM3

Air Pollution

All major development proposals will be required to assess the likely impacts of the development on air quality and mitigate any negative impacts by:

- a. Ensuring the development is located within easy reach of established public transport services;*
- b. Maximising provision for cycling and pedestrian facilities;*
- c. Encouraging the use of cleaner transport fuels on site, through the inclusion of electric car charging points; and*
- d. Contributing towards the improvement of the highway network where the development is predicted to result in increased congestion on the highway network...’*

3 Assessment Methodology


- 3.1 Neither the NPPF nor the NPPG is prescriptive on the methodology for assessing air quality effects or describing significance; practitioners continue to use guidance provided by Defra and non-governmental organisations, including Environmental Protection UK (EPUK) and the Institute of Air Quality Management (IAQM). However, the NPPG does advise that *“Assessments need to be proportionate to the nature and scale of development proposed and the potential impacts (taking into account existing air quality conditions), and because of this are likely to be locationally specific. The scope and content of supporting information is best discussed and agreed between the local planning authority and applicant before it is commissioned.”* It lists a number of areas that might be usefully agreed at the outset.
- 3.2 This air quality assessment covers the elements recommended in the NPPG. The approach is consistent with the EPUK & IAQM Land-Use Planning & Development Control: Planning For Air Quality document [4], the IAQM Guidance on the assessment of dust from demolition and construction [5] and, where relevant, Defra’s Local Air Quality Management Technical Guidance: LAQM.TG16 [6]. It includes the key elements listed below:
- assessment of the existing air quality in the study area (existing baseline) and prediction of the future air quality without the development in place (future baseline), using official government estimates from Defra, publicly available air quality monitoring data for the area, and relevant Air Quality Review and Assessment (R&A) documents;
 - a qualitative assessment of likely construction-phase impacts with mitigation and controls in place; and
 - a quantitative prediction of the future operational-phase air quality impact with the development in place (with any necessary mitigation), encompassing
 - the impacts of the development traffic on the local area
 - the impacts on future occupants of the development from their exposure to the prevailing levels of air pollution, which can be a factor in the suitability of the site for its proposed uses.
- 3.3 In line with the guidance set out in the NPPG, the Environmental Health Department at ADC was consulted to agree the scope and methodology for this assessment. The scope and methodology of this assessment was agreed on 11/02/2022 and RPS was referred to the additional *Air quality and emissions mitigation guidance for Sussex (2021)*.

- 3.4 Air quality guidance advises that the organisation engaged in assessing the overall risks should hold relevant qualifications and/or extensive experience in undertaking air quality assessments. The RPS air quality team members involved at various stages of this assessment have professional affiliations that include Fellow and Member of the Institute of Air Quality Management and Chartered Environmentalist and have the required academic qualifications for these professional bodies. In addition, the Director responsible for authorising all deliverables has over 17 years' experience.

Summary of Key Pollutants Considered

- 3.5 For the operational phase of the Proposed Development, the main pollutants from road traffic with potential for local air quality impacts are nitrogen oxides (NO_x) and particulate matter (PM₁₀). Emissions of total NO_x from combustion sources comprise nitric oxide (NO) and NO₂. The NO oxidises in the atmosphere to form NO₂. The assessment of operational impacts therefore focuses on changes in NO₂ and PM₁₀ concentrations. The impact from fine particulate matter, known as PM_{2.5} (a subset of PM₁₀) concentrations has also been considered.

Figure 3.1 Types of Vehicle Emissions

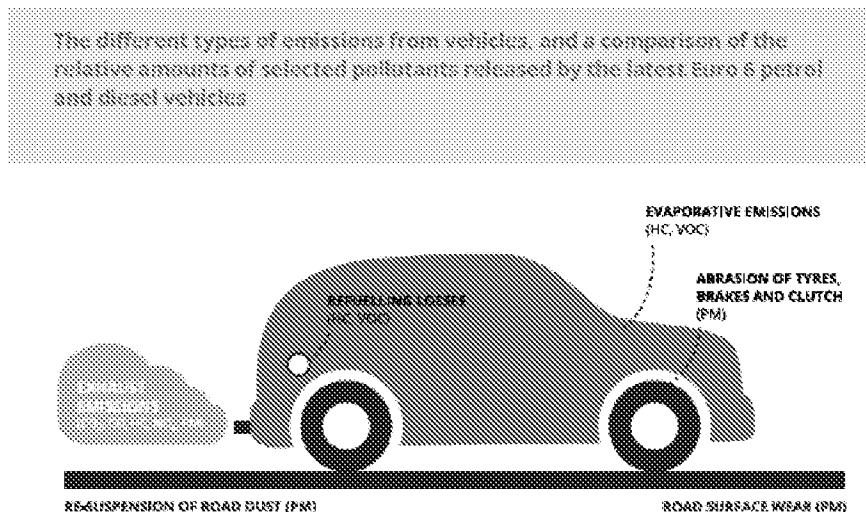

Source: European Environment Agency (2016) Explaining Road Transport Emissions: A Non-technical Guide

- 3.6 For the construction phase of the Proposed Development the key pollutant is dust, covering both the PM₁₀ fraction that is suspended in the air that can be breathed, and the deposited dust that has fallen out of the air onto surfaces and which can potentially cause temporary annoyance effects.

- 3.7 Regarding exhaust emissions from construction-related vehicles (contractors' vehicles and Heavy Goods Vehicles (HGVs), diggers, and other diesel-powered vehicles), these are unlikely to have a significant impact on local air quality [5] except for large, long-term construction sites: the EPUK & IAQM Land-Use Planning & Development Control: Planning For Air Quality document [4] indicates that air quality assessments should include developments increasing annual average daily Heavy Duty Vehicle (HDV) traffic flows by more than 25 within or adjacent to an AQMA and more than 100 elsewhere. The results of the Highways and Access assessment indicates that the aforementioned EPUK & IAQM thresholds are not expected to be exceeded for any individual road during the construction phase of this project; therefore, construction-vehicle exhaust emissions have not been assessed specifically.

Construction Phase - Methodology

- 3.8 Dust is the generic term used to describe particulate matter in the size range 1-75 µm in diameter [7]. Particles greater than 75 µm in diameter are termed grit rather than dust. Dusts can contain a wide range of particles of different sizes. The normal fate of suspended (i.e. airborne) dust is deposition. The rate of deposition depends largely on the size of the particle and its density; together these influence the aerodynamic and gravitational effects that determine the distance it travels and how long it stays suspended in the air before it settles out onto a surface. In addition, some particles may agglomerate to become fewer, larger particles; whilst others react chemically.
- 3.9 The effects of dust are linked to particle size and two main categories are usually considered:
- PM₁₀ particles, those up to 10 µm in diameter, remain suspended in the air for long periods and are small enough to be breathed in and so can potentially impact on health; and
 - Dust, generally considered to be particles larger than 10 µm which fall out of the air quite quickly and can soil surfaces (e.g. a car, window sill, laundry). Additionally, dust can potentially have adverse effects on vegetation and fauna at sensitive habitat sites.
- 3.10 The IAQM Guidance on the assessment of dust from demolition and construction sets out 350 m as the distance from the site boundary and 50 m from the site traffic route(s) up to 500 m of the entrance, within which there could potentially be nuisance dust and PM₁₀ effects on human receptors. For sensitive ecological receptors, the corresponding distances are 50 m in both cases. (In this particular application, there are no ecological receptors within the distances and ecological effects have been scoped out). These distances are set to be deliberately conservative.

- 3.11 Concentration-based limit values and objectives have been set for the PM₁₀ suspended particle fraction, but no statutory or official numerical air quality criterion for dust annoyance has been set at a UK, European or World Health Organisation (WHO) level. Construction dust assessments have tended to be risk based, focusing on the appropriate measures to be used to keep dust impacts at an acceptable level.
- 3.12 The IAQM dust guidance aims to estimate the impacts of both PM₁₀ and dust through a risk-based assessment procedure. The IAQM dust guidance document states: *"The impacts depend on the mitigation measures adopted. Therefore the emphasis in this document is on classifying the risk of dust impacts from a site, which will then allow mitigation measures commensurate with that risk to be identified."*
- 3.13 The IAQM dust guidance provides a methodological framework, but notes that professional judgement is required to assess effects: *"This is necessary, because the diverse range of projects that are likely to be subject to dust impact assessment means that it is not possible to be prescriptive as to how to assess the impacts. Also a wide range of factors affect the amount of dust that may arise, and these are not readily quantified."*
- 3.14 Consistent with the recommendations in the IAQM dust guidance, a risk-based assessment has been undertaken for the development, using the well-established source-pathway-receptor approach:
- The dust impact (the change in dust levels attributable to the development activity) at a particular receptor will depend on the magnitude of the dust source and the effectiveness of the pathway (i.e. the route through the air) from source to receptor.
 - The effects of the dust are the results of these changes in dust levels on the exposed receptors, for example annoyance or adverse health effects. The effect experienced for a given exposure depends on the sensitivity of the particular receptor to dust. An assessment of the overall dust effect for the area as a whole has been made using professional judgement taking into account both the change in dust levels (as indicated by the Dust Impact Risk for individual receptors) and the absolute dust levels, together with the sensitivities of local receptors and other relevant factors for the area.
- 3.15 The detail of the dust assessment methodology is provided in Appendix A.
- 3.16 The dust risk categories that have been determined for each of the four activities (demolition, earthworks, construction and trackout) have been used to define the appropriate site-specific mitigation measures based on those described in the IAQM dust guidance. The guidance states that provided the mitigation measures are successfully implemented, the resultant effects of the dust exposure will normally be 'not significant'.


- 3.17 This assessment does not consider the air quality impacts of dust from any contaminated land or buildings. If contaminated land is identified on the Application Site, the impacts will be assessed in other technical discipline reports.

Operational Phase - Methodology

Atmospheric Dispersion Modelling of Pollutant Concentrations

- 3.18 In urban areas, pollutant concentrations are primarily determined by the balance between pollutant emissions that increase concentrations, and the ability of the atmosphere to reduce and remove pollutants by dispersion, advection, reaction and deposition. An atmospheric dispersion model is used as a practical way to simulate these complex processes; such a model requires a range of input data, which can include emissions rates, meteorological data and local topographical information. The model used and the input data relevant to this assessment are described in the following sub-sections.

Figure 3.2 Air Pollution: From Emissions to Exposure

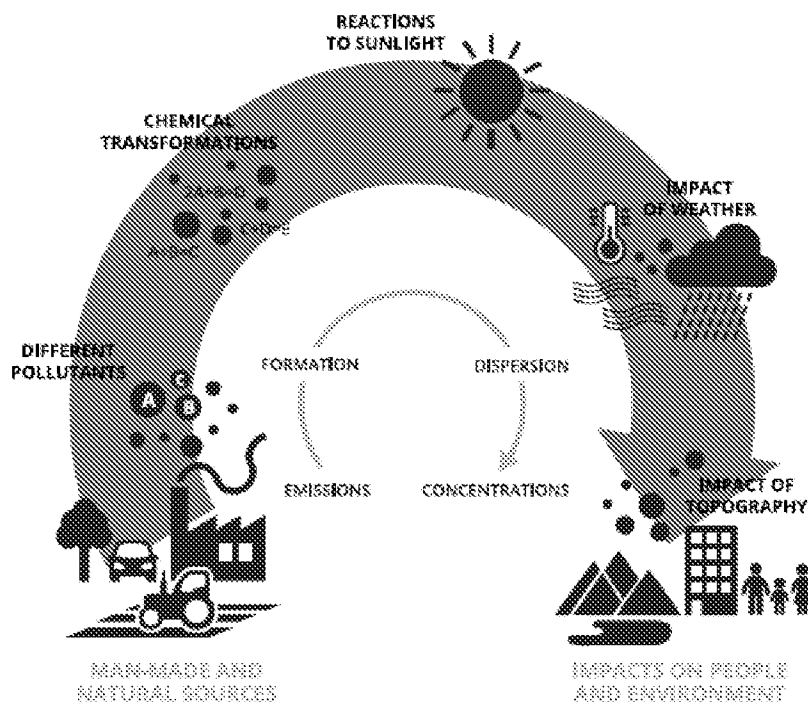

Source: European Environment Agency (2016) Explaining Road Transport Emissions: A Non-technical Guide

- 3.19 The atmospheric pollutant concentrations in an urban area depend not only on local sources at a street scale, but also on the background pollutant level made up of the local urban-wide background, together with regional pollution and pollution from more remote sources brought in on the incoming air mass. This background contribution needs to be added to the fraction from

the modelled sources, and is usually obtained from measurements or estimates of urban background concentrations for the area in locations that are not directly affected by local emissions sources. Background pollution levels are described in detail in Section 4.

- 3.20 The ADMS-Roads model has been used in this assessment to predict the air quality impacts from changes in traffic on the local road network. This is a version of the Atmospheric Dispersion Modelling System (ADMS), a formally validated model developed in the UK by Cambridge Environmental Research Consultants Ltd (CERC) and widely used in the UK and internationally for regulatory purposes.

Modelled Scenarios

- 3.21 The following scenarios were modelled:

- Without Development – without the Proposed Development in the first year that the development is expected to be fully operational, 2026; and
- With Development – with the Proposed Development in the first year that the development is expected to be fully operational, 2026.

Model Input Data

Traffic Flow Data

- 3.22 Traffic data used in the assessment have been provided by the project's transport consultants, RPS. The traffic flow data provided for this assessment are summarised in Table 3.1. The modelled road links are illustrated in Figure 1.

Table 3.1 Traffic Data Used Within the Assessment

Road Link ID	Road Link Name	Speed (km.hr ⁻¹)	Daily Two-Way Vehicle Flow			
			Without Development		With Development	
			LDV	HDV	LDV	HDV
1	Pagham Road 1	97	11662	97	12146	97
2	Pagham Road 2	97	6718	90	7390	90
3	Pagham Road 3	48	8295	90	8295	90
4	Hook Lane	48	4974	0	5133	0
5	Sefter Road 1	97	5158	7	5346	7
6	Sefter Road 2	48	8848	7	9036	7

Notes:

HDV = Heavy Duty Vehicle - vehicles greater than 3.5 t gross vehicle weight including buses

LDV = Light Duty Vehicle

3.23 The average speed on each road has been reduced by 10 km.hr⁻¹ to take into account the possibility of slow-moving traffic near junctions and at roundabouts in accordance with LAQM.TG16.

3.24 The traffic data includes the following committed developments:

- App Ref: 3P/30/19/OUT - 300 Dwellings, 80 bed care Home & D1 Uses
- App Ref: P/134/16/OUT – 280 Dwellings
- App Ref: P/140/16/OUT – 400 Dwellings, 70 bed Car Home & Primary School.

Vehicle Emission Factors

3.25 The modelling has been undertaken using Defra's 2020 emission factor toolkit (version 11) which draws on emissions generated by the European Environment Agency (EEA) COPERT 5.3 emission calculation tool.

Meteorological Data

3.26 ADMS-Roads requires detailed meteorological data as an input. The most representative observing station for the region of the study area that supplies all the data in the required format is Shoreham Airport approximately 34.5 km east of the Application Site. Meteorological data from that station for 2020 have been used within the dispersion model. The wind rose is presented in Figure 2.

Receptors

3.27 The air quality assessment predicts the impacts at locations that could be sensitive to any changes. For assessing human-health impacts, such sensitive receptors should be selected where the public is regularly present and likely to be exposed over the averaging period of the objective. LAQM.TG16 [6] provides examples of exposure locations and these are summarised in Table 3.2.

Table 3.2 Examples of Where Air Quality Objectives Apply

Averaging Period	Objectives should apply at:	Objectives should generally not apply at:
Annual-mean	All locations where members of the public might be regularly exposed. Building façades of residential properties, schools, hospitals, care homes.	Building façades of offices or other places of work where members of the public do not have regular access. Hotels, unless people live there as their permanent residence. Gardens of residential properties. Kerbside sites (as opposed to locations at the building's façades), or any other location where public exposure is expected to be short-term.

Averaging Period	Objectives should apply at:	Objectives should generally not apply at:
Daily-mean	All locations where the annual-mean objective would apply, together with hotels. Gardens of residential properties.	Kerbside sites (as opposed to locations at the building's façade), or any other location where public exposure is expected to be short-term.
Hourly-mean	All locations where the annual and 24 hour mean would apply. Kerbside sites (e.g. pavements of busy shopping streets). Those parts of car parks, bus stations and railway stations etc which are not fully enclosed, where members of the public might reasonably be expected to spend one hour or more. Any outdoor locations to which the public might reasonably be expected to spend 1-hour or longer.	Kerbside sites where the public would not be expected to have regular access.

3.28 Representative sensitive receptors for this assessment have been selected at properties where pollutant concentrations and/or changes in pollutant concentrations are anticipated to be greatest, as listed in Table 3.3.

Table 3.3 Modelled Sensitive Receptors

ID	Description	x	y
1	Residential Property at Pagham Road/Sefter Road	489467	99517
2	Residential Property at Pagham Road/Rookery Farm Access	489367	99047
3	Windmill Cottage	489282	98836
4	Residential Property at Hook Lane/Pagham Road	489330	98817
5	Residential Property at Sefter Road/Hook Lane	489877	99397
6	Residential Property at Hook Lane/Drift Road	489675	99019
7	Proposed Receptor 1	489326	98989
8	Proposed Receptor 2	489306	98929
9	Proposed Receptor 3	489297	98873

- 3.29 The annual, daily and hourly-mean AQS objectives apply at the front and rear façades of all residential properties. The approaches used to predict the concentrations for these different averaging periods are described below.

Long-Term Pollutant Predictions

- 3.30 Annual-mean NO_x and PM₁₀ concentrations have been predicted at representative sensitive receptors using ADMS-Roads, then added to relevant background concentrations. Primary NO in the NO_x emissions is converted to NO₂ to a degree determined by the availability of atmospheric oxidants locally and the strength of sunlight. For road traffic sources, annual-mean NO₂ concentrations have been derived from the modelled road-related annual-mean NO_x concentration using Defra's calculator [8].

Short-Term Pollutant Predictions

- 3.31 In order to predict the likelihood of exceedances of the hourly-mean AQS objectives for NO₂ and the daily-mean AQS objective for PM₁₀, the following relationships between the short-term and the annual-mean values at each receptor have been considered.

Hourly-Mean AQS Objective for NO₂

- 3.32 Research undertaken in support of LAQM.TG16 has indicated that the hourly-mean limit value and objective for NO₂ is unlikely to be exceeded at a roadside location where the annual-mean NO₂ concentration is less than 60 µg.m⁻³. The threshold of 60 µg.m⁻³ NO₂ has been used as the guideline for considering a likely exceedance of the hourly-mean nitrogen dioxide objective.

Daily-Mean AQS Objective for PM₁₀

- 3.33 The number of exceedances of the daily-mean AQS objective for PM₁₀ of 50 µg.m⁻³ may be estimated using the relationship set out in LAQM.TG16:

$$\text{Number of Exceedances of Daily Mean of } 50 \mu\text{g.m}^{-3} = -18.5 + 0.00145 * (\text{Predicted Annual-mean PM}_{10})^3 + 206 / (\text{Predicted Annual-mean PM}_{10} \text{ Concentration})$$

- 3.34 This relationship indicates that the daily-mean AQS objective for PM₁₀ is likely to be met if the predicted annual-mean PM₁₀ concentration is 31.8 µg.m⁻³ or less.
- 3.35 The daily mean objective is therefore not considered further within this assessment if the annual-mean PM₁₀ concentration is predicted to be less than 31.5 µg.m⁻³.

Fugitive PM₁₀ Emissions

- 3.36 Transport PM₁₀ emissions arise from both the tailpipe exhausts and from fugitive sources such as brake and tyre wear and re-suspended road dust. Improvements in vehicle technologies are

reducing PM₁₀ exhaust emissions; therefore, the relative importance of fugitive PM₁₀ emissions is increasing. Current official vehicle emission factors for particulate matter include brake dust and tyre wear which studies suggest may account for approximately one-third of the total particulate emissions from road transport; but not re-suspended road dust (which remains unquantified.)

Significance Criteria for Development Impacts on the Local Area

3.37 The EPUK & IAQM Land-Use Planning & Development Control: Planning For Air Quality document [4] advises that:

"The significance of the effects arising from the impacts on air quality will depend on a number of factors and will need to be considered alongside the benefits of the development in question. Development under current planning policy is required to be sustainable and the definition of this includes social and economic dimensions, as well as environmental. Development brings opportunities for reducing emissions at a wider level through the use of more efficient technologies and better designed buildings, which could well displace emissions elsewhere, even if they increase at the development site. Conversely, development can also have adverse consequences for air quality at a wider level through its effects on trip generation."

3.38 When describing the air quality impact at a sensitive receptor, the change in magnitude of the concentration should be considered in the context of the absolute concentration at the sensitive receptor. Table 3.4 provides the EPUK & IAQM approach for describing the long-term air quality impacts at sensitive human-health receptors in the surrounding area.

Table 3.4 Impact Descriptors for Individual Sensitive Receptors

Long term average concentration at receptor in assessment year	% Change in concentration relative to Air Quality Assessment Level			
	1	2-5	6-10	>10
75 % or less of AQAL	Negligible	Negligible	Slight	Moderate
76 -94 % of AQAL	Negligible	Slight	Moderate	Moderate
95 - 102 % of AQAL	Slight	Moderate	Moderate	Substantial
103 – 109 % of AQAL	Moderate	Moderate	Substantial	Substantial
110 % or more than AQAL	Moderate	Substantial	Substantial	Substantial

1. AQAL = Air Quality Assessment Level, which may be an air quality objective, limit value, or an Environment Agency Environmental Assessment Level (EAL).

2. The table is intended to be used by rounding the change in percentage pollutant concentration to whole numbers, which then makes it clearer which cell the impact falls within. The user is encouraged to treat the numbers with recognition of their likely accuracy and not assume a false level of precision. Changes of 0%, i.e. less than 0.5% will be described as negligible.
3. The table is only designed to be used with annual mean concentrations.
4. Descriptors for individual receptors only; the overall significance is determined using professional judgement. For example, a 'moderate' adverse impact at one receptor may not mean that the overall impact has a significant effect. Other factors need to be considered.
5. When defining the concentration as a percentage of the AQAL, use the 'without scheme' concentration where there is a decrease in pollutant concentration and the 'with scheme;' concentration for an increase.
6. The total concentration categories reflect the degree of potential harm by reference to the AQAL value. At exposure less than 75% of this value, i.e. well below, the degree of harm is likely to be small. As the exposure approaches and exceeds the AQAL, the degree of harm increases. This change naturally becomes more important when the result is an exposure that is approximately equal to, or greater than the AQAL.
7. It is unwise to ascribe too much accuracy to incremental changes or background concentrations, and this is especially important when total concentrations are close to the AQAL. For a given year in the future, it is impossible to define the new total concentration without recognising the inherent uncertainty, which is why there is a category that has a range around the AQAL, rather than being exactly equal to it.

- 3.39 The human-health impact descriptors above apply at individual receptors. The EPUK & IAQM guidance states that the impact descriptors *"are not, of themselves, a clear and unambiguous guide to reaching a conclusion on significance. These impact descriptors are intended for application at a series of individual receptors. Whilst it maybe that there are 'slight', 'moderate' or 'substantial' impacts at one or more receptors, the overall effect may not necessarily be judged as being significant in some circumstances."*
- 3.40 Professional judgement by a competent, suitably qualified professional is required to establish the significance associated with the consequence of the impacts. This judgement is likely to take into account the extent of the current and future population exposure to the impacts and the influence and/or validity of any assumptions adopted during the assessment process.

Significance Criteria for New Population Exposure (Site Suitability)

- 3.41 The EPUK & IAQM guidance considers an exceedance of an air quality objective at a building façade to be significant adverse effect unless provision is made to reduce the resident's or occupant's exposure by some means.

Determination of Mitigation

- 3.42 The *Air quality and emissions guidance for Sussex (2021)* document sets out a screening checklist for developers. As the Land West of Pagham Road proposed development is classified as "major" by the *"Town and Country Planning (Development Management Procedure) (England) Order 2015"*, an air quality assessment and emissions mitigation assessment are required. This is provided in Appendix C

Uncertainty

- 3.43 All air quality assessment tools, whether models or monitoring measurements, have a degree of uncertainty associated with the results. The choices that the practitioner makes in setting-up the model, choosing the input data, and selecting the baseline monitoring data will decide whether the final predicted impact should be considered a central estimate, or an estimate tending towards the upper bounds of the uncertainty range (i.e. tending towards worst-case).
- 3.44 The atmospheric dispersion model itself contributes some of this uncertainty, due to it being a simplified version of the real situation: it uses a sophisticated set of mathematical equations to approximate the complex physical and chemical atmospheric processes taking place as a pollutant is released and as it travels to a receptor. The predictive ability of even the best model is limited by how well the turbulent nature of the atmosphere can be represented.
- 3.45 Each of the data inputs for the model, listed earlier, will also have some uncertainty associated with them. Where it has been necessary to make assumptions, these have mainly been made towards the upper end of the uncertainty range informed by an analysis of relevant, available data.
- 3.46 The atmospheric dispersion model used for this assessment, ADMS Roads, has been validated by its supplier and is widely used by professionals in the UK and overseas. A site-specific verification (calibration) provides additional certainty and is particularly important when air quality levels are close to exceeding the objectives/limit values.
- 3.47 LAQM.TG16 requires that local authorities verify the results of any detailed modelling undertaken for the purposes of fulfilling their R&A duties. Model verification refers to the checks that are carried out on model performance at a local level. Modelled concentrations are compared with the results of monitoring. Where there is a disparity between modelled and monitored concentrations, the first step is to review the appropriateness of the data inputs to determine whether the performance of the model can be improved. Once reasonable efforts have been made to reduce the uncertainties in the data inputs, an adjustment may be established and applied to reduce any remaining disparity between modelled and monitored concentrations. No adjustment factor is deemed necessary where the modelled concentrations are within 25% of the monitored concentrations.
- 3.48 For the verification and adjustment of NO_x/NO₂ concentrations for R&A purposes, it is recommended that the comparison involves a combination of automatic and diffusion monitoring, rather than a single automatic monitor. This is to ensure any adjustment factor derived is representative of all locations modelled and not unduly weighted towards the characteristics at a single site. Where only diffusion tubes are used for the model verification, the study should

consider a broad spread of monitoring locations across the study area to provide sufficient information relating to the spatial variation in pollutant concentrations.

3.49 Local Authorities generally implement a broad spread of monitoring, particularly in areas that are known to be sensitive to changes in air quality. Consequently, Local Authorities are usually able to verify the models they use for R&A purposes; however for individual developments, there is less likely to be a broad range of monitoring locations within the relevant study area. In this case, a broad spread of monitoring data is not currently available to allow the model to be verified for the study area. Appendix B sets out the results of a sensitivity test multiplying the modelled road contribution by a factor of 2.

3.50 The main components of uncertainty in the total predicted concentrations, made up of the background concentration and the modelled fraction, include those summarised in Table 3.5.

Table 3.5 Approaches to Dealing with Uncertainty used Within the Assessment

Concentration	Source of Uncertainty	Approach to Dealing with Uncertainty	Comments
Background Concentration	Characterisation of current baseline air quality conditions	The background concentration used within the assessment is the most conservative value from a comparison of measured and Defra mapped concentration estimate.	The background concentration is the major proportion of the total predicted concentration.
	Characterisation of future baseline air quality (i.e. the air quality conditions in the future assuming that the development does not proceed)	The future background concentration used in the assessment is the same as the current background concentration and no reduction has been assumed. This is a conservative assumption as, in reality, background concentrations are likely to reduce over time as cleaner vehicle technologies form an increasing proportion of the fleet.	The conservative assumptions adopted ensure that the background concentration used within the model contributes to the result being towards the top of the uncertainty range, rather than a central estimate.
Fraction from Modelled Sources	Traffic flow estimates	High growth assumptions have been used to develop the traffic dataset used within the model.	The modelled fraction is a minor proportion of the total predicted concentration.
	Traffic speed estimates	The average speed has been reduced in congested areas to take account of slow-moving and queuing traffic.	
	Road-related emission factors – projection to future years	The most recently published emission factors have been used within the modelling and these are based on the current and best understanding of the variation in emission factors in future years.	
	Meteorological Data	Uncertainties arise from any differences between the conditions at the met station and the development site, and between the historical met years and the future years. These have been minimised by using	

Concentration	Source of Uncertainty	Approach to Dealing with Uncertainty	Comments
		meteorological data collated at a representative measuring site. The model has been run for a full year of meteorological conditions. This means that the conditions in 8,760 hours have been considered in the assessment.	
	Receptors	Receptor locations have been identified where concentrations are highest or where the greatest changes are expected.	
	Dispersion Modelling	It has not been possible to verify the model due to a lack of nearby monitors. Sensitivity analysis has been undertaken. The results are presented in Appendix B.	

- 3.51 The analysis of the component uncertainties indicates that, overall, the predicted total concentration is likely to be towards the top of the uncertainty range rather than being a central estimate. The actual concentrations that will be found when the development is operational are unlikely to be higher than those presented within this report and are more likely to be lower.

4 Baseline Air Quality Conditions

Overview

- 4.1 The background concentration often represents a large proportion of the total pollution concentration, so it is important that the background concentration selected for the assessment is realistic. National Planning Practice Guidance and EPUK & IAQM guidance highlight public information from Defra and local monitoring studies as potential sources of information on background air quality. LAQM.TG16 recommends that Defra mapped concentration estimates are used to inform background concentrations in air quality modelling and states that: *“Where appropriate these data can be supplemented by and compared with local measurements of background, although care should be exercised to ensure that the monitoring site is representative of background air quality”*.
- 4.2 For this assessment, the background air quality has been characterised by drawing on information from the following public sources:
- Defra maps [9], which show estimated pollutant concentrations across the UK in 1 km grid squares; and
 - published results of local authority Review and Assessment (R&A) studies of air quality, including local monitoring and modelling studies.
- 4.3 A detailed description of how the baseline air quality has been derived for this Proposed Development site is summarised in the following paragraphs.

Review and Assessment Process

- 4.4 ADC has not designated any AQMAs, indicating that air quality in the area is generally good throughout the District.

Local Urban Background Monitoring

- 4.5 Monitors at urban background locations measure concentrations away from the local influence of emission sources and are therefore broadly representative of residential areas within large conurbations. Monitoring at local urban background locations is considered an appropriate source of data for the purposes of describing baseline air quality for this Proposed Development site.
- 4.6 There are no local monitoring stations where urban background concentrations are measured using continuous automatic instruments.

- 4.7 However, ADC manually monitored NO₂ concentrations at three urban background locations using passive diffusion tubes up to 2016. After 2016, all three were relocated to roadside sites.
- 4.8 The neighbouring district (Chichester) also monitors NO₂ at urban background locations. Some of monitoring locations in Chichester are closer to the Application Site than the locations within Arun. The most recently measured annual-mean concentrations are presented in Table 4.1.

Table 4.1 Passively Monitored Urban Background Annual-Mean NO₂ Concentrations

Site Name	District	Approximate Distance from the Application Site (km)	Concentration (µg.m ⁻³)				
			2015	2016	2017	2018	2019
Litt03	Arun	13.8	12.9	12.9	-	-	-
Arun07		14.7	12.7	13.7	-	-	-
Bog11		4.4	15.4	15.1	-	-	-
7 – Cleveland Road	Chichester	6.0	17	18	16	15	14
11- Arthur Purchase		6.9	18	20	18	17	17

All concentrations have been adjusted for bias

Defra Mapped Concentration Estimates

- 4.9 Defra's total annual-mean NO₂ concentration estimates have been collected for the 1 km grid squares of the monitoring sites and the Proposed Development and are summarised in Table 4.2.

Table 4.2 Defra Mapped Annual-Mean Background NO₂ Concentration Estimates

Monitor Code	Approximate Distance from the Application Site (km)	Concentration (µg.m ⁻³)	
		Range of Monitored	Estimated Defra Mapped
Application Site	-	-	9.0
Litt03	13.8	12.9	11.7
Arun07	14.7	12.7 – 13.7	9.5
Bog11	4.4	15.1 – 15.4	11.6
7 – Cleveland Road	6.0	14 – 18	11.6
11- Arthur Purchase	6.9	17 – 20	11.6

Appropriate Background Concentrations for the Development Site

- 4.10 For NO₂, the Defra mapped background concentration estimates are generally smaller than the range of the results from monitoring and the use of these data would not be conservative. The Bog11 monitor is the closest monitoring location to the Application Site. Automatically monitored annual-mean NO₂ concentrations at the monitor range from 15.1 to 15.4 µg.m⁻³. To ensure the assessment is conservative, the background annual-mean NO₂ concentration has been derived from the highest concentration of 15.4 µg.m⁻³, monitored in 2015.
- 4.11 In the absence of PM₁₀ and PM_{2.5} monitoring at this site, the background annual-mean concentration at the Application Site has been derived from the Defra mapped background concentration estimate.
- 4.12 Historically the view has been that background traffic-related NO₂ concentrations in the UK would reduce over time, due to the progressive introduction of improved vehicle technologies and increasingly stringent limits on emissions. After a prolonged period through the last decade where background annual-mean NO₂ concentrations did not generally decrease in line with expectations, the most recent monitoring studies indicate ambient traffic-related NO₂ concentrations are now falling. To ensure that the assessment presents conservative results, no reduction in the background has been applied for future years.
- 4.13 Table 4.3 summarises the annual-mean background concentrations for NO₂, PM₁₀ and PM_{2.5} used in this assessment.

Table 4.3 Summary of Background Annual-Mean (Long-term) Concentrations used in the Assessment

Pollutant	Data Source	Concentration (µg.m ⁻³)
NO ₂	Bog11 (2015)	15.4
PM ₁₀	Defra Mapped (2018)	13.7
PM _{2.5}		9.4

5 Assessment of Construction-Phase Air Quality Impacts

Construction Dust

- 5.1 Whilst no detailed construction phase information is currently available, the type of activities that could cause fugitive dust emissions are: demolition; earthworks; handling and disposal of spoil; wind-blown particulate material from stockpiles; handling of loose construction materials; and movement of vehicles, both on and off site.
- 5.2 The level and distribution of construction dust emissions will vary according to factors such as the type of dust, duration and location of dust-generating activity, weather conditions and the effectiveness of suppression methods.
- 5.3 The main effect of any dust emissions, if not mitigated, could be annoyance due to soiling of surfaces, particularly windows, cars and laundry. However, it is normally possible, by implementation of proper control, to ensure that dust deposition does not give rise to significant adverse effects, although short-term events may occur (for example, due to technical failure or exceptional weather conditions). The following assessment, using the IAQM methodology, predicts the risk of dust impacts and the level of mitigation that is required to control the residual effects to a level that is “not significant”.

Risk of Dust Impacts

Source

- 5.4 No demolition would take place at the proposed development. Therefore, it has been scoped out of this assessment.
- 5.5 The site area is greater than 10,000 m², the dust emission magnitude for the earthworks phase is classified as large.
- 5.6 The total volume of the buildings to be constructed would be between 25,000 and 100,000 m³ and the dust emission magnitude for the construction phase is classified as medium.
- 5.7 Assuming that the maximum number of outwards movements in any one day is less than 10 HDVs, the dust emission magnitude for trackout would be classified as small.

Table 5.1 Dust Emission Magnitude for Earthworks, Construction and Trackout

Earthworks	Construction	Trackout
Large	Medium	Small

Pathway and Receptor - Sensitivity of the Area

5.8 All earthworks and construction activities are assumed to occur within the site boundary. As such, receptors at distances within 20 m, 50 m, 100 m, 200 m and 350 m of the site boundary have been identified and are illustrated in Figure 3. The sensitivity of the area has been classified and the results are provided in Table 5.2 below.

Table 5.2 Sensitivity of the Surrounding Area for Demolition, Earthworks and Construction

Potential Impact	Sensitivity of the Surrounding Area	Reason for Sensitivity Classification
Dust Soiling	High	Approx. 25 residential properties on Honeysuckle Drive, Oaktree Close, Barley Close, Old Barn Close, Millview Close, Nyetimber Mill to the south and west of the site. Windmill Barn and Commonmead Barn to the north. 10 – 100 high sensitivity receptors located within 20 m of the site boundary (Table A.4)
Human Health	Low	Approx. 25 residential properties on Honeysuckle Drive, Oaktree Close, Barley Close, Old Barn Close, Millview Close, Nyetimber Mill to the south and west of the site. Windmill Barn and Commonmead Barn to the north. Background PM₁₀ concentrations for the assessment = 13.7 µg.m⁻³ 10 – 100 high sensitivity receptors located within 20 m of the site boundary and PM₁₀ concentrations below 24 µg.m⁻³ (Table A.5)

5.9 The Dust Emission Magnitude for trackout is classified as small and trackout may occur on roads up to 500 m from the site. The major routes within 500 m of the site are Pagham Road and Sefter Road. The sensitivity of the area has been classified and the results are provided in Table 5.3

Table 5.3 Sensitivity of the Surrounding Area for Trackout

Potential Impact	Sensitivity of the Surrounding Area	Reason for Sensitivity Classification
Dust Soiling	Medium	Between 1 and 10 residential properties aligning Pagham Road (north bound). 1 – 10 high sensitivity receptors located within 20 m of the roads (Table A.5)
Human Health	Low	Between 1 and 10 residential properties aligning Pagham Road (north bound). Background PM ₁₀ concentrations for the assessment = 13.7 µg.m ⁻³ 1 – 10 high sensitivity receptors located within 20 m of the roads and PM ₁₀ concentrations below 24 µg.m ⁻³ (Table A.6)

Overall Dust Risk

5.10 The Dust Emission Magnitude has been considered in the context of the Sensitivity of the Area (Tables A.5 and A.6) to give the Dust Impact Risk. Table 5.4 summarises the Dust Impact Risk for the three activities.

Table 5.4 Dust Impact Risk for Earthworks, Construction and Trackout

Source	Earthworks	Construction	Trackout
Dust Soiling	High	Medium	Negligible
Human Health	Low	Low	Negligible
Risk	High	Medium	Negligible

5.11 Taking the site as a whole, the overall risk is deemed to be high. The mitigation measures appropriate to a level of risk for the site as a whole and for each of the phases are set out in Section 7.

5.12 Provided this package of mitigation measures is implemented, the residual construction dust effects will not be significant. The IAQM dust guidance states that “*For almost all construction activity, the aim should be to prevent significant effects on receptors through the use of effective mitigation. Experience shows that this is normally possible. Hence the residual effect will normally be ‘not significant’.*” The IAQM dust guidance recommends that significance is only assigned to the effect after the activities are considered with mitigation in place.

6 Assessment of Operational-Phase Air Quality Impacts

Assessment of Air Quality Impacts on Surrounding Area

6.1 This section of the report summarises the future operational-phase air quality impacts of the key pollutants associated with the development traffic of the proposed scheme.

Nitrogen Dioxide (NO₂)

6.2 Table 6.1 presents the annual-mean NO₂ concentrations predicted at the façades of existing receptors.

Table 6.1 Predicted Annual-Mean NO₂ Impacts at Existing Receptors

Receptor ID	Concentration (µg.m ⁻³)		With - Without Dev as % of the AQS Objective	Impact Descriptor
	Without Development	With Development		
1	16.5	16.6	0	Negligible
2	16.0	16.0	0	Negligible
3	16.0	16.0	0	Negligible
4	15.9	15.9	0	Negligible
5	15.9	15.9	0	Negligible
6	15.8	15.8	0	Negligible
Maximum	16.5	16.6	0	-
Minimum	15.8	15.8	0	-

6.3 Predicted annual-mean NO₂ concentrations in the opening year at the façades of the existing receptors are below the AQS objective for NO₂. When the magnitude of change is considered in the context of the absolute concentrations, the impact descriptor is 'negligible'.

6.4 As all predicted annual-mean NO₂ concentrations are below 60 µg.m⁻³, the hourly-mean objective for NO₂ is likely to be met at all receptors. The short-term NO₂ impact can be considered 'negligible' and is not considered further within this assessment.

6.5 Overall, the impact on the surrounding area from NO₂ is considered to be 'negligible', using the criteria adopted for this assessment and based on professional judgement.

Particulate Matter (PM₁₀)

6.6 Table 6.2 presents the annual-mean PM₁₀ concentrations predicted at the façades of existing receptors.

Table 6.2 Predicted Annual-Mean PM₁₀ Impacts at Existing Receptors

Receptor ID	Concentration (µg.m ⁻³)		With - Without Dev as % of the AQS Objective	Impact Descriptor
	Without Development	With Development		
1	14.1	14.1	0	Negligible
2	13.9	13.9	0	Negligible
3	13.9	13.9	0	Negligible
4	13.9	13.9	0	Negligible
5	13.9	13.9	0	Negligible
6	13.9	13.9	0	Negligible
Maximum	14.1	14.1	0	-
Minimum	13.9	13.9	0	-

6.7 Predicted annual-mean PM₁₀ concentrations in the opening year at the façades of the existing receptors are well below the AQS objective for PM₁₀. When the magnitude of change is considered in the context of the absolute concentrations, the impact descriptor is categorised as 'negligible' at all receptors.

6.8 As all predicted annual mean PM₁₀ concentrations are below 31.5 µg.m⁻³, the daily-mean PM₁₀ objective is expected to be met at all receptors and the short-term PM₁₀ impact is not considered further within this assessment.

6.9 Overall, the impact on the surrounding area from PM₁₀ is considered to be 'negligible', using the criteria adopted for this assessment and based on professional judgement.

Fine Particulate Matter (PM_{2.5})

6.10 Table 6.3 presents the annual-mean PM_{2.5} concentrations predicted at the façades of existing receptors.

Table 6.3 Predicted Annual-Mean PM_{2.5} Impacts at Existing Receptors

Receptor ID	Concentration (µg.m ⁻³)		With - Without Dev as % of the AQS Objective	Impact Descriptor
	Without Development	With Development		
1	9.6	9.6	0	Negligible
2	9.5	9.5	0	Negligible
3	9.5	9.5	0	Negligible
4	9.5	9.5	0	Negligible
5	9.5	9.5	0	Negligible
6	9.5	9.5	0	Negligible
Maximum	9.6	9.6	0	-
Minimum	9.5	9.5	0	-

 AQS objective = 25 µg.m⁻³

- 6.11 Predicted annual-mean PM_{2.5} concentrations in the opening year at the façades of the existing receptors are below the AQS objective for PM_{2.5} at all receptors. When the magnitude of change is considered in the context of the absolute concentrations, the impact descriptor is categorised as 'negligible' at all receptors.
- 6.12 Overall, the impact on the surrounding area from PM_{2.5} is considered to be 'negligible', using the criteria adopted for this assessment and based on professional judgement.

Assessment of New Population Exposure (Site Suitability)

- 6.13 This section of the report summarises the operational-phase air quality impacts on future occupants of the development from their exposure to the prevailing levels of air pollution, which can be a factor in the suitability of the site for its proposed uses.
- 6.14 Table 6.4 presents the annual-mean NO₂, PM₁₀ and PM_{2.5} concentrations predicted at the façades of proposed receptors.

Table 6.4 Predicted Annual-Mean NO₂, PM₁₀ and PM_{2.5} Concentrations (µg.m⁻³) at Proposed Receptors

Receptor ID	Receptor Name	NO ₂	PM ₁₀	PM _{2.5}
7	Proposed Receptor 1	15.7	13.8	9.5
8	Proposed Receptor 2	15.7	13.8	9.5
9	Proposed Receptor 3	15.9	13.9	9.5
Maximum	-	15.9	13.9	9.5
Minimum	-	15.7	13.8	9.5

- 6.15 The long-term and short-term objectives apply at the Proposed Development.
- 6.16 The predicted annual-mean NO₂ concentrations range between 15.7 and 15.9 µg.m⁻³, well below the annual-mean AQS objective of 40 µg.m⁻³ at all receptors. Furthermore, as the annual-mean NO₂ concentration is predicted to be less than 60 µg.m⁻³, the hourly-mean AQS objective is expected to be met.
- 6.17 The predicted annual-mean PM₁₀ concentrations range between 13.8 and 13.9 µg.m⁻³, well below the annual-mean AQS objective of 40 µg.m⁻³ at all receptors. Furthermore, as the annual-mean PM₁₀ concentration is predicted to be less than 31.5 µg.m⁻³, the daily-mean AQS objective for this pollutant is expected to be met.
- 6.18 Predicted annual-mean PM_{2.5} concentrations are 9.5 µg.m⁻³. Predicted concentrations at all receptors are below the annual-mean AQS objective of 25 µg.m⁻³.

Significance of Effects

- 6.19 It is generally considered good practice that, where possible, an assessment should communicate effects both numerically and descriptively. Professional judgement by a competent, suitably qualified professional is required to establish the significance associated with the consequence of the impacts.
- 6.20 The impacts predicted at individual receptors and the geographical extent over which such impacts occur, can be used to inform the judgement on the impact on the surrounding area as a whole, and whether the resulting overall effect is significant or not. The IAQM guidance states, *"Whilst it may be that there are 'slight', 'moderate', or 'substantial' impacts at one or more receptors, the overall effect may not necessarily be judged as being significant in some circumstances."* and *"...a 'moderate' or 'substantial' impact may not have a significant effect if it is confined to a very small area and where it is not obviously the cause of harm to human health."*
- 6.21 The results of the modelling indicate that with the development, the predicted NO₂, PM₁₀ and PM_{2.5} concentrations at existing receptors are below the relevant long and short-term AQS objectives. When the magnitude of change in annual-mean NO₂, PM₁₀ and PM_{2.5} concentrations is considered in the context of the absolute predictions, the air quality impacts of the development on existing receptors are categorised as 'negligible'. Taking into account the geographical extent of the impacts predicted in this study, the overall impact of the development on the surrounding area as a whole is considered to be 'negligible', using the descriptors adopted for this assessment.
- 6.22 The AQS objectives for NO₂, PM₁₀ and PM_{2.5} are likely to be met at the facades of the Proposed Development. On that basis, future occupants of the development should be exposed to acceptable air quality and the site is deemed suitable for its proposed future in this respect.

- 6.23 Using professional judgement, the resulting air quality effect is considered to be 'not significant' overall.

Sensitivity and Uncertainty

- 6.24 Section 3 provided an analysis of the sources of uncertainty in the results of the assessment. The conclusion of that analysis was that, overall, the predicted total concentration is likely to be towards the top of the uncertainty range rather than being a central estimate. The actual concentrations that will be found when the development is operational are unlikely to be higher than those presented within this report and are more likely to be lower.
- 6.25 The impacts at existing receptors are shown to be not significant even for this conservative scenario. Similarly, the predicted pollutant concentrations at proposed receptors are below the relevant AQS objectives. Consequently, further sensitivity analysis has not been undertaken and, in practice, the impacts at sensitive receptors are likely to be lower than those reported in this conservative assessment.

7 Assessment of Cumulative Effects

- 7.1 During the construction phase, cumulative dust effects may occur if there are other proposed and potential developments within 700 metres of the project site and construction activities occur at the same time as the project. Assuming that mitigation and control measures that are proportionate to risk of a dust impact are identified and implemented at those sites, the cumulative effect should not be significant.
- 7.2 During the operational phase, cumulative effects have been taken into account to the extent that the traffic from other developments has been included in the traffic data provided for this assessment. The other developments included within the traffic data provided are given in paragraph 3.24. No further cumulative effects are considered likely.

8 Mitigation

Mitigation During Construction

- 8.1 The IAQM dust guidance lists mitigation measures for low, medium and high dust risks.
- 8.2 As summarised in Table 5.4, the predicted Dust Impact Risk is classified as high for earthworks, medium for construction and negligible for trackout. The general site measures described as 'highly recommended' for high risks are listed below. The 'highly recommended' measures for high-risk earthworks and medium risk construction sites are also listed. There are no 'highly recommended' measures for negligible risk trackout.

Communications

- Develop and implement a stakeholder communications plan that includes community engagement before work commences on site.
- Display the name and contact details of person(s) accountable for air quality and dust issues on the site boundary. This may be the environment manager/engineer or the site manager.
- Display the head or regional office contact information

Dust Management Plan

- Develop and implement a Dust Management Plan (DMP) (which may include measures to control other emissions), approved by the Local Authority. The level of detail will depend on the risk, and should include as a minimum the highly recommended measures in this document. The desirable measures should be included as appropriate for the site. The DMP may include monitoring of dust.

Site Management

- Record all dust and air quality complaints, identify cause(s), take appropriate measures to reduce emissions in a timely manner, and record the measures taken.
- Make the complaints log available to the local authority when asked.
- Record any exceptional incidents that cause dust and/or air emissions, either on- or off- site, and the action taken to resolve the situation in the log book.

Monitoring

- Undertake daily on-site and off-site inspection, where receptors (including roads) are nearby, to monitor dust, record inspection results, and make the log available to the local authority when asked. This should include regular dust soiling checks of surfaces
- Carry out regular site inspections to monitor compliance with the DMP, record inspection results, and make an inspection log available to the local authority when asked.
- Increase the frequency of site inspections by the person accountable for air quality and dust issues on site when activities with a high potential to produce dust are being carried out and during prolonged dry or windy conditions.
- Agree dust deposition, dust flux, or real-time PM₁₀ continuous monitoring locations with the Local Authority. Commence baseline monitoring at least three months before work commences on site or, if it a large site, before work on a phase commences. A shorter monitoring period or concurrent upwind and downwind monitoring may be agreed by the local authority. Further guidance is provided by IAQM on monitoring during demolition, earthworks and construction [10].

Preparing and Maintaining the Site

- Plan site layout so that machinery and dust causing activities are located away from receptors, as far as is possible. Use screening intelligently where possible – e.g. locating site offices between potentially dusty activities and the receptors.
- Erect solid screens or barriers around dusty activities or the site boundary that are at least as high as any stockpiles on site.
- Fully enclose site or specific operations where there is a high potential for dust production and the site is active for an extended period.
- Avoid site runoff of water or mud.
- Keep site fencing, barriers and scaffolding clean.
- Remove materials that have a potential to produce dust from site as soon as possible, unless being re-used on site. If they are being re-used on-site cover as described below.
- Depending on the duration that stockpiles will be present and their size - cover, seed, fence or water to prevent wind whipping.

Operating Vehicle/machinery and Sustainable Travel

- Ensure all vehicles switch off engines when stationary – no idling vehicles.

- Avoid the use of diesel or petrol powered generators and use mains electricity or battery powered equipment where practicable.
- Impose and signpost a maximum-speed-limit of 15 mph on surfaced and 10 mph on un-surfaced haul roads and work areas (if long haul routes are required these speeds may be increased with suitable additional control measures provided, subject to the approval of the nominated undertaker and with the agreement of the local authority, where appropriate)
- Produce a Construction Logistics Plan to manage the sustainable delivery of goods and materials.
- Implement a Travel Plan that supports and encourages sustainable travel (public transport, cycling, walking, and car-sharing).

Operations

- Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques such as water sprays or local extraction, e.g. suitable local exhaust ventilation systems.
- Ensure an adequate water supply on the site for effective dust/particulate matter suppression/mitigation, using non-potable water where possible.
- Use enclosed chutes, conveyors and covered skips, where practicable.
- Minimise drop heights from conveyors, loading shovels, hoppers and other loading or handling equipment and use fine water sprays on such equipment wherever appropriate.
- Ensure equipment is readily available on site to clean any dry spillages, and clean up spillages as soon as reasonably practicable after the event using wet cleaning methods.

Waste Management

- Avoid bonfires and burning of waste materials.

Medium Risk Measures Specific to Construction

- Ensure sand and other aggregates are stored in bunded areas and are not allowed to dry out, unless this is required for a particular process, in which case ensure that appropriate additional control measures are in place.

High Risk Measures Specific to Earthworks

- Re-vegetate earthworks and exposed areas/soil stockpiles to stabilise surfaces as soon as practicable.

- Use Hessian, mulches or trackifiers where it is not possible to re-vegetate or cover with topsoil, as soon as practicable.
- Only remove the cover in small areas during work and not all at once.

8.3 The IAQM dust guidance states that with the recommended dust mitigation measures in place the residual effect will normally be “*not significant*”, and recommends the mitigation is secured by for example planning conditions, a legal obligation, or by legislation.

Mitigation for the Operational Impact of the Development on the Surrounding Area

8.4 When the change in concentration at existing sensitive receptors is considered in the context of the absolute concentration, the overall air quality impact on the surrounding area as a whole is categorised as “negligible” and the resulting effect is considered to be “not significant”. On that basis, no mitigation measures are considered necessary.

Mitigation for New Population Exposure (Site Suitability)

8.5 The predicted pollutant concentrations at proposed sensitive receptors are below the relevant AQS objectives. As such, the air quality effect of exposure on future occupants is considered to be “not significant”. On that basis, no mitigation measures are considered necessary.

Mitigation in *Air quality and emissions mitigation guidance for Sussex (2021)*

8.6 For the operational phase, the *Air quality and emissions mitigation guidance for Sussex (2021)* lists standard mitigation that all major residential developments must follow:

- All gas fired boilers to meet a minimum standard of <40mgNO_x/kWh. Consideration should be given to renewable sources of energy, e.g. air source heat pumps, as an alternative
- Meet the electric vehicle charging point guidance set out in *West Sussex County Council Guidance on Parking at New Developments (September 2020)*.

8.7 Table 2 of the *Air quality and emissions mitigation guidance for Sussex (2021)* sets out a list of possible mitigation measures for residential and commercial/industrial developments. The residential and additional measures are set out in the table below (the list of measures is not exhaustive nor listed in order of preference).

Residential
Invest in EV charging infrastructure within the development over and above the current recommended standards
Provide vouchers for alternatives to private car use
Set up a car club within the development or contribute to the cost of a local car club
Set up or join an existing car sharing scheme for residents
Designate parking spaces for car club/car sharing vehicles
Designate parking spaces for low emission vehicles
Provide electric bikes
Improve cycle paths to link to the existing local cycle network
Provide secure cycle storage
Invest in additional evergreen infrastructure to reduce particulates and other pollutants
Additional Mitigation
Contribute to local low or zero emission vehicle refuelling/recharging infrastructure
Contribute to low emission bus service provision or waste collection services
Contribute to local bike/e-bike hire schemes
Contribute to renewable fuel and energy generation projects
Fund incentives for the take-up of low emission technologies and fuels

9 Conclusions


- 9.1 This assessment has considered dust effects during the construction phase and the air quality impacts during the operational phase of the Land West of Pagham Road development.
- 9.2 Impacts during construction, such as dust generation and plant vehicle emissions, are predicted to be of short duration and only relevant during the construction phase. The results of the risk assessment of construction dust impacts undertaken using the IAQM dust guidance, indicates that before the implementation of mitigation and controls, the risk of dust impacts will be high. Implementation of the highly-recommended mitigation measures described in the IAQM construction dust guidance should reduce the residual dust effects to a level categorised as “*not significant*”.
- 9.3 Regarding the operational impact of the Land West of Pagham Road development on the surrounding area, detailed atmospheric dispersion modelling has been undertaken for the first year in which the development is expected to be fully operational, 2026. The operational impact of the Land West of Pagham Road development on existing receptors in the local area is predicted to be ‘negligible’ taking into account the changes in pollutant concentrations and absolute levels. Using the criteria adopted for this assessment together with professional judgement, the overall impact on the area as a whole is described as ‘negligible’.
- 9.4 Regarding suitability of air quality at the site for introducing new occupants, pollutant concentrations at the façades of proposed residential receptors are predicted to be well within the relevant health-based air quality objectives. On that basis, future occupants of the Land West of Pagham Road development should be exposed to acceptable air quality and the site is deemed suitable for its proposed future use in this respect.
- 9.5 Using professional judgement, the resulting air quality effect of the Land West of Pagham Road development is considered to be ‘not significant’ overall.
- 9.6 At the heart of the NPPF is a presumption in favour of sustainable development, subject to caveats where a plan or project affects a habitats site. For determining planning applications, this means approving development proposals if they accord with the local development plan, unless material considerations indicate otherwise. If the development plan is absent, silent or the policies are out of date, then planning permission should be granted unless any adverse impacts would significantly outweigh the benefits, or specific policies in the NPPF indicate development should be restricted.

- 9.7 The NPPG advises that in considering planning permission, the relevant question for air quality is *“will the proposed development (including mitigation) lead to an unacceptable risk from air pollution, prevent sustained compliance with limit values or national objectives for pollutants or fail to comply with the requirements of the Habitats Regulations or other environmental policies and duties, taking into account the presence of Air Quality Management Areas and Clean Air Zones, and the cumulative impacts from individual sites in local areas?”* The proposed development will not.
- 9.8 The Land West of Pagham Road development does not, in air quality terms, conflict with national or local policies. There are no constraints to the development in the context of air quality.

Glossary

AADT	Annual Average Daily Traffic Flow
ADMS	Atmospheric Dispersion Modelling System
AQMA	Air Quality Management Area
AQS	Air Quality Strategy
Deposited Dust	Dust that has settled out onto a surface after having been suspended in air
DMP	Dust Management Plan
Dust	Solid particles suspended in air or settled out onto a surface after having been suspended in air
Effect	The consequences of an impact, experienced by a receptor
EPUK	Environmental Protection UK
HDV	Heavy Duty Vehicle
HGV	Heavy Goods Vehicle
IAQM	Institute of Air Quality Management
Impact	The change in atmospheric pollutant concentration and/or dust deposition. A scheme can have an 'impact' on atmospheric pollutant concentration but no effect, for instance if there are no receptors to experience the impact
NPPF	National Planning Policy Framework
NPPG	National Planning Practice Guidance
R&A	Review and Assessment
Receptor	A person, their land or property and ecologically sensitive sites that may be affected by air quality
Risk	The likelihood of an adverse event occurring
Trackout	The transport of dust and dirt from the construction/demolition site onto the public road network, where it may be deposited and then re-suspended by vehicles using the network

Figures

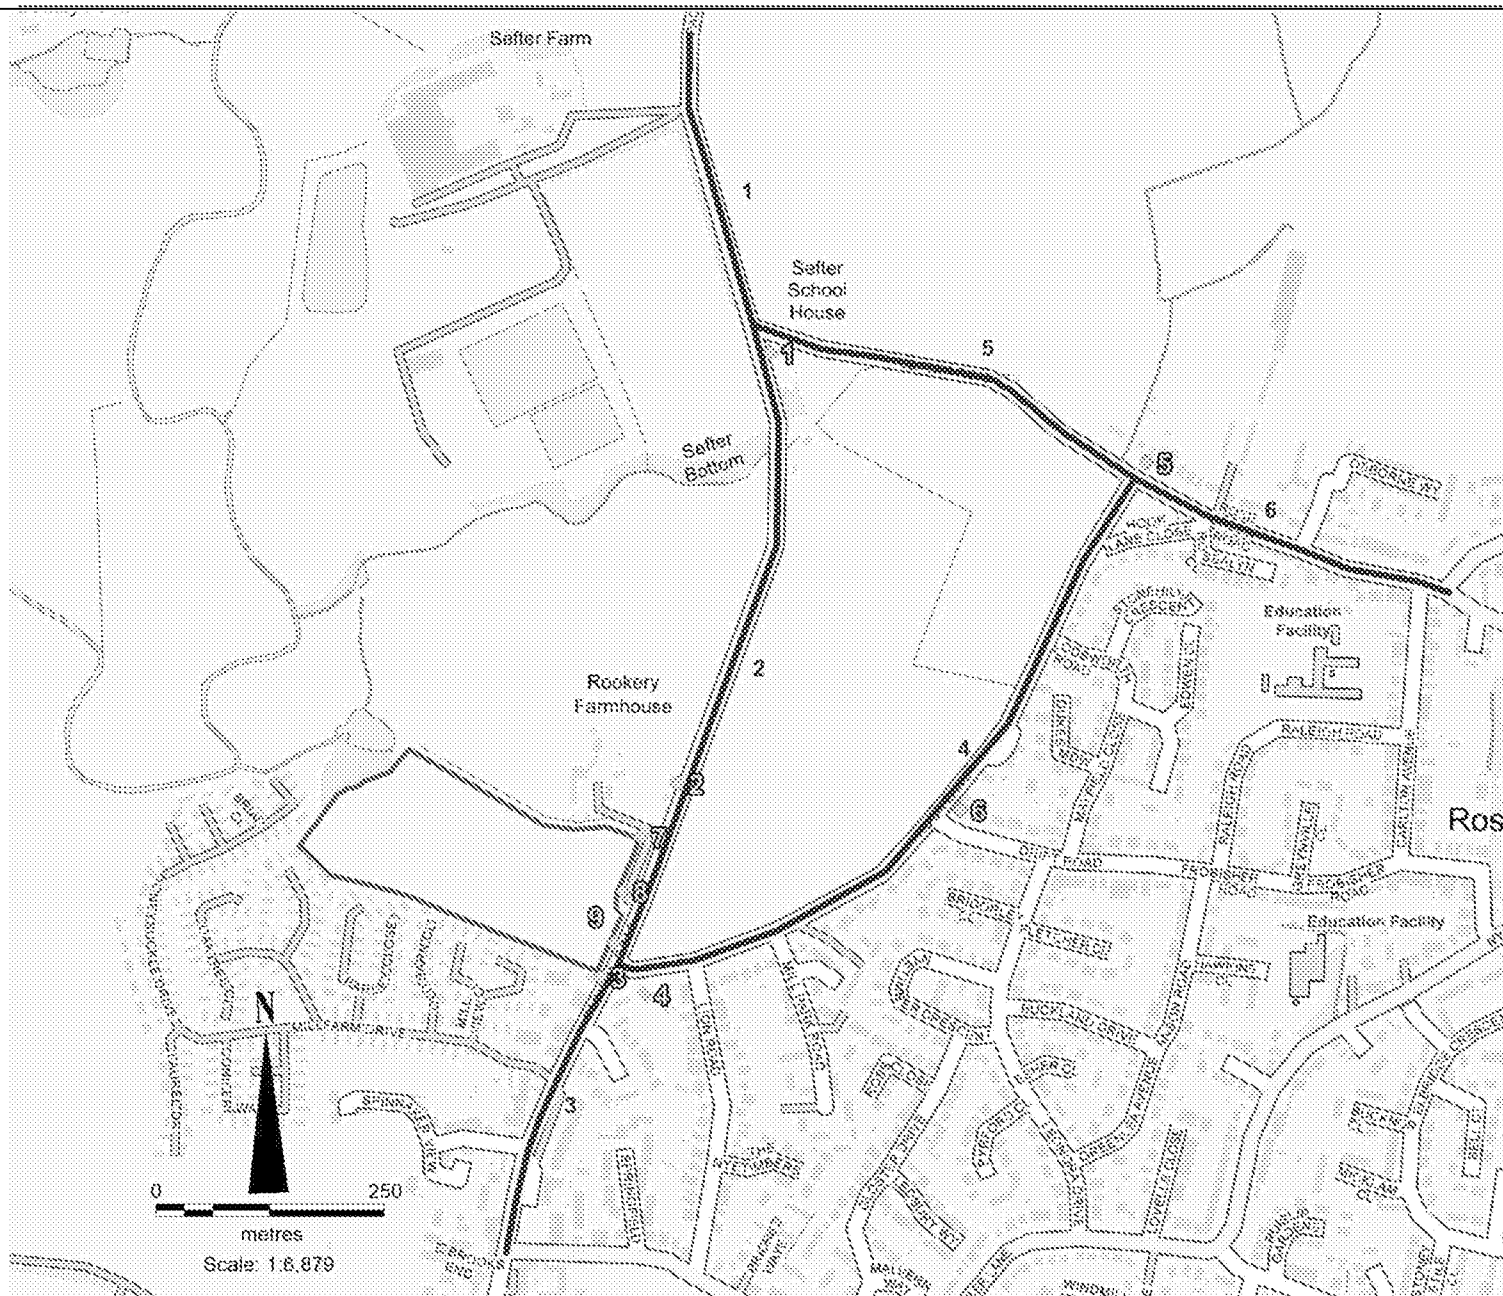

Legend

- Approximate Site Boundary
- Road Links Modelled
- Sensitive Receptors Modelled

© 2022 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS' appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipient's responsibility to print to correct scale. Only written dimensions should be used.



6-7 Lovers Walk
Brighton East Sussex BN1 6AH

T 01273 546800 F 01273 546801
E rpsbn@rpsgroup.com W rpsgroup.com

Client: For Hallam Land Management/Hallam Land Management

Project: Land West of Pagham Road

Job Ref: JAR02954

File location:

Date: 04/02/2022

Rev: 0

Drawn: WH

Checked: KB

Figure 1: Road Links and Receptors Modelled

rpsgroup.com/uk


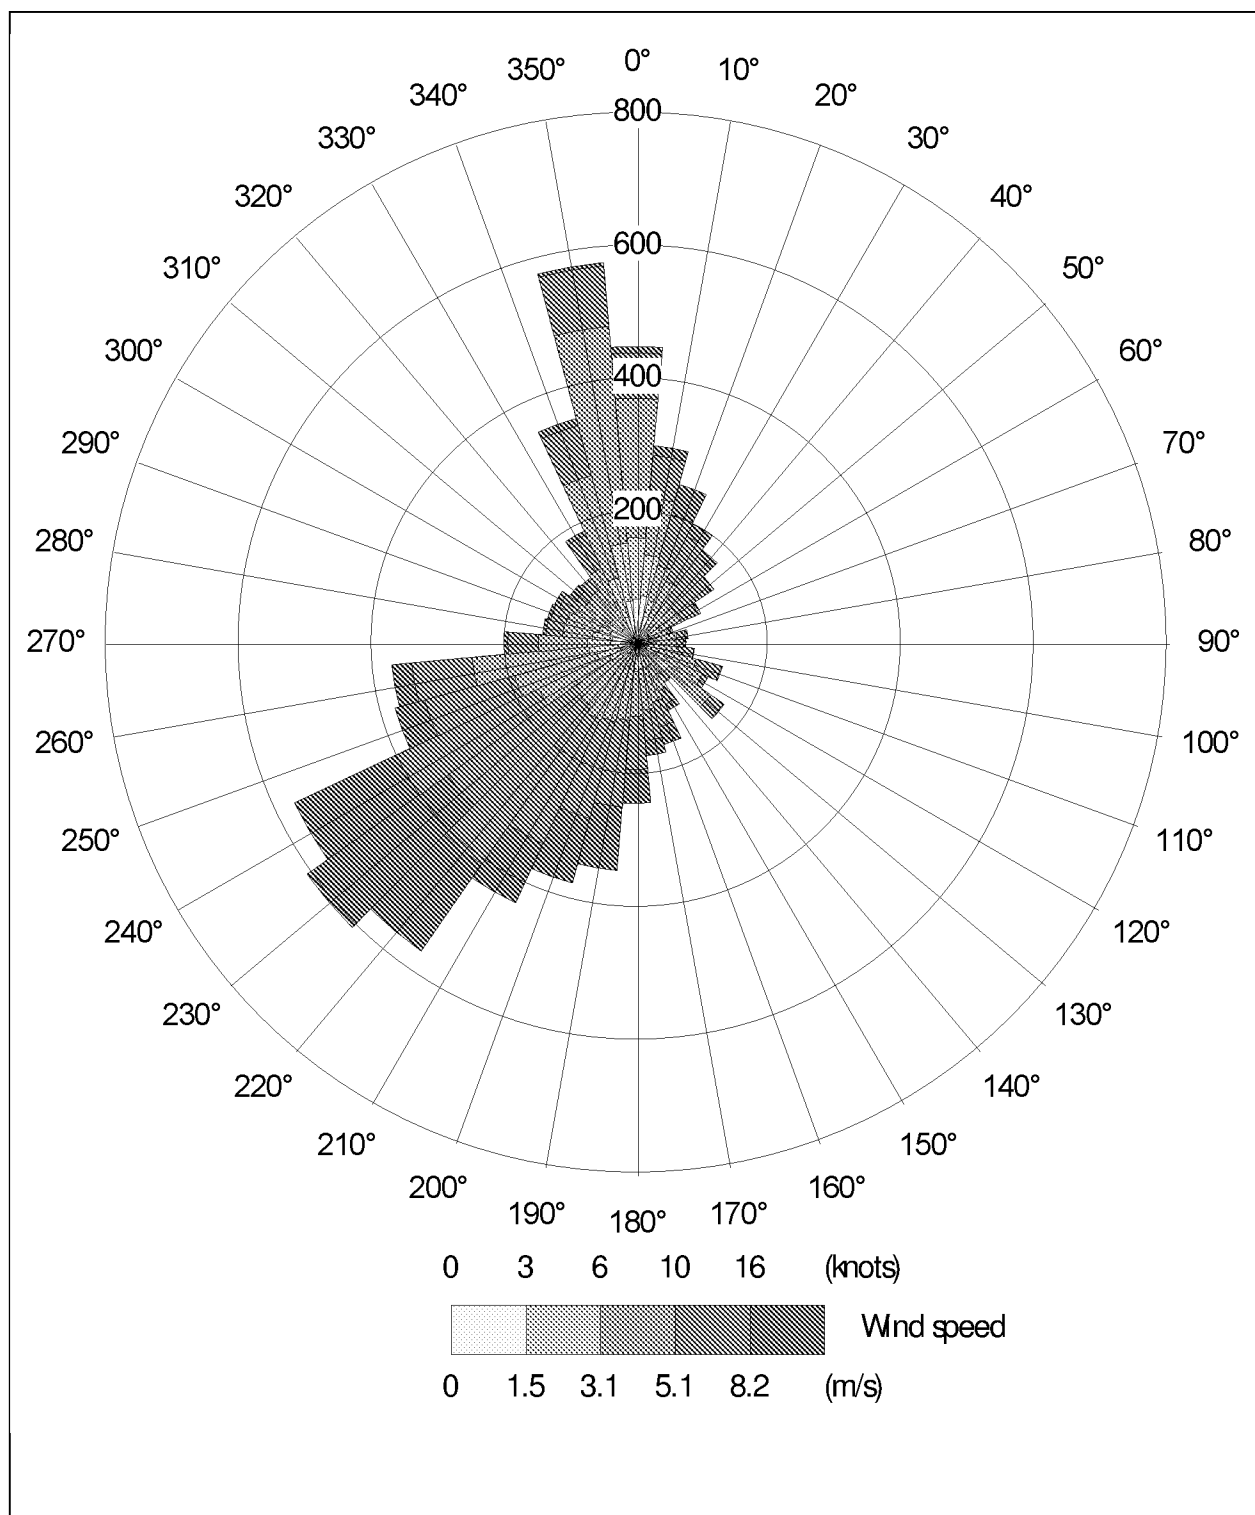


Figure 2: Wind Rose – Shoreham Airport (2020)

Project Number	JAR02954	Project Title	Land West of Pagham Road		
Client:	For Hallam Land Management	Rev :	0	Drawn By:	WH
		Date:	04/02/2022	Checked By:	KB
File location:					
© 2022 RPS Group					
Notes					
1. This drawing has been prepared in accordance with the scope of RPS' appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.			6-7 Lovers Walk Brighton East Sussex BN1 6AH		
2. If received electronically it is the recipient's responsibility to print to correct scale. Only written dimensions should be used.			T 01273 546800 F 01273 546801 E rpsbn@rpsgroup.com W rpsgroup.com rpsgroup.com/uk		

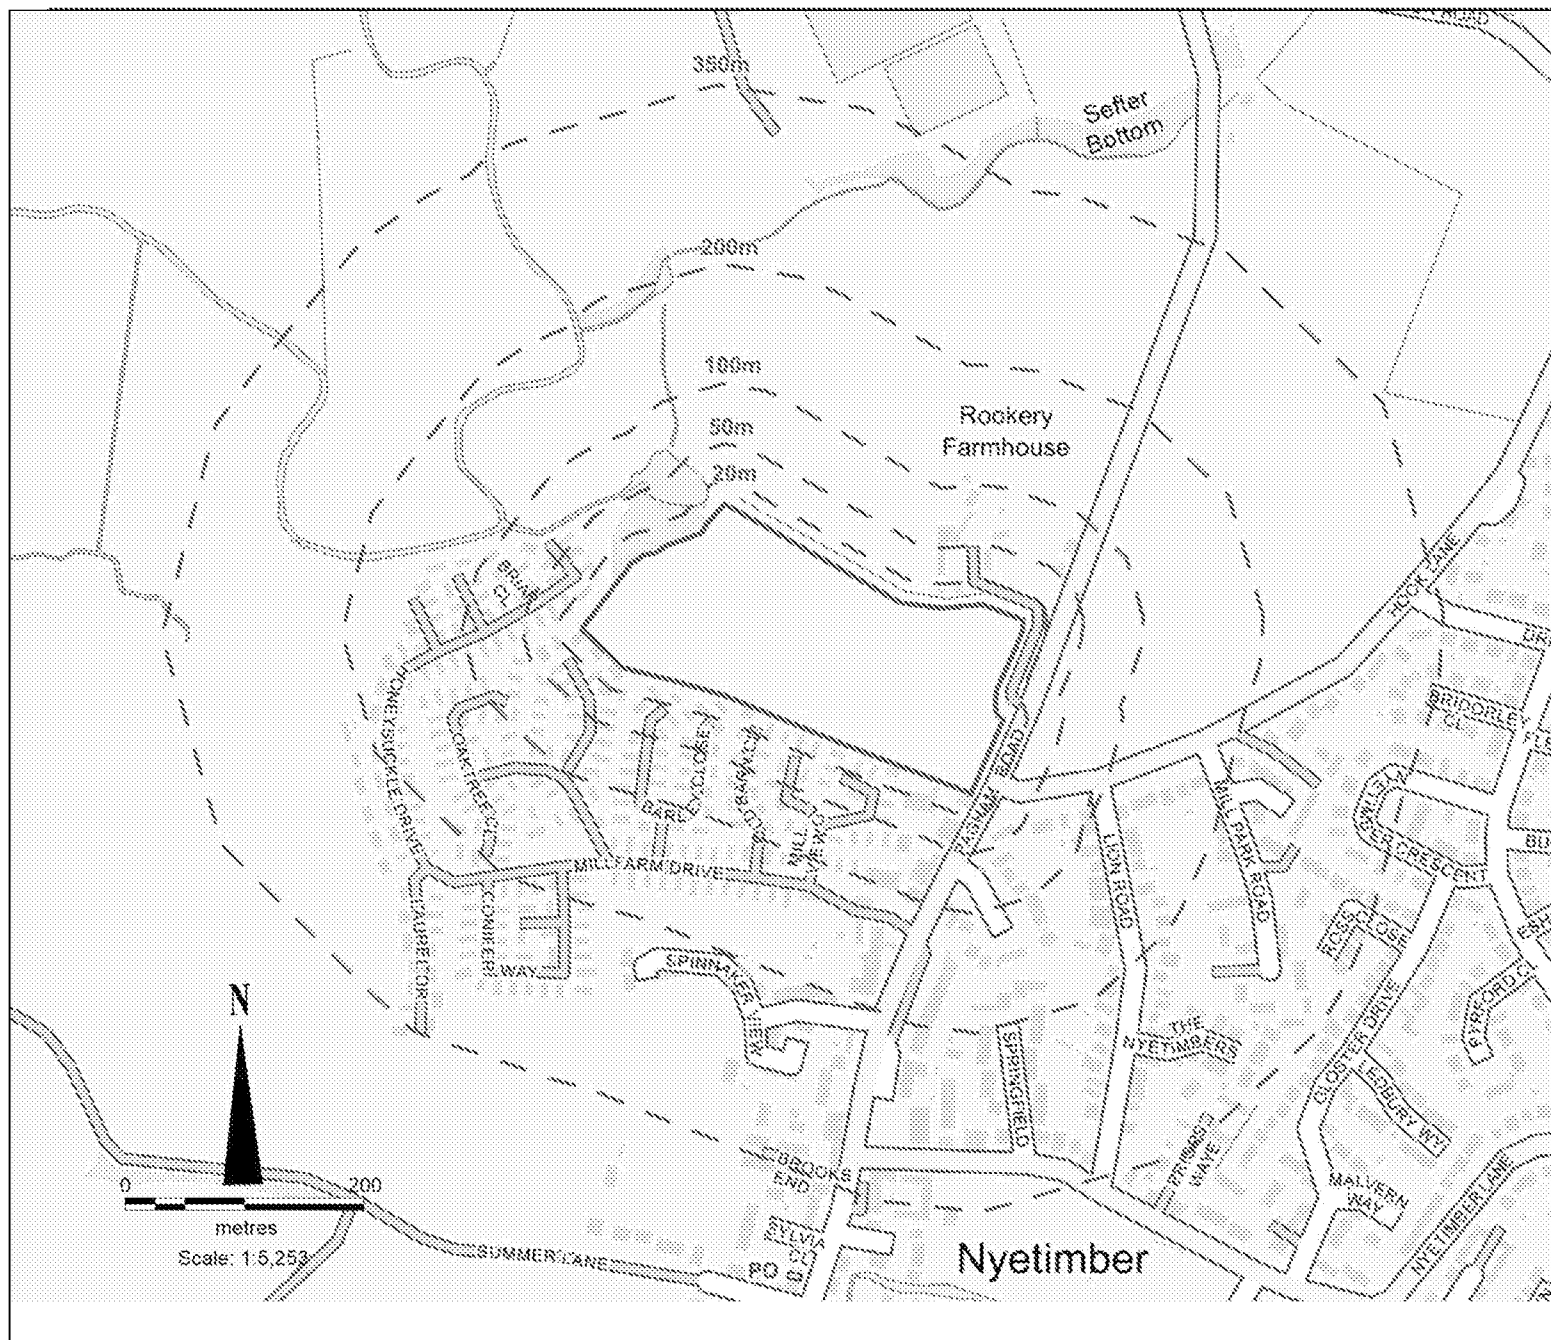

Legend

-  Approximate Site Boundary
-  Construction Dust Buffers

© 2022 RPS Group

Notes

1. This drawing has been prepared in accordance with the scope of RPS' appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipient's responsibility to print to correct scale. Only written dimensions should be used.



6-7 Lovers Walk
Brighton East Sussex BN1 6AH

T 01273 546800 F 01273 546801
E rpsbn@rpsgroup.com W rpsgroup.com

Client: For Hallam Land Management

Project: Land West of Pagham Road

Job Ref: JAR02954

File location:

Date: 04/02/2022

Rev: 0

Drawn: WH

Checked: KB

Figure 3: Construction Dust Buffers

rpsgroup.com/uk

Appendices

Appendix A: Detailed Construction Dust Assessment Methodology

Source

- A.1 The IAQM dust guidance gives examples of the dust emission magnitudes for demolition, earthworks and construction activities and trackout. These example dust emission magnitudes are based on the site area, building volume, number of HDV movements generated by the activities and the materials used. These example magnitudes have been combined with details of the period of construction activities to provide the ranking for the source magnitude that is set out in Table A.1.

Table A.1 Risk Allocation – Source (Dust Emission Magnitude)

Features of the Source of Dust Emissions	Dust Emission Magnitude
Demolition - building over 50,000 m³, potentially dusty construction material (e.g. concrete), on-site crushing and screening, demolition activities > 20 m above ground level. Earthworks – total site area over 10,000 m², potentially dusty soil type (e.g. clay), >10 heavy earth moving vehicles active at any one time, formation of bunds > 8 m in height, total material moved > 100,000 tonnes. Construction - total building volume over 100,000 m³, activities include piling, on-site concrete batching, sand blasting. Period of activities more than two years. Trackout – 50 HDV outwards movements in any one day, potentially dusty surface material (e.g. High clay content), unpaved road length > 100 m.	Large
Demolition - building between 20,000 to 50,000 m³, potentially dusty construction material and demolition activities 10 - 20 m above ground level. Earthworks – total site area between 2,500 to 10,000 m², moderately dusty soil type (e.g. silt), 5 – 10 heavy earth moving vehicles active at any one time, formation of bunds 4 - 8 m in height, total material moved 20,000 to 100,000 tonnes. Construction - total building volume between 25,000 and 100,000 m³, use of construction materials with high potential for dust release (e.g. concrete), activities include piling, on-site concrete batching. Period of construction activities between one and two years. Trackout – 10 - 50 HDV outwards movements in any one day, moderately dusty surface material (e.g. High clay content), unpaved road length 50 – 100 m.	Medium
Demolition - building less than 20,000 m³, construction material with low potential for dust release (e.g. metal cladding or timber), demolition activities < 10 m above ground, demolition during winter months. Earthworks – total site area less than 2,500 m². Soil type with large grain size (e.g. sand), < 5 heavy earth moving vehicles active at any one time, formation of bunds < 4 m in height, total material moved < 10,000 tonnes earthworks during winter months. Construction - total building volume below 25,000 m³, use of construction materials with low potential for dust release (e.g. metal cladding or timber). Period of construction activities less than one year.	Small

Features of the Source of Dust Emissions	Dust Emission Magnitude
Trackout – < 10 HDV outwards movements in any one day, surface material with low potential for dust release, unpaved road length < 50 m.	

Pathway and Receptor - Sensitivity of the Area

- A.2 Pathway means the route by which dust and particulate matter may be carried from the source to a receptor. The main factor affecting the pathway effectiveness is the distance from the receptor to the source. The orientation of the receptors to the source compared to the prevailing wind direction is a relevant risk factor for long-duration construction projects; however, short-term construction projects may be limited to a few months when the most frequent wind direction might be quite different, so adverse effects can potentially occur in any direction from the site.
- A.3 As set out in the IAQM dust guidance, a number of attempts have been made to categorise receptors into high, medium and low sensitivity categories; however there is no unified sensitivity classification scheme that covers the quite different potential effects on property, human health and ecological receptors.
- A.4 Table A.2 and Table A.3 sets out the IAQM basis for categorising the sensitivity of people and property to dust and PM₁₀ respectively

Table A.2 Sensitivities of People and Property Receptors to Dust

Receptor	Sensitivity
Principles:- - Users can reasonably expect enjoyment of a high level of amenity; or - the appearance, aesthetics or value of their property would be diminished by soiling; and the people or property would reasonably be expected to be present continuously, or at least regularly for extended periods as part of the normal pattern of use of the land. Indicative Examples:- - Dwellings. - Museums and other culturally important collections. - Medium and long-term car parks and car showrooms.	High
Principles:- - Users would expect to enjoy a reasonable level of amenity, but would not reasonably expect to enjoy the same level of amenity as in their home; or - the appearance, aesthetics or value of their property could be diminished by soiling; or - the people or property wouldn't reasonably be expected to be present here continuously or regularly for extended periods as part of the normal pattern of use of the land. Indicative Examples:- - Parks.	Medium

Receptor	Sensitivity
• Places of work.	
Principles:- • the enjoyment of amenity would not reasonably be expected; or • there is property that would not reasonably be expected to be diminished in appearance, aesthetics or value by soiling; or • there is transient exposure, where the people or property would reasonably be expected to be present only for limited periods of time as part of the normal pattern of use of the land. Indicative Examples:- • Playing fields, farmland (unless commercially-sensitive horticultural). • Footpaths and roads. • Short-term car parks.	Low

Table A.3 Sensitivities of People and Property Receptors to PM₁₀

Receptor	Sensitivity
Principles:- • Locations where members of the public are exposed over a time period relevant to the air quality objective (in the case of the 24-hour objective for PM₁₀, a relevant location would be one where individuals may be exposed for eight hours or more in a day). Indicative Examples:- ▪ Residential properties. ▪ Schools, hospitals and residential care homes.	High
Principles:- • Locations where the people exposed are workers and exposure is over a time period relevant to the air quality objective (in the case of the 24-hour objective for PM₁₀, a relevant location would be one where individuals may be exposed for eight hours or more in a day). Indicative Examples:- ▪ Office and shop workers (but generally excludes workers occupationally exposed to PM₁₀ as protection is covered by Health and Safety at Work legislation).	Medium
Principles:- • Locations where human exposure is transient exposure. Indicative Examples:- • Public footpaths. • Playing fields, parks. • Shopping streets.	Low

A.5 The IAQM methodology combines consideration of the pathway and receptor to derive the 'sensitivity of the area'. Table A.4 and Table A.5 show how the sensitivity of the area has been derived for this assessment.

Table A.4 Sensitivity of the Area to Dust Soiling Effects on People and Property

Receptor Sensitivity	Number of Receptors ^a	Distance from the Source (m) ^b			
		<20	<50	<100	<350
High	>100	High	High	Medium	Low
	10-100	High	Medium	Low	Low
	1-10	Medium	Low	Low	Low
Medium	>1	Medium	Low	Low	Low
Low	>1	Low	Low	Low	Low

The sensitivity of the area has been derived for demolition, construction, earthworks and trackout.

a The total number of receptors within the stated distance has been estimated. Only the highest level of area sensitivity from the table has been recorded.

b For trackout, the distances have been measured from the side of the roads used by construction traffic. Without site-specific mitigation, trackout may occur from roads up to 500 m from large sites, 200 m from medium sites and 50 m from small sites, as measured from the site exit. The impact declines with distance from the site, and trackout impacts have only been considered up to 50 m from the edge of the road.

Table A.5 Sensitivity of the Area to Human Health Impacts

Receptor Sensitivity	Annual Mean PM ₁₀ Concentration ^a	Number of Receptors ^{b, c}	Distance from the Source (m) ^d				
			<20	<50	<100	<200	<350
High	> 32 µg.m ⁻³	>100	High	High	High	Medium	Low
		10-100	High	High	Medium	Low	Low
		1-10	High	Medium	Low	Low	Low
	28 - 32 µg.m ⁻³	>100	High	High	Medium	Low	Low
		10-100	High	Medium	Low	Low	Low
		1-10	High	Medium	Low	Low	Low
	24 - 28 µg.m ⁻³	>100	High	Medium	Low	Low	Low
		10-100	High	Medium	Low	Low	Low
		1-10	Medium	Low	Low	Low	Low
	< 24 µg.m ⁻³	>100	Medium	Low	Low	Low	Low
		10-100	Low	Low	Low	Low	Low
		1-10	Low	Low	Low	Low	Low
Medium	> 32 µg.m ⁻³	>10	High	Medium	Low	Low	Low

Receptor Sensitivity	Annual Mean PM ₁₀ Concentration ^a	Number of Receptors ^{b, c}	Distance from the Source (m) ^d				
			<20	<50	<100	<200	<350
		1 – 10	Medium	Low	Low	Low	Low
	28 – 32 µg.m ⁻³	> 10	Medium	Low	Low	Low	Low
		1-10	Low	Low	Low	Low	Low
	< 28 µg.m ⁻³	>1	Low	Low	Low	Low	Low
Low	-	>1	Low	Low	Low	Low	Low

The sensitivity of the area has been derived for demolition, construction, earthworks and trackout.

a This refers to the background concentration derived from the assessment of baseline conditions later in this report. The concentration categories listed in this column apply to England, Wales and Northern Ireland but not to Scotland.

b The total number of receptors within the stated distance has been estimated. Only the highest level of area sensitivity from the table has been recorded.

c For high sensitivity receptors with high occupancy (such as schools or hospitals), the approximate number of occupants has been used to derive an equivalent number of receptors.

d For trackout, the distances have been measured from the side of the roads used by construction traffic. Without site-specific mitigation, trackout may occur from roads up to 500 m from large sites, 200 m from medium sites and 50 m from small sites, as measured from the site exit. The impact declines with distance from the site, and trackout impacts have only been considered up to 50 m from the edge of the road.

A.6 The IAQM dust guidance lists the following additional factors that can potentially affect the sensitivity of the area and, where necessary, professional judgement has been used to adjust the sensitivity allocated to a particular area:

- any history of dust generating activities in the area;
- the likelihood of concurrent dust generating activity on nearby sites;
- any pre-existing screening between the source and the receptors;
- any conclusions drawn from analysing local meteorological data which accurately represent the area; and if relevant the season during which the works will take place;
- any conclusions drawn from local topography;
- duration of the potential impact, as a receptor may become more sensitive over time; and
- any known specific receptor sensitivities which are considered go beyond the classifications given in the table above.

A.7 The matrices in Table A.6, Table A.7, Table A.8 and Table A.9 have been used to assign the risk for each activity to determine the level of mitigation that should be applied. For those cases where the risk category is 'negligible', no mitigation measures are required beyond those mandated by legislation.

Table A.6 Risk of Dust Impacts – Demolition

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
High	High Risk	Medium Risk	Medium Risk
Medium	High Risk	Medium Risk	Low Risk
Low	Medium Risk	Low Risk	Negligible

Table A.7 Risk of Dust Impacts – Earthworks

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
High	High Risk	Medium Risk	Low Risk
Medium	Medium Risk	Medium Risk	Low Risk
Low	Low Risk	Low Risk	Negligible

Table A.8 Risk of Dust Impacts – Construction

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
High	High Risk	Medium Risk	Low Risk
Medium	Medium Risk	Medium Risk	Low Risk
Low	Low Risk	Low Risk	Negligible

Table A.9 Risk of Dust Impacts – Trackout

Sensitivity of Area	Dust Emission Magnitude		
	Large	Medium	Small
High	High Risk	Medium Risk	Low Risk
Medium	Medium Risk	Low Risk	Negligible
Low	Low Risk	Low Risk	Negligible

Appendix B: Sensitivity Test

B.1 This appendix presents the results of a sensitivity test where the annual-mean modelled NO_x contributions have been multiplied by a model adjustment factor of 2.

B.2 Table B.1 presents the annual-mean NO₂ concentrations predicted at the façades of existing and proposed receptors.

Table B.1 Adjusted Annual-mean NO₂ Concentrations (µg.m⁻³)

Existing/New Population Exposure	Receptor	Without	With	With – Without % AQO	Impact Descriptor
Existing	1	17.6	17.8	0	Negligible
	2	16.5	16.6	0	Negligible
	3	16.7	16.7	0	Negligible
	4	16.4	16.4	0	Negligible
	5	16.4	16.4	0	Negligible
	6	16.2	16.3	0	Negligible
New Population Exposure	7	-	15.9	-	-
	8	-	16.0	-	-
	9	-	16.5	-	-
Maximum		17.6	17.8	-	-
Minimum		16.2	15.9	-	-

B.3 Overall, even with the model adjustment factor, predicted annual-mean NO₂ concentrations in the opening year at the façades of the existing and proposed receptors are below the AQO objective for NO₂. When the magnitude of change is considered in the context of the absolute concentrations, the impact descriptor is 'negligible'.

Appendix C: Emissions Mitigation Calculation

C.1 The *Air quality and emissions mitigation guidance for Sussex (2021)* requires developments to estimate the associated health damage cost.

Emissions Calculation for Development Traffic

C.2 The method follows the example provided on pages 8 and 9 of *Air quality and emissions mitigation guidance for Sussex (2021)*. The emissions assessment and corresponding mitigation calculation follows this process:

1. Identify the trips/annum generated by the proposed development (this information will be available in the Transport Assessment, Transport Statement or TRICS database);
2. Assume an average distance travelled of 10km/trip;
3. Calculate the emissions of NO_x and PM_{2.5} (tonnes/annum) using the Emissions Factor Toolkit, and an assumption of an average speed of 50 Km/h [¹];
4. Look-up the latest HM Treasury and Defra IGCB damage costs and multiple the outputs from step 3 above to provide a value of the emissions health damage, for each pollutant. This can be found here: <https://www.gov.uk/guidance/air-quality-economiceconomicanalysis#damage-costs-approach>;
5. Multiply the calculated emissions health damage values by 5, to quantify emissions over a five-year period; and
6. Sum the NO_x and PM_{2.5} costs to provide a total health damage value.

C.3 The guidance states that this is the minimum sum of money that must be spent on practical mitigation measures.

Results of Emissions Calculation for Development Traffic

C.4 The number of light and heavy good vehicles trips generated by the development is estimated using the traffic data for road link 2 (Pagham Road) in Table 3.1. A total of 672 trips per day has been used with no HDVs. The average speed for the entire trip is assumed to be 50 km/hr. The emissions for the year of the completion of the site have been calculated using the DEFRA Emissions Factor Toolkit and presented in Table C.1.

Table C.1 2026 Emissions

Pollutant	Emissions (tonnes per annum) 2026
NO _x	0.37
PM _{2.5}	0.04

¹ <http://laqm.defra.gov.uk/review-and-assessment/tools/tools.html>

- C.5 In line with steps 4-6 of the *Air quality and emissions mitigation guidance for Sussex (2021)* the latest HM Treasury and Defra IGCB damage costs [2] for rural road transport NO_x and PM_{2.5} have been presented. The emissions presented in Table C.1 have been multiplied by the Central Damage Cost and then multiplied by 5 to account for a five-year period.
- C.6 The 2026 emissions presented in Table C.1 are multiplied by the latest HM Treasury and Defra IGCB damage costs presented in Table C.2

Table C.2 Steps 4-6 of Air quality and emissions mitigation guidance for Sussex (2021 Methodology)

Pollutant	Central Damage Cost (£/t)	Central Damage Cost x Emissions (£)	Total Cost for Five-year Period (£)	Total Health Damage Value (£)
NO _x	8,907	3,319	16,597	33,517
PM _{2.5}	79,474	3,384	16,920	

² <https://www.gov.uk/government/publications/assess-the-impact-of-air-quality/air-quality-appraisal-damage-cost-guidance>

References

- 1 Defra, 2010, The Air Quality Standards Regulations.
- 2 Defra, 2007, The Air Quality Strategy for England, Scotland, Wales and Northern Ireland. Volume 2.
- 3 Communities and Local Government, July 2021, National Planning Policy Framework
- 4 EPUK & IAQM, January 2017, Land-Use Planning & Development Control: Planning For Air Quality
- 5 IAQM, 2014, Guidance on the assessment of dust from demolition and construction
- 6 Defra, February 2018, Local Air Quality Management Technical Guidance, 2016 (LAQM.TG16)
- 7 British Standard Institute, 1983, BS 6069:Part 2:1983, ISO 4225-1980 Characterization of air quality. Glossary
- 8 <http://laqm.defra.gov.uk/review-and-assessment/tools/tools.html>
- 9 Drawn from Defra Maps at <http://uk-air.defra.gov.uk/data/laqm-background-maps?year=2018>
- 10 IAQM, 2012, Air Quality Monitoring in the Vicinity of Demolition and Construction Sites

Contact

RPS Consulting Services Ltd
6-7 Lovers Walk
Brighton
BN1 6AH

