



MARK WELBY
CONSULTING ARBORISTS

Arboricultural Report

Including a tree survey, impact assessment and method statement
for residential dwellings at

Pagham Phase 4b,
Land North of Summer Lane, PO21 4NJ

Reference: MW.2504.P4B.AIA
Client: Northgate Properties Ltd
Date: 22 January 2026
Revision: -



Mark Welby DioArb(BES), TechCert(ArborA), FArborA

M Welby Ltd, trading as Mark Welby Consulting Arborists
Hampshire, UK



Executive Summary

Trees are a consideration in this outline planning application for residential dwellings. Therefore, this report has been drafted to provide the information required to enable the local planning authority to meet the duty placed upon them by section 197 of the Town and Country Planning Act (as amended, 2021).

Included are a BS5837:2012 compliant tree survey, arboricultural impact assessment, and tree protection strategy that includes a method statement and tree protection plan.

This document has been drafted to support an outline application for the development of this site. The attached plan is illustrative only. Applications are to be made for Outline Consent for both 120 and 130 units. This report provides sufficient information for the council to be able to assess either application as a detailed tree protection plan is usually secured under an appropriate reserved matters condition.

The tree protection plan does not graphically represent the entire site. It only covers the areas where there are trees of sufficient size to be included in the survey and assessment.

No trees are to be removed to facilitate the proposals.

The new dwellings and associated construction will all be located outside the root protection areas of retained trees, so all can be adequately protected throughout the construction process.

The proposed vehicular link to the approved development to the south of the site has been specifically designed to minimise impact on the veteran oak tree and the retained poplar groups (all protected by TPO).

Tree protection commitments include erecting barriers and a pre-start audit/meeting.

Provided the protection strategy is implemented as outlined, this application has a low arboricultural impact and is thus acceptable.



Table of Contents

1. Instructions and Terms of Reference	2
Documents Supplied	2
2. Statutory & Other Relevant Constraints	3
Tree Preservation Orders	3
The Forestry Act	3
Veteran Trees	4
Ecology	4
3. Survey Scope & Methodology	4
4. Arboricultural Impact Assessment	6
Proposal	6
Tree Removals	6
Tree Surgery	6
Construction Impact	6
Supervision & Monitoring	6
Service & Utility Provisions	6
Summary	7
5. Arboricultural Method Statement	7
Phasing	7
Pre-start Confirmation	8
Construction Exclusion Zone (CEZ)	8
Protection Barriers	8
Ground Protection	9
Site Induction	10
Tree Surgery	11
Installation of Underground Services	11
6. Limitations of Use and Copyright.	13
Appendix	14
i. Tree Protection Barriers	15
ii. Tree Categories Explained	17
iii. Protection Plan	18

1. Instructions and Terms of Reference

- 1.1. In August 2025, I was instructed by Northgate Properties Ltd to undertake a tree survey and subsequently, in November, to produce this report to accompany a planning application for dwellings on the site at Pagham Phase 4b, Land North of Summer Lane, PO21 4NJ.
- 1.2. Following the recommendations of the British Standard¹, this report includes the necessary information to enable the local planning authority to meet the duty placed upon them by section 197 of the Town and Country Planning Act (as amended, 2021).
- 1.3. It demonstrates that the proposal's impact, both direct and indirect, has been assessed, and mitigation, compensation, and tree protection have been proposed where appropriate.
- 1.4. Correctly implementing the tree protection specified in this report is critical for ensuring the retained trees are successfully protected throughout construction.
- 1.5. The assessment considers the proposal's impact on the constraints of trees retained within the site and those on adjacent land. Such impact can be caused directly through construction damage and indirectly from post-development resentment and pressure to detrimentally prune or remove the trees. The latter is often due to a poor juxtaposition between the proposal and the trees.
- 1.6. A tree's root protection area (RPA) represents a minimum area in m² that shall be left undisturbed around it. This is initially represented by a circle but is fundamentally an area of rooting volume. It is often adjusted to account for constraints to root growth within the site (primarily highways and buildings). The British Standard provides recommendations regarding the protection of existing trees during the construction process. This is achieved by ensuring a tree protection strategy is implemented before any demolition or construction on site.

Documents Supplied

- Proposed: 11865-RLA-25-00-DR-MP-0005_P02_Pagham 4B NDSS Layout.dwg
- Site survey: 657PG02E Topo & Utility Survey.dwg

¹BS5837:2012 Trees in relation to design, demolition and construction

2. Statutory & Other Relevant Constraints

Local Planning Authority	Arun District Council
Tree Preservation Orders & Conservation Area restrictions Checked at the time of writing using the following link https://arun.cloud.cadcorp.com/Webmap/Map.aspx?mapName=Public_TPO	
Tree Preservation Orders	Yes: Poplar groups #03 & 04 and two oaks
Conservation Areas	None
Forestry Act (1967)	Licence may be required for tree removals
Ancient Semi-Natural Woodland (ASNW) https://magic.defra.gov.uk/MagicMap.aspx	None
Ancient Tree Inventory https://ati.woodlandtrust.org.uk/tree-search/?v=	No records
Obvious veteran trees	YES: 2No. oaks (#07 & 08)
Sites of special scientific interest (SSSI) https://magic.defra.gov.uk/MagicMap.aspx	No
Legal covenants and outstanding planning conditions	Not known
Bedrock: British Geological Survey: https://geologyviewer.bgs.ac.uk/? ga=	London Clay Formation - Clay, silt and sand
Soil: Landis SoilScape https://www.landis.org.uk/soilscapes/	Loamy soils with naturally high groundwater
Checked online at the time of writing (information must be verified before any tree work is carried out).	

Tree Preservation Orders

2.1.A Tree Preservation Order (TPO) is issued by a local planning authority to protect specific trees, groups of trees, or woodlands for the sake of public amenity. A TPO prohibits actions such as cutting down, topping, lopping, uprooting, or causing intentional damage or destruction to the trees without obtaining written consent from the local planning authority. If consent is granted, it may come with conditions that must be adhered to. This process is regulated by the Town and Country Planning Act 1990.

The Forestry Act

2.2.The Forestry Act 1967 governs tree felling in the UK. To fell more than five cubic metres of timber in any calendar quarter, you must obtain a felling licence from the Forestry Commission. There are some exceptions to this requirement, including trees that are located in gardens, churchyards, or orchards.

Veteran Trees

2.3. Veteran trees are protected through planning policy and sometimes TPOs. They are often ancient trees that have significant ecological, cultural, or historical value. Local planning authorities are required to consider the impact of development on veteran trees and to protect them where possible. This is also supported by the National Planning Policy Framework (NPPF).

Ecology

2.4. The Natural Environment and Rural Communities Act 2006 places a duty on public authorities to have regard to conserving biodiversity when carrying out their functions. This includes protecting trees that provide habitats for wildlife. The Wildlife and Countryside Act 1981 also provides protection for certain species of plants and animals, making it an offence to intentionally damage or destroy their habitats.

3. Survey Scope & Methodology

- 3.1. Tree survey data can be found on the appended plan.
- 3.2. The tree survey has been carried out following the recommendations of The British Standard and the trees are assessed objectively and without reference to any site layout proposals. Categories are based on each tree's health and condition, together with an assessment of its life expectancy if its surroundings were to be unchanged.
- 3.3. The reference numbers of surveyed trees and groups of trees are shown on the tree reference plan, which is appended to this report and based on the supplied survey drawing. Stem locations within groups may be estimated, and indicative of canopy only.
- 3.4. The tree survey was carried out from ground level only, with the aid of binoculars as necessary, following the Visual Tree Assessment² (VTA) method.
- 3.5. Where trees are located on neighbouring land, an estimated appraisal of their quality and dimensions has been made.
- 3.6. Where stems or branches are obscured by ivy or other materials a full assessment of those parts will not be possible.
- 3.7. Tree heights were measured with a clinometer or estimated in relation to those measured.
- 3.8. Trunk diameters are measured at 1.5m above ground level, where this is not possible, then Figure C.1 of the British Standard is followed.
- 3.9. Tree canopies were markedly asymmetrical, and were measured (or estimated by pacing) in four directions using a laser measure. Symmetrical canopies are measured in one direction only,

² Mattheck, C. & Breloer, H., 1998. The Body Language of Trees: A Handbook for Failure Analysis. London: H.M.S.O.



with dimensions in the remaining directions assumed to be similar. For the canopies of groups of trees, the maximum radius for each compass point is measured (more complicated groups will have further notes taken and an accurate representation will be shown on the plan).

3.10. All estimated dimensions are noted in the data.

4. Arboricultural Impact Assessment

Proposal

- 4.1. It is proposed to build a number of residential dwellings on the site, the layout of which can be seen on the appended plan.
- 4.2. Please note that the tree protection plan does not graphically represent the entire site. It only covers the areas where there are trees of sufficient size to be included in the survey and assessment.
- 4.3. This document has been drafted to support an outline application for the development of this site. The attached plan is illustrative only. Applications are to be made for Outline Consent for both 120 and 130 units. This report provides sufficient information for the council to be able to assess either application as a detailed tree protection plan for outline applications is usually secured under an appropriate reserved matters condition.

Tree Removals

- 4.4. No trees need to be removed to facilitate this proposal.

Tree Surgery

- 4.5. There are no plans for any tree surgery work at this stage.

Construction Impact

- 4.6. The new dwellings are located outside the root protection areas of retained trees, so all can be adequately protected throughout the construction process.
- 4.7. The proposed vehicular link to the approved development to the south of the site has been specifically designed to minimise impact on the veteran oak tree and the retained poplar groups (all protected by TPO).

Supervision & Monitoring

- 4.8. Some sites require more arboricultural involvement during the construction process than others. This is typically commensurate with the pressure on retained trees and the complexity of the tree protection strategy.
- 4.9. It is my opinion that regular monitoring visits would not be necessary for this project.

Service & Utility Provisions

- 4.10. There is adequate space to service the site whilst avoiding all RPAs.

Summary

4.11. Provided the tree protection strategy is implemented as outlined in the following method statement, this application has a low arboricultural impact and is thus acceptable.

5. Arboricultural Method Statement

- 5.1. The tree protection on this site is subject to implementation as detailed in the following sections.
- 5.2. The recommendations of the British Standard have been applied where viable. Where deviations from the preferred approach are required, the impact on any retained trees is minimised through a combination of supervision from an arboriculturist and adherence to the associated method statement.
- 5.3. Once permission is granted, the strategy must be followed to avoid impacting the trees and adhere to any planning conditions.
- 5.4. The information within this section must be passed to the site foreman and cascaded to all relevant personnel involved in the project.
- 5.5. Any questions about the content or its implementation shall be directed to **Mark Welby Consulting Arborists at 01730 239492** before action is taken.
- 5.6. A tree protection plan showing the types of tree protection and their locations is appended. It includes the tree survey data, existing site features and the approved construction. The plan must be read in conjunction with this method statement.

Phasing

5.7. It is essential that the following phasing is followed if trees are to be effectively protected throughout construction.

1	Tree removals
2	Installation of protection barriers
3	Installation of protection barriers (Appendix i: TPF 2 or 3)
4	Confirmation that tree protection barriers are installed to be sent to LPA
5	Construction Phase
6	Removal of tree protection barriers upon completion of work

Table 1: Timing of operations in relation to trees

5.9. The above has been drafted at the planning stage. Shall any of the protection measures prove incompatible with elements of the build program, contact the project arboriculturist to discuss options.

Pre-start Confirmation

5.10. The most important step in the tree protection process: confirmation that the tree protection barriers are in place must be forwarded to the LPA before any external work starts. This may be a photographic record sent via email.

Construction Exclusion Zone (CEZ)

5.11. The CEZ is a root-sensitive area where construction activities are to be excluded. The default method of doing so is through the installation of tree protection barriers. If construction access is required in the CEZ then ground protection can be used to facilitate this.

5.12. Everyone engaged in the construction process is responsible for respecting the tree protection measures and observing the necessary precautions within and adjacent to them.

5.13. Inside the exclusion zone, the following shall apply:

- No mechanical excavation whatsoever;
- No excavation by any other means without arboricultural site supervision;
- No hand digging without a written method statement having first been approved by the project arboriculturist;
- No lowering of levels for any purpose (except removal of grass sward using hand tools);
- No storage of plant or materials;
- No storage or handling of any chemical including cement washings;
- No vehicular access (unless ground protection is installed);
- No fire lighting.

5.14. In addition to the above, further precautions are necessary adjacent to trees:

- No substances injurious to tree health, including fuels, oil, bitumen, cement (including cement washings), builder's sand, concrete mixing and other chemicals shall be stored or used within or directly adjacent to the protection area of retained trees;
- No fire shall be lit such that flames come within 5m of tree foliage.

5.15. Variations from the above may be specified in the following sections of this method statement.

This is only acceptable where detailed and will typically be subject to supervision by the arboriculturist.

Protection Barriers

5.16. Barriers must be fit to exclude construction activity and appropriate to the degree and proximity of work around the retained tree(s). Barriers shall be maintained to ensure that they remain rigid and complete.


5.17. See Appendix i for barrier specifications.

5.18. The default specification comprises a vertical and horizontal scaffold framework, well-braced to resist impacts. The vertical tubes shall be spaced at a maximum interval of 3 m and driven securely into the ground. Onto this framework, welded mesh panels shall be securely fixed. Care shall be exercised when locating the vertical poles to avoid underground services and, in the case of the bracing poles, also to avoid contact with structural roots. If the presence of underground services precludes the use of driven poles, an alternative specification shall be prepared in conjunction with the project arboriculturist that provides an equal level of protection. Such alternatives could include the attachment of the panels to a free-standing scaffold support framework.

5.19. On smaller projects or those where the level of construction is less intensive, alternative specifications may be acceptable (see [Appendix I](#)), subject to agreement with the project arboriculturist and written approval LPA (local planning authority).

Ground Protection

5.20. If required to facilitate access within the CEZ (or as shown on the appended tree protection plan), ground protection is to be installed. If not already included on the tree protection plan, it must be approved in writing by the local planning authority before implementation. The ground protection must be capable of supporting the expected loads and avoiding rutting, compaction and damage to the soil: as advised in section 6.2.3 of the British Standard.

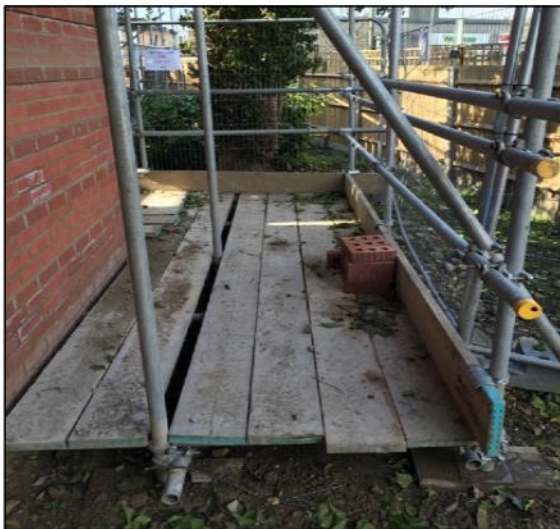

GP1: Tree protection barriers and scaffold ground protection



GP2: Tree protection barriers & trackmat ground protection

5.21. Stages of ground protection installation:

1. If required, dismantle barriers and re-erect them to protect any newly exposed CEZ not to be covered by ground protection;

2. Any shrubs, saplings or trees to be removed, are to be cut or ground out to just below ground level rather than grubbed or winched out, which can damage the roots of retained trees;
3. Lay woven geotextile over the existing ground surface by hand;
4. Cover the area with a compressible layer (200mm of woodchip, for example), using hand tools only;
5. Cover compressible layer with side butting scaffold boards, plywood boards of proprietary trackway/trackmats;
6. Confirm surface is acceptable for use with the project arboriculturist;
7. Area ready for construction access;
8. Any scaffolding required within the area will be erected with the uprights placed on spreader boards;
9. The boarding will be left in place until the construction works are finished.

5.22. A single thickness of boarding laid on the soil surface will provide sufficient protection for pedestrian loads. However, for wheeled or tracked construction traffic movements within the RPA, ground protection will involve the use of temporary geocell/cellular confinement systems, reinforced concrete slabs or track-board systems details of which are to be specified by the project engineer and approved for use by the project arboriculturist and local authority before construction commences.

5.23. Track-boards can be sourced from Trakmats, 0800 622 6838, www.trakmats.co.uk, or GroundGuards, 0113 209 3685, www.ground-guards.co.uk.

5.24. There is to be no excavation within the ground protection area whatsoever. This includes the installation of services and associated utilities, without prior approval.

Site Induction

5.25. All site staff are to be briefed on the tree protection strategy for the site as part of the general site induction procedure. This can be carried out by the site manager once he has been briefed by the project arboriculturist.

5.26. In general, this will include the following:

1. Explanation of the purpose of the tree protection barriers and any ground protection
2. Explanation of the demolition procedures near trees
3. Explanation of the sensitive/supervised excavation areas
4. What to do if access is needed within a protected area for any reason

5. What to do if damage occurs to any tree protection barriers and how to contact the project arboriculturist if necessary.

Tree Surgery

- 5.27. Should any pruning work be required, the following must be adhered to once any requisite permissions are obtained.
- 5.28. All work will be carried out under BS3998³ industry best practice and in line with any works already agreed upon with the council.
- 5.29. The statutory protection^{4 5} will be adhered to. If further advice is required, particularly if bats are discovered during tree work, it will be obtained from Natural England or other competent persons and recommendations adhered to.
- 5.30. The stumps of any trees removed from within the Construction Exclusion Zone or the RPAs of retained trees will be either cut flush to ground level and left in situ or ground out using a stump grinder. They will not be winched out.
- 5.31. All operations shall be carefully carried out to avoid damage to the trees being treated or neighbouring trees. No trees to be retained shall be used for anchorage or winching purposes.

Installation of Underground Services

- 5.32. Mechanical trenching for the installation of underground apparatus and drainage severs any roots present and can change the local soil hydrology in a way that adversely affects the health of the tree. For this reason, particular care must be taken in the routeing and methods of installation of all underground apparatus. Wherever possible, apparatus must be routed outside RPAs. Where this is not possible, it is preferable to keep the apparatus together in common ducts. Inspection chambers shall be sited outside the RPA.
- 5.33. Where underground apparatus is to pass within the RPA, detailed plans showing the proposed routeing must be drawn up in conjunction with the project arboriculturist. In such cases, trenchless insertion methods shall be used: Microtunnelling, Surface-launched directional drilling, Pipe ramming or Impact moling (see BS5837:2012 Table 3), with entry and retrieval pits being sited outside the RPA. Provided that roots can be retained and protected, excavation using hand-held tools might be acceptable for shallow service runs. If this is the case, the following methodology must be followed:

³ BS3998:2010- *Recommendations for Tree Work*. London: British Standards Institute

⁴ *Wildlife and Countryside Act*. (1981) London: HMSO.

⁵ *Conservation of Habitats and Species Regulations (2017)* London: HMSO.

5.34. Stages for installing services:

1. Contact project arboriculturist to hold pre-start site meeting and 'toolbox' talk before starting work.
2. Remove just enough tree protection fencing to allow access to the area and facilitate trenching.
3. Remove any surface vegetation or existing hard surfaces using hand tools.
4. Using an air-pick excavate the trench, keeping to the minimum dimensions required.
5. Roots occurring in clumps of 25 mm diameter and over are encountered they will be retained and kept damp by covering with hessian (re-wetted as required). If required, these shall be severed only following consultation with an arboriculturist; as such roots might be essential to the tree's health and stability.
6. Feed in services.
7. Backfill the trench with 200-300mm depth of excavated soil, or a mixture of excavated and imported topsoil to BS3882: 2015, firming down with heels.
8. Repeat step 7 until the trench is filled.
9. Re-erect tree protection fencing as per the approved plan.

5.35. The method of excavation above, for trenching within RPAs, is using air excavation. This tool utilises compressed air to remove soil from around tree roots causing minimal damage and can be run off a typical site compressor. I can provide details of contractors supplying air excavation services if required.

5.36. Alternatively, trenchless technology, such as thrust boring can be used in some instances and is particularly effective as it can pass directly under the tree, at a depth which is likely to avoid almost all impact on the roots of the subject tree. As no access/thrust pits will be located within the RPAs of the subject trees, the need for arboricultural supervision is limited.

5.37. Reference can be made to NJUG Vol 4⁶ for guidance, but any approach must be approved by the project arboriculturist and brought to the attention of the local authority tree officer.

⁶ National Joint Utilities Group. (2010). Volume 4: NJUG Guidelines For The Planning, Installation And Maintenance Of Utility Apparatus In Proximity To Trees (Issue 2) – Operatives Handbook. NJUG.

6. Limitations of Use and Copyright.

Copyright M Welby Ltd trading as Mark Welby Consulting Arborists. All rights reserved.

No part of this report may be copied or reproduced by any means without prior written permission from M Welby Ltd. If you have received this report in error, please destroy all copies in your possession or control and notify M Welby Ltd. This report has been prepared for the exclusive use of the commissioning party and unless otherwise agreed in writing by M Welby Ltd, no other party may use, make use of or rely on the contents of the report. No liability is accepted by M Welby Ltd for any use of this report, other than for the purposes for which it was originally prepared and provided. Opinions and information provided in the report are based on M Welby Ltd using due skill, care and diligence in the preparation of the same and no explicit warranty is provided as to their accuracy. It shall be noted, and it is expressly stated that no independent verification of any of the documents or information supplied to M Welby Ltd. has been made.




Appendix





i.

Tree Protection Barriers

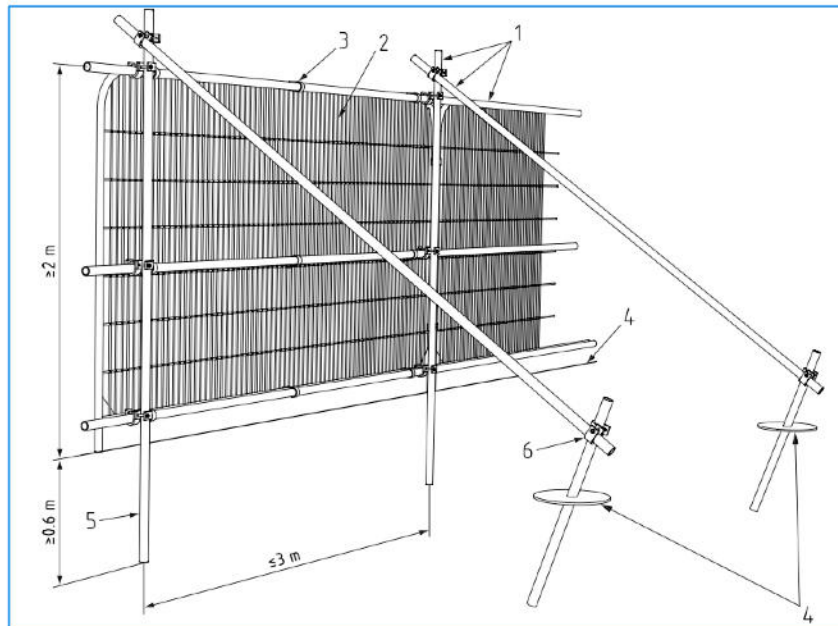

1 Standard scaffold poles

2 Heavy gauge 2 m tall galvanised tube and welded mesh infill panels

3 panels secured to up rights and cross members with wire-ties

4 ground level

5 uprights driven into the ground until secure (minimum depth 0.6 m)

6 Standard scaffold clamps

TPF1: Default specification for protective barrier (Fig 2 from BS5837:2012)



TPF 2: Alternative fencing option: scaffold uprights with backstay



TPF 3: Alternative fencing option: on boots with backstay



TPF 4: Plastic barrier for low intensity areas of construction



TPF 5: Chain-link for low intensity areas on large projects

ii.

Tree Categories Explained

BS5837:2012 Table 1 -Cascade chart for tree quality assessment			
Category and definition	Criteria (including subcategories where appropriate)		
Trees unsuitable for retention (see Note)			
Category U Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years	*Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning) *Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline *Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low quality trees suppressing adjacent trees of better quality <i>NOTE Category U trees can have existing or potential conservation value which it might be desirable to preserve; see 4.5.7.</i>		
	1 Mainly arboricultural qualities	2 Mainly landscape qualities	3 Mainly cultural values, including conservation
Trees to be considered for retention			
Category A Trees of high quality with an estimated remaining life expectancy of at least 40 years	Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant and/or principal trees within an avenue)	Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features	Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood-pasture)
Category B Trees of moderate quality with an estimated remaining life expectancy of at least 20 years	Trees that might be included in category A, but are downgraded because of impaired condition (e.g. presence of significant though remediable defects, including unsympathetic past management and storm damage), such that they are unlikely to be suitable for retention for beyond 40 years; or trees lacking the special quality necessary to merit the category A designation	Trees present in numbers, usually growing as groups or woodlands, such that they attract a higher collective rating than they might as individuals; or trees occurring as collectives but situated so as to make little visual contribution to the wider locality	Trees with material conservation or other cultural value
Category C Trees of low quality with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 150mm	Unremarkable trees of very limited merit or such impaired condition that they do not qualify in higher categories	Trees present in groups or woodlands, but without this conferring on them significantly greater collective landscape value; and/or trees offering low or only temporary/transient landscape benefits	Trees with no material conservation or other cultural value



iii.

Protection Plan



See the following page

