




OPENREACH

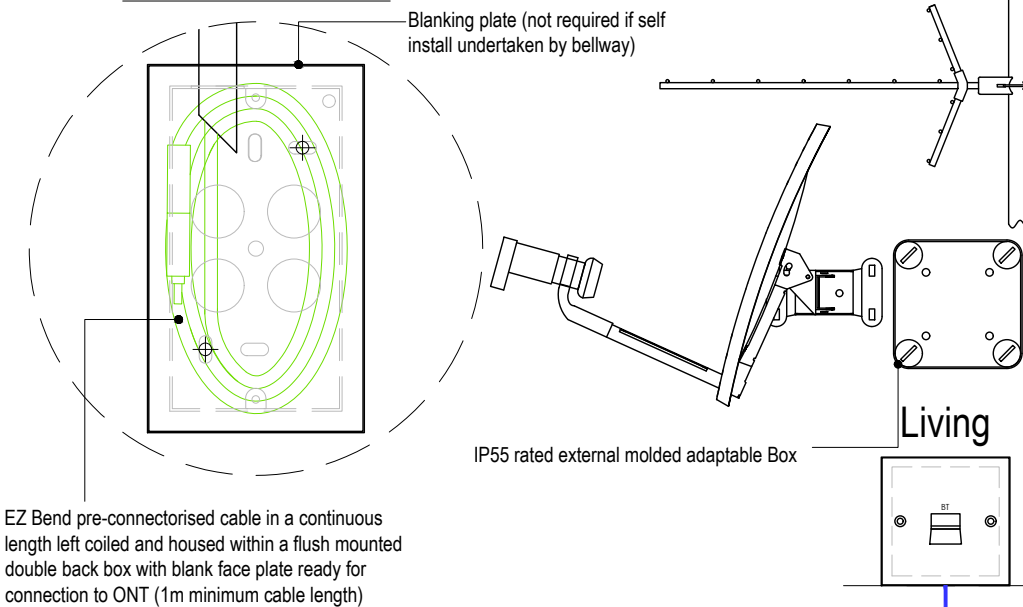

HYPEROPTIC

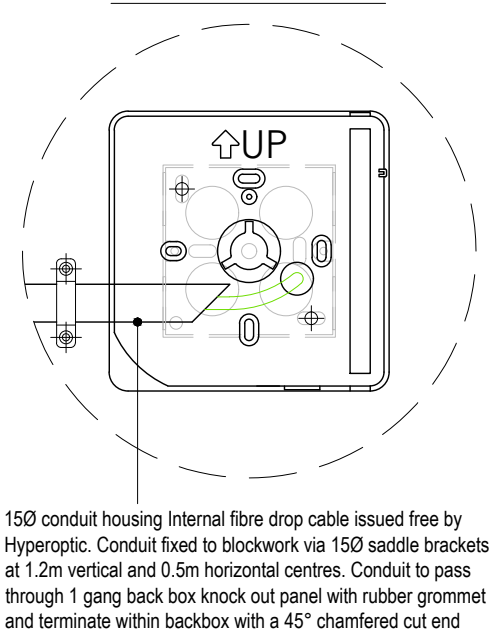

VIRGIN MEDIA

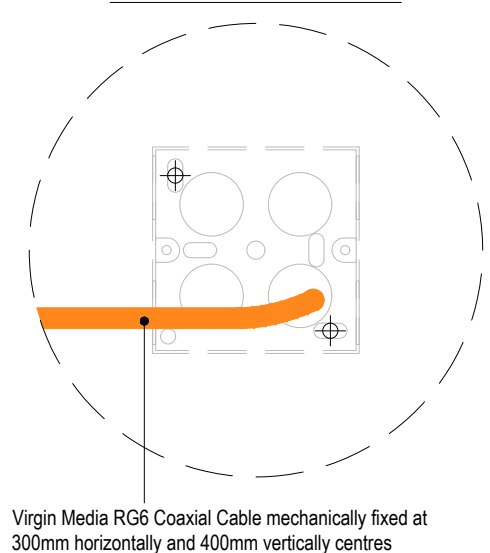


1x CCT100 (twin) or 2x CT100 (single) Sky CAI benchmarked cable from lounge plate to IP55 rated external adaptable Box. Sky cable to pass through cavity wall via 19mmØ conduit (20mmØ hole). Cable to be taped as necessary to prevent return into conduit. Allow additional 1500mm min. spool in loft to enable future connection to dish

TV Aerial Coax 3/4 Way Splitter to be installed in an easy visible accessible location, above loft insulation

REV	DATE
A	09.07.21

Ref: Amendment Schedule Issue 3.1
Virgin Media FTTP now included, ONT/ITB relocated to left hand side, Bed 1 amended to 4 module plate to accommodate Virgin Media Coaxial euro module, BT telecom socket amended from secondary to master, TV Aerial coax 3/4 way splitter shown

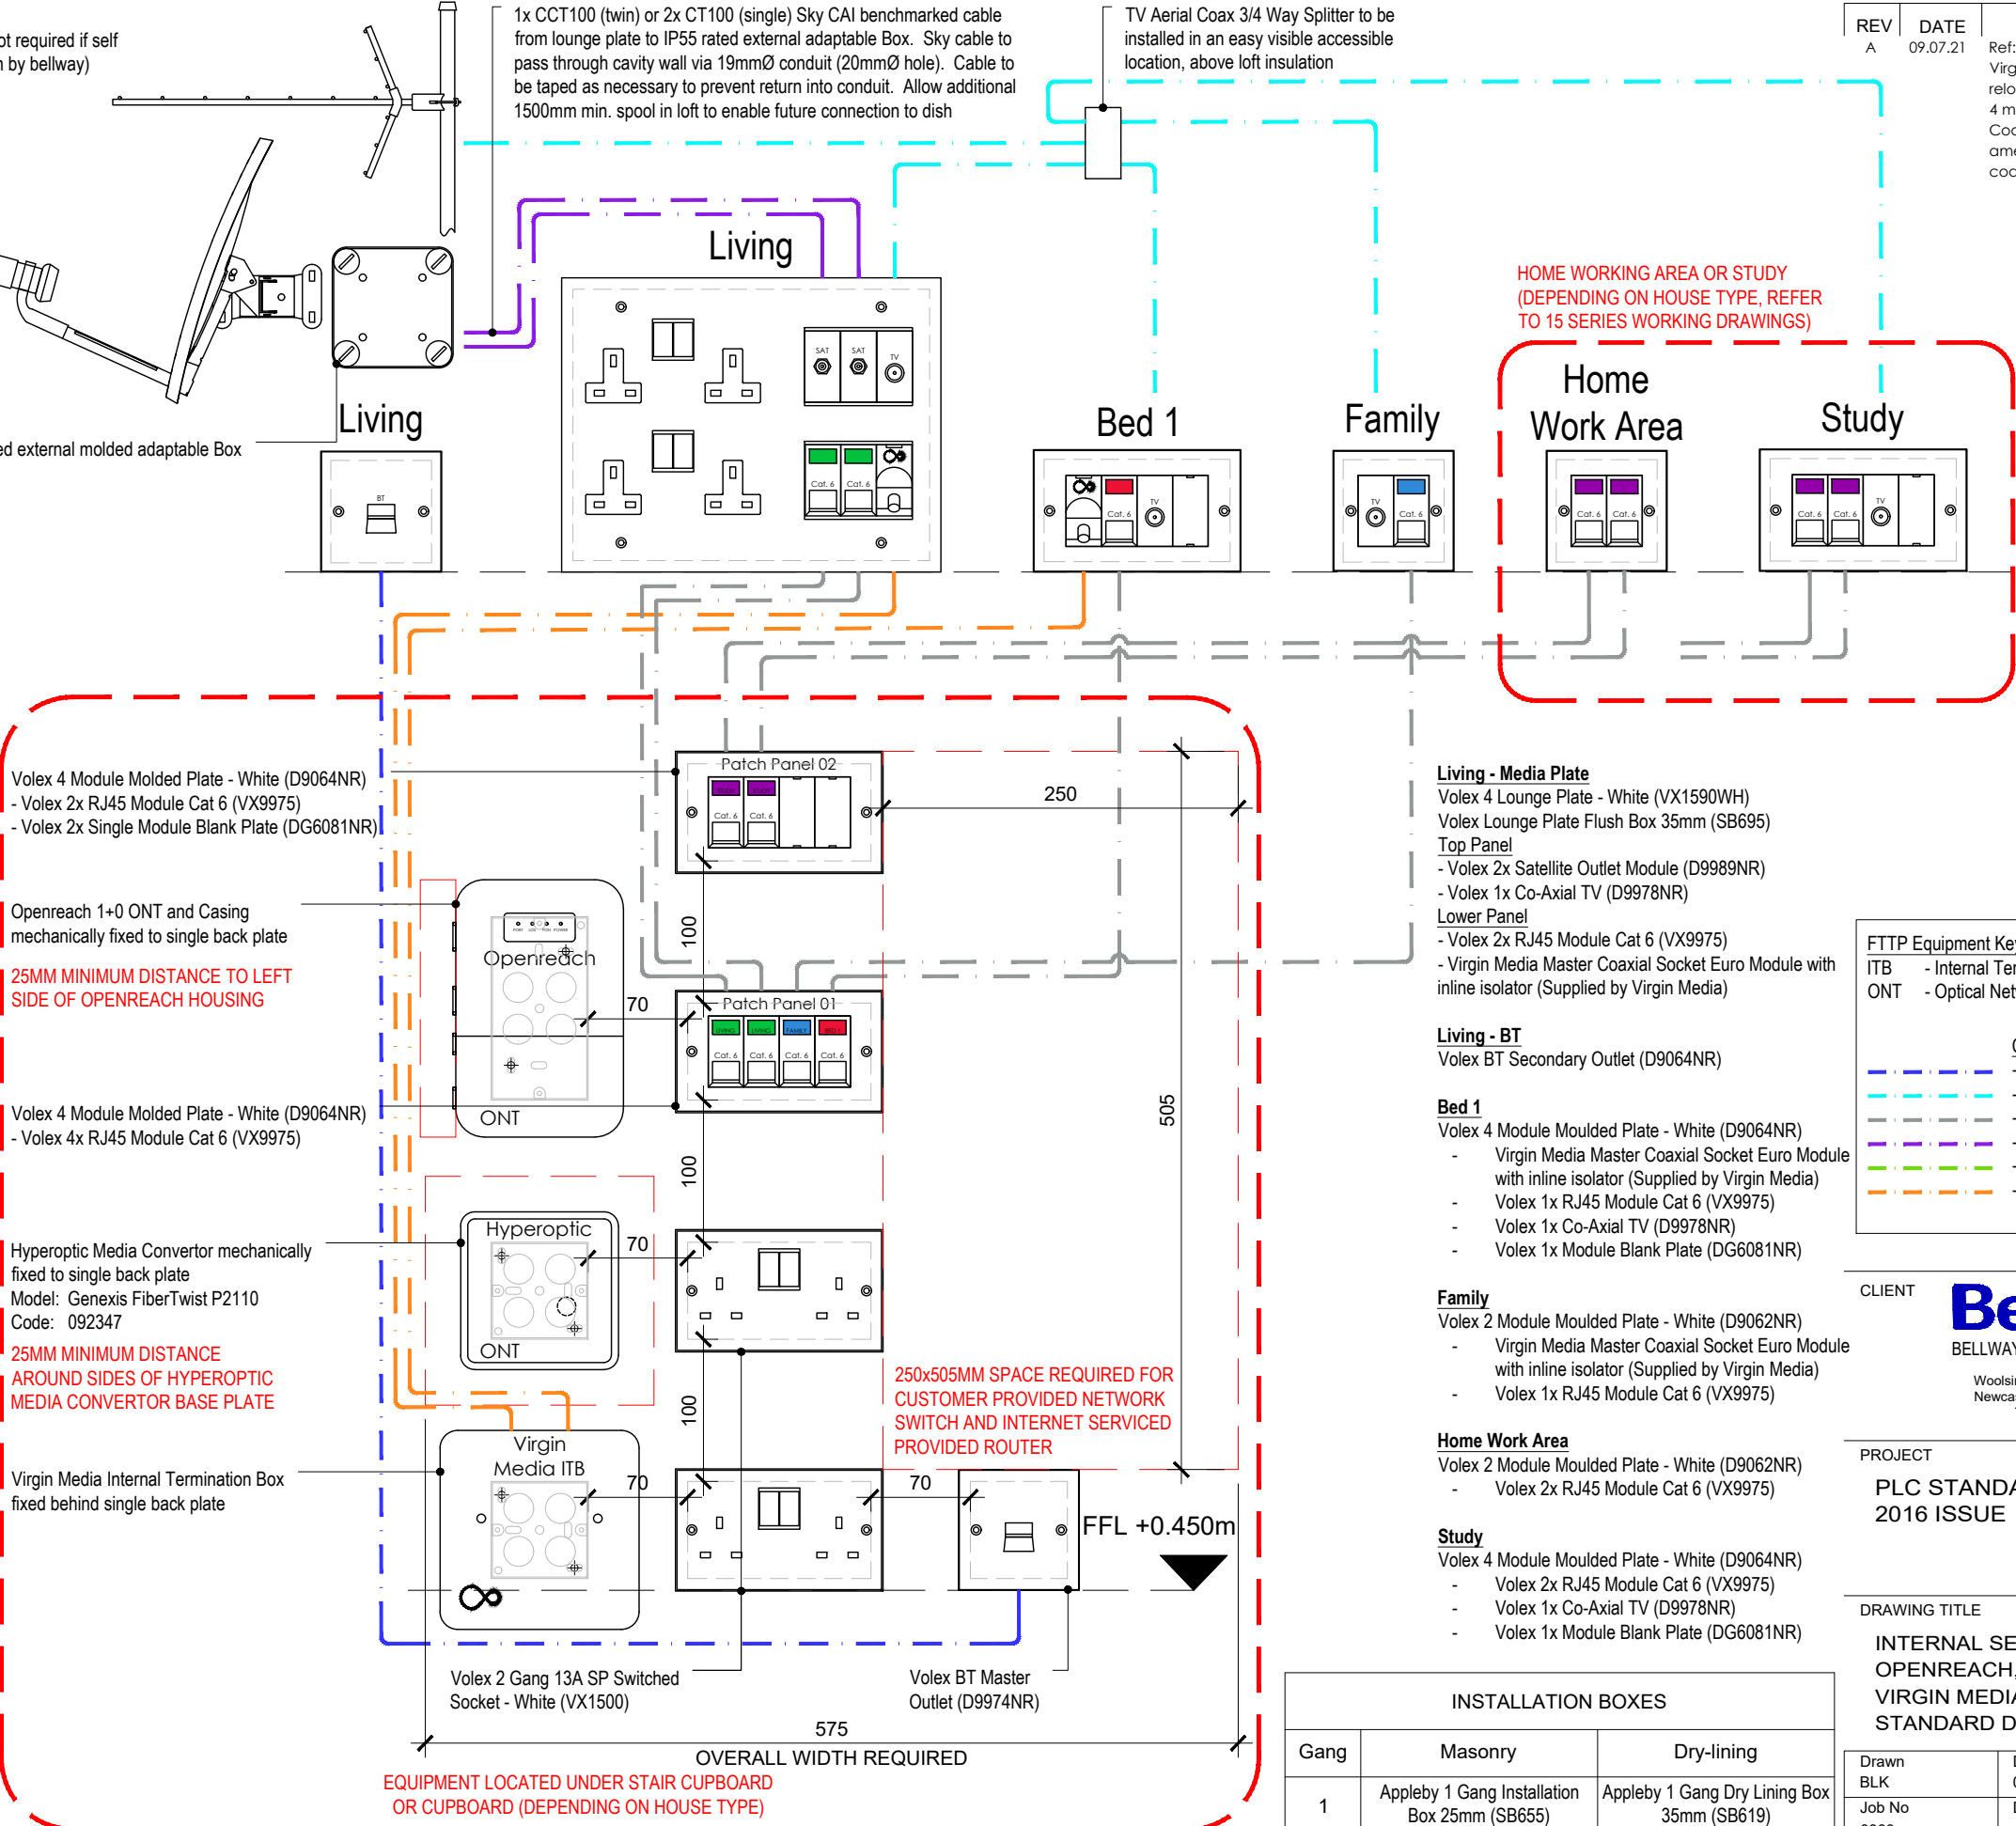

FFL +0.450m

FTTP Equipment Key:	
ITB	- Internal Termination Box (Virgin Media)
ONT	- Optical Network Termination

Cable Key:	
- - - - -	- CW1308 Telephone Cable
- - - - -	- Coaxial Cable
- - - - -	- Cat 6 Cable
- - - - -	- 1x CCT100 (twin) or 2x CT100 (single)
- - - - -	- Fibre Cable
- - - - -	- RG6 Coaxial Cable

CLIENT

Bellway

BELLWAY plc

Woollington House, Woollington
Newcastle-upon-Tyne NE13 8BF
Tel: 0191 217 0717

PROJECT

PLC STANDARD DETAILS

2016 ISSUE

DRAWING TITLE

INTERNAL SERVICES (FTTP)

OPENREACH, HYPEROPTIC & VIRGIN MEDIA COMMS CUPBOARD

STANDARD DETAIL 1/2

INSTALLATION BOXES		
Gang	Masonry	Dry-lining
1	Appleby 1 Gang Installation Box 25mm (SB655)	Appleby 1 Gang Dry Lining Box 35mm (SB619)
2	Appleby 2 Gang Installation Box 25mm (SB665)	Appleby 2 Gang Dry Lining Box 35mm (SB629)

Drawn BLK	Date 03/05/21	Scale 1:5@A3
Job No 0000	Drawing No A/SD/S90/B/11	Revision A
Dwg Status		